

MusX User and Developer Manual

A browser-based node patcher for sound and music

Paul Fishwick and Claude Code

July 2026

Contents

1	Introduction	2
1.1	Design Goals	2
2	Installation and Setup	3
3	Interface Tour	3
3.1	Canvas and Objects	3
3.2	Adding Objects	3
3.3	Navigating: Pan, Zoom, and Fit	3
3.4	Wiring and Deleting Cables	4
3.5	Resizing Graphical Objects	4
3.6	Frequency and Note Display	4
3.7	Audio Lifecycle: Start Audio, Play, Stop	4
3.8	Saving and Loading	4
4	Object Catalog	5
5	Sound Sources and CDP-Style Processing	5
5.1	Soundfile and Microphone Inputs	5
5.2	Granular Transformation	5
5.3	Modulatable Parameters	6
5.4	Sample Library and Grouped Patches	6
6	The funcgen Expression Language	6
7	Code Objects	7
8	Built-in Demo Patches	7
9	Architecture	8
10	Developer Reference: Adding a New Object	8
11	Testing	9

1 Introduction

MusX is a single-page, browser-based *node patcher* for building sounds and music. A patch is a graph of typed objects (“nodes”) wired together by cables; the graph is evaluated by the Web Audio API [3] through the Tone.js library [4]. MusX evolved from studying two seminal visual dataflow environments for computer music: Miller Puckette’s Pure Data (Pd) [1] and Cycling ’74’s Max/MSP [2]. From those systems MusX borrows the central idea that a musician builds an instrument by *wiring objects together* rather than writing a program in text, along with specific conventions such as the tilde (~) suffix on signal-rate objects, inlets on the top of a box and outlets on the bottom, and the distinction between audio signals and control messages. MusX deliberately keeps a much smaller object set than Pd or Max, aiming for a simple but comprehensive core that runs with no installation in any modern browser. More recently MusX has grown a *sound-transformation* side inspired by the Composers Desktop Project (CDP) [6] and its node-based front end SoundThread [7]. Where CDP transforms recorded sound offline through command-line tools, MusX reimplements the same ideas as *real-time* Web Audio objects: soundfile and microphone inputs (Section 5) feeding granular and other transformations that process live.

As shown in Figure 1, the workspace is a dot-grid canvas populated with object boxes. Audio cables are drawn thick and orange; control cables are thin and green. A toolbar across the top hosts the global controls (audio on/off, transport, tempo, master level, and patch file management).

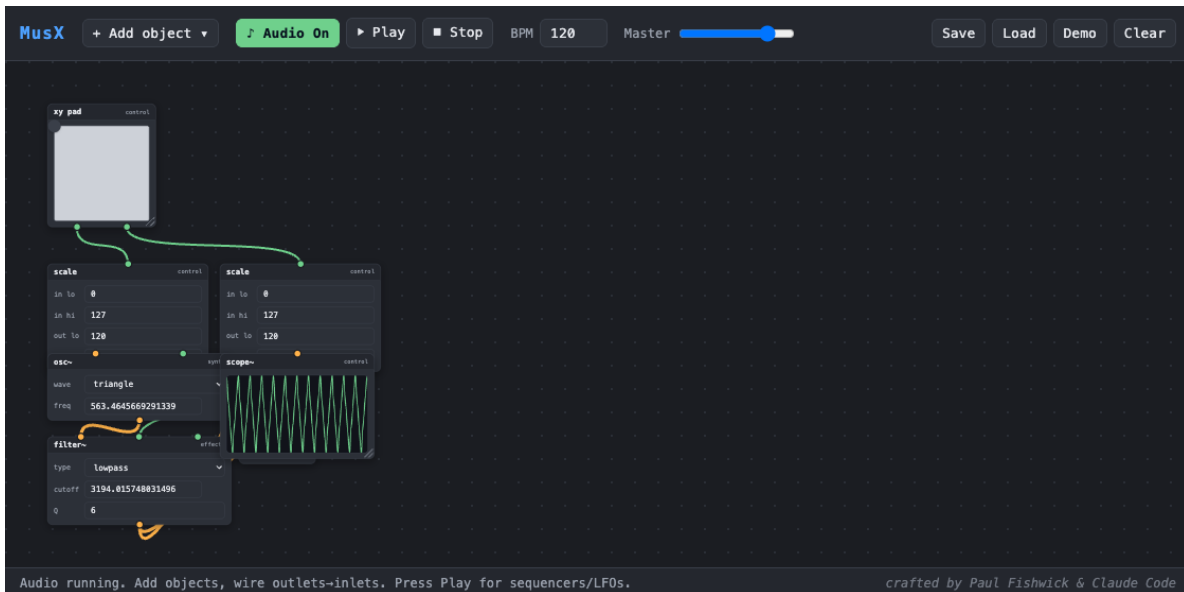


Figure 1: The MusX workspace with the “XY Synth” patch loaded — an `xy pad` drives a `tri~` oscillator through two `scale` objects and a resonant `filter~` into the output, with a `scope~` showing the waveform. This patch reproduces the subtractive-synth example from the Max/MSP product page [2].

1.1 Design Goals

- **No build step, no install.** MusX is plain HTML, CSS, and ES-module JavaScript. Tone.js is vendored locally; nothing is fetched at runtime except the optional Python runtime (Section 7).

- **Local-first.** Everything runs in the browser on the user’s machine.
- **Signal vs. message.** As in Pd and Max, MusX separates audio signals (continuous, sample-rate) from control messages (discrete events).
- **One object = one definition.** Adding a new object is a single registry entry; the graph engine never special-cases an object type (Section 10).
- **Resizable, legible UI.** Every graphical object can be resized, and any object carrying a frequency shows the corresponding musical note.

2 Installation and Setup

MusX has been developed and tested on macOS with a Chromium-based browser. Because it uses ES modules, it must be served over HTTP rather than opened from the filesystem. The repository root contains two shell scripts:

```
./start # serves http://localhost:8123 (prints the URL)
./stop # stops the server (robust: stops by port even if the pid file is stale)
```

`./start` first frees its port: if any process (a stale server or another application) is already listening there, it is closed before MusX takes the port. After `./start`, open the printed <http://localhost:8123/index.html>. Click **Start Audio** once (browsers require a user gesture before audio may begin), then build a patch or load a demo.

3 Interface Tour

3.1 Canvas and Objects

Object boxes are dragged by their title bar. Each box has *inlets* along the top and *outlets* along the bottom, drawn as small circles colour-coded by type: orange for audio, green for control. Selecting a box (single click) and pressing **Delete** removes it.

3.2 Adding Objects

Objects are added from a two-level menu organised by function, shown in Figure 2. The menu opens either from the **+ Add object** button in the toolbar or by right-clicking empty canvas; hovering a category reveals its objects in a submenu. Right-click drops the new object where you clicked; the button drops it at a staggered default position.

3.3 Navigating: Pan, Zoom, and Fit

Patches can grow larger than the visible canvas. Scroll the mouse wheel to **zoom** in and out (the zoom centres on the cursor); drag an empty part of the canvas (or use the middle mouse button) to **pan**. Double-clicking empty canvas **fits** all objects into view. Loading a patch automatically fits it, so an incoming patch is always framed completely regardless of its size. Object dragging and object placement remain accurate at any zoom level.

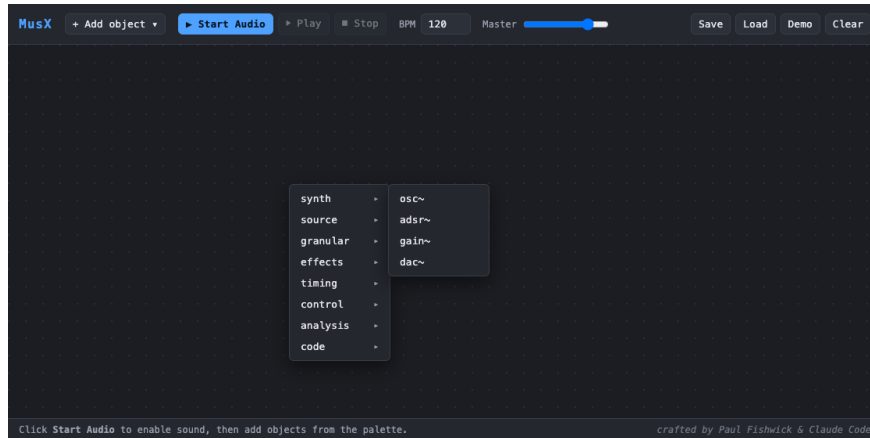


Figure 2: The two-level “Add object” menu. Top level lists the functional categories; hovering a category (here `synth`) reveals its objects to the right.

3.4 Wiring and Deleting Cables

Drag from an outlet to an inlet to create a cable. Audio outlets connect only to audio inlets and control to control; mismatches are rejected. A cable highlights red on hover; clicking it deletes it.

3.5 Resizing Graphical Objects

Every graphical object — `xy pad`, `scope~`, `plot`, `keyboard`, `step seq`, `slider`, `bang`, `message`, and `code` — has a resize grip in its bottom-right corner. Dragging it rescales the object (the keyboard rescales its keys, the grid its cells, canvases their drawing area). The size is stored in the patch and restored on load.

3.6 Frequency and Note Display

Any object whose parameters include a frequency shows the nearest musical note and octave immediately after the number, as in Figure 3. The note is shown only when the frequency lies within a few cents of an equal-tempered pitch (for example 440 Hz → A4, 1760 Hz → A6); frequencies that are not notes leave the label blank. The on-screen keyboard labels each C with its octave (C3, C4, ...).

3.7 Audio Lifecycle: Start Audio, Play, Stop

Start Audio unlocks the browser audio context and builds the live signal graph; continuously sounding objects (free-running oscillators) begin immediately. **Play** runs the global transport so that time-based objects (`metro`, `step seq`, the `funcgen` control sweep) fire, and ramps the master gain up. **Stop** pauses the transport and ramps the master gain to zero. While stopped, `scope~` and `plot` draw a flat line so the visuals match the silence.

3.8 Saving and Loading

Save downloads the current patch as JSON (object types, positions, parameter values, widget sizes, and all cables); **Load** restores one. Six example patches ship in `patches/` and are also available from the **Demo** button.

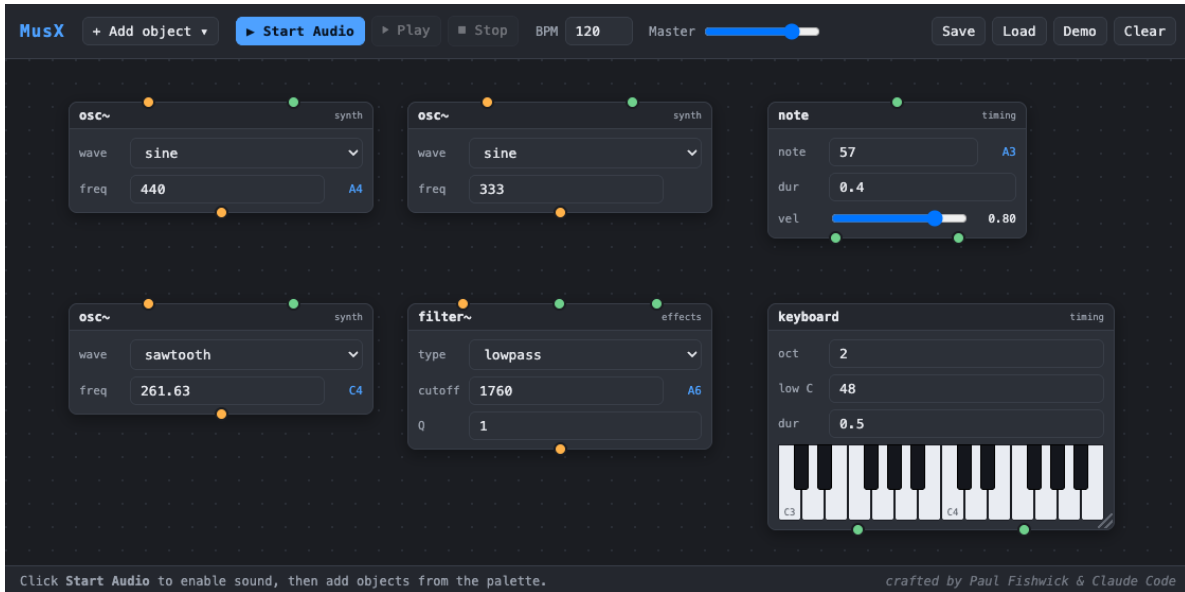


Figure 3: Frequency-to-note display. The `osc~` at 440 Hz shows A4 and at 261.63 Hz shows C4; 333 Hz shows no note; the `filter~` cutoff of 1760 Hz shows A6; the `note` object shows A3. The keyboard’s C keys are labelled with their octaves.

4 Object Catalog

Objects are grouped by function. Audio inlets/outlets are marked with a tilde in the interface. Table 1 summarises the current set.

5 Sound Sources and CDP-Style Processing

In addition to synthesis, MusX can transform *recorded* sound in real time, in the spirit of the Composers Desktop Project (CDP) [6] and its node-based front end SoundThread [7]. Where CDP runs offline command-line tools that read and write soundfiles, MusX reimplements the same ideas as live Web Audio objects.

5.1 Soundfile and Microphone Inputs

The `sndfile~` object plays an audio buffer: load a WAV with its *file* button or by dragging one onto the box, or choose a bundled sound from its grouped dropdown. It loops, plays at a variable *rate* (varispeed), and restarts on a `trig`. The `mic~` object brings in live microphone audio; because laptop microphones are quiet it provides makeup gain (0–8) and a live input-level meter in decibels, so one can see the signal arriving. Both objects are shown in Figure 4. Use **headphones** with a live microphone: through the speakers the microphone hears the output and howls.

5.2 Granular Transformation

The granular objects granulate a buffer using overlapping short grains, which decouples time from pitch. `grain~` is the full cloud (grain size, overlap, scan speed, transposition, reverse); `tstretch~` changes speed while preserving pitch; and `pshift~` transposes while preserving speed. Figure 5

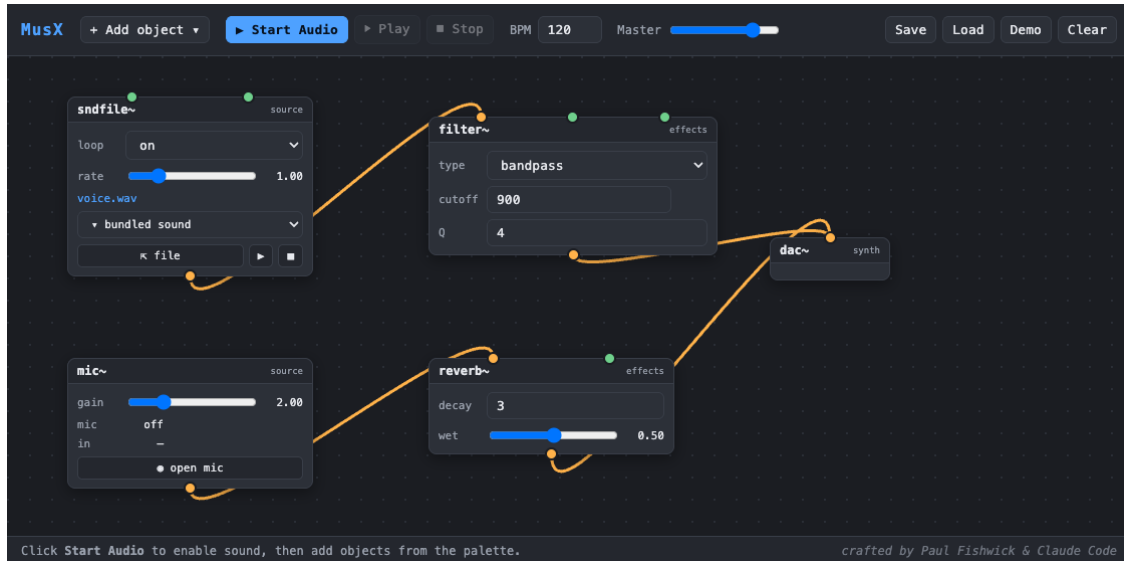


Figure 4: The two sound-input objects. `sndfile~` (with a bundled sound loaded) feeds a `bandpass filter~`; `mic~` feeds a `reverb~`; both reach the output.

shows two granular voices feeding a shared reverb. Because a granular object reads its own buffer (rather than a live stream), it loads a file exactly as `sndfile~` does.

5.3 Modulatable Parameters

Any parameter may be declared *modulatable*, in which case it exposes an optional control inlet named after the parameter. A cable from a `funcgen` LFO, a `slider`, or an `xy pad` then drives that parameter continuously, while its own widget still works when nothing is patched. For example, wiring a slow `funcgen` into the `rate` inlet of `sndfile~` automates the tape-style varispeed wobble that is expressive to perform by hand. Modulation drives the audio directly and does not move (or overwrite) the widget’s stored value, so the effect is heard rather than seen. The granular objects expose their grain, overlap, rate, and pitch parameters this way — patching an LFO into `pshift~`’s pitch inlet, for instance, produces vibrato.

5.4 Sample Library and Grouped Patches

Sample sounds ship under `sounds/`, organised into sub-directories (`tonal/`, `vocal/`, `texture/`) whose names become the group headings in the soundfile dropdown. Example patches ship under `patches/`, likewise grouped into sub-directories (`cdp/`, `granular/`, `live/`). A patch may reference a bundled sound by its path so that the sound auto-loads when audio starts; saved patches store this path (not the audio itself), so bundled sounds reload automatically while a user’s own imported files are re-selected on load.

6 The `funcgen` Expression Language

The `funcgen` object generates a function specified algebraically, in the spirit of Max’s `expr~`. The expression is written in terms of a phase variable `t`. It is evaluated two ways simultaneously: the `sig` outlet plays one cycle of the expression over $t \in [0, 1)$ as an audible wavetable oscillator,



Figure 5: The “Granular Cloud” patch (patches/granular/): `grain~` scans a drone slowly while `pshift~` transposes a vowel up a fifth; both are mixed into a reverb, with a `scope~` on the output.

and the `val` outlet samples the expression over time as a control stream suitable for feeding a plot (Figure 6). The parser is sandboxed — it never calls JavaScript `eval` on user input — and supports `+` `-` `*` `/` `^`, parentheses, the constants `pi`, `e`, `tau`, and the functions `sin` `cos` `tan` `asin` `acos` `atan` `exp` `log` `ln` `sqrt` `abs` `floor` `ceil` `round` `sign` `min` `max` `mod` `plus` `oscillator` `shapes` `saw` `square` `tri` `pulse`.

7 Code Objects

The `code` object runs user-written code at control rate: it reads its inlets `a` and `b`, runs the code whenever an input arrives, and emits the result. Two languages are supported. **JavaScript** runs natively (a bare expression such as `a*b+1` or a function body with `return`). **Python** runs through the Pyodide WebAssembly runtime [5], which is downloaded from its CDN the first time a Python code object executes; JavaScript code objects never trigger that download. Figure 7 shows a patch in which a `message` sends a MIDI number to a `code` object that converts it to hertz, while a `bang` button triggers the envelope.

Security note. Because a code object executes the code it contains, loading a patch file authored by someone else will run that code — exactly as opening a Max patch containing a `js` object would. This is safe for your own patches; treat untrusted patch files with the same caution as any downloaded program.

8 Built-in Demo Patches

Six demos ship with MusX. Two reproduce examples from the Max/MSP product page [2]. **Custom Synth** (Figure 8) recreates the first “Sound without limits” patch: stacked saw and square oscillators through a resonant filter, distortion, and delay, driven by the step sequencer. **Lay-ered Pad** (Figure 9) recreates the third patch, which in Max uses multichannel (MC) objects to



Figure 6: A `funcgen` evaluating $\sin(2\pi t) + 0.3\sin(6\pi t)$. The `plot` (blue) shows the function sampled over time; the `scope~` (green) shows the same function rendered as an audible wavetable — note the matching harmonic ripple.

stack fifty detuned oscillators; MusX emulates this with a stack of detuned oscillators feeding an LFO-swept filter and reverb. The remaining demos are **XY Synth** (Figure 1), **FuncGen** → **Plot** (Figure 6), **Keyboard Synth**, and **Bang + Code** (Figure 7).

9 Architecture

MusX separates two layers. The *graph layer* (`js/graph/`) holds a serialisable model of objects and connections and renders the boxes, ports, and cables; it knows nothing about audio. The *audio layer* (`js/audio/engine.js` plus the per-object definitions in `js/nodes/`) builds the live Tone.js [4] graph from the model. Audio cables become real Tone connections; control cables are delivered dynamically — when an object emits, the engine looks up the current control connections and calls the targets — so editing cables while running takes effect immediately. A single master gain node sits between every `dac~` and the Web Audio destination [3]; the transport's Stop ramps it to zero, which is how Stop reliably silences free-running drones.

10 Developer Reference: Adding a New Object

An object type is one entry in the node registry. A definition declares its title, category, inlets, outlets, parameter widgets, an optional `render` for custom UI, and a `create` that builds its Tone.js object(s) and returns a small runtime (`audioIn`, `audioOut`, `receive`, `setParam`, `start`, `dispose`). To make an object resizable, set `resizable: true` and, in `render`, assign `view._vizEl` (the element to measure) and `view._onResize(w, h)` (how to apply a new size). No change to the graph engine is required.

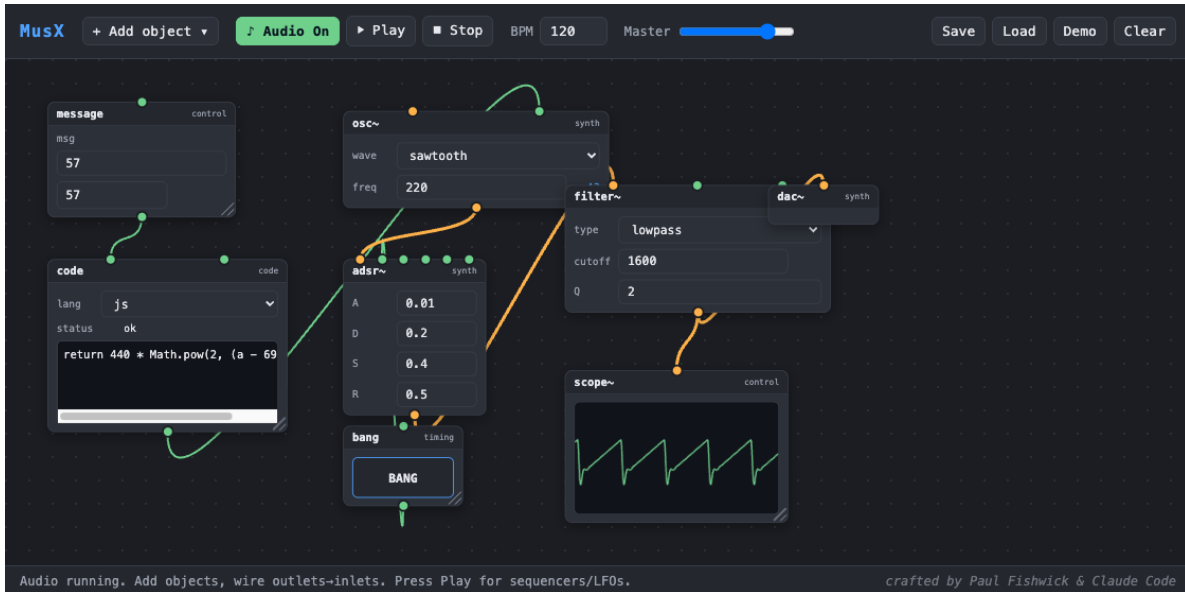


Figure 7: The “Bang + Code” patch. A message (MIDI 57) feeds a code object computing $440 * \text{Math.pow}(2, (a - 69) / 12) \rightarrow$ the oscillator’s frequency; the bang button triggers the `adsr~`.

11 Testing

MusX ships with a headless test harness (`tests/auto/test.mjs`) that loads each demo and verifies both structure and sound. Because a browser cannot “hear” audio, the harness taps a meter off the master and reads the live level in decibels, confirming that a patch produces real signal rather than silence, that Stop drives the output to zero, and that the keyboard and bang trigger audible notes. The manual’s figures are produced separately by a Selenium script (`docs/make_figures.py`) that drives the same interface in headless Chrome.

References

- [1] M. Puckette. “Pure Data: another integrated computer music environment.” *Proceedings of the International Computer Music Conference*, 1996. Software: <https://puredata.info>.
- [2] Cycling ’74. *Max* (Max/MSP). <https://cycling74.com/products/max>.
- [3] W3C. *Web Audio API*. <https://www.w3.org/TR/webaudio/>.
- [4] Y. Mann. *Tone.js: A Web Audio framework for interactive music in the browser*. <https://tonejs.github.io>.
- [5] The Pyodide development team. *Pyodide: Python with the scientific stack, compiled to WebAssembly*. <https://pyodide.org>.
- [6] The Composers Desktop Project. *CDP: a suite of sound-transformation processes for musique concrète*. <https://www.composersdesktop.com>; source: <https://github.com/ComposersDesktop/CDP8>.
- [7] J.-P. Higgins. *SoundThread: a node-based graphical interface for the Composers Desktop Project*. <https://github.com/j-p-higgins/SoundThread>.



Figure 8: The “Custom Synth” demo (Max “Sound without limits”, patch 1): a step sequencer drives saw + square oscillators through an envelope, resonant lowpass filter, distortion, and delay, with a scope on the output.

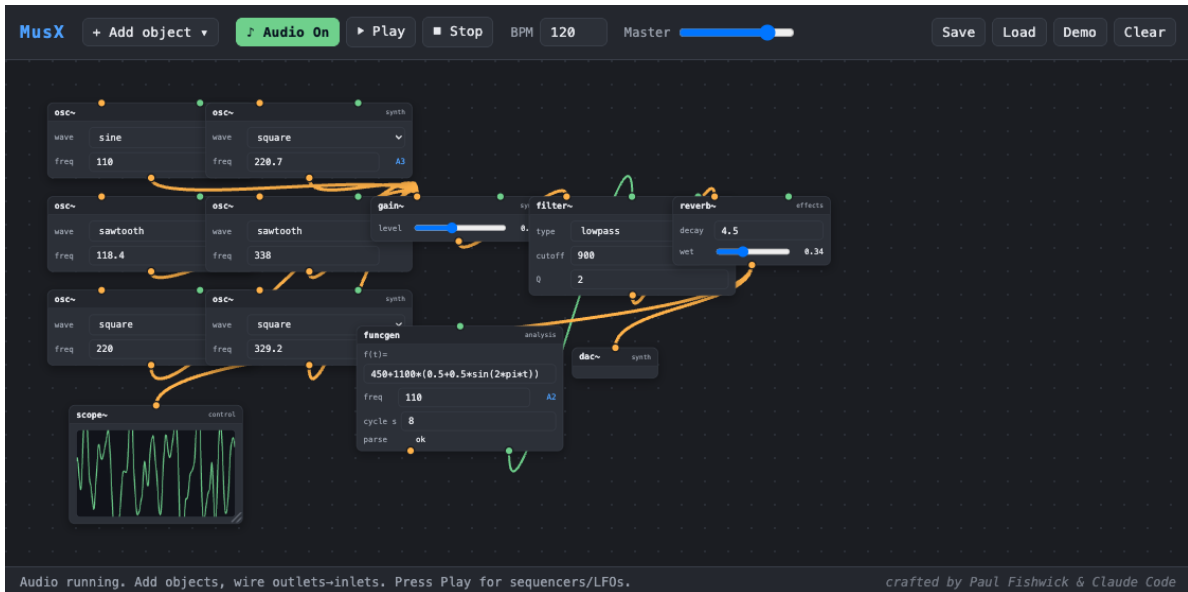


Figure 9: The “Layered Pad” demo (Max “Sound without limits”, patch 3): six detuned oscillators are mixed and passed through a filter whose cutoff is swept by a slow **funcgen** LFO, then reverberated. This emulates the MC (multichannel) oscillator bank of the original.

Category	Object	Function
source	<code>sndfile~</code>	Soundfile player: load/drag a WAV or pick a bundled sound; loop, varispeed, <code>trig</code>
	<code>mic~</code>	Live microphone input; gain makeup and a live input-level (dB) meter
synth	<code>osc~</code>	Oscillator (sine/square/saw/triangle); freq control + audio-rate FM inlet
	<code>adsr~</code>	Attack-decay-sustain-release amplitude envelope
	<code>gain~</code>	Amplitude / level
	<code>dac~</code>	Audio output (to speakers via the master)
effects	<code>filter~</code>	Lowpass/highpass/bandpass/notch with cutoff + Q
	<code>delay~</code>	Feedback delay (time, feedback, wet)
	<code>reverb~</code>	Reverb (decay, wet)
	<code>dist~</code>	Distortion (amount, wet)
granular	<code>grain~</code>	Granular cloud of a buffer (grain size, overlap, time, pitch, reverse)
	<code>tstretch~</code>	Time-stretch: change speed/duration, keep pitch
	<code>pshift~</code>	Pitch-shift: change pitch, keep speed/duration
timing	<code>transport</code>	Sets global tempo (BPM)
	<code>metro</code>	Emits a bang every musical interval
	<code>bang</code>	Manual trigger button
	<code>note</code>	Emits a note (frequency + duration) from a MIDI number
	<code>keyboard</code> <code>step seq</code>	On-screen piano; emits note + frequency Piano-roll step sequencer
control	<code>number, slider</code>	Numeric value sources
	<code>math, scale</code>	Arithmetic; linear range mapping (<code>scale</code>)
	<code>message</code>	Emits a stored value on click
	<code>xy pad</code>	2-D control surface (X and Y, 0–127)
	<code>scope~</code>	Oscilloscope
analysis	<code>plot</code>	Rolling XY graph of a control stream
	<code>funcgen</code>	Algebraic function generator (Section 6)
code	<code>code</code>	JS/Python control-rate code object (Section 7)

Table 1: The MusX object catalog.