

External Jobs API Integration Guide

Enterprise REST integration specification for connecting client ERP, CRM and order-management systems to the Geko Field Scheduling & Operations Engine.

API VERSION 1.0 · REST

TLS 1.2 / 1.3

JSON

● PRODUCTION READY

BASE URL

**geko-
scheduling.vercel.app/api**

AUDIENCE

**Integration
Engineers**

FORMAT

application/json

DOCUMENT DATE

24 August 2026

Geko Scheduling Platform — Enterprise REST Integration Guide · Confidential — For Client Integration Use

Contents

01	Executive Overview	Integration flow & scope
02	Authentication & Security	API keys & headers
03	Endpoints Reference	Create & retrieve jobs
04	Job Status Lifecycle	State machine
05	HTTP Error Codes & Handling	Status codes & error format
06	Code Examples & Implementation Libraries	cURL, Python, Node.js, C#, PHP
07	Rate Limits & Best Practices	Throughput & idempotency
08	Technical Support & Integration Assistance	Contacts & escalation

01 Executive Overview

The Geko Jobs Integration API provides a direct, programmatic bridge between client-side ERP, CRM and order-management platforms and the Geko Field Scheduling & Operations Engine.

By integrating with this endpoint, your systems can:

1. **Automate Job Dispatch** — ingest new customer work orders directly into the Geko schedule without manual Excel/CSV uploads.
2. **Synchronise Lifecycle Data** — retrieve real-time progress, engineer status updates, and completion timestamps.
3. **Geo-Location Integration** — supply postcodes and addresses that feed directly into Geko's route optimisation and engineer travel calculations.

Integration Flow

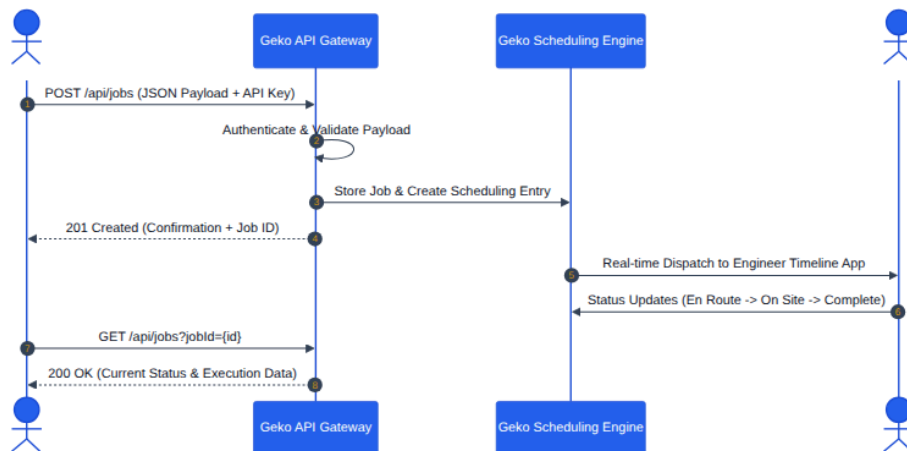


Figure 1 — End-to-end request flow between the client system, the Geko API Gateway, the Scheduling Engine, and the field engineer.

All API transactions are encrypted via HTTPS and authenticated using an API Key mechanism.

Required HTTP Headers

Every request sent to the Geko API must include the following headers:

HTTP Headers

```
Content-Type: application/json
X-API-Key: <YOUR_ASSIGNED_API_KEY>
```

⚠ IMPORTANT

- Treat your API Key as a sensitive secret. Never embed it in client-side code (browser JavaScript, public mobile app frontends) or public repositories.
- If an API Key is lost or compromised, contact your Geko account manager immediately for instant key revocation and rotation.

03 Endpoints Reference

3.1 Create / Ingest a Job

Creates a new job in the Geko Scheduling platform. Once created, the job is immediately available for automatic dispatch, manual slot allocation, or route planning.

Method	POST
Path	/api/jobs
Authentication	Required — X-API-Key

Request Body Schema

FIELD	TYPE	REQUIRED	DESCRIPTION	CONSTRAINTS / EXAMPLES
jobId	string	Optional	Your system's unique identifier/reference number. If omitted, Geko auto-assigns a unique ID (JOB-XXXXX).	Max 64 chars — ORD-2026-0881 , J-0D5C3407
title	string	Optional	Customer salutation or title.	Mr , Mrs , Ms , Dr , Prof
firstName	string	Optional	Customer first name.	Eleanor
lastName	string	Optional	Customer surname.	Rigby
addressLine1	string	Optional	Primary street name and building/door number.	42 Penny Lane
town	string	Optional	Town or city name.	Liverpool
postcode	string	Required	UK postal code. Used for geocoding and travel estimation.	Valid UK format — L18 1DG
phone	string	Optional	Customer telephone or mobile number.	07812 345678
email	string	Optional	Customer email address.	customer@domain.com
jobType	string	Required	Work category. Must be either Solar Install or Battery Only .	Solar Install or Battery Only

FIELD	TYPE	REQUIRED	DESCRIPTION	CONSTRAINTS / EXAMPLES
<code>jobLength</code>	string / number	Optional	Expected duration of the installation in days. Defaults to <code>1</code> or <code>2</code> based on specification.	<code>1</code> , <code>2</code>
<code>jobDate</code>	string	Optional	Target installation date.	<code>DD/MM/YYYY</code> or <code>YYYY-MM-DD</code> — e.g. <code>27/08/2026</code>

Example Request

POST /api/jobs

HTTP

```

POST /api/jobs HTTP/1.1
Host: geko-scheduling.vercel.app
Content-Type: application/json
X-API-Key: YOUR_API_KEY

{
  "jobId": "ORD-2026-0881",
  "title": "Mrs",
  "firstName": "Eleanor",
  "lastName": "Rigby",
  "addressLine1": "42 Penny Lane",
  "town": "Liverpool",
  "postcode": "L18 1DG",
  "phone": "07812 345678",
  "email": "eleanor.rigby@example.com"
  "jobType": "Solar Install",
  "jobLength": "2",
  "jobDate": "27/08/2026"
}

```

Success Response 201 Created

Response Body

JSON

```

{
  "success": true,
  "message": "Job created successfully"
  "jobId": "ORD-2026-0881"
}

```

3.2 Retrieve Job Status & Details

Fetches the complete dataset for a specific job, including live execution status, address combinations, and scheduling details.

Method	GET
Path	/api/jobs?jobId={jobId}

Authentication	Required — X-API-Key
----------------	----------------------

Query Parameters

PARAMETER	TYPE	REQUIRED	DESCRIPTION
jobId	string	Required	The unique Job Identifier to retrieve (e.g. ORD-2026-0881 or J-0D5C3407).

Example Request

GET /api/jobs HTTP

GET /api/jobs?jobId=ORD-2026-0881 HTTP
Host: geko-scheduling.vercel.app
X-API-Key: YOUR_API_KEY

Success Response 200 OK

Response Body JSON

{
 "success": true,
 "job": {
 "jobId": "ORD-2026-0881",
 "title": "Mrs",
 "firstName": "Eleanor",
 "lastName": "Rigby",
 "customerName": "Mrs Eleanor Rigby",
 "address": "42 Penny Lane, Liverpool",
 "addressLine1": "42 Penny Lane",
 "town": "Liverpool",
 "postcode": "L18 1DG",
 "phone": "07812 345678",
 "email": "eleanor.rigby@example.co",
 "jobType": "Solar Install",
 "jobLength": "2",
 "jobDate": "27/08/2026",
 "jobStatus": "unassigned",
 "uploadedAt": "2026-08-24T08:15:30",
 "source": "api"
 }
}

04 Job Status Lifecycle

As jobs transition through field operations workflows, the `jobStatus` field reflects real-time status changes.

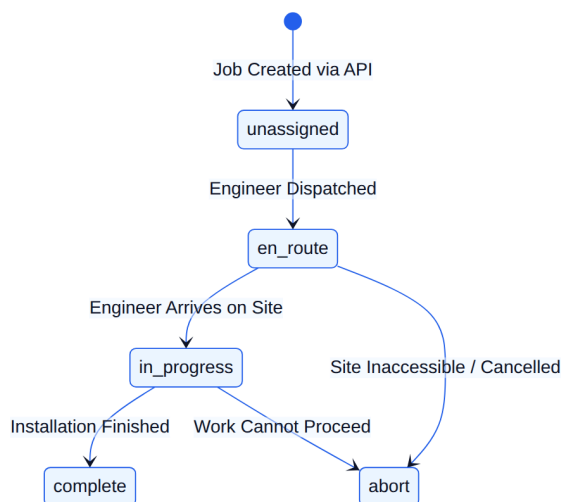


Figure 2 — Valid job status transitions from creation through completion or abort.

STATUS CODE	DISPLAY LABEL	DESCRIPTION
unassigned	Unassigned	Job received and stored in queue; awaiting engineer assignment.
en-route	En Route	Assigned engineer is actively travelling to the customer site.
in-progress	In Progress	Engineer is currently on-site performing work.
complete	Complete	Installation and sign-off complete. Photos & docs uploaded.
abort	Aborted	Work aborted (e.g. customer no-show, unsafe conditions).

05 HTTP Error Codes & Handling

The Geko API adheres to standard HTTP status codes.

HTTP STATUS	REASON	PAYLOAD DESCRIPTION	RECOMMENDED ACTION
200 OK	Success	Request succeeded as expected.	Process response data.
201 Created	Created	Job successfully ingested into Geko.	Store <code>jobId</code> in your database.
400 Bad Request	Validation Error	Missing mandatory field (e.g. <code>jobType</code> or <code>postcode</code>).	Verify and correct request payload.
401 Unauthorised	Authentication Failure	Missing or invalid <code>X-API-Key</code> .	Check the API Key header.
404 Not Found	Resource Missing	Job ID does not exist in Geko system.	Confirm <code>jobId</code> string accuracy.
409 Conflict	Duplicate Key	A job with that <code>jobId</code> already exists.	Use a unique <code>jobId</code> or query via GET.
405 Method Not Allowed	Invalid Method	Calling an unsupported HTTP method (e.g. <code>DELETE</code>).	Restrict calls to <code>GET</code> and <code>POST</code> .
500 Server Error	Processing Exception	Internal runtime failure.	Retry with exponential backoff; contact support.

Standard Error Response Format

Error Body

JSON

```
{
  "success": false,
  "error": "jobType is required."
}
```

Reference implementations for creating and retrieving a job, across common client stacks.

cURL

shell

bash

```
# 1. Create a Job (Solar Install)
curl -X POST "https://geko-scheduling.vercel.app/api/jobs" \
  -H "Content-Type: application/json" \
  -H "X-API-Key: YOUR_API_KEY" \
  -d '{
    "jobId": "ORD-1002",
    "title": "Mr",
    "firstName": "John",
    "lastName": "Smith",
    "addressLine1": "10 High Street",
    "town": "Bristol",
    "postcode": "BS1 4DJ",
    "phone": "07700 900123",
    "email": "john.smith@example.com",
    "jobType": "Solar Install",
    "jobLength": "2",
    "jobDate": "28/08/2026"
  }'

# 2. Retrieve a Job
curl -X GET "https://geko-scheduling.vercel.app/api/jobs?jobId=ORD-1002" \
  -H "X-API-Key: YOUR_API_KEY"
```

Python

requests

geko_client.py

python

```
import requests

API_BASE = "https://geko-scheduling.vercel.app/api/jobs"
API_KEY = "YOUR_API_KEY"

headers = {
    "Content-Type": "application/json",
    "X-API-Key": API_KEY
```

```

}

# --- Create Job (Battery Only) ---
payload = {
  "jobId": "ORD-1003",
  "title": "Dr",
  "firstName": "Sarah",
  "lastName": "Connor",
  "addressLine1": "15 Park Boulevard",
  "town": "Manchester",
  "postcode": "M1 1AA",
  "phone": "07700 900456",
  "email": "sarah.connor@example.com",
  "jobType": "Battery Only",
  "jobLength": "1",
  "jobDate": "29/08/2026"
}

response = requests.post(API_BASE, json=payload, headers=headers)
print("Create response:", response.status_code, response.json())

# --- Retrieve Job ---
get_response = requests.get(f"{API_BASE}?jobId=ORD-1003", headers=headers)
job_data = get_response.json()
print("Job Status:", job_data.get("job", {}).get("jobStatus"))

```

Node.js

fetch

geko-client.js

javascript

```

const API_BASE = 'https://geko-scheduling.vercel.app/api/jobs';
const API_KEY = 'YOUR_API_KEY';

async function createAndFetchJob() {
  const headers = {
    'Content-Type': 'application/json',
    'X-API-Key': API_KEY
  };

  // 1. Post new job (Solar Install)
  const createRes = await fetch(API_BASE, {
    method: 'POST',
    headers,
    body: JSON.stringify({
      jobId: 'ORD-1004',
      title: 'Ms',
      firstName: 'Jane',
      lastName: 'Doe',
      addressLine1: '8 Queen Street',

```

```

        town: 'Leeds',
        postcode: 'LS1 2TW',
        phone: '07700 900789',
        email: 'jane.doe@example.com',
        jobType: 'Solar Install',
        jobLength: '2',
        jobDate: '30/08/2026'
    })
});
const createData = await createRes.json();
console.log('Created:', createData);

// 2. Fetch job details
const getRes = await fetch(`${API_BASE}?jobId=ORD-1004`, { headers });
const getData = await getRes.json();
console.log('Job Details:', getData.job);
}

createAndFetchJob();

```

C#

.NET Core / HttpClient

Program.cs

csharp

```

using System;
using System.Net.Http;
using System.Text;
using System.Text.Json;
using System.Threading.Tasks;

class Program
{
    private static readonly HttpClient client = new HttpClient();
    private const string ApiUrl = "https://geko-scheduling.vercel.app/api/jobs";
    private const string ApiKey = "YOUR_API_KEY";

    static async Task Main()
    {
        client.DefaultRequestHeaders.Add("X-API-Key", ApiKey);

        var newJob = new
        {
            jobId = "ORD-1005",
            title = "Mr",
            firstName = "Alan",
            lastName = "Turing",
            addressLine1 = "1 Computable Way",
            town = "Cambridge",
            postcode = "CB2 1TN",

```

```

        phone = "07700 900999",
        email = "alan@example.com",
        jobType = "Solar Install",
        jobLength = "2",
        jobDate = "01/09/2026"
    };

    var json = JsonSerializer.Serialize(newJob);
    var content = new StringContent(json, Encoding.UTF8, "application/json");

    var response = await client.PostAsync(ApiUrl, content);
    var result = await response.Content.ReadAsStringAsync();
    Console.WriteLine($"POST Response: {result}");
}
}

```

PHP

cURL

geko-client.php

php

```

<?php
$apiUrl = "https://geko-scheduling.vercel.app/api/jobs";
$apiKey = "YOUR_API_KEY";

$jobPayload = [
    "jobId"      => "ORD-1006",
    "title"      => "Mr",
    "firstName"  => "Arthur",
    "lastName"   => "Dent",
    "addressLine1" => "42 Cottington Lane",
    "town"       => "London",
    "postcode"   => "SW1A 1AA",
    "phone"      => "07700 900111",
    "email"      => "arthur.dent@example.com",
    "jobType"    => "Battery Only",
    "jobLength"  => "1",
    "jobDate"    => "02/09/2026"
];

$ch = curl_init($apiUrl);
curl_setopt($ch, CURLOPT_RETURNTRANSFER, true);
curl_setopt($ch, CURLOPT_POST, true);
curl_setopt($ch, CURLOPT_POSTFIELDS, json_encode($jobPayload));
curl_setopt($ch, CURLOPT_HTTPHEADER, [
    "Content-Type: application/json",
    "X-API-Key: " . $apiKey
]);

$response = curl_exec($ch);

```

```
$httpCode = curl_getinfo($ch, CURLINFO_HTTP_CODE);  
curl_close($ch);  
  
echo "HTTP Code: " . $httpCode . "\n";  
echo "Response: " . $response . "\n";  
?>
```

07 Rate Limits & Best Practices

- **Rate Limit** — 120 requests per minute per API Key (soft burst limit).
- **Idempotency** — providing your internal order number in `jobId` guarantees idempotency and prevents accidental double-creation of work orders.
- **Batch Ingestion** — for bulk historical transfers exceeding 500 jobs, staggered batch intervals of 100ms between requests are recommended.
- **Date Formatting** — always format dates as `DD/MM/YYYY` (or ISO `YYYY-MM-DD`) to ensure calendar sorting synchronisation.

08

Technical Support & Integration Assistance

For integration queries, API key provisioning, or sandbox testing credentials, reach out via the channels below.

TECHNICAL SUPPORT TEAM

api-support@geko-renewables.co.uk

ESCALATIONS

Operations Engineering Desk

PLATFORM STATUS

geko-scheduling.vercel.app

DOCUMENT STATUS

Production Ready · v1.0

— End of Document —