

Using MySQL Workbench

In this guide we will create a database with MySQL Workbench and export it to a *.sql script file

Prerequisites: MySQL server 8.4.11 and MySQL Workbench 8.0.47 installed.

Bjørn Christensen - 2026



Open SQL Workbench and create a Connection

SQL Workbench

View Database Tools Scripting Help

Welcome to MySQL workbench

3. MySQL Server username

1. Click

MySQL Connections

Local instance MySQL80

root
localhost:3306

2. Name your connection

Setup New Connection

Connection Name: bjornsConnection
Connection Method: Standard (TCP/IP)

Parameters SSL Advanced

Hostname: 127.0.0.1

Username: bjorn

Password: Store in Vault ...

Default Schema:

4. Click

5. MySQL Server password


6. OK

7. Test your Connection

8. OK

username and password you defined during MySQL Server installation

Next open your new Connection

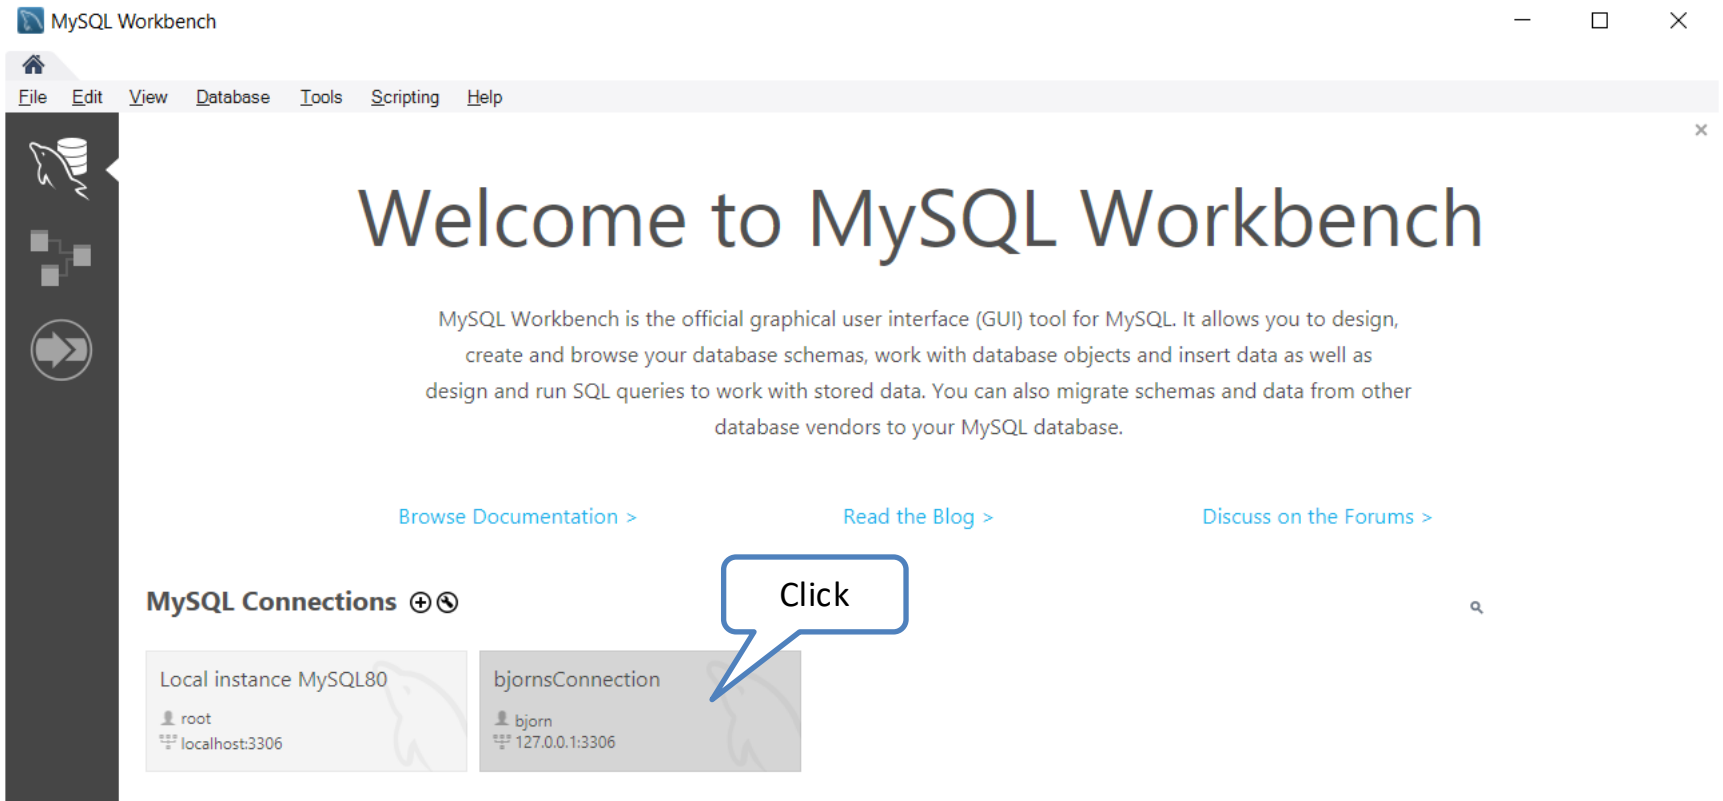

Now create the database

A database is called a schema in MySQL Workbench

The screenshot shows the MySQL Workbench interface with the 'books_db - Schema' dialog box open. The dialog box has a 'Name' field containing 'books_db', 'Charset/Collation' dropdowns set to 'Default Charset' and 'Default Collation', and an 'Apply' button. A 'Rename References' button is also visible. The left sidebar shows a list of schemas: bilprojekt, bookstore, erik, javamasterspringmvc, sakila, sys, test, wishlist_db, and world. The bottom status bar shows 'No object selected' and 'Schema'.

1. Click

2. Give a database name

3. Apply two times, then Finish

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

4

Create a table and add some columns

2. Click Create Table

3. Give the table a name

1. Double click to highlight your database

4. And add some columns

5. Apply two times, then Finish

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Column Name	Datatype	PK	NN	UQ	B	UN	ZF	AI	G	Default/Expression
id	INT	☒	☒	☒	☐	☒	☐	☒	☐	
title	VARCHAR(45)	☐	☐	☐	☐	☐	☐	☐	☐	NULL
year	VARCHAR(45)	☐	☐	☐	☐	☐	☐	☐	☐	NULL

Column Name: Data Type:

Charset/Collation:

Default:

Storage: ☐ Virtual ☐ Stored

☐ Primary Key ☐ Not Null

☐ Binary ☐ Unsigned

☐ Auto Increment ☐ Generated

Apply Revert Context Help Snippets

Let's add some data to the table

MySQL Workbench

bjornsConnection x

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

books_db

Tables

books

Views

Stored Procedures

Functions

bookstore

erik

javamasterspringmvc

sakila

sys

test

wishlist_db

world

books - Table

books x

Limit to 1000 rows

1 • `SELECT * FROM books_db.books;`

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Result Grid

	id	title	year
1	ABC		1957
2		Huset Højbo	1967
3		De små synger	1962
4	NULL	NULL	NULL

2. Enter some data

3. Apply two times, then Finish

Apply Revert Context Help Snippets

A little more configuration

- **Safe/Unsafe UPDATE statements**

MySQL Workbench tillader pr default ikke DELETE statements uden WHERE clause.

For at ændre dette i MySQL Workbench:

- Edit>Preferences>SQL Editor
- Uncheck: Safe Updates
- Genstart MySQL Workbench.

Hand-in projects with a database

- Always create a SQL script that can re-generate the database and all it's tabels and data.
- Be sure to test the script: Delete the database and re-generate it using the script.
- Put the SQL script in the resources folder in the IntelliJ project and be sure to add it to GitHub.

Create a SQL script to re-generate the database

The screenshot shows the MySQL Workbench interface with the 'Data Export' dialog open. The dialog is titled 'Administration - Data Export' and 'bjornsConnection Data Export'. It has two tabs: 'Object Selection' and 'Export Progress'. The 'Object Selection' tab is active, showing a list of tables to export. The 'Export Options' section is at the bottom, with 'Export to Self-Contained File' selected. The 'Include Create Schema' checkbox is checked. The 'Start Export' button is at the bottom right.

1. Click > Data Export

2. Check the database to export

3. Select Dump Structure and Data

4. Select Export to Self-Contained File

5. Give your script a filename

6. Include Create Schema

7. Click

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Run a SQL script to re-generate a database

The screenshot shows the MySQL Workbench interface with the 'Administration - Data Import' dialog open. The dialog has two tabs: 'Import from Disk' and 'Import Progress'. The 'Import from Disk' tab is active, showing 'Import Options'. Under 'Import Options', 'Import from Self-Contained File' is selected, and the file path 'C:\Users\Björn\Desktop\books_db.sql' is entered. A callout '3. Select your file' points to the file path field. Below this, 'Default Schema to be Imported To' is set to 'Default Target Schema:'. A callout '4. Click' points to the 'Start Import' button at the bottom right. On the left, the 'Navigator' pane shows a list of schemas: 'bilprojekt', 'bookstore', 'erik', and 'world'. A callout '2. Select Export from Self-Contained File' points to the 'bookstore' schema. A callout '1. Click > Data Import' points to the 'Data Import' menu item in the top menu bar. A callout 'Refresh to see the new database' points to the refresh icon in the Navigator pane. A callout '4. Click' also points to the 'Start Import' button. A text box on the right side of the dialog states: 'Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.'

1. Click > Data Import

2. Select Export from Self-Contained File

3. Select your file

4. Click

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Done !

Now you have a database in MySQL
with a single table and some data