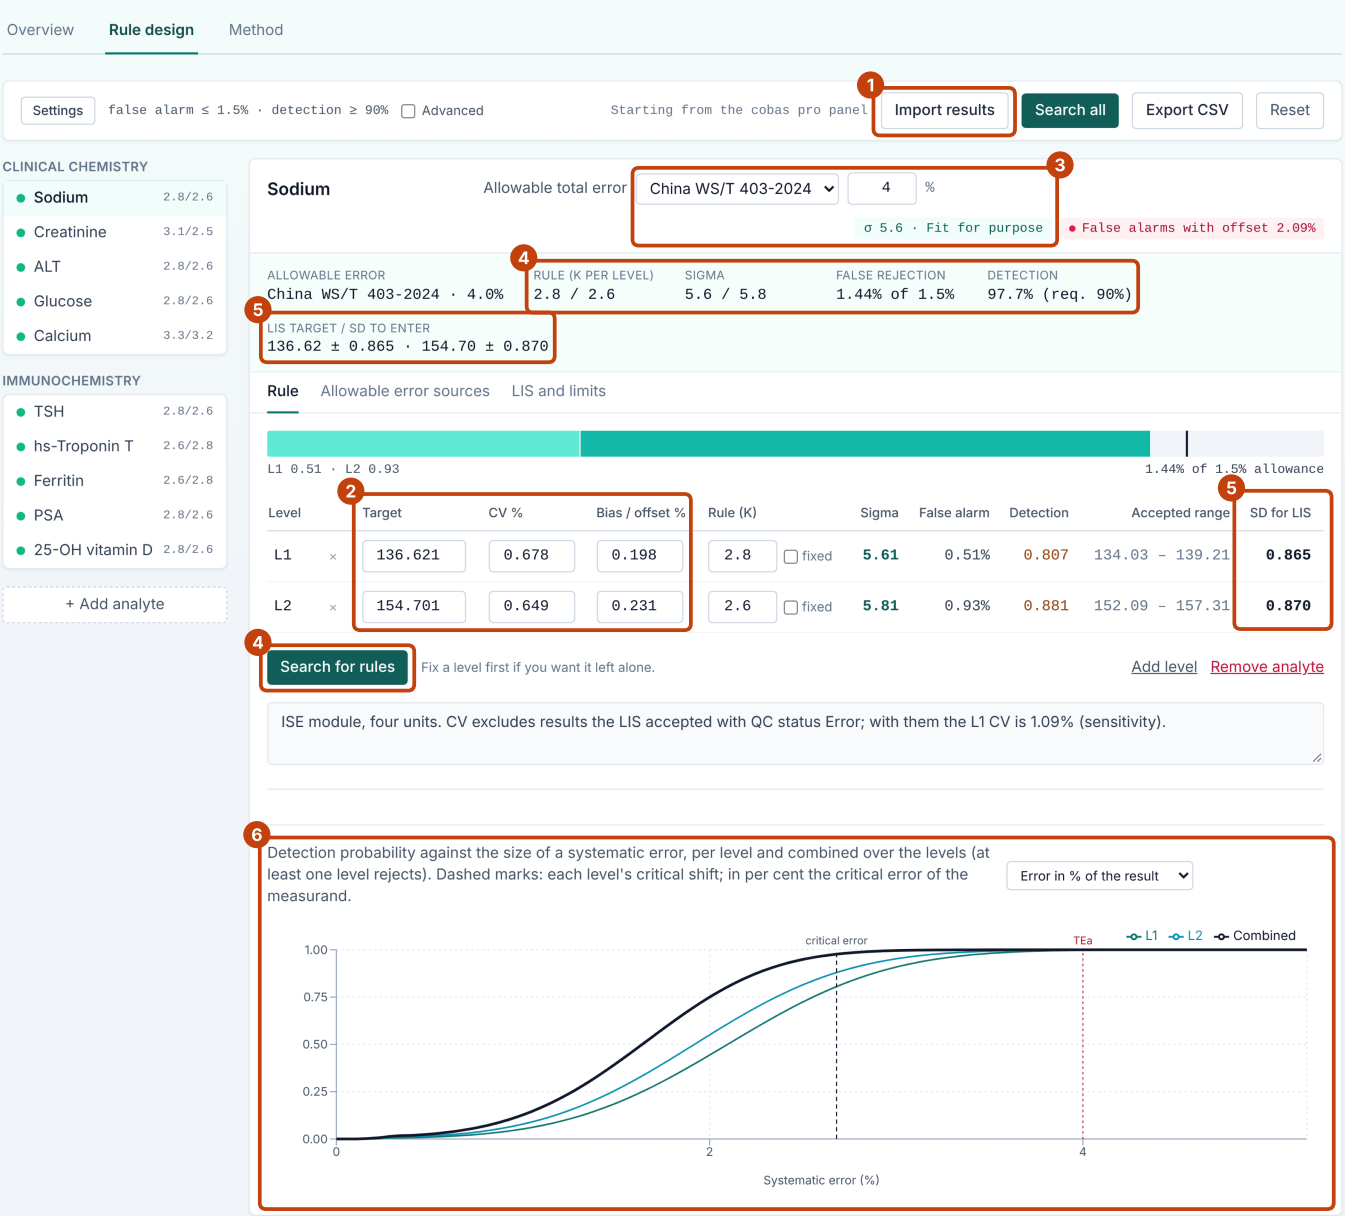


cobas infinity export → ① import → ② CV, target, offset → ③ TEa source → ④ rule search → ⑤ target and SD in the LIS

1 Import the cobas infinity export (or type the values).

2 Per level: target (lot mean), CV of the worst analyser, analyser offset.

3 Choose the allowable total error source; sigma per level follows.

4 Rule search: K per level, combined false rejection and detection against the requirement.

5 Output: the target and the SD to enter so that the LIS's 1:3s rule reproduces the derived limit.

6 Detection against the size of a systematic error, per level and combined.