

DATABASE TEKKOM.SHOP


1. CREATE DATABASE

Langkah awal membuat database utama untuk aplikasi belanja.


Query:

```
CREATE DATABASE tekkom_shop;
```

```
USE tekkom_shop;
```

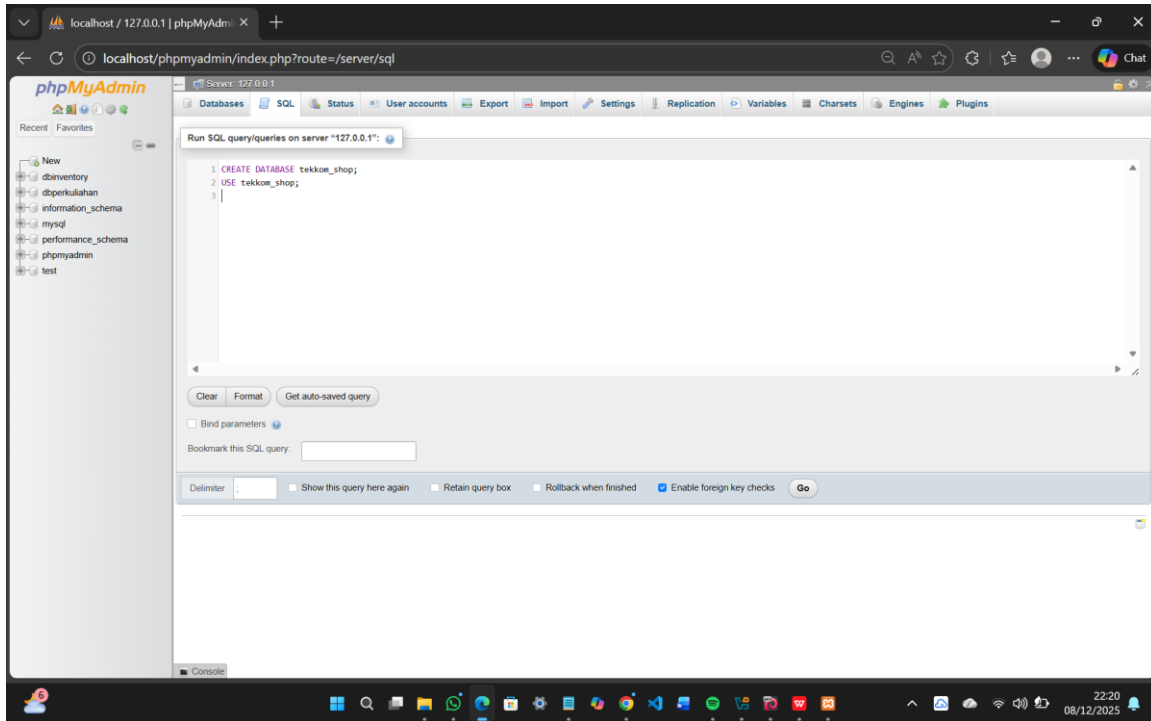

Hasilnya terdapat nama database di bagian kiri yaitu tekkom_shop ->

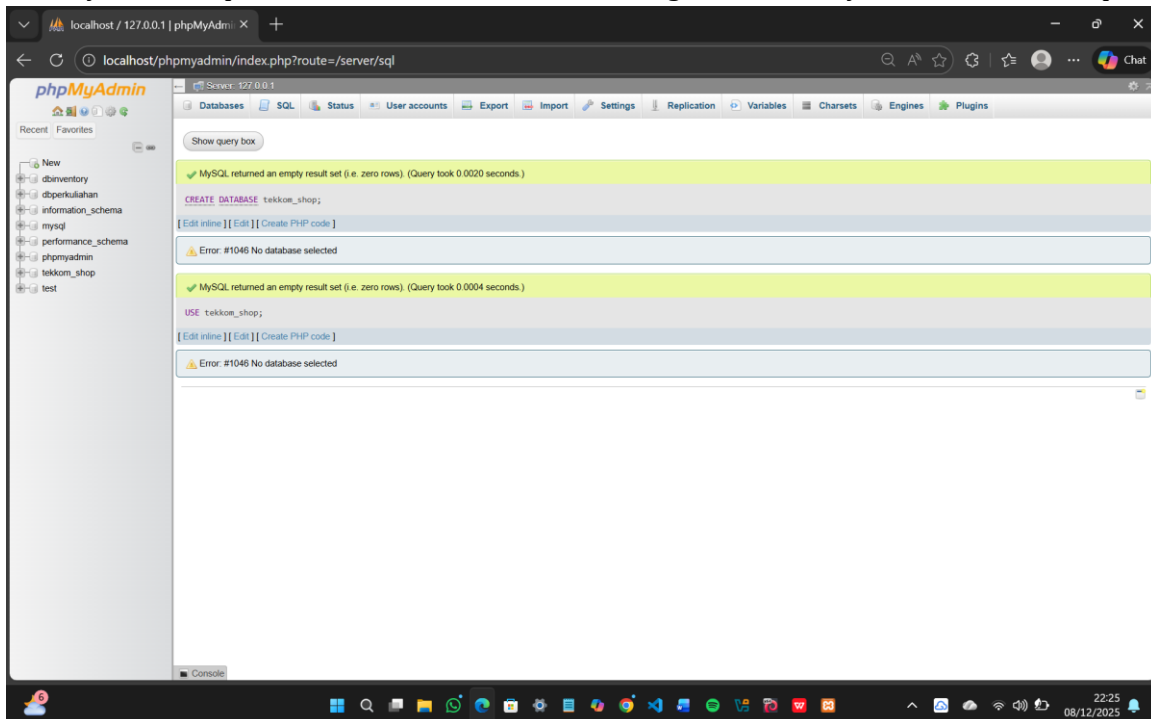



2. TABEL USERS

Fungsi: Menyimpan akun pengguna (username, password, nama, alamat).

Query:

```
CREATE TABLE users (  
    id_user INT PRIMARY KEY AUTO_INCREMENT,  
    username VARCHAR(50),  
    password VARCHAR(255),  
    nama VARCHAR(100),  
    alamat TEXT  
);  
  
INSERT INTO users (username, password, nama, alamat) VALUES  
(  
'syifa24', '12345', 'Mufalah Syifa', 'Jl. Melati No. 12'),  
(  
'ariyanta10', '12345', 'Ariyanta Muyassar', 'Jl. Kenanga No. 5'),  
(  
'faqih04', '12345', 'Muhammad Faqih Ramadhan', 'Jl. Cempaka No. 9'),  
(  
'riska02', '12345', 'Riska Amelia', 'Jl. Dahlia No. 7'),  
(  
'fatih28', '12345', 'Fatih Bernas Mulyadi', 'Jl. Mawar No. 18'),  
(  
'lina_k', '12345', 'Lina Kartika', 'Jl. Anggrek No. 2'),  
(  
'budi_s', '12345', 'Budi Santoso', 'Jl. Teratai No. 3'),  
(  
'nina_w', '12345', 'Nina Wardani', 'Jl. Seruni No. 11'),  
(  
'sinta_a', '12345', 'Sinta Aulia', 'Jl. Tulip No. 20'),  
(  
'rangga_p', '12345', 'Rangga Pratama', 'Jl. Flamboyan No. 15');
```

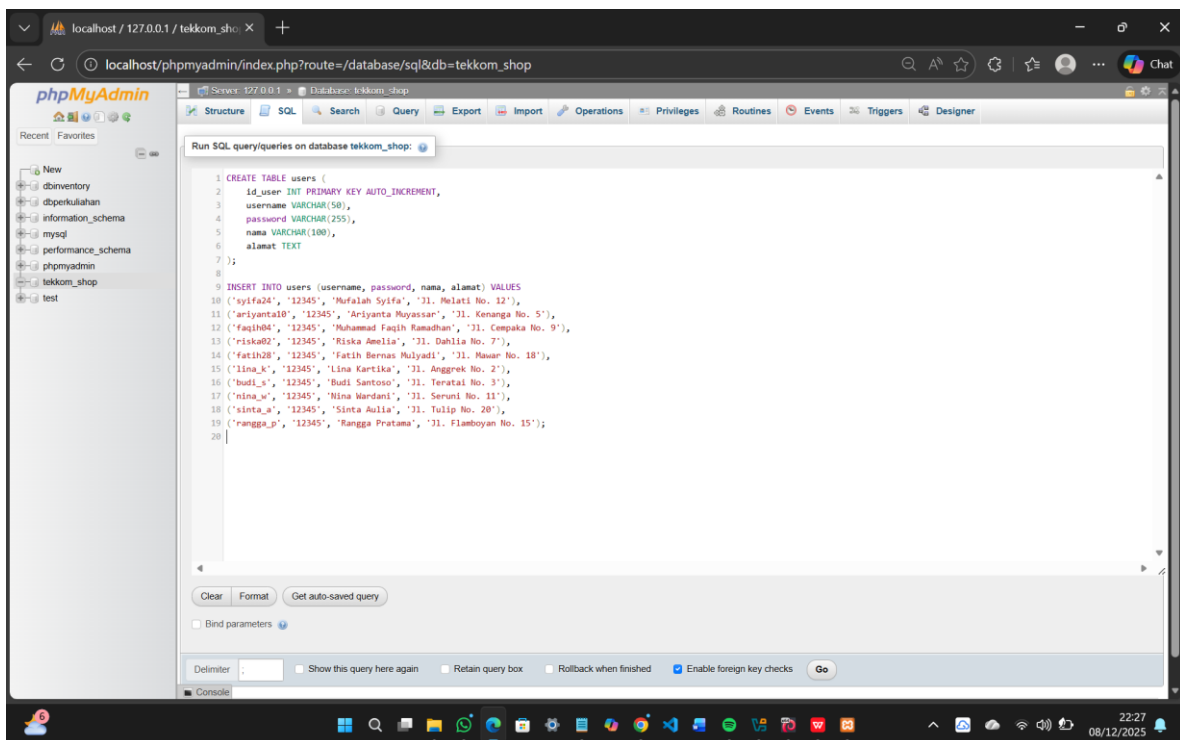

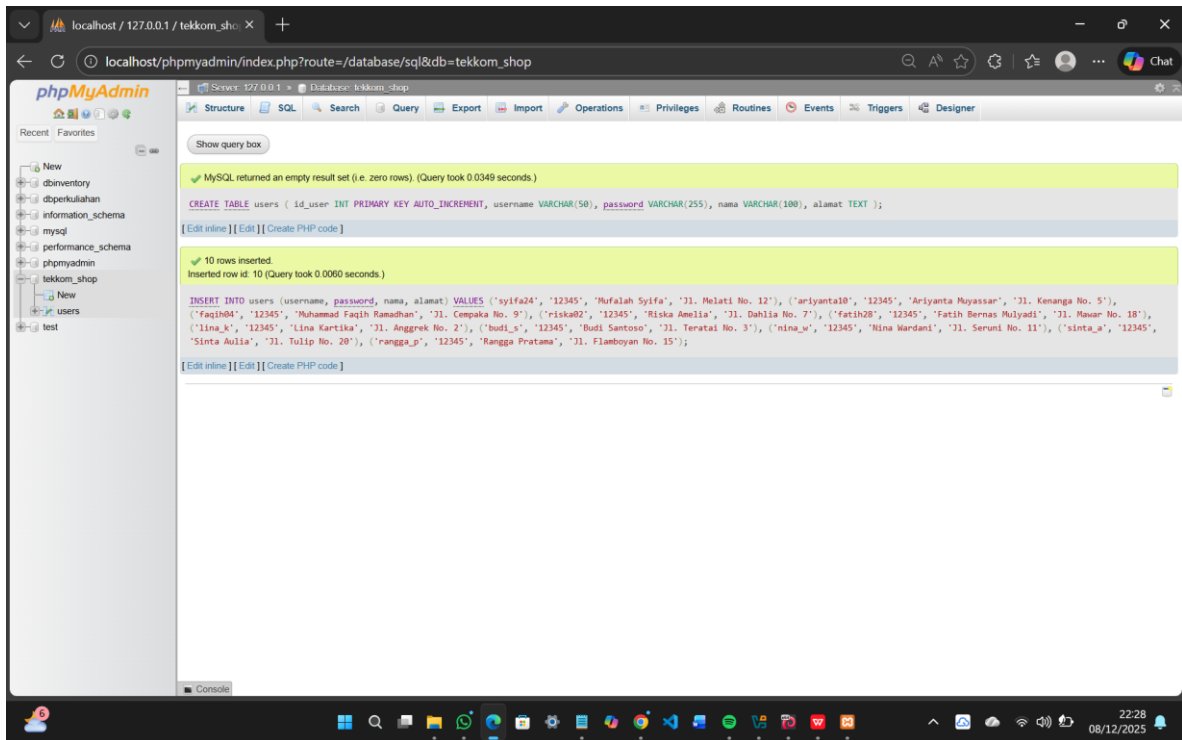

Hasilnya table berikut :

The screenshot shows the 'Table: users' view in phpMyAdmin. The table contains 10 rows of data. The columns are: id_user, username, password, nama, and alamat.

	id_user	username	password	nama	alamat
☐	1	syifa24	12345	Mufalah Syifa	Jl. Melati No. 12
☐	2	ariyanta10	12345	Ariyanta Muyassar	Jl. Kenanga No. 5
☐	3	faqih04	12345	Muhammad Faqih Ramadhan	Jl. Cempaka No. 9
☐	4	riskaa02	12345	Riska Amelia	Jl. Dahlia No. 7
☐	5	fatih28	12345	Fatih Bernas Mulyadi	Jl. Mawar No. 18
☐	6	lina_k	12345	Lina Kartika	Jl. Anggrek No. 2
☐	7	budi_s	12345	Budi Santoso	Jl. Teratai No. 3
☐	8	nina_w	12345	Nina Wardani	Jl. Seruni No. 11
☐	9	sinta_a	12345	Sinta Aulia	Jl. Tulip No. 20
☐	10	rangga_p	12345	Rangga Pratama	Jl. Flamboyan No. 15


3. TABEL PRODUCTS


Fungsi: Menyimpan daftar produk, stok, dan harga.

Query :

```
CREATE TABLE products (  
    id_produk INT PRIMARY KEY AUTO_INCREMENT,  
    nama_produk VARCHAR(100),  
    stok INT,  
    harga INT  
);
```

```
INSERT INTO products (nama_produk, stok, harga) VALUES  
( 'Monitor', 10, 500000),  
( 'Keyboard', 15, 150000),  
( 'Mouse', 20, 50000),  
( 'Printer', 10, 900000),  
( 'Power Supply', 9, 600000),  
( 'RAM', 6, 700000),  
( 'CPU', 8, 800000),  
( 'Motherboard', 13, 400000),  
( 'Harddisk', 15, 300000),  
( 'Flashdisk', 20, 100000);
```

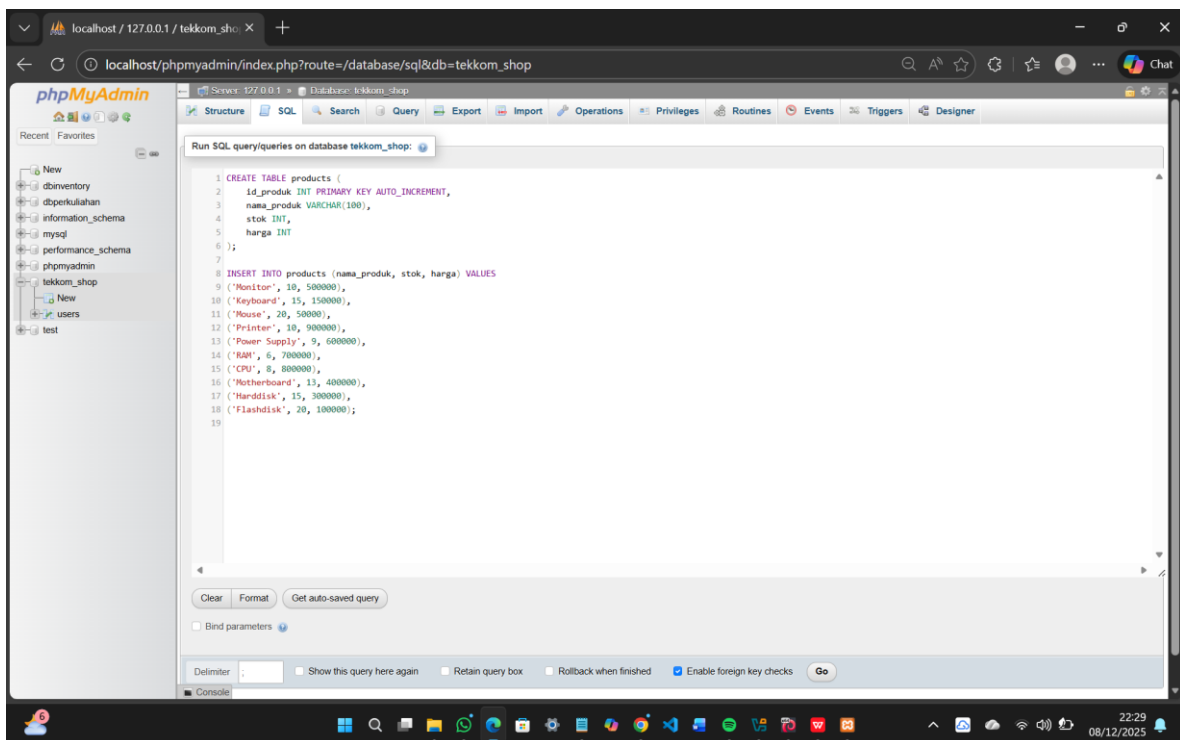

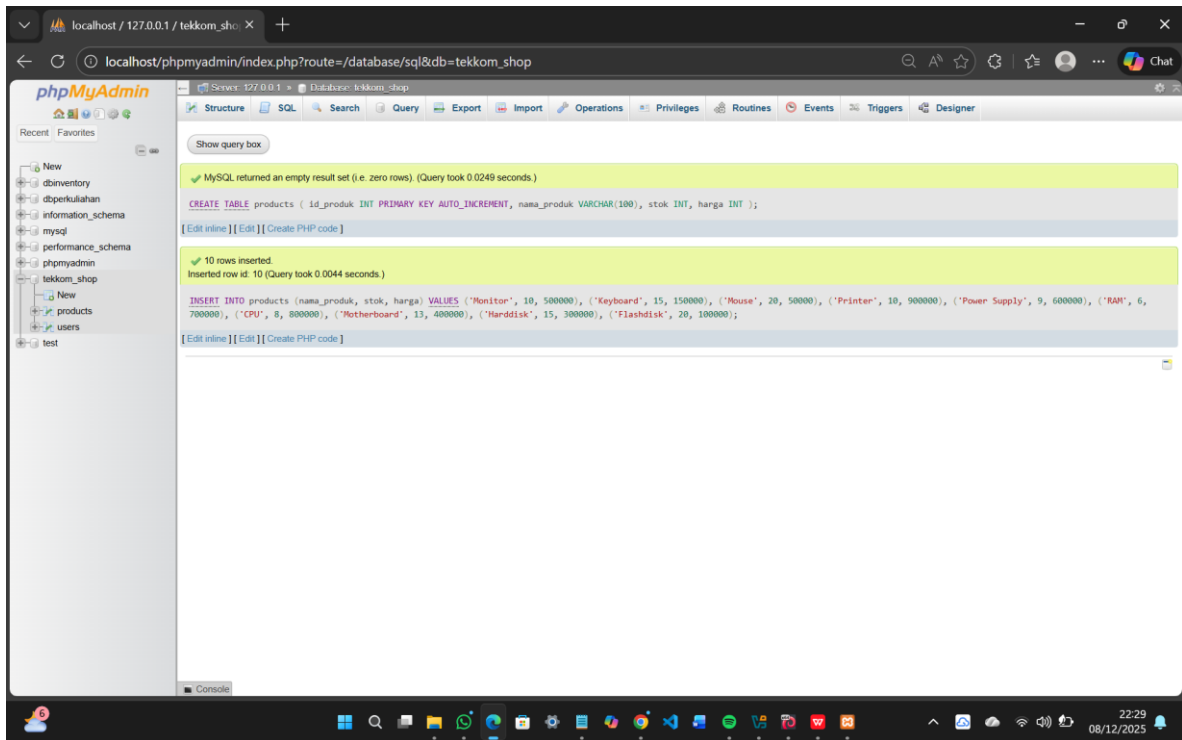

Hasilnya table berikut :

The screenshot shows the phpMyAdmin interface for the 'tekkom_shop' database, displaying the 'products' table. The table structure is shown at the top, and the data is displayed in a table below. The table has 10 rows of data.

	id_produk	nama_produk	stok	harga
☐	1	Monitor	10	500000
☐	2	Keyboard	15	150000
☐	3	Mouse	20	50000
☐	4	Printer	10	900000
☐	5	Power Supply	9	600000
☐	6	RAM	6	700000
☐	7	CPU	8	800000
☐	8	Motherboard	13	400000
☐	9	Harddisk	15	300000
☐	10	Flashdisk	20	100000

4. TABEL CART


Fungsi: Menyimpan keranjang belanja user sebelum checkout.


Query :

```
CREATE TABLE cart (  
    id_cart INT PRIMARY KEY AUTO_INCREMENT,  
    id_user INT,  
    id_produk INT,  
    jumlah INT,  
    FOREIGN KEY (id_user) REFERENCES users(id_user),  
    FOREIGN KEY (id_produk) REFERENCES products(id_produk)  
);
```

```
INSERT INTO cart (id_user, id_produk, jumlah) VALUES
```

```
(1, 1, 1),  
(1, 3, 2),  
(2, 2, 1),  
(3, 5, 1),  
(4, 4, 1),  
(5, 6, 3),  
(6, 7, 1),  
(7, 10, 2),  
(8, 8, 1),  
(9, 9, 2);
```

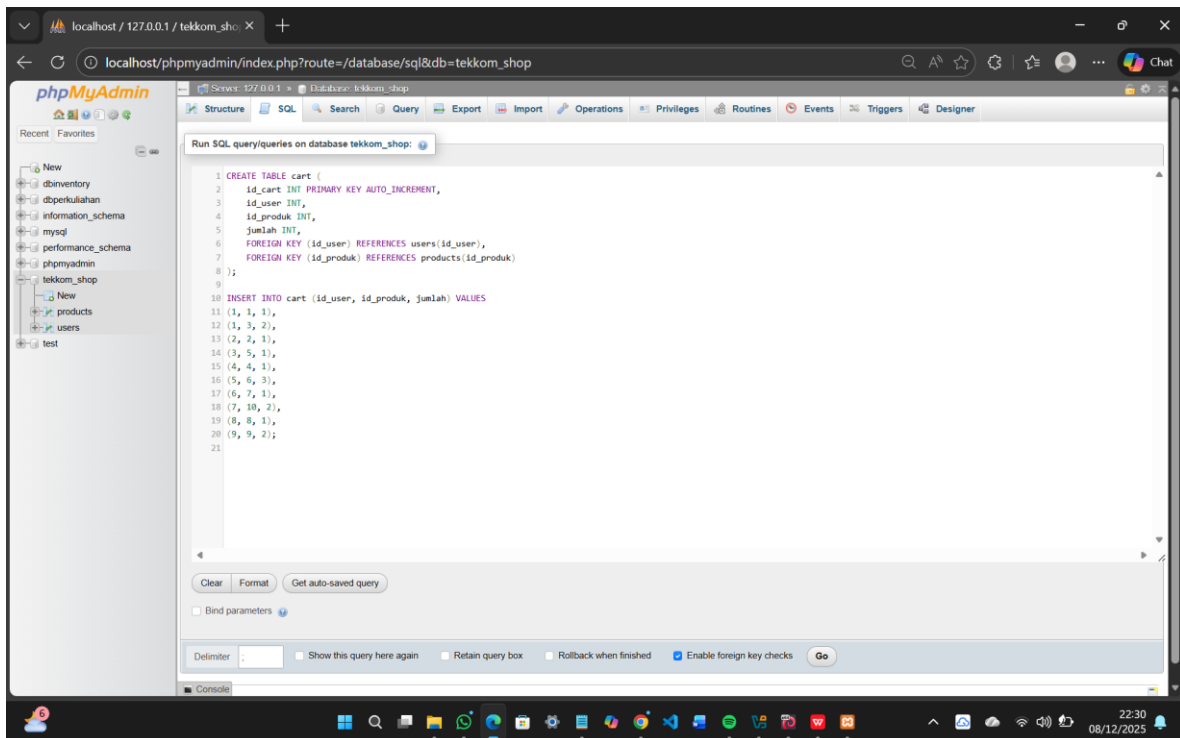

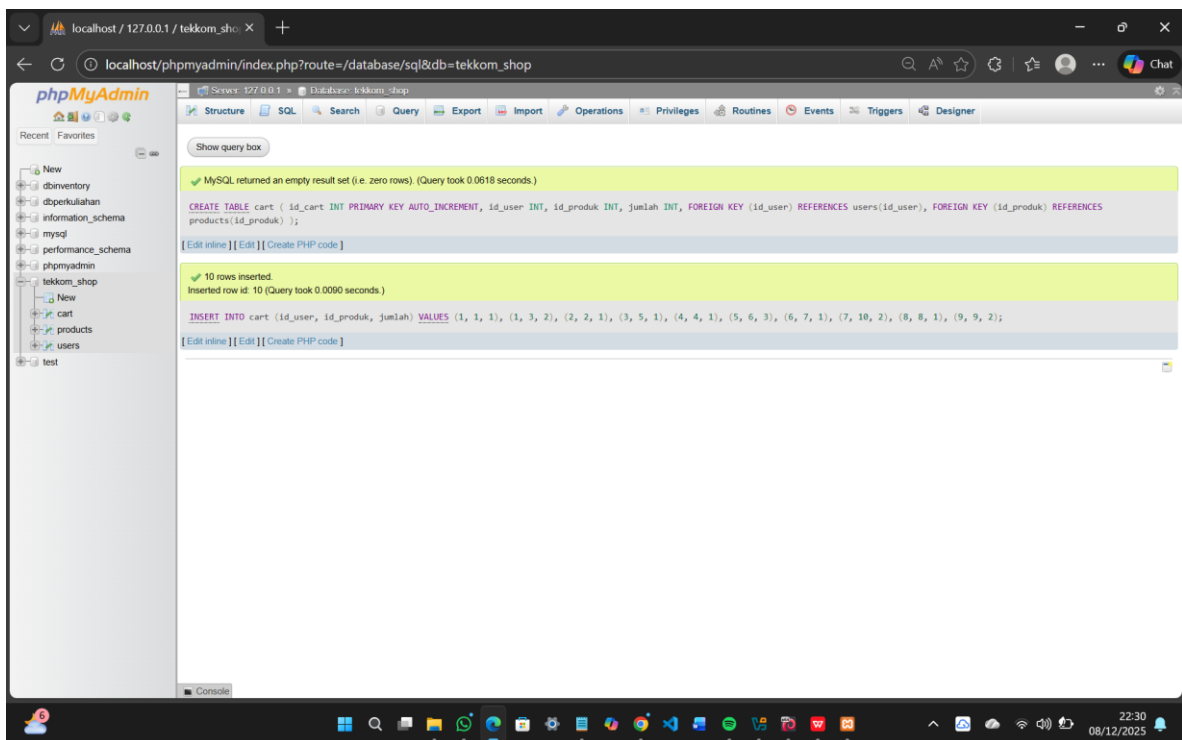

Hasil tabelnya :

Showing rows 0 - 9 (10 total, Query took 0.0006 seconds)

SELECT * FROM `cart`

Profiling [Edit inline] [Edit] [Explain SQL] [Create PHP code] [Refresh]

Show all | Number of rows: 25 | Filter rows: Search this table | Sort by key: None

Extra options

		id_cart	id_user	id_produk	jumlah
☐	Edit Copy Delete	1	1	1	1
☐	Edit Copy Delete	2	1	3	2
☐	Edit Copy Delete	3	2	2	1
☐	Edit Copy Delete	4	3	5	1
☐	Edit Copy Delete	5	4	4	1
☐	Edit Copy Delete	6	5	6	3
☐	Edit Copy Delete	7	6	7	1
☐	Edit Copy Delete	8	7	10	2
☐	Edit Copy Delete	9	8	8	1
☐	Edit Copy Delete	10	9	9	2

↑ ☐ Check all | With selected: Edit Copy Delete Export

Show all | Number of rows: 25 | Filter rows: Search this table | Sort by key: None


5. TABEL ORDERS


Fungsi: Menyimpan data transaksi checkout: user, tanggal, metode pembayaran, total.

Query:

```
CREATE TABLE orders (  
  id_order INT PRIMARY KEY AUTO_INCREMENT,  
  id_user INT,  
  tanggal DATETIME,  
  metode VARCHAR(20),  
  total INT,  
  FOREIGN KEY (id_user) REFERENCES users(id_user)  
);
```

```
INSERT INTO orders (id_user, tanggal, metode, total) VALUES  
(1, NOW(), 'COD', 550000),  
(2, NOW(), 'Transfer', 150000),  
(3, NOW(), 'COD', 600000),  
(4, NOW(), 'Transfer', 900000),  
(5, NOW(), 'COD', 2100000),  
(6, NOW(), 'COD', 800000),  
(7, NOW(), 'Transfer', 200000),  
(8, NOW(), 'COD', 400000),  
(9, NOW(), 'Transfer', 300000),  
(10, NOW(), 'COD', 1000000);
```

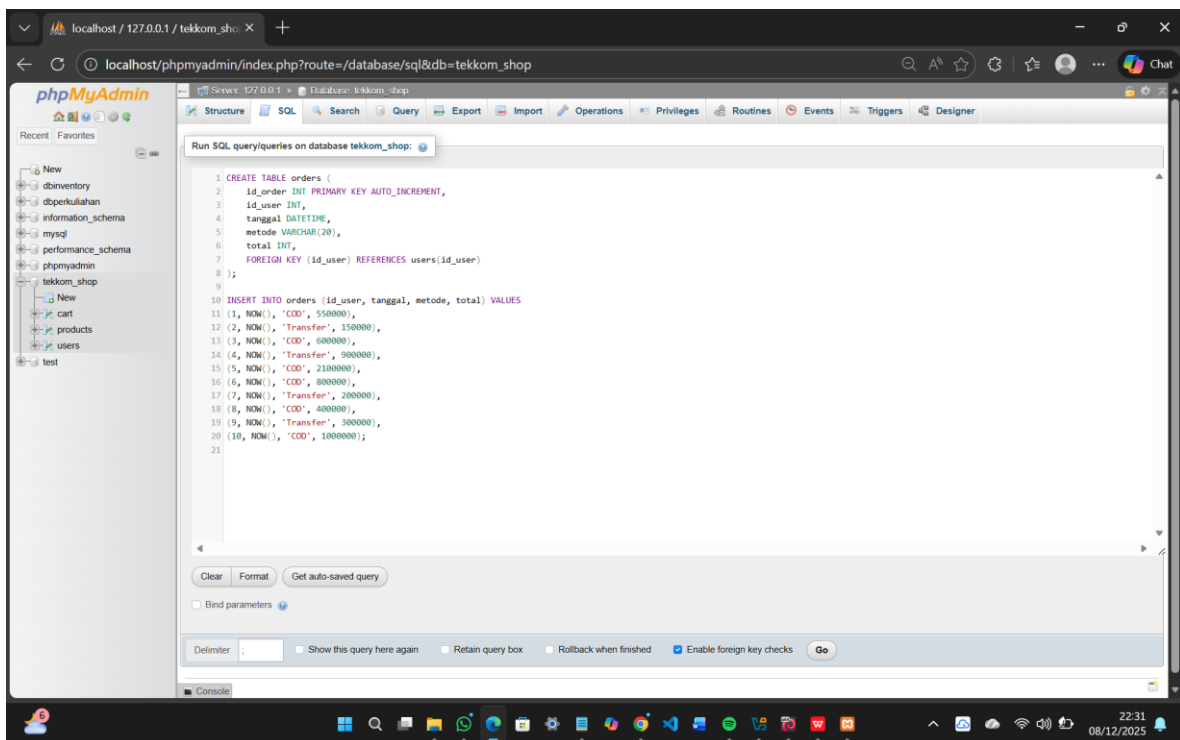

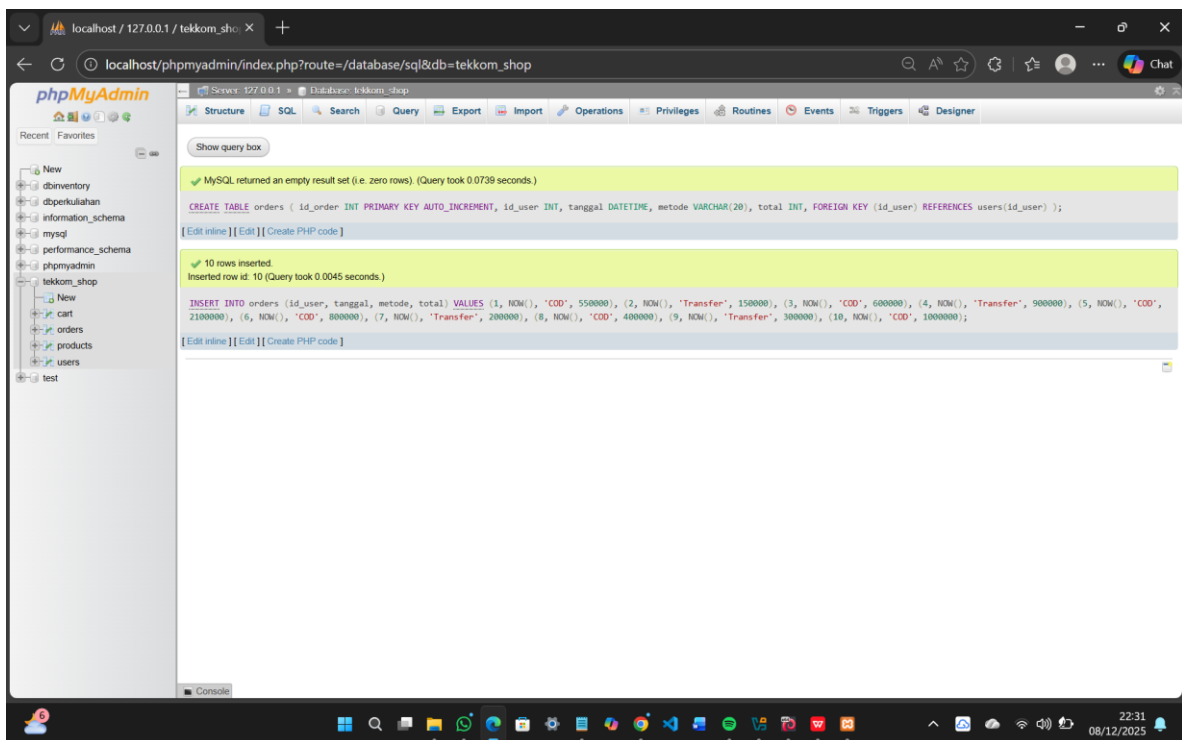

Hasil tabelnya :

The screenshot shows the phpMyAdmin interface for the 'tekkom_shop' database, displaying the 'orders' table. The table has 10 rows of data, showing the results of the INSERT query. The columns are: id_order, id_user, tanggal, metode, and total.

	id_order	id_user	tanggal	metode	total
☐	1	1	2025-12-08 22:31:13	COD	550000
☐	2	2	2025-12-08 22:31:13	Transfer	150000
☐	3	3	2025-12-08 22:31:13	COD	600000
☐	4	4	2025-12-08 22:31:13	Transfer	900000
☐	5	5	2025-12-08 22:31:13	COD	2100000
☐	6	6	2025-12-08 22:31:13	COD	800000
☐	7	7	2025-12-08 22:31:13	Transfer	200000
☐	8	8	2025-12-08 22:31:13	COD	400000
☐	9	9	2025-12-08 22:31:13	Transfer	300000
☐	10	10	2025-12-08 22:31:13	COD	1000000


6. TABEL ORDER_DETAILS


Fungsi: Menyimpan detail barang per transaksi (jumlah & subtotal).

Query :


```
CREATE TABLE order_details (  
    id_detail INT PRIMARY KEY AUTO_INCREMENT,  
    id_order INT,  
    id_produk INT,  
    jumlah INT,  
    subtotal INT,  
    FOREIGN KEY (id_order) REFERENCES orders(id_order),  
    FOREIGN KEY (id_produk) REFERENCES products(id_produk)  
);
```

```
INSERT INTO order_details (id_order, id_produk, jumlah, subtotal) VALUES  
(1, 1, 1, 500000),  
(1, 3, 1, 500000),  
(2, 2, 1, 150000),  
(3, 5, 1, 600000),  
(4, 4, 1, 900000),  
(5, 6, 3, 2100000),  
(6, 7, 1, 800000),  
(7, 10, 2, 200000),  
(8, 8, 1, 400000),  
(9, 9, 1, 300000);
```

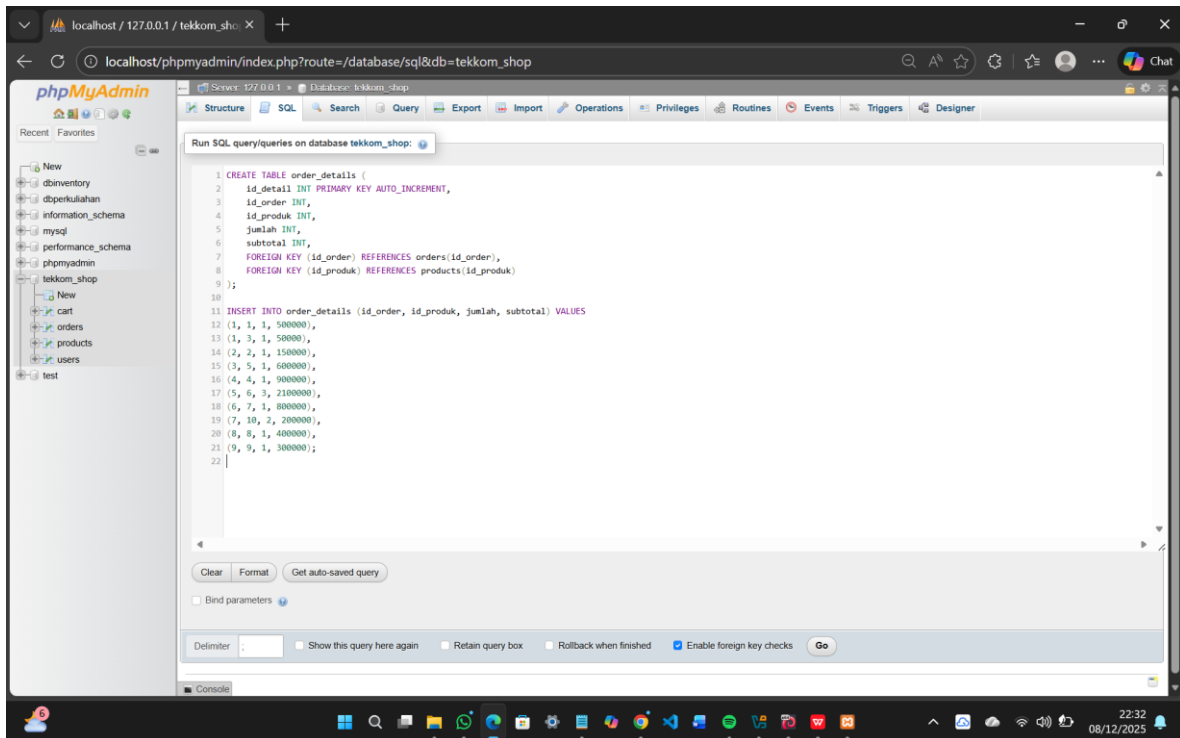

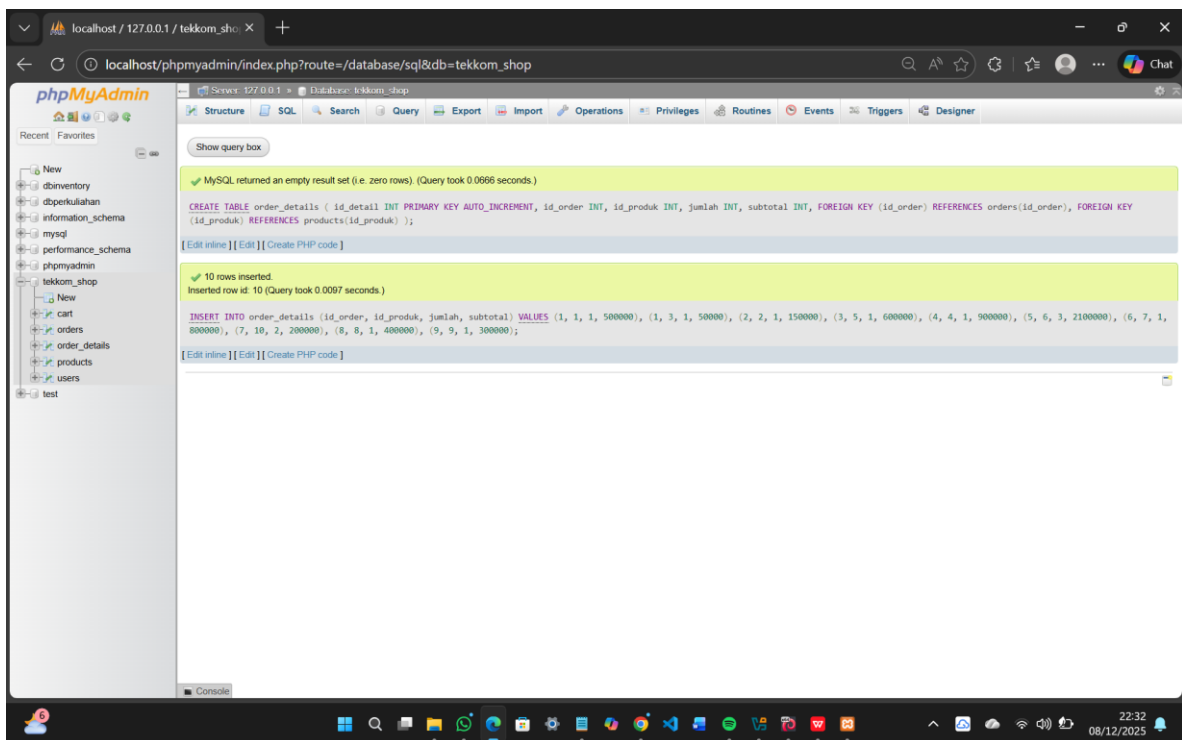

Hasil tabelnya:

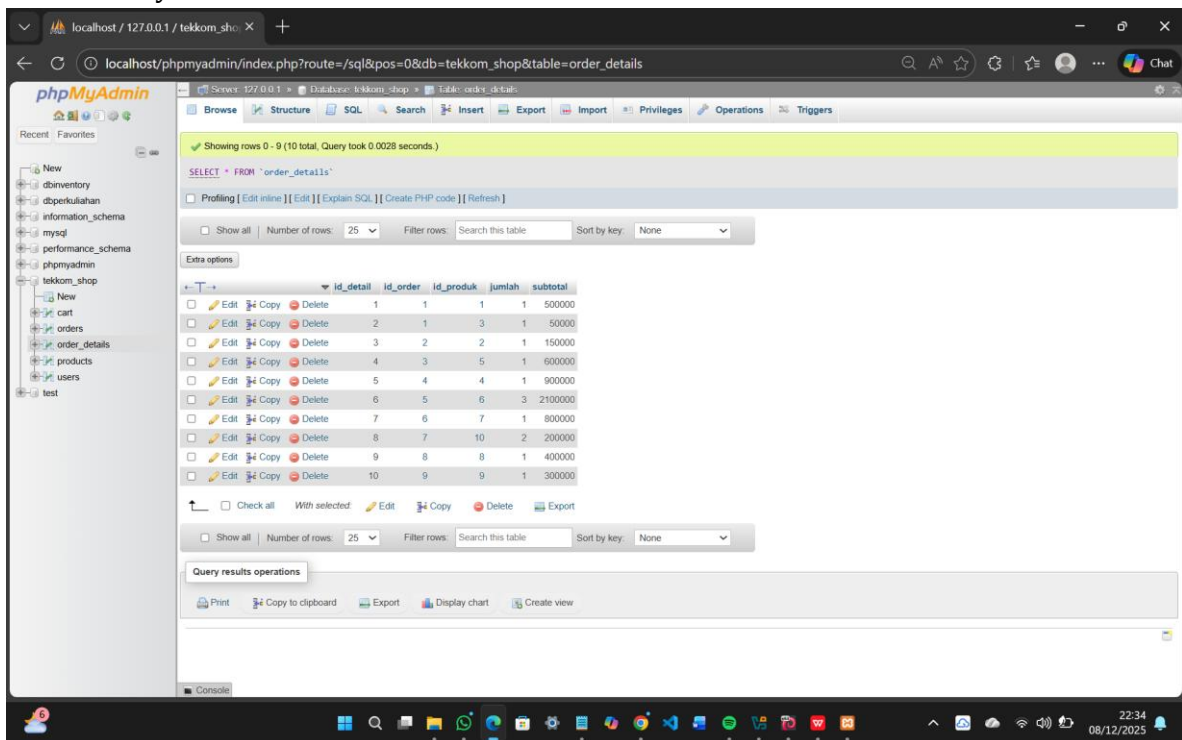

7. TRIGGER PENGURANGAN STOK

Fungsi: Mengurangi stok secara otomatis setelah data order_details masuk. Triger hasilnya tidak membentuk table tapi fitur pada database yang berfungsi menjalankan perintah secara otomatis ketika terjadi aksi tertentu pada tabel (seperti insert, update, atau delete), sehingga membantu mengurangi stok otomatis, menjaga konsistensi data, dan melakukan pencatatan perubahan tanpa perlu perintah manual.

Quary :

```
DELIMITER $$
```

```
CREATE TRIGGER kurangi_stok
AFTER INSERT ON order_details
FOR EACH ROW
BEGIN
    UPDATE products
    SET stok = stok - NEW.jumlah
    WHERE id_produk = NEW.id_produk;
END $$
```

```
DELIMITER ;
```

