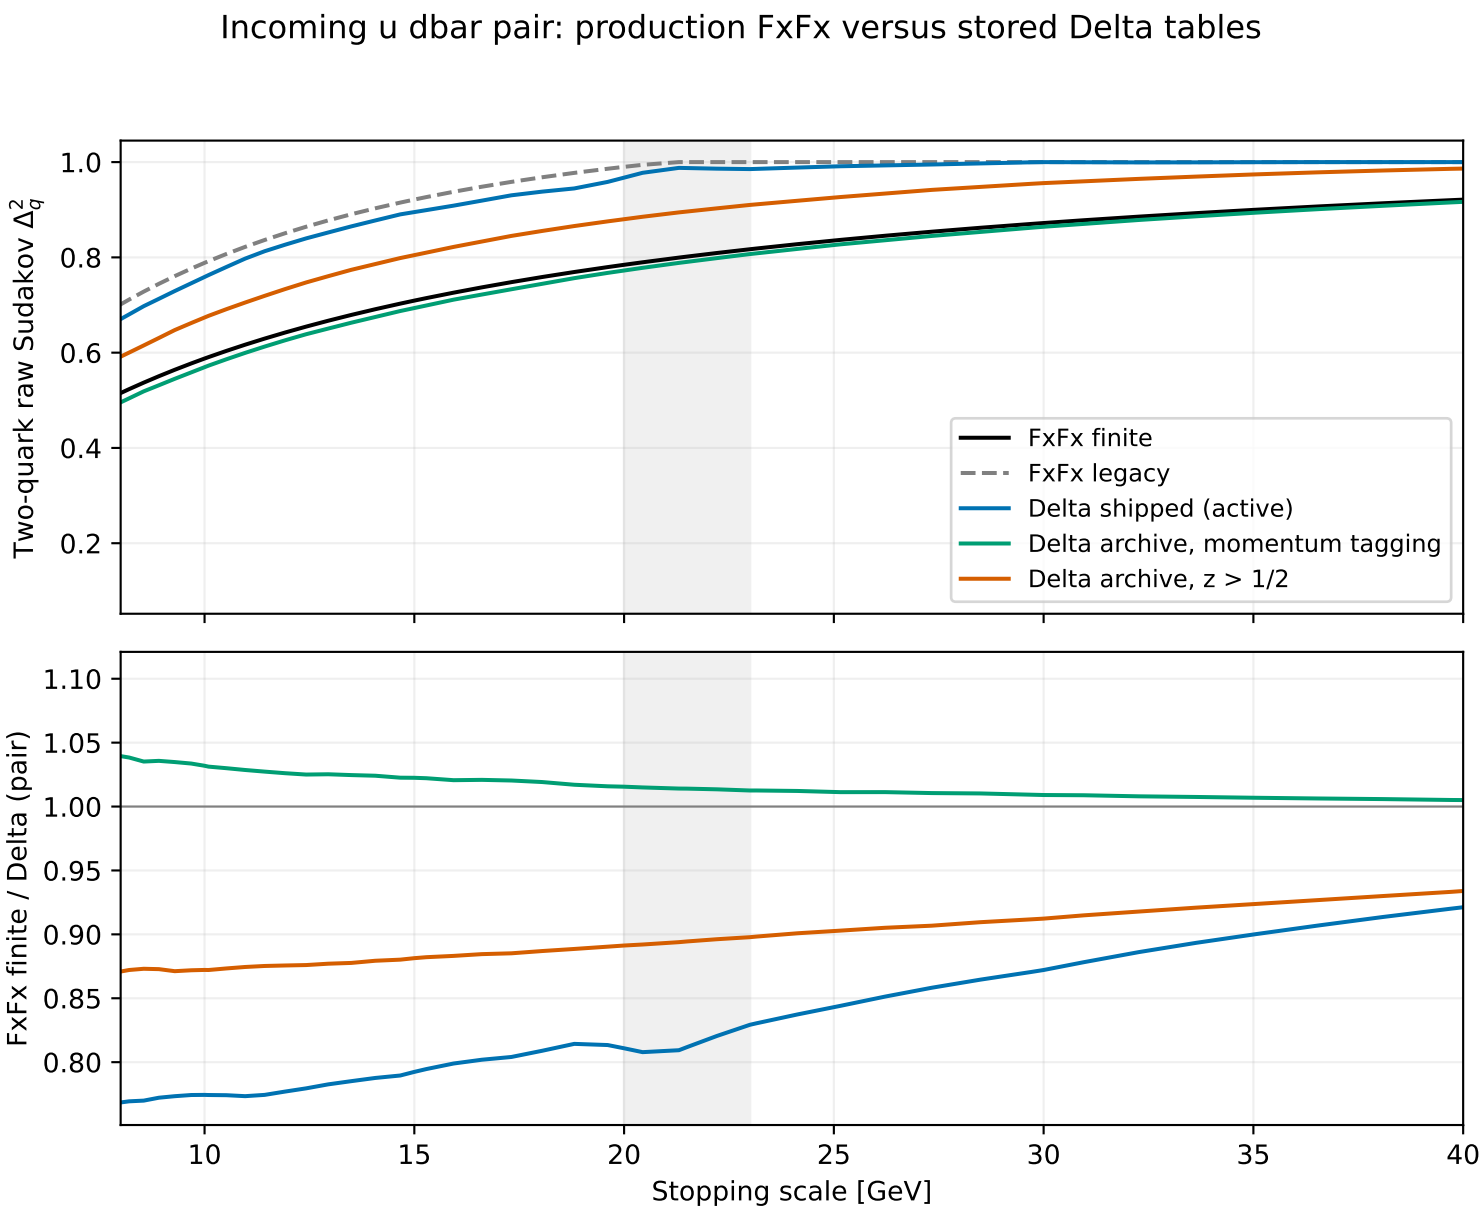

$Q = m_{dip} = m_W$; FxFx uses $\alpha_s(m_Z) = 0.119$, two loops and A2.
The stored tables retain their own generation settings. PDF ratios and matching compensations excluded.