

WZ+0,1j source shower scales: S events before showering


Combined source

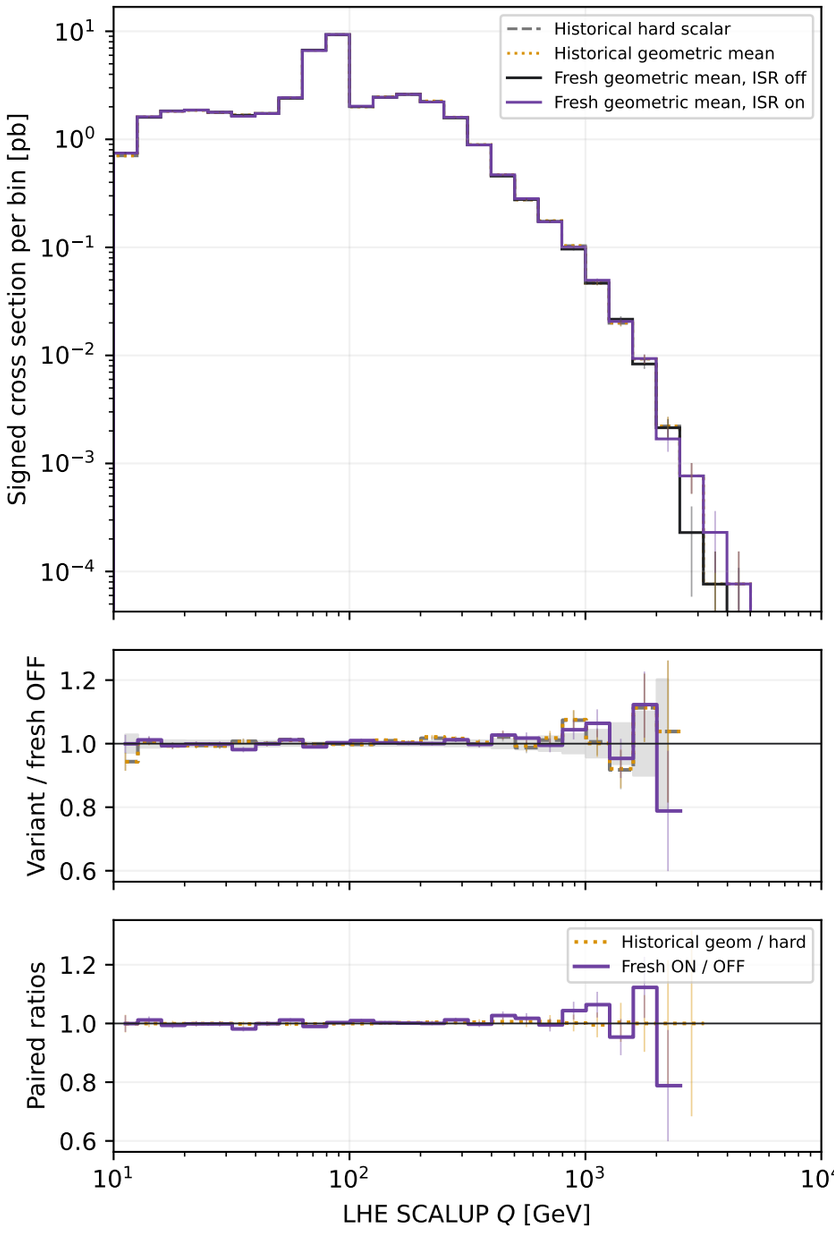

Source @0

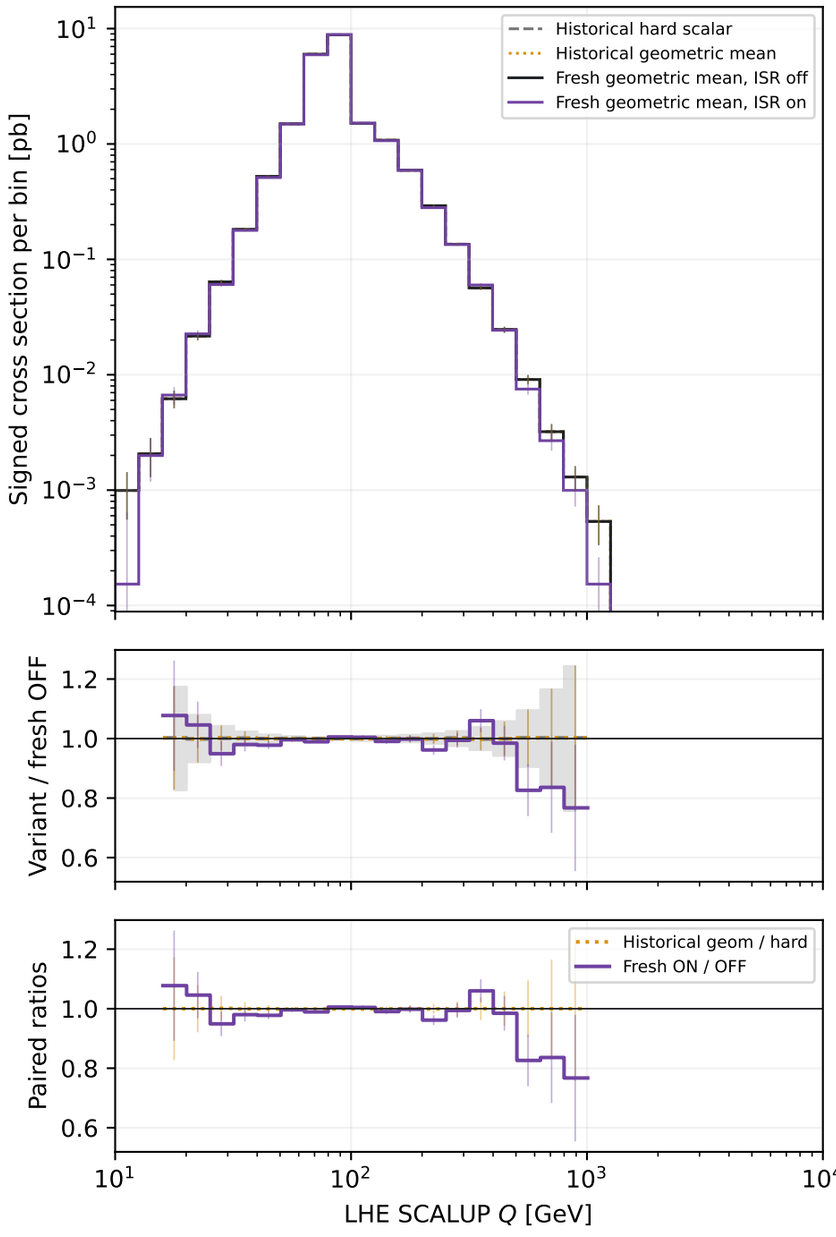


Source @1

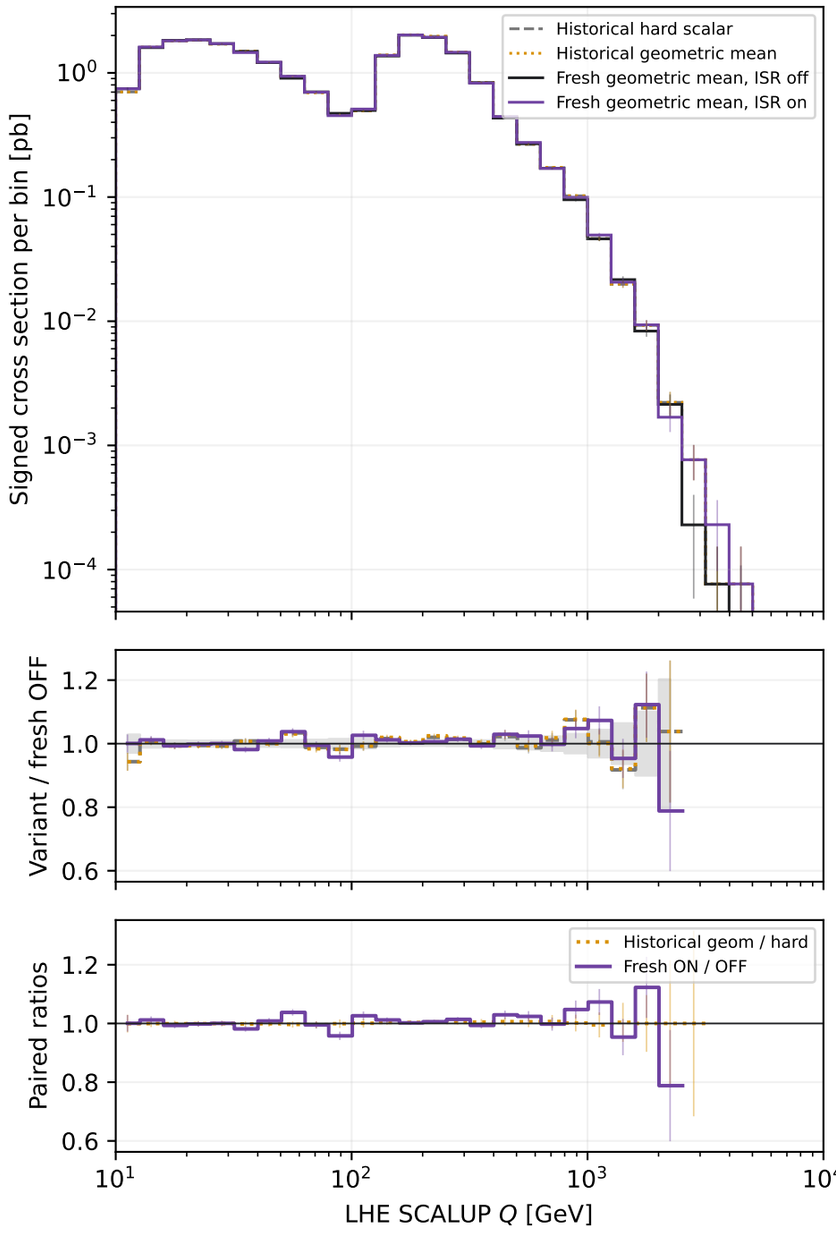


All bins retained; signed LHE weights / complete source event count; no area normalization. Ratio points require a positive denominator above 3 sampling errors.
Bars: numerator fixed-N sampling error / denominator; common-ratio band: fresh OFF. Source-normalization uncertainty and cross-run covariance are not included.
Spectrum axes use symlog where signed bins require it. Historical and fresh source epochs differ; these scales are measured before showering.

WZ+0,1j source shower scales: H events before showering


Combined source

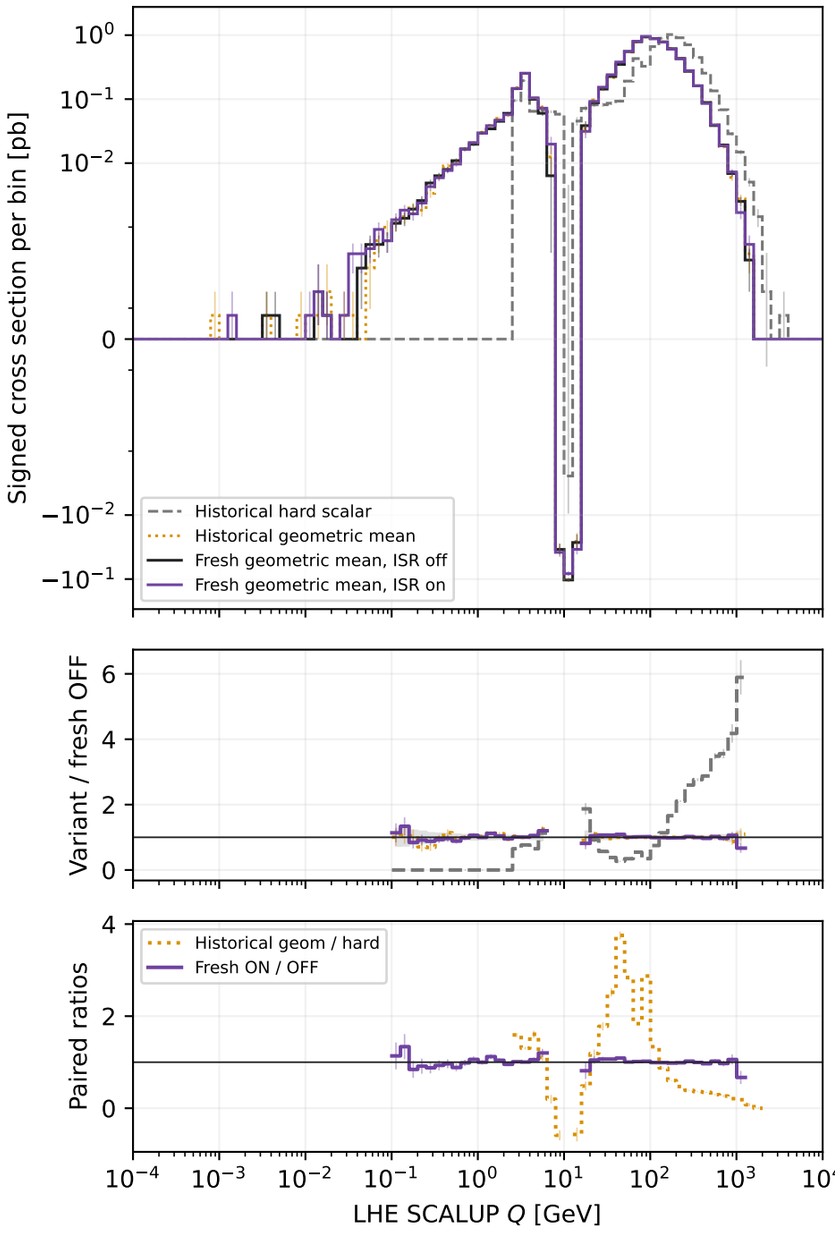

Source @0

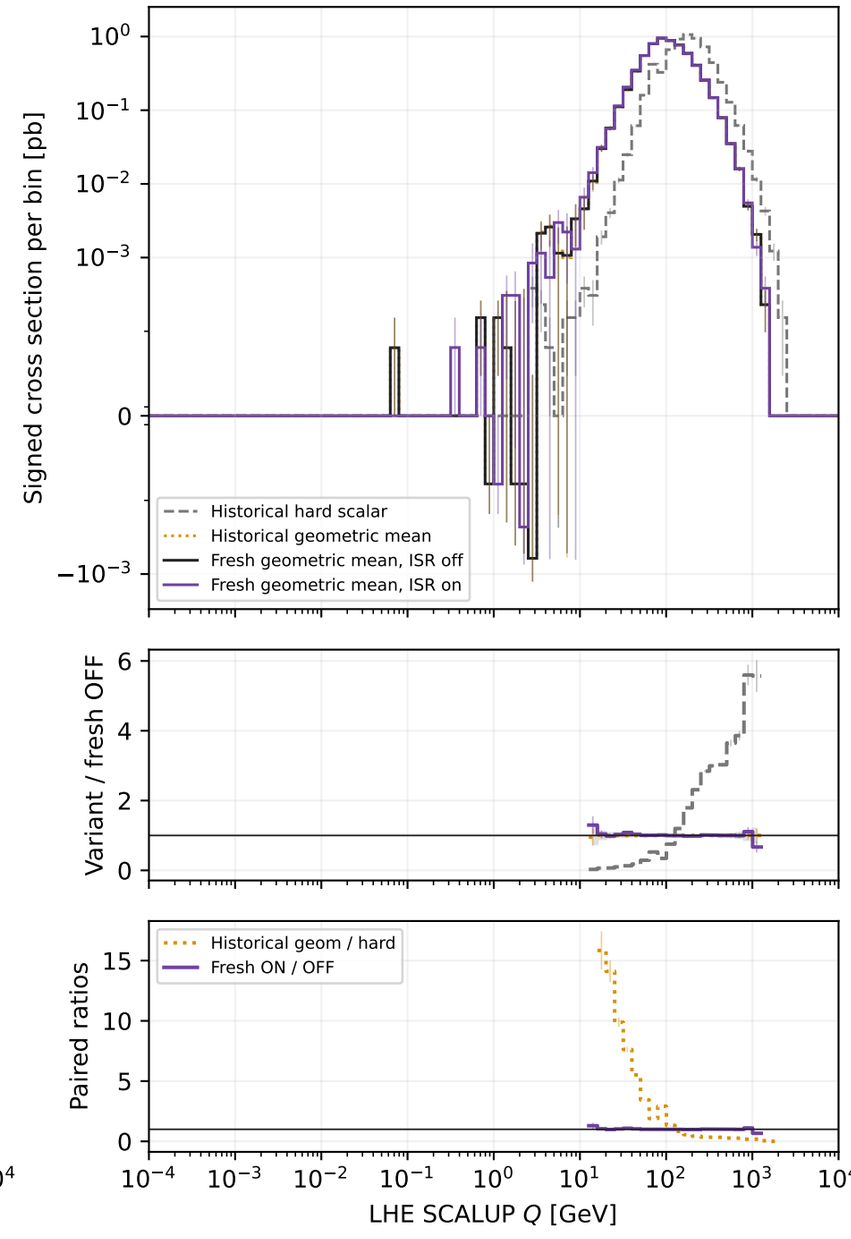

Source @1

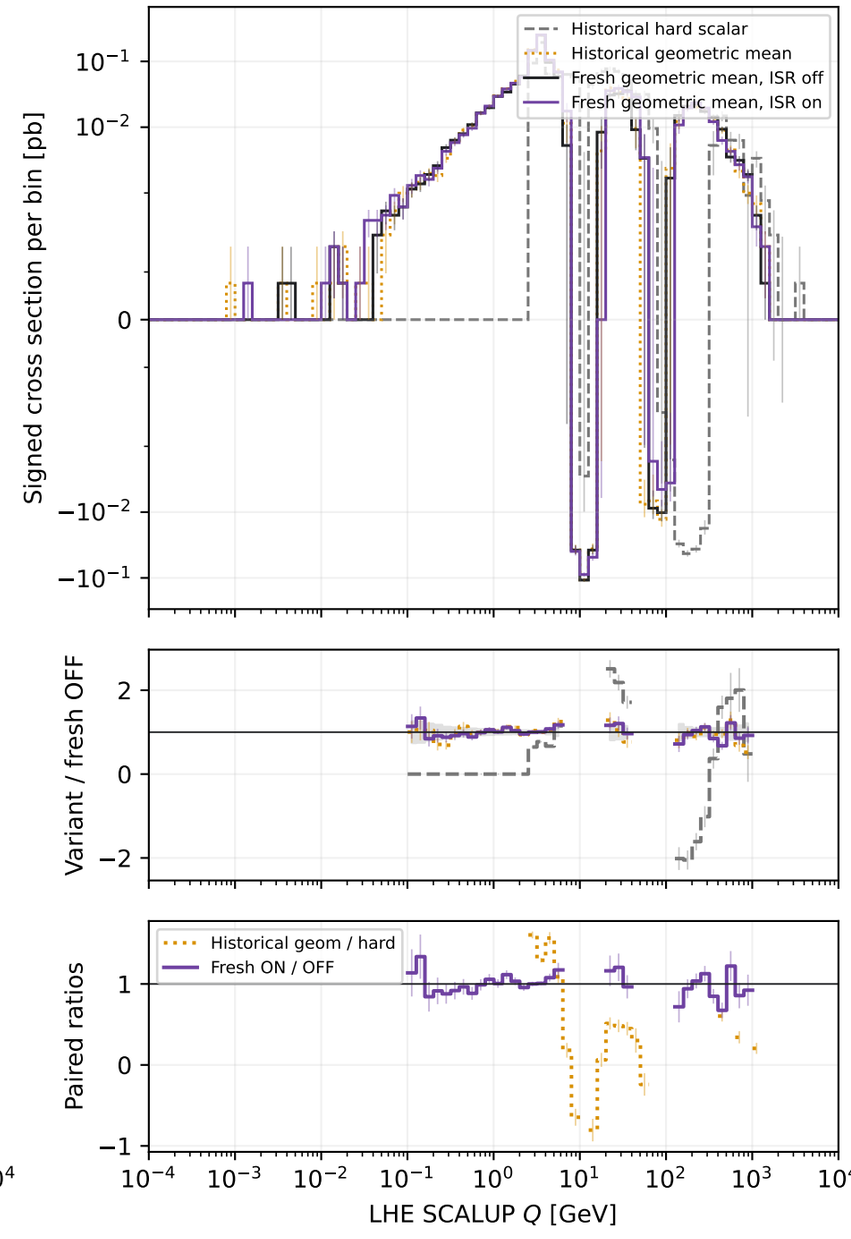

All bins retained; signed LHE weights / complete source event count; no area normalization. Ratio points require a positive denominator above 3 sampling errors.
Bars: numerator fixed-N sampling error / denominator; common-ratio band: fresh OFF. Source-normalization uncertainty and cross-run covariance are not included.
Spectrum axes use symlog where signed bins require it. Historical and fresh source epochs differ; these scales are measured before showering.