User Guide

2019.7.0

Q4 2019

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Table of Contents

Introduction 4
Welcome to Ipro-Q 4
Who Should Use Ipro-Q? 4
In this Guide 4
Contacting Ipro Tech Support 5
Adding/Correcting Images with Ipro-Q 6
Multi-image Processing 6
Single-image Processing 9
Adding OCR with Ipro-Q 10
Producing Documents in Ipro-Q 11
Relativity Workspaces 11
Defining a New Ipro-Q Production Job 12
Getting started 12
Selecting Numbering Options 14
Selecting Relativity Import Options 16
Selecting Output Options 17
Selecting Image Options 25
Completing the Production 29
Managing Production Jobs 31
Pause/resume a job 31
Review job details 32
Copy (clone) a job 32
Cancel a job 32
Delete a job 32
View Ipro-Q summary page 32
Quality Control 33
Using the Ipro eCapture QC Module 33
Reviewing Ipro-Q Issues in Relativity 33

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

QC flags 33
Ipro-Q errors 34
SQL Error Logging 35
Managing Ipro-Q Jobs 36
Viewing Jobs 36
Working in the Ipro-Q Summary page 38
Running a Saved Job 39
Pausing or Canceling a Job in Progress 39
Deleting a Job 39

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Introduction

Welcome to Ipro-Q

Ipro-Q® is an application that provides seamless integration between Ipro® processing and Relativity® review on the Ipro for enterprise platform. Ipro-Q efficiently creates images and OCR from the native files in your cases. Imaging and OCR jobs are efficiently processed and seamlessly added to your Relativity cases. Ipro also provides production capabilities for your Relativity cases. All these features allow you to leverage the power and performance of Ipro processing even if you are using Relativity.

If you have not yet installed Ipro-Q, please see the Ipro-Q *Installation and Configuration Guide*.

Who Should Use Ipro-Q?

Administrators and users tasked to evaluate and/or correct image problems (missing and/or damaged images), add missing OCR text, and/or create production sets in Relativity should use Ipro-Q. Such users should know how to use Relativity, be familiar with the applicable workspaces, have appropriate permissions, and understand the imaging, OCR, and/or production needs of a particular workspace.

See your Relativity documentation for details on using Relativity.

In this Guide

This guide includes the following chapters:

- "Adding/Correcting Images with Ipro-Q" beginning on page 6
- "Adding OCR with Ipro-Q" beginning on page 10
- "Producing Documents in Ipro-Q" beginning on page 11
- "Quality Control" beginning on page 33
- "Managing Ipro-Q Jobs" beginning on page 36

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Contacting Ipro Tech Support

Support hours

- General Support Hours: Monday – Friday, 5 a.m. – 7 p.m. (GMT-07:00) Arizona
- After Hours: 24 x 7 for urgent issues

How to contact us

- Phone: 877-324-4776
- Web: https://Iprotech.com/resources/Ipro-support/ to submit a ticket.
- Email: support@Iprotech.com

About our support system

All issues entered by phone, email, and web will generate a new support ticket and an auto-response will be sent to the sender with the new issue number. Reply to this email for all future email correspondence on that issue to prevent a duplicate ticket from being generated.

Web Users: You will need to register the first time you visit our website. After that, you can simply log in with your username and password.

By default, you will be able to view, edit, and report on all issues entered under your contact ID (email address). Our support platform also allows contacts from your organization to be listed as "Support Administrators," giving them the ability to view all issues entered by anyone inside the organization. If this is something you wish to be granted, please have your management contact Ipro Support at support@Iprotech.com with "Support Admin Request" in the subject line and the names and email addresses of those to be given access in the email message.

Support prerequisites

Please have the following information available before contacting/emailing Support:

- Ipro Tech software name and version number - in Relativity, select the Applications & Scripts tab in the Home tab strip, then click the Application Library tab. Find Ipro in the list and note the version number.
- Operating system running the Ipro software and service pack number (for example, Windows 7 SP1)
- Description of problem, screen shot, and complete transcript of error received, if applicable
- Summary of steps that produced the problem/error
- Email a ZIP file containing any relevant screen shots, error messages, or files (for example, log files).
- If you email Support, please include the following in the email subject line:
  Product name version/company – Nature of request (for example, [Subject]/ABC Co. – Install Issue)

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Adding/Correcting Images with Ipro-Q

Easily and efficiently add missing images or replace damaged images using the following procedures. When Ipro-Q creates an image, it is available in the Relativity viewer and data for your case is updated, for example, the Has Images field is updated from No to Yes.

Multi-image Processing

Complete the following steps when several images need to be created. New images will be created and added to your workspace; existing images (for example, damaged images you want to correct) will be replaced by the new images.

1. Getting started:
   a. Log in to Relativity.
   b. Identify the workspace and the documents with which you will be working (all documents or a saved search). Native files must exist for these documents.
   c. If the needed search does not exist in a particular workspace, define and save the search.
2. Complete one of the following steps to open Ipro-Q:
   – **From Home**: On the Home tab strip, click **Ipro > Ipro-Q**.
   – **From a workspace**: Open the workspace, then select **Ipro > Ipro-Q** on the tab strip as shown in this figure. The Ipro-Q summary page appears (the **Ipro-Q** tab).
3. Click Create Imaging Job.
4. Complete the imaging job definition; refer to the following table as needed.

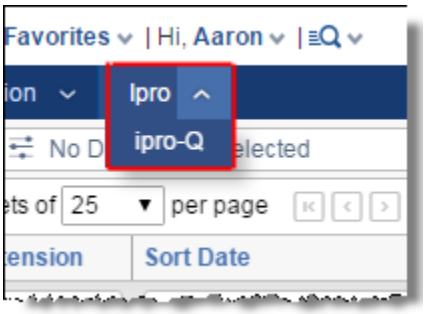

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Imaging Job Definition

Item	Description
Name	Enter a name for the imaging job. This name is used in Ipro-Q/ Relativity and is also sent to Ipro eCapture with a timestamp for use in eCapture.
Use Custom Output Path	Do not select this option if you want to accept the default path (defined during Ipro-Q installation). Select this option to define a different output path.
Image Output Path	If you select the **Use Custom Output Path** option, enter the full UNC path where images for this job should be placed. The location must be accessible to the Relativity computer and the destination folder must exist. Ipro-Q will create a job-specific folder in this location.
Set QC Status to "Hidden for QC"	Select this option to prevent users from viewing the document images in the job being defined. This Ipro-Q setting maps to the Relativity **Hide Images for QC Review** option. User groups with the **View Images Hidden for QC Review** permission will be able to release the images for review. To release images processed through Ipro-Q, use the mass edit operation to change the status of the Image QC Status field to null. See your Relativity documentation for details on using mass edit.
Workspace (Home access only)	If you opened Ipro-Q from Home, select the workspace for which images will be created. This selection will determine options available for the remainder of the job definition.
Relativity Saved Search	Take one of the following actions: • Select **All Documents**. When this option is selected, images for all pages of all documents in all folders of the selected workspace will be created (except those for which native files are missing). • Select a saved search containing the documents to be processed. For example, a search may be defined to find all documents for which the Has Images field value is No and the HasNative field value is Yes. See your Relativity documentation for details on creating/saving searches.
Ipro for enterprise Imaging Project	Select the Ipro eCapture project to be used for the imaging job. Files will be processed using all eCapture project settings. For details on eCapture project options, see the *Ipro eCapture Help on the Ipro Help Center*.

Imaging Job Definition

Item	Description
Ipro for enterprise Imaging URL	Select the Ipro eCapture URL through which your imaging job should be processed. Available URLs are identified based on the workspace/project selected above, your Ipro-Q workspace mappings, and the eCapture data managed in Ipro for enterprise.
Time Zone	From the drop-down menu, select a time zone that the eCapture project[1] will use for processing. The time-zones that appear in the drop-down menu are pulled from the eCapture environment. If a time zone is not selected, the imaging job will use the eCapture project's default setting.

5. Review the job summary and continue as follows:
   - Click **Save and Run** to run the job now.
   - Click **Save** to save the job and run it at another time. See "Running a Saved Job" on page 39 for details.
   - To remove the job from Ipro-Q, click **Delete**. The job will be removed from the Ipro-Q summary page (image files that have been created are not removed).
   - To return to the Ipro-Q summary page, click **Back to Q**.
6. Watch the progress/status of jobs on the Ipro-Q summary page. All jobs are listed on this tab. See "Managing Ipro-Q Jobs" on page 36 for details.

[1] Applies to eCapture version 2018.5.0 or later. Older versions of eCapture will use the project's default time zone to process imaging jobs.

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Single-image Processing

If you are working in the Relativity viewer and a document lacks an image file but does have a native file, the **Image with Ipro** button will appear as shown in the following figure. (Depending on your Ipro-Q configuration, this button may appear by itself as shown here, or alongside the Relativity Image button.)

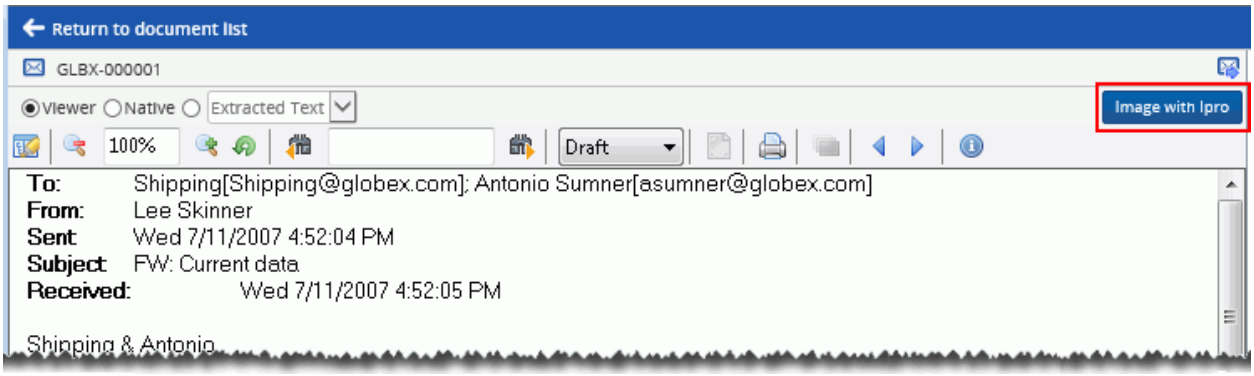

To create an image "on the fly" using Ipro-Q:

1. Click the **Image with Ipro** button.
2. Wait as the native file is processed. The following message appears:

   

   NOTES: Single-image jobs take priority over multi-image jobs in Ipro-Q. Also, the Ipro eCapture project used to define job options is pre-defined by your administrator.
3. When the image is processed, evaluate it in the viewer.

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Adding OCR with Ipro-Q

Ipro-Q can create OCR text for documents for which it does not exist and add it to the Extracted Text field, provided either image files exist for the documents or the native files are .PDFs.

1. Getting started:
   a. Log in to Relativity.
   b. Identify the workspace and the documents with which you will be working (all documents or a saved search).
   c. If the needed search does not exist in a particular workspace, define and save the search.
2. Complete one of the following steps to open Ipro-Q:
   – **From Home**: On the Home tab strip, click **Ipro > Ipro-Q**.
   – **From a workspace**: Open the workspace, then select **Ipro > Ipro-Q** on the tab strip.
3. Click Create OCR Job.
4. Complete the OCR job definition; refer to the following table as needed.

OCR Job Definition

Item	Description
Name	Enter a name for the OCR job.
Workspace (Home access only)	If you opened Ipro-Q from Home, select the workspace for which OCR will be created.
Ipro for enterprise OCR URL	Select the Ipro eCapture URL through which your OCR job should be processed. Available URLs are identified based on the workspace selected above, your Ipro-Q workspace mappings, and the eCapture data managed in Ipro for enterprise.
Relativity Saved Search	Take one of the following actions: • Select **All Documents**. When this option is selected, OCR for all pages of all documents in all folders of the selected workspace will be created (except those for which image files or native PDFs are missing or contain no text). • Select a saved search containing the documents to be processed. For example, a search may be defined to find all documents for which the Extracted Text field is not set. See your Relativity documentation for details on creating/saving searches.
Text Output Field	Select the Extracted Text field in this workspace.

5. Take one of the following actions:

- Click **Save** to save the job and run it at another time. See "Running a Saved Job" on page 39 for details.
- Click **Save and Run** to save the job and run it.

With either selection, the job summary page appears.

6. Review the job summary and continue as follows:
   - To start a saved job now, click **Save and Run**. The job will begin processing.
   - To remove the job from Ipro-Q, click **Delete**. The job will be removed from the Ipro-Q summary page (OCR that has been created is not removed).
   - To return to the Ipro-Q summary page, click **Back to Q**.
7. Watch the progress/status of jobs on the Ipro-Q summary page. All jobs are listed on this tab. See "Managing Ipro-Q Jobs" on page 36 for details.

Producing Documents in Ipro-Q

When a review is complete in Relativity, use the procedures in this chapter to efficiently define and run production sets using Ipro-Q.

Relativity Workspaces

Ipro-Q productions support Relativity workspaces that have single and/or multiple object type fields. These fields can be associated with document level object types. Productions will successfully complete in Ipro-Q when the Case has a single object type field or has a multiple object type field associated to a document level object type.

Existing Relativity multiple object fields that are associated with a document are to be produced as Load File fields only. When a multiple object type field is created within a Relativity workspace, a table is created in the Workspace database that matches the name of the created ObjectType. These values are not directly linked to the EDDSDBO.Documents table like the single object type fields.

The EDDSDBO.ObjectFieldRelation table defines the mapping for the multiple object fields values as follows:

```
SELECT RelationalTableName, RelationalTableColumnName, RelationalTableColumnName2, *

FROM [EDDS{WorkspaceID}].[EDDSDBO].ExtendedViewFields

WHERE ArtifactTypeID = 10 /* document */

AND FieldTypeID = 13 /* multi-object */
```

Descriptions for the tables/fields referenced in the previous statement:

- **RelationalTableName** - Table where the relationship between the doc and multi-object value is defined
- **RelationalTableColumnName** - The Field in the Table that ties to the Docs ArtifactID
- **RelationalTableColumnName2** - Ties to the ArtifactID of the table created to store Object Type's data

1700 N. Desert Drive, Ste 101

Tempe, AZ 8528

602-325-4776

Defining a New Ipro-Q Production Job

Getting started

To begin defining an Ipro-Q production job:

1. Log in to Relativity.
2. Identify the workspace containing the documents you will be producing.
3. To protect certain documents from being produced, ensure that the workspace includes a **Production Shield** setting (a saved search); see "Configuring Ipro-Q" in the Ipro-Q *Installation and Configuration Guide*.

   When Production Shield is set, documents in the saved search that are included in the production will be excluded and validation errors will be noted.
4. Identify the saved search containing the documents to be produced. If the needed search does not exist in a particular workspace, define and save the search.
5. **Important!** The following information applies to Ipro eCapture version 2017.3.4 or earlier. This does not apply for Ipro eCapture 2017.3.5[2] or later.

   If you will be including (burning in) redactions as part of the production, note that Ipro-Q does not currently support Relativity's full-page redaction tool ( ).

   Therefore, if this tool has been used in documents that are to be produced using Ipro-Q and you want to include (burn-in) redactions, you *must* replace the full-page redactions with redactions made using another redaction tool (such as the basic redaction tool) before you run the production. If this is not done, the pages containing full-page redactions will be placeholdered and errors will be noted.
6. Complete one of the following steps to open Ipro-Q:
   - **From Home**: On the Home tab strip, click **Ipro > Ipro-Q**.
   - **From a workspace**: Open the workspace, then select **Ipro > Ipro-Q** on the tab strip.
7. Click Create Production Job.
8. Start with the entries and selections in the **Information** area of the Ipro Productions page. See the following table for details. Required entries are indicated in this table with an asterisk, *.

[2] Starting with Ipro eCapture version 2017.3.5, when a full page redaction is encountered with X and Y coordinates of 0, and a Height and Width of 1, the redaction settings are updated so they cover the entire page. This is how Ipro Eclipse defines full page redactions.

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Basic Production Job Information

Item	Description
Name*	Enter a name for the production job.
Use Custom Output Path	Select this option if you want to use an output path other than the default (defined during Ipro-Q installation).
Production Output Location	If you select the **Use Custom Output Path** option, enter a full UNC path where files for this job should be placed. The location must be accessible to the Relativity computer and the destination folder must exist. Ipro-Q will create a job-specific folder in this location, using the following folder structure: 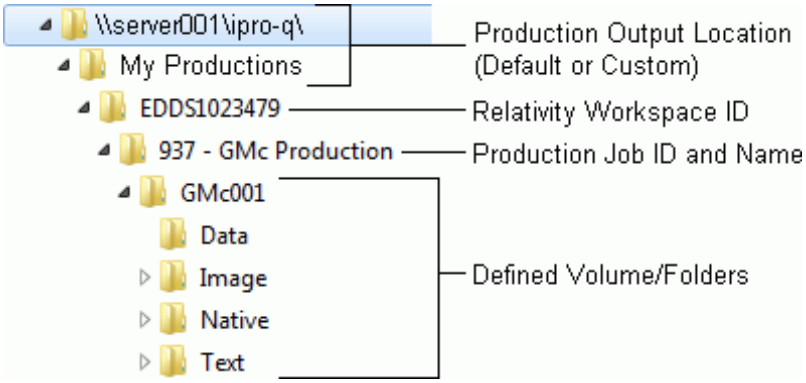
Workspace*	If you started Ipro-Q from the Home page, select the workspace containing the documents to be produced.
Relativity Saved Search	Select the search containing the documents that are to be produced.
Group Identifier Field*	Select the field that identifies family or other relational documents to be included in the production.
Extracted Text Field*	Select the field containing case documents' full text (or path from which OCR text is loaded).
Ipro for enterprise Production Project*	Select the Ipro eCapture project to be used for the production job. Files will be processed using all eCapture project settings. For details on eCapture project options, see the *Ipro eCapture User Guide*.

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Basic Production Job Information

Item	Description
Ipro for enterprise Production Endpoint*	Select the Ipro eCapture URL through which your production job should be processed. Available URLs are identified based on the Relativity workspace selected, your Ipro-Q workspace mappings, and the eCapture data managed in Ipro for enterprise.

NOTE: Fields available for selection in the Ipro-Q production definition are those configured for the Workspace. See your Relativity documentation for details on field types.

9. Continue with the procedures explained in this section:

– "Selecting Numbering Options" on page 14
– "Selecting Relativity Import Options" on page 16
– "Selecting Output Options" on page 17
– "Selecting Image Options" on page 25

TIPS: After the basic information is completed:

- Click headings on the page to expand or collapse each section (**Numbering Options**, etc.).
- Save the production definition by clicking **Save** at the bottom of the page. Any required settings that are missing will be identified at the top of the page.
- Continue work on an unfinished definition by clicking it in the list of production jobs on the **Ipro-Q** tab and clicking **Edit** in the Export Tools pane.

Selecting Numbering Options

This area of the page allows you to define the way in which you want produced documents numbered.

To select numbering options:

1. Click **Numbering Options** to expand this area of the page.
2. Define the numbering to be used for the production job; see the following table for details.
3. When all numbering options have been defined, either complete other procedures in this section or click **Save** to save the current definition.

   When the definition is complete, go to "Selecting Relativity Import Options" on page 16.

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Production - Job Numbering Options

Item	Description
Continue Previous Numbering	**Criteria for use** If the following conditions are true, complete the following procedure. • Multiple Ipro-Q export sets comprise a single export job and you want continuous numbering for the entire job. • You are creating new numbers, not using original document numbers. • The export set being configured is *not* the first set in the complete job and a previous export set has been completed. **Procedure** a. Click **Continue Previous Numbering**. b. In the resulting dialog box, select the export set that numbering should follow. c. Review the numbering information, then click **OK**. d. Continue with "Selecting Relativity Import Options" on page 16 (skip remaining numbering options described in this table). **NOTE**: Choosing to continue previous numbering and then creating a new numbering scheme negates the Continue Previous Numbering setting.
Type	Select a document numbering scheme: **Basic**: includes text prefix, delimiter, starting page, and page number width options. Each page will be numbered as a separate document, as in ABC-0001, ABC-0002, etc. **Advanced**: includes document numbering in addition to page numbering. Each page will be numbered using document and page identification, as in ABC-0001.001, ABC-0001.002, etc.
Basic Options	
Prefix	Optional: enter a prefix and optionally select a delimiter for your new numbering scheme. Prefix must be alphanumeric (no special characters).
Prefix Delimiter	
Starting Page	Enter the starting page number (a whole number greater than zero).

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Production - Job Numbering Options

Item	Description
Page Width	Enter the number of digits to be used for page numbers (greater than or equal to the size of the starting page number). Leading zeros will be used as needed.
Example	This example matches the page numbering scheme you have defined. Review it to make sure the numbering is as intended.
Advanced Options	
Prefix	Optional: Enter a prefix and delimiter as described above.
Prefix Delimiter	
Starting Document	Enter the starting document number (a whole number greater than zero).
Document Width	Enter the number of digits to be used for document numbers (greater than or equal to the size of the starting page number). Leading zeros will be used as needed.
Page Delimiter	Optional: Select a delimiter to separate document numbers from page numbers.
Starting Page	Enter the starting page number (a whole number greater than zero). Documents containing multiple pages will include the document number followed by these page numbers.
Page Width	Enter the number of digits to be used for page numbers (greater than or equal to the size of the starting page number). Leading zeros will be used as needed.
Example	This example matches the document numbering scheme you have defined. Review it to make sure the numbering is as intended.

Selecting Relativity Import Options

By default, Ipro-Q will produce documents from your Relativity case(s) but will not define Ipro-Q jobs as Relativity production sets or include them in the case workspace's **Case Admin > Production Sets** list.

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

To define an Ipro-Q production as a Relativity production set, complete the following steps. If not, skip this section and continue with ““Selecting Output Options” on page 17 and/or “Selecting Image Options” on page 25.

1. Click **Relativity Import Options** to expand this area of the page.
2. Define the production job for Relativity; see the following table for details. Required entries are indicated with an asterisk, *.

Item	Description
Generate Relativity Production*	Select this option to define the Relativity production set.
Relativity Production*	Select the production set to which the Ipro-Q production should be added.
Custom Text Field	To add production-related notes to an existing Relativity field (defined for this purpose), select the field that includes such notes.
Custom Text	If you select a custom text field, enter notes for this production to be included in this field.
Production Volume Field	To add production-related volume information to an existing Relativity case field, select the production-volume field.
Production Page Count Field	To add production-related page-count information to an existing Relativity case field, select the page-count field.
Production Text Field	Select the field into which the production text should be loaded.
Production Native Path Field	Select the Relativity field that contains the native file path for productions.

Selecting Output Options

This section of the page allows you to define the types of files that will be produced and how they will be organized for the production.

To select output options:

1. Click **Output Options** to expand this area of the page.
2. Complete the areas that correspond to the files you want to produce as defined in the following sections:

– Native on page 18
– Image on page 19
– Text on page 20
– Load files on page 21
– Volume and folder information on page 24

Native

To produce native files, the files must exist in your case. Ensure they exist in the location(s) defined in the case before completing the Ipro-Q production job.

Complete the **Native** section of the Ipro-Q **Productions** page to include native files in the production job. See the following table for details.

Production - Native Output Options

Item	Description
Native Output Enabled	Select this option to include native files in the production.
File Naming	Select a naming convention for native files: • **Use new number**: Name native files based on selected document numbering. Example: ABC-0001.docx. • **Append field**: Name native files with the selected document number followed by the value of a specific field. After this option is selected, two additional selections are required: – **File Name Field**: Select the field to be used. – **File Name Delimiter**: Select a delimiter to separate the document number and field value. Example: ABC-0001_Confidential.docx Ineligible characters will be omitted from the name and very long names may be truncated. • **Use field**: Name native files with the value of a specific field (such as a field containing the original file name). After this option is selected, an additional selection is required: – **File Name Field**: Select the field to be used. Example: Distribution Report.docx Ineligible characters will be omitted from names and very long names may be truncated.

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Production - Native Output Options

Item	Description
	NOTE: If the selected field contains the same value for different documents, and multiple documents with the same name end up in the same output folder, then duplicate files will be overwritten.
Exclude Native if Redacted	Select this option to remove native files from the production if images have been redacted.
Select Natives	Click this button to limit production of native files to specific file types. After clicking this option, select file types in the resulting dialog box and click **OK**. You can choose a category (such as Database) and/or individual software products.

Image

To produce image files, the files must exist in your case. Ensure they exist in the location(s) defined in the case before completing the Ipro-Q production job.

Complete the **Image** section of the Ipro-Q **Productions** page to include native files in the production job. See the following table for details.

Also review "Selecting Image Options" on page 25 and complete that section as needed.

Production – Image Output Options

Item	Description
Image Output Enabled	Select this option to include image files in the production.

Production – Image Output Options

Item	Description
Imaging Output Type	Select the way in which document pages will be processed and the format to be used for image files: • **Single-page image**: Each document page will be produced in a single TIFF file. (For example, each page of a ten-page document will be produced in a separate file.) • **Multi-page image**: All document pages will be produced in a single TIFF file. (For example, ten pages will be contained in one file.) • **Single-page PDF**: Each document page will be produced in a single image PDF file that is PDF/A compliant. (For example, each page of a ten-page document will be produced in a separate file.) • **Multi-page PDF**: All document pages will be produced in a single image PDF file that is PDF/A compliant. (For example, ten pages will be contained in one file.) • **Searchable single- or multi-page PDF**: Same as above, except the PDFs will contain searchable text.
Placeholder Missing Images and **Placeholder Text**	Select this option to include a custom placeholder file for documents with no associated images. The file will include the text you enter in the **Placeholder Text** field. Placeholder text is limited to 128 characters.
	NOTE: This option applies only to documents for which an image path is not defined. Other problems—an incorrect file path, a file missing in the specified location, server problems, etc.—are considered as processing errors (not missing images). They are indicated in the production by an "Error Processing Image" placeholder.

Text

To produce text (OCR) files, complete the **Text** section of the Ipro-Q **Output Options** area. See the following table for details.

Production – Text Output Options

Item	Description
Text Output Enabled	Select this option to include text (OCR) files in the production. It is necessary to select this option if you wish to select the [ProductionText] and/or [ProductionTextPath] load file fields in the Select Document Fields dialog when exporting to .DAT. See page **Error! Bookmark not defined.** for additional information. **NOTE**: If documents have redactions, text files will be produced, but redacted text will be omitted based on the **Burn Redactions** option (see page 26).
File Type	Select the way in which document pages will be processed: • **Document Level Text**: All document pages will be produced in a single text file. • **Page Level Text**: Each document page will be produced in a single text file.
Replace w/Placeholder Text	If you are exporting images and using a placeholder for missing images, you can select this option to use the same placeholder text for text files corresponding to missing images (whether or not original text files are missing). If the option is not selected, a default "TEXT PLACEHOLDER" will be used.

Load files

To produce load files, complete the **Load File Options** section of the Ipro-Q **Output Options** area. See the following table for details. Load files are named "Image" followed by the extension of the selected load file(s).

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Production – Load File Options

Item	Description
Load Files	Click the corresponding **Select Files** button and select needed load files. Options available depend on your output selections. (For example, if you are not producing text, the **Text (*.lst)** option will not be available.) • Concordance (*.dat) • Ipro LFP (*.lfp) • Opticon (*.opt) • Ipro DLF (*.dlf) • Custom (*.txt) • Text (*.lst)
Field Delimiters	If **Custom** is selected (for a .TXT file), default delimiters are comma and quotation mark. Select other delimiters if needed: • **Field**: the character that separates each field. • **Enclose**: the character that marks the beginning and end of a field's content.
Fields	Click the **Select Fields** button to select the fields to be included in selected load files. In the resulting dialog box: 1. In the left list, locate a field(s) and/or tag(s) to be included in the production. 2. Take any of the following actions: – To select all fields, click **>>**. – To select an individual field, select it in the "Available" (left) list and click **>**. – To select multiple items, click a field name, then Shift+click or Ctrl+click others to choose a contiguous or non-contiguous set, respectively. When all fields have been selected, click **>**. *Continued*
Fields, continued	– To remove all fields, click **<<**; to remove a single field, click it and then **<**. – To select the field order, click a field in the "Selected" (right) column and click **Up** or **Down** to move the field in the list. Repeat for other fields until the order is as desired. (Top-to-bottom in this list equates to left-to-right in the load file.) 3. When finished, click **Ok**.

Production – Load File Options

Item	Description
	NOTES: • In addition to case-specific fields, fields for production-related data will be available. These fields are included at the top of the field list. The type of production data available depends on the type(s) of load file selected. • For .DAT files, if [ProductionText] is selected, redacted text will be omitted from the file if the **Burn Redactions** option is selected in **Image Options** (see page 25). • As of version 2017.3.0, the [ProductionTextPath] field was added as an optional load file field for .DAT files. This load file field is only used for exporting at this time. It only works when the field which the extracted text is imported into is the Relativity field for Extracted Text. If mapped to import to another field, e.g. ProdText2, results will not be imported correctly; instead, the path to the text file will show in the application interface rather than the contents of the text file. If you wish to have the extracted text written back to Relativity to verify the OCR text is correct when burning in Redactions for a Production, the [ProductionText] load file field must be selected in addition to the [ProductionTextPath] load file field. These two fields are available for selection only if the **Text Output Enabled** option is checked in the **Image** box. See page 21 for additional information. The [ProductionTextPath] field exports the path only.
Encoding	Select the character set to be used. Common encodings are available for selection.
Date Format	Select the date format to be used. Common formats are available for selection.

Production – Load File Options

Item	Description
File Path	Select the format for file paths in the load file (exported image, native, and/or text file paths, depending on which file types are being produced and which load file is selected). Options include: • **Absolute**: Include the complete export path. • **Relative path**: All path details preceding the production volume name (described later) will be replaced with a backslash. • **Custom**: Replace details preceding the production volume name with a custom path. Enter the needed path in the **Custom Text** field. Examples: If the actual path for a produced image is: \\server001\production\vol001\images\001\ABC0001.TIF For each option, the path in the load file will be as follows: • **Absolute**: Same as actual path. • **Custom**: If user defines the custom path to be E:\, then the path in the load files will be: E:\vol001\images\001\ABC0001.TIF • **Relative**: the path will be: \vol001\images\001\ABC0001.TIF
Custom Text	Enter the custom file path if **Custom** was the selected option above.

Volume and folder information

These sections of the Ipro-Q **Output Options** area allow you to define the following:

- **Volume**: An identifier for the root-level directory (top-level folder) for production results. Multiple volumes can be created, depending on the size of the production and maximum volume size defined.
- **Folder Information**: The folders that will be used to organize files in volumes (or you can accept the default names).

Production files will be placed in the following folders in the specified output location (see "Getting started" on page 12).

Production – Volume and Folder Options

Item	Description
Volume Information	

Production – Volume and Folder Options

Item	Description
Starting Prefix	Enter a "base" volume (top-level folder) name. By default, the prefix is VOL. If no prefix is used, the volume will be identified by number.
Starting Number	Enter the beginning number (1 or greater) for the set of volumes that will be used for the current production.
Volume Number Width	Enter the number of digits to be used in the volume number, from 1 - 9. The minimum recommended width is 3.
Max Size	Select from a list of common media capacities. **No Limit** can also be selected, in which case one volume will be used. When the maximum size is reached, a new volume will be created.
Folder Information	
Image Folder	Enter a name for the folder in which produced image files will be placed.
Native Folder	Enter a name for the folder in which produced native files will be placed.
Text Folder	Enter a name for the folder in which produced text files will be placed.
Load Files Folder	Enter a name for the folder in which produced load files will be placed.
Starting Number	Enter the beginning number (1 or greater) for the set of folders that will be used for the current production. This number will apply to each folder being used (Image, Native, etc.).
Folder Number Width	Enter the number of digits to be used in the folder number, from 1 - 9. The minimum recommended width is 3.
Sample Folder Structure	Review your volume/folder definition in the **Sample Folder Structure** area; make changes if needed.

Selecting Image Options

When images are selected for production, Ipro-Q allows you to include or exclude redactions and provides a variety of options regarding the information that can be included/added to each image file's

header and/or footer. Most endorsement options apply to both TIFF and PDF; those that are unique to one type or the other will be unavailable (dimmed).

To define image options:

1. Click **Image Options** to expand this area of the page.
2. Complete the following areas for your production as needed:
   - "Redaction options" on page 26
   - "Endorsement settings" on page 27

Redaction options

IMPORTANT! If your documents include full-page redactions and you are using Ipro eCapture version 2017.3.4 or earlier, you must complete the preparation explained in step 5 of "Getting started" on page 12 to avoid production errors.

To include redactions in produced images, complete this area of the **Image Options** section. See the following table for details.

When redactions are burned:

- Selected redactions are applied in the produced images.
- If text files are included in the output, the redacted text is omitted from the text files.
- If a .DAT file is included in the output and includes the [Production Text] field, the redacted text will be omitted from the load file.

If you do not burn redactions, images (and all other files) produced will include redacted text.

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Production - Redaction Options

Item	Description
Burn Redactions	Select this option to apply redactions in the produced images.
Redaction Options	Select the way in which redactions will appear—basic black and white options are available, or you can select **As Is Color** to maintain the redaction colors as defined for the case.
Markup Sets	Click the **Select Markup** button to select the markup sets to be included. In the resulting dialog box: 1. In the left list, locate a markup set containing the redactions to be applied in the production images. 2. Take any of the following actions: – To select all markup sets, click **>>**. – To select an individual markup sets, click it in the "Available" (left) list and click **>**. – To select multiple items, click a markup set, then Shift+click or Ctrl+click others to choose a contiguous or non-contiguous set, respectively. When all markup sets have been selected, click **>**. – To remove all markup sets, click **<<**; to remove a single markup set, click it and then **<**. 3. When finished, click **Ok**.

Endorsement settings

Ipro-Q allows you to add information to each image file's header and/or footer. For example, this figure shows a page with custom text added in the header and the image key in the footer.

Most endorsement options apply to both TIFF and PDF; those that are unique to one type or the other will be unavailable (dimmed).

To include endorsements in produced images, complete the **Endorsement Settings** area of the **Image Options** section. See the following table for details.

Production – Endorsement Settings

Item	Description
Endorsement Types	Select the type of information to be used for the endorsement: • **Custom text**: A message that you define. • **Field**: Content (corresponding to each document) of a field that you select. • **Image key**: Document numbers as defined in "Selecting Numbering Options" on page 14. • **Bar Code**: A bar-code version of the document number.
Apply To	Select the pages to which the endorsement will be applied: **All Pages** or **First page only**.
Font Size	Select the size of the font to be used for endorsements. Smaller fonts allow more text to be included.
Location to Map	Select the location in the document header (**Top** choices) or footer (**Bottom** choices) where the endorsement should be placed, then click **Map Endorsement**. Repeat this step to add other endorsements. Different endorsements can be added in each area of the header/footer and/or in a single area.
Endorsement Mappings	After all endorsements have been added, review the result in the **Endorsement Mappings** area. If needed, make changes to the mappings: • Click an individual endorsement, then click **Remove Selected** to remove that endorsement. • If multiple endorsements are included in a single area, click an individual endorsement and use the **Up** or **Down** buttons for the mapped location to move the endorsement. See the example following this table.

Mapping example

In the following example, the user has mapped the image key, bar code, and a custom text message in the header and footer:

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

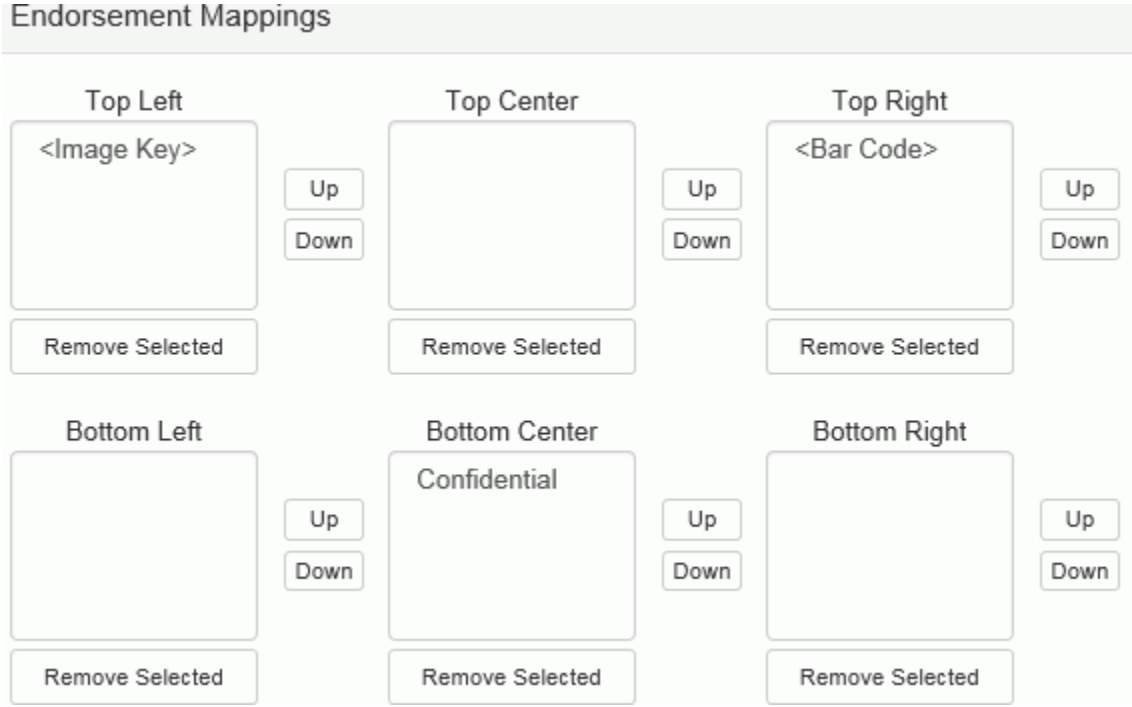

Completing the Production

To complete and run the production job:

1. Review your selections on the Ipro-Q Productions page; make needed changes.
2. When finished, click **Save**.
3. In the **Export Tools** pane, click **Validate** and evaluate the Validation Report. A typical report is shown in the following figure; different entries will exist depending on your export selections.

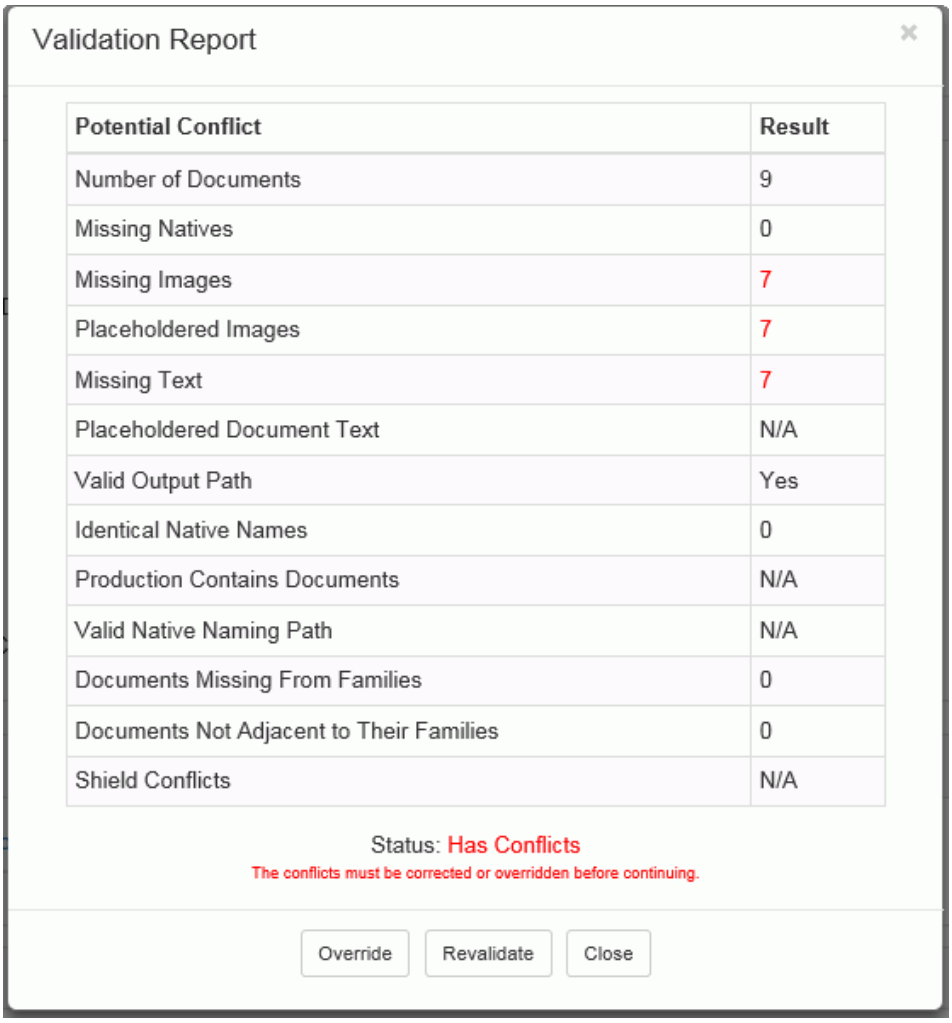

Validation Report

Potential Conflict	Result
Number of Documents	9
Missing Natives	0
Missing Images	7
Placeholdered Images	7
Missing Text	7
Placeholdered Document Text	N/A
Valid Output Path	Yes
Identical Native Names	0
Production Contains Documents	N/A
Valid Native Naming Path	N/A
Documents Missing From Families	0
Documents Not Adjacent to Their Families	0
Shield Conflicts	N/A

Status: Has Conflicts
The conflicts must be corrected or overridden before continuing.

Override Revalidate Close

Validation Report Example

4. Review the report, then take any of the following actions:
   - If no conflicts exist, click **Close** and skip to step 7.
   - If conflicts exist and the **Override** button is dimmed (not available), then some of the errors identified must be corrected before documents can be produced. In this case, go to step 5.
   - If conflicts exist, you want to ignore them for the production, and the **Override** button is available, skip to step 6.
5. Correct and revalidate:
   a. Make a note of the conflicts listed in the Validation Report, then click **Close** in the report.
   b. Research the conflicts and make needed corrections. For example, missing images without placeholders cannot be overridden.
   c. As needed, change the production job definition – click **Edit** in the Export Tools pane and make corrections.

d. Click **Save**, then click **Validate**.

e. In the Validate Report, click **Revalidate**.

f. If no conflicts exist, click **Close** and skip to step 7. If conflicts still exist, repeat this step or complete step 6.

6. **Override conflicts**: If the **Override** button is available, you can ignore problems and run the production. For example, you can run a production even if some images are missing (but have placeholders), then address the missing images at another time.

   To override conflicts, slick the **Override** button and go to the next step.

7. Click **Run** to initiate the production.

8. Review details in the **Incomplete/Errored Import Jobs** section of the page. This section includes a job ID assigned by Ipro eCapture, job status, and import details, including the location of the job's error log (if one is created).

   If a job fails, a **Retry** button will also be present. If the failure is correctable (for example, a network connection was lost), make the correction and click **Retry**. (**Retry** is also available on the Ipro-Q summary page for jobs that stop due to problems.)

Managing Production Jobs

The following actions can be taken in the Ipro Productions page for a selected job. Some of these actions can also be performed from the Ipro-Q summary page as discussed in "Managing Ipro-Q Jobs" on page 36.

The actions that are available depend on whether the job is in progress, has been saved, or has started running, as indicated by which buttons are available in the **Export Tools** pane. This example indicates that a job has started running but was paused; the buttons indicate which actions can be taken.

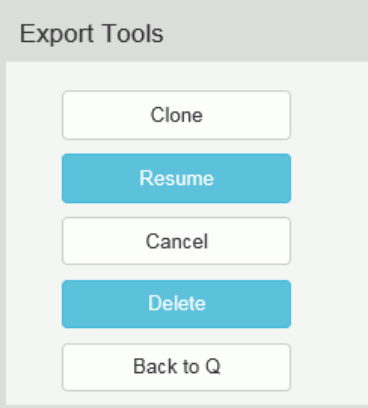

Pause/resume a job

Once a production job starts running, it can be halted temporarily and restarted at a later time. This can be useful for long jobs or those incurring problems. To do so, click **Pause** in the **Export Tools** pane.

To start a paused job, click **Resume**.

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Review job details

Any time after a job is validated, view job details in the **Summary** pane, as shown in this example.

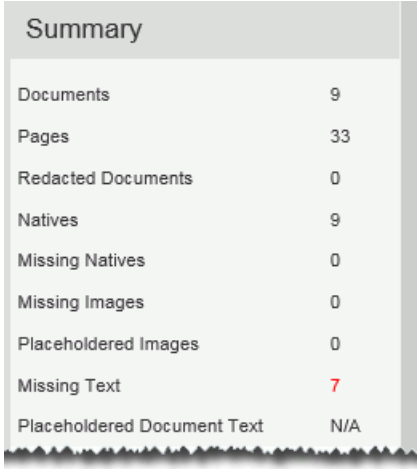

Summary	
Documents	9
Pages	33
Redacted Documents	0
Natives	9
Missing Natives	0
Missing Images	0
Placeholdered Images	0
Missing Text	7
Placeholdered Document Text	N/A

If a job has completed, you can also:

- View production files: In Windows Explorer, navigate to the output path defined for the job.
- View details in Relativity: If the production job was imported into Relativity (page 16), review production details in Relativity. See your Relativity documentation for details.

Copy (clone) a job

Any time after a production job is defined and saved, it can be cloned. This provides an easy way to create new jobs with similar definitions. To do so:

1. In Relativity, open the Ipro Productions page for the job to be copied and click **Clone**. A new production job is created with the same definition, except the name ends with "(Copy)."
2. Change the job name and any other production options as needed. See details in "Defining a New Ipro-Q Production Job" on page 12.
3. Validate and run the job as explained in "
4. Completing the Production" on page 29.

Cancel a job

A job that has not been saved or has been paused can be canceled. Click **Cancel** at the bottom of the page or in the **Export Tools** pane. The job will be canceled immediately.

NOTE: If a job was running and some files were produced, they will not be removed. Also, canceled jobs are not deleted from Ipro-Q.

Delete a job

Any time after a job has been saved, click **Delete**. It will be deleted immediately.

View Ipro-Q summary page

Click **Back to Q** to return to the Ipro-Q summary page.

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Quality Control

Using the Ipro eCapture QC Module

Images and/or OCR created through Ipro-Q can be reviewed and corrected using the eCapture QC Module. The eCapture QC Module allows you to identify and correct a wide variety of processing issues. Documents corrected in the eCapture QC Module are automatically loaded back into Relativity as they are processed, and the identified issues (QC flags) are also loaded into Relativity.

To evaluate documents in the Ipro eCapture QC Module:

1. Start the eCapture QC Module.
2. Select File > Create Session for Ipro for enterprise Imaging Job(s) from the eCapture QC menu bar.
3. Select the needed Ipro-Q job and click **OK**. The job name is the one defined in Relativity.
4. Evaluate and correct processing issues as needed; refer to your Ipro eCapture documentation for details.
5. Return to Relativity and continue with the next topic.

Reviewing Ipro-Q Issues in Relativity

QC flags

After you evaluate documents in the Ipro eCapture QC Module, the eCapture ENT IMGING FLAGS field data is transferred to the Ipro QC Flags field in Relativity so that you can search for QC'ed documents based on specific eCapture QC flags.

The following figure shows a search condition defined in Relativity to find certain types of Microsoft® Excel® files processed through Ipro-Q and flagged in the Ipro eCapture QC Module:

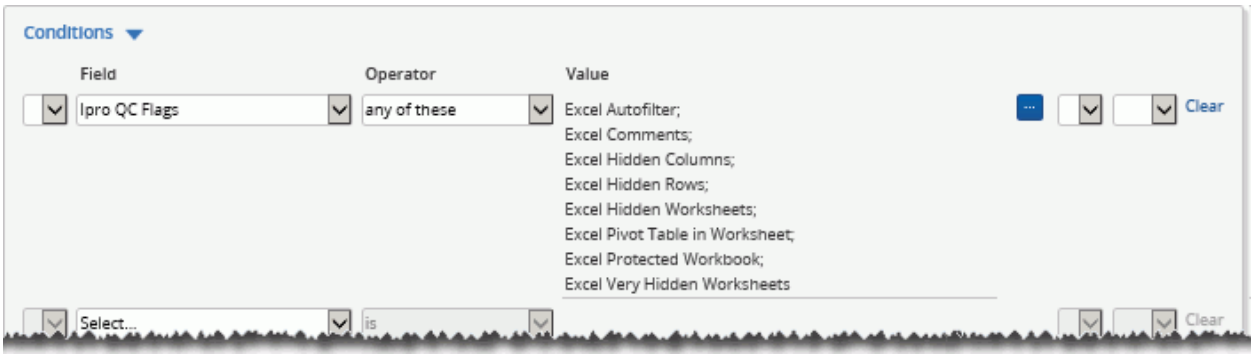

See your Relativity documentation for details on constructing and using searches.

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Ipro-Q errors

Instead of (or in addition to) the previous procedures, you can use the following saved searches provided with Ipro-Q to find documents with errors. These errors may or may not correspond to flags used by the Ipro eCapture QC Module:

- Image errors: Problems during image processing, such as encrypted/password-protected files.
- OCR errors: Problems during OCR processing, such as a document with too little text.
- Production errors: Problems during the Ipro-Q production process, such as missing files.

To review job errors:

1. Open the needed Relativity workspace and click the **Documents** tab.
2. Click to open the Saved Searches browser.
3. Expand the Ipro folder and click the search for the type of errors you want to review:

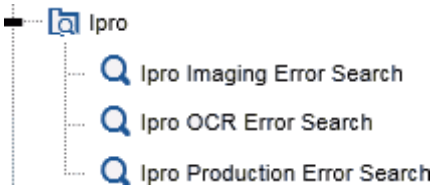

4. View error details in the search results, which include:

Image Error Search

- File name
- Control number
- Ipro imaging error
- Ipro QC flags (as applicable)

OCR Error Search

- File name
- Control number
- Ipro OCR error

Production Error Search

- Control number
- Ipro production error

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

SQL Error Logging

Ipro-Q provides debugging and error logging in SQL. If you encounter problems with Ipro-Q that are not identified/solved using the previous procedures and you have appropriate SQL experience (see the following note), complete the following procedure to turn on Ipro-Q debugging and review resulting error details.

CAUTION! The following information is intended only for experienced administrators with Microsoft SQL knowledge and experience.

Only administrators with a strong understanding of SQL and experience working in SQL database tables should perform the following procedure. Administrators without this background may unintentionally corrupt Relativity databases.

If you do not have the needed background, please see the log file explained on page 36 and/or contact Ipro customer support for assistance as explained on page 5.

1. In SQL Server Management Studio or a similar tool, locate the Relativity **EDDS** database.
2. In the list of EDDS tables, locate and open the **eddsdbo.Configuration** table.
3. In the list of table entries, locate the **Ipro LogLevel** section.
4. In the IproLogLevel **Value** field, enter one of the following values. Each value represents a logging level; levels provide messages of increasing severity and higher levels will include messages from lower levels.

Value	Description
0	All (log all details)
1	Trace
2	Debug
4	Info
8	Warn
16	Error
32	Fatal
64	Turn logging off (default setting)

5. Logging begins once a level is set to a value other than 64. To view error/debug information, open the **eddsdbo.IproErrorLog** table in the EDDS database.

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Log file

The EDDS.EDDSDBO.IproErrorLog file is also included in the production output location. This file contains production error details.

Managing Ipro-Q Jobs

Viewing Jobs

To view and manage Ipro-Q jobs:

1. In Relativity, complete one of the following steps to open Ipro-Q:
   - **From Home**: On the Home tab strip, click **Ipro > Ipro-Q**.
   - **From a workspace**: Open the workspace, then select **Ipro > Ipro-Q** on the tab strip.

   The following figure shows the Ipro-Q summary page.

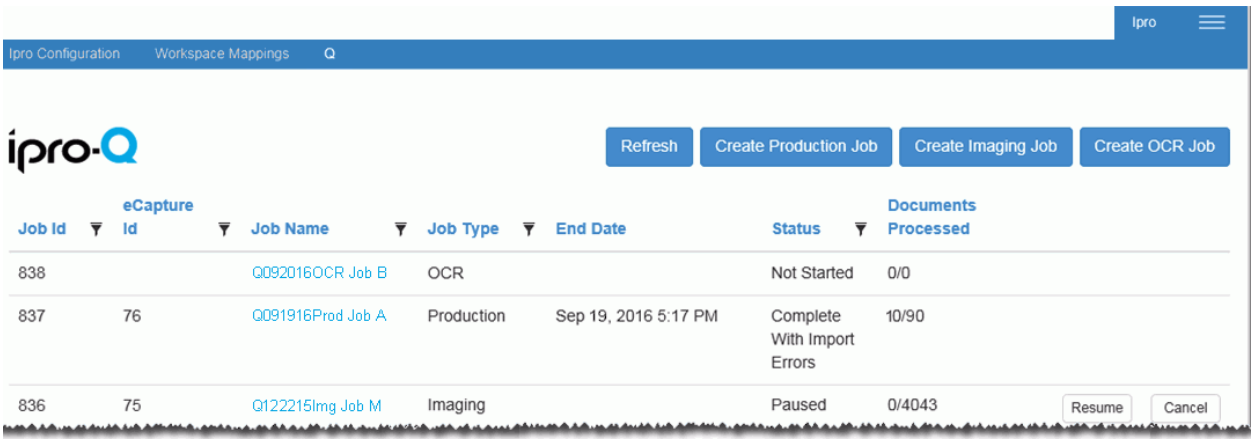

2. Review job details on the Ipro-Q summary page. Details are listed in the following table.

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Ipro-Q Job Details

Column	Description
Job Id	Tracking number assigned by Ipro-Q.
eCapture Id	Tracking number assigned by Ipro eCapture, for use in eCapture.
Job Name	This column lists one of the following identifiers: • **Name**: The name defined for each Ipro-Q job. • **Non-Workspace Related Job**: When the Ipro-Q summary page is viewed from a workspace, all jobs are listed, but jobs from other workspaces are indicated with this name. Individual job names are links; clicking a job name displays details for that job.
Job Type	Each job is either an **Imaging**, **OCR**, or **Production** job.
End Date	The date and time each job completed.
Status	Current status of each job, such as **Not Started**, **Running**, **Complete**, **Canceled**, or **Failure**. **NOTES**: • A job will be listed as **Complete** whether or not errors exist. • A job will be listed as **Failure** if Relativity cannot connect to Ipro eCapture.
Workspace (Home access only)	Appears when Ipro-Q is viewed from Home; this column lists the workspace in which each job was run.
Documents Processed	Total number of completed documents/total documents in the job. Documents lacking native files and redacted images are skipped; the total number of skipped documents is listed in this column, for example: 8496/8558 (62 Skipped) **NOTES**: • Documents may complete with errors. • Completed + Skipped = Total Documents

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Working in the Ipro-Q Summary page

Take any of the following actions in the Ipro-Q summary page to view and monitor jobs.

Ipro-Q Summary Page Actions

Action	Description
Filtering	To filter the list: 1. Click for the column on which you want to sort. 2. Select an operator (Equals, Contains, etc.) and enter your filtering criteria. 3. Click . In this example, the job list will be filtered to show only OCR jobs. 4. To clear a filtered list, click (note the top of the icon is blue to indicate the filtered column), then click .
Paging	The Ipro-Q summary page displays ten jobs at a time. For longer lists, use the page navigation bar at the bottom of the list to view all jobs:
Refresh	Click **Refresh** to ensure the job list displays the latest information.
Sorting	Click any column heading to sort the list on that column.
Viewing job details	Click a job name to view details for that job.

1700 N. Desert Drive, Ste 101
Tempe, AZ 8528
602-325-4776

Running a Saved Job

Saved jobs (excluding production jobs that have not been validated) that have not been run can be easily started from the Ipro-Q summary page – click the **Run** button as shown in the following figure.

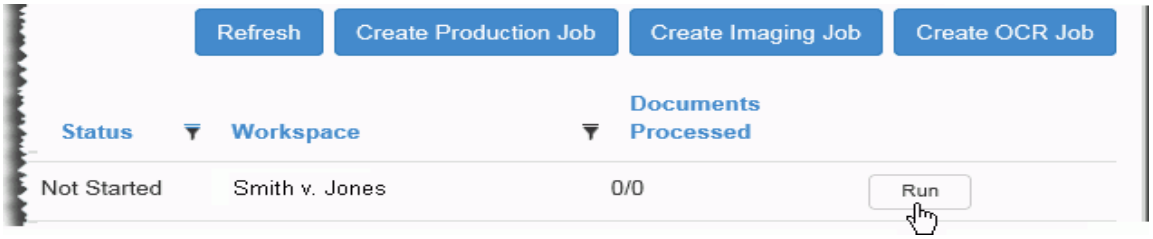

Pausing or Canceling a Job in Progress

Once a job starts, its status changes to **Running**. If necessary, pause or cancel the job by clicking the applicable button as shown in the following figure:

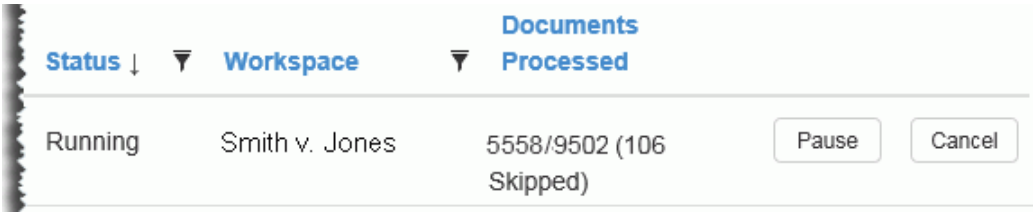

- Pausing: Documents that are in progress will be completed before a job is paused. When the job is paused, the button changes to **Resume**. When you are ready to continue the job, click **Resume**.
- Cancelling: Canceled jobs remain in the jobs list (with status of Cancelling or Cancelled), and any documents created to that point in time are not removed.

Deleting a Job

To remove a job from the Ipro-Q summary page:

1. Locate the job in the job list and click the job name.
2. On the job details page, click **Delete**. The job will be removed from the Ipro-Q job list (no text or files created through Ipro-Q are removed).