



Genotype MP
TJL/Mouse Genome Informatics

Author: Sharon Giannatto

Date: 2019-10-31

Table of Contents

- Overview..... 1
- 1. Class Diagrams 1
 - 1.1. Model Genotype MP 2
 - 1.1.1. Class GenotypeMPController 2
 - 1.1.2. Class DenormGenotypeMPDomain..... 3
 - 1.1.3. Class DenormAnnotationMPDomain 4
 - 1.1.4. Class GenotypeMPService 4
 - 1.1.5. Class SlimGenotypeAlleleReferenceDomain..... 5
 - 1.1.6. Class SlimGenotypeDomain 5
 - 1.1.7. Class GenotypeMPDomain 6
 - 1.1.8. Class GenotypeMPTranslator 6
 - 1.1.9. Class SlimGenotypeTranslator..... 7
 - 1.1.10. Class AnnotationSer 7
 - 1.1.11. Class AnnotationService 7
 - 1.1.12. Class GenotypeMPTranslator2..... 7
 - 1.1.13. Class SlimGenotypeAlleleReferenceDomain 7

Overview

The Genotype MP Endpoints allow searching, creation, update and deletion of Genotype MP Annotations.

This document generated by genmymodel.com The project is called GenotypeMP API, the project is private. To edit:

login: bitwise89@hotmail.com

password: Slc3lliot

1. Class Diagrams

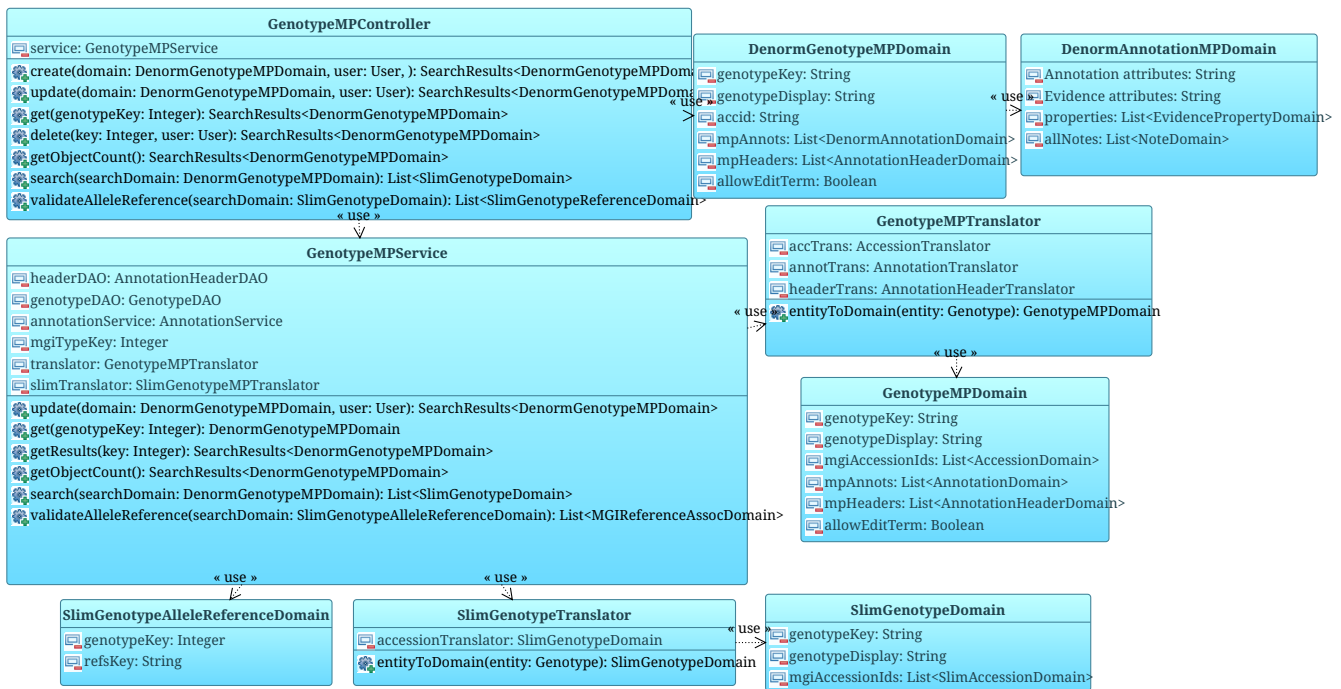


Figure 1. GenotypeMP API Diagram

Referenced Elements

- Class GenotypeMPController — see ["GenotypeMPController" definition](#)
- Class DenormGenotypeMPDomain — see ["DenormGenotypeMPDomain" definition](#)
- Class DenormAnnotationMPDomain — see ["DenormAnnotationMPDomain" definition](#)
- Class GenotypeMPService — see ["GenotypeMPService" definition](#)
- Class SlimGenotypeAlleleReferenceDomain — see ["SlimGenotypeAlleleReferenceDomain" definition](#)
- Class SlimGenotypeDomain — see ["SlimGenotypeDomain" definition](#)

- Class GenotypeMPDomain — [see "GenotypeMPDomain" definition](#)
- Class GenotypeMPTranslator — [see "GenotypeMPTranslator" definition](#)
- Class SlimGenotypeTranslator — [see "SlimGenotypeTranslator" definition](#)

1.1. Model Genotype MP

The Genotype MP Endpoints allow searching, creation, update and deletion of Genotype MP Annotations.

This document generated by genmymodel.com The project is called GenotypeMP API, the project is private. To edit:

login: bitwise89@hotmail.com

password: Slc3lliot

1.1.1. Class GenotypeMPController

Is: Provides the Genotype MP endpoints for the PWI

Has: A GenotypeMPService which performs operations on objects using search and CRUD methods. Create and Delete methods will return a *not implemented* error.

Does: Calls GenotypeMPService methods and returns Denormalized Genotype MP Domain(s)

Attributes

- service : GenotypeMPService[1] — [see "GenotypeMPService" definition](#)

Description

Used by each of the controller search/CRUD methods

Operations

- create(domain : DenormGenotypeMPDomain [1] , user : User [1]) : SearchResults<DenormGenotypeMPDomain>

Description

Returns a 'not implemented' error.

- update(domain : DenormGenotypeMPDomain [1] , user : User [1]) : SearchResults<DenormGenotypeMPDomain>

Description

Calls the service update method - see the GenotypeMPService for more info.

- get(genotypeKey : Integer [1]) : SearchResults<DenormGenotypeMPDomain>

Description

Calls the service get method to get a denormalized domain of MP annotation information for the given genotype key.

- delete(key : Integer [1] , user : User [1]) : SearchResults<DenormGenotypeMPDomain>

Description

Returns *not implemented* error

- getObjectCount() : SearchResults<DenormGenotypeMPDomain>

Description

Returns the count of all MP annotations in the database

- search(searchDomain : DenormGenotypeMPDomain [1]) : List<SlimGenotypeDomain>

Description

Calls the service search method to get a list of SlimGenotypeDomains based on the parameters in the searchDomain

- validateAlleleReference(searchDomain : SlimGenotypeDomain [1]) : List<SlimGenotypeReferenceDomain>

Description

Calls the service validateAlleleReference method to get the list of all references for a genotype based on the searchDomain genotype key and reference key

1.1.2. Class DenormGenotypeMPDomain

Is: A flattened representation of a GenotypeMPDomain.

Has: a genotypeKey, genotypeDisplay and accession id. A list of flattened MP Annotations and a list of MP Headers and a flag to allow edit of the term

Attributes

- genotypeKey : String[1]
- genotypeDisplay : String[1]
- accid : String[1]
- mpAnnots : List<DenormAnnotationDomain>[1] — [\[U_YKZAcN4PEDeIRsGOayXXUw\]](#)
- mpHeaders : List<AnnotationHeaderDomain>[1] — [\[U_cCMYcN4PEDeIRsGOayXXUw\]](#)
- allowEditTerm : Boolean[1]

1.1.3. Class DenormAnnotationMPDomain

Is: A flattened' representation of an MP Annotation. One instance represents one MP annotation/evidence/property for a genotype.

Has: A set of VOC_Annot, VOC_Evidence and VOC_EvidenceProperty attributes and a List of notes.

Does:

Attributes

- Annotation attributes : String[1]
- Evidence attributes : String[1]
- properties : List<EvidencePropertyDomain>[1] — [[U_mAkikN4OEDeIRsGOayXXUw](#)]
- allNotes : List<NoteDomain>[1] — [[U_oP7WEN4OEDeIRsGOayXXUw](#)]

1.1.4. Class GenotypeMPService

Is: Provides search and CRUD methods for the controller

Has: services, dao's and translators which are used by the various search/CRUD methods.

Does: Provides the implementation for the controller search/CRUD methods. See method descriptions

create/delete: not implemented.

We use the service update method - which passes the incoming domain to the AnnotationService which in turn processes the create/update/delete based on the processStatus of the incoming domain.

Attributes

- headerDAO : AnnotationHeaderDAO[1] — [[U_OMMx0dvGEDeELctTZOeZdw](#)]
- genotypeDAO : GenotypeDAO[1] — [[U_QTRzENvGEDeELctTZOeZdw](#)]
- annotationService : AnnotationService[1] — see "AnnotationService" definition
- mgiTypeKey : Integer[1]
- translator : GenotypeMPTranslator[1] — see "GenotypeMPTranslator" definition
- slimTranslator : SlimGenotypeMPTranslator[1] — [[U_sRz6gNvGEDeELctTZOeZdw](#)]

Operations

- update(domain : DenormGenotypeMPDomain [1] , user : User [1]) : SearchResults<DenormGenotypeMPDomain>

Description

Iterates over each annotation in the incoming denormalized domain creating a GenotypeMPDomain with a list of AnnotationDomains, with the proper processStatus set, to

pass to the AnnotationService. It then bundles the domain in a SearchResults to return. Shouldn't it go back to the database to refresh the domain?

- `get(genotypeKey : Integer [1]) : DenormGenotypeMPDomain`

Description

Uses a genotypeDAO to get a Genotype entity for the key parameter. Creates one Denorm. Uses a GenotypeMPTranslator to translate that entity to a GenotypeMPDomain. Then creates a DenormGenotypeMPDomain from the GenotypeMPDomain. Sorts then returns GenotypeMPDomain

- `getResults(key : Integer [1]) : SearchResults<DenormGenotypeMPDomain>`

Description

Used by the controller update method to get the results from the database after the update.

- `getObjectCount() : SearchResults<DenormGenotypeMPDomain>`

Description

Creates and executes a query to get the count of all MP annotations in the database, returned in a SearchResults object.

- `search(searchDomain : DenormGenotypeMPDomain [1]) : List<SlimGenotypeDomain>`

Description

Creates a database query from the searchDomain, processes the results into a list of DenormGenotypeMPDomains

- `validateAlleleReference(searchDomain : SlimGenotypeAlleleReferenceDomain [1]) : List<MGIReferenceAssocDomain>`

Description

Creates a query using the genotypeKey and refsKey from the searchDomain, processes the results into a list of SlimGenotypeDomains

1.1.5. Class SlimGenotypeAlleleReferenceDomain

No description.

Attributes

- `genotypeKey : Integer[1]`
- `refsKey : String[1]`

1.1.6. Class SlimGenotypeDomain

Is: A slimmed down version of a GenotypeMPDomain

Has: a genotype key, genotype display and a set of accession IDs.

Does:

Attributes

- genotypeKey : String[1]
- genotypeDisplay : String[1]
- mgiAccessionIds : List<SlimAccessionDomain>[1] — [[_U_U-4RQN4QEDeIRsGOayXXUw](#)]

1.1.7. Class GenotypeMPDomain

Is: Is a domain object which encapsulates the attributes of a Genotype MP Annotation

Has: a genotypeKey, genotypeDisplay and a list of accession ids. A list of MP Annotations and a list of MP Headers and a flag to allow edit of the term

Does:

Attributes

- genotypeKey : String[1]
- genotypeDisplay : String[1]
- mgiAccessionIds : List<AccessionDomain>[1] — [[_U_4QrncN4PEDeIRsGOayXXUw](#)]
- mpAnnots : List<AnnotationDomain>[1] — [[_U_6soFcN4PEDeIRsGOayXXUw](#)]
- mpHeaders : List<AnnotationHeaderDomain>[1] — [[_U_cCMYcN4PEDeIRsGOayXXUw](#)]
- allowEditTerm : Boolean[1]

1.1.8. Class GenotypeMPTranslator

Is: A translator which translates a Genotype entity into a GenotypeMPDomain

Has: An Accession translator to translate the entities accession IDs to AccessionDomains, a AnnotationTranslator, to translate the entities annotations to AnnotationDomains and a AnnotationHeaderTranslator to translate the entities MP AnnotationHeader's to AnnotationHeaderDomains.

Does: Translates a Genotype Entity into a GenotypeMPDomain

Attributes

- accTrans : AccessionTranslator[1] — [[_U_oOIQkNl_EDemlKeUvYL7lw](#)]
- annotTrans : AnnotationTranslator[1] — [[_U_s5cwMNI_EDemlKeUvYL7lw](#)]
- headerTrans : AnnotationHeaderTranslator[1] — [[_U_x6b90Nl_EDemlKeUvYL7lw](#)]

Operations

- entityToDomain(entity : Genotype [1]) : GenotypeMPDomain

1.1.9. Class SlimGenotypeTranslator

Is: Is a translator which translates n Genotype entity into a SlimGenotypeDomain

Has: An accessionTranslator to translate the entities accession ids to AccessionDomains

Does: Translates a Genotype entity into a SlimGenotypeDomain. The genotypeDisplay cannot be calculated by this Translator, The service does that.

Attributes

- accessionTranslator : SlimGenotypeDomain[1] — [see "SlimGenotypeDomain" definition](#)

Operations

- entityToDomain(entity : Genotype [1]) : SlimGenotypeDomain

1.1.10. Class AnnotationSer

No description.

1.1.11. Class AnnotationService

No description.

1.1.12. Class GenotypeMPTranslator2

No description.

1.1.13. Class SlimGenotypeAlleleReferenceDomain

No description.