

IS311 Web Development

Week 04 - Lecture 5

Dr. Abbas Malik
amaalik@psu.edu.sa

Web Technologies



Structure



Style



Behavior

CSS - Cascading Style Sheets


- Use to style an HTML document
- Describes how HTML elements should be displayed
- Control the layout of multiple web pages at once
- Stored in CSS files

CSS

- HTML was NEVER intended to contain tags for formatting a web page
- HTML 3.2: & color attributes are introduced
- Developers need to add font and color information on every page - a nightmare
- CSS removed the style formatting from HTML

CSS Syntax

- A rule consists of **selector** and a **declaration block**

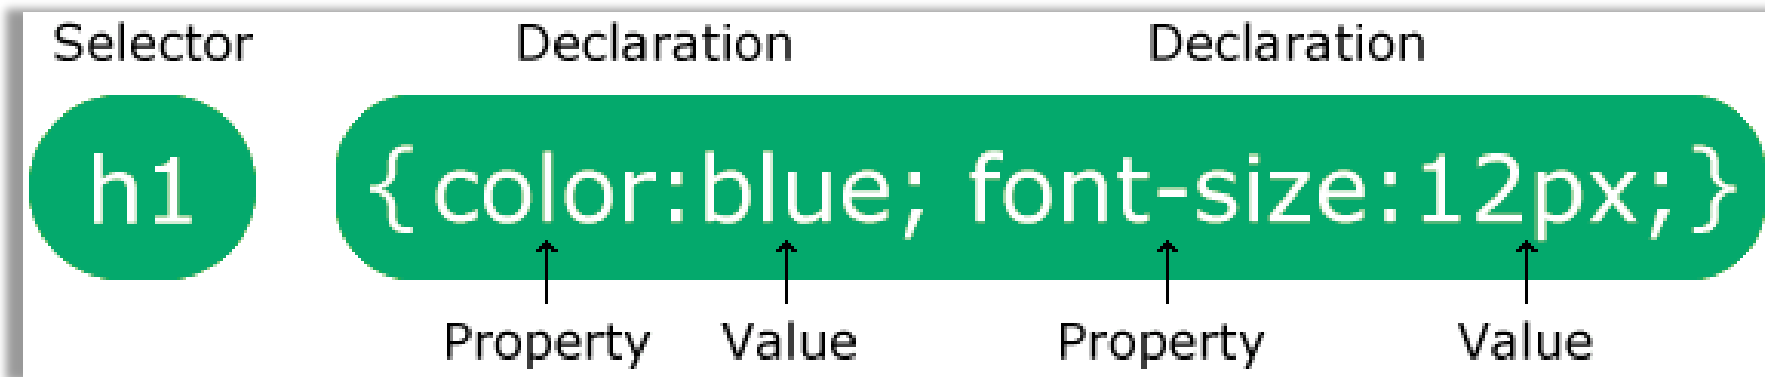

CSS Syntax

- A rule consists of **selector** and a **declaration block**


```
p {  
  color: red;  
  text-align: center;  
}
```

Setting Text color to Red

Setting Text alignment to center

CSS Syntax

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <title>CSS Intro</title>
  <style>
    p {
      color: red;
      text-align: center;
    }
  </style>
</head>
<body>
  <h1>CSS Introduction</h1>
  <p>This is a test of the CSS.</p>
</body>
</html>
```

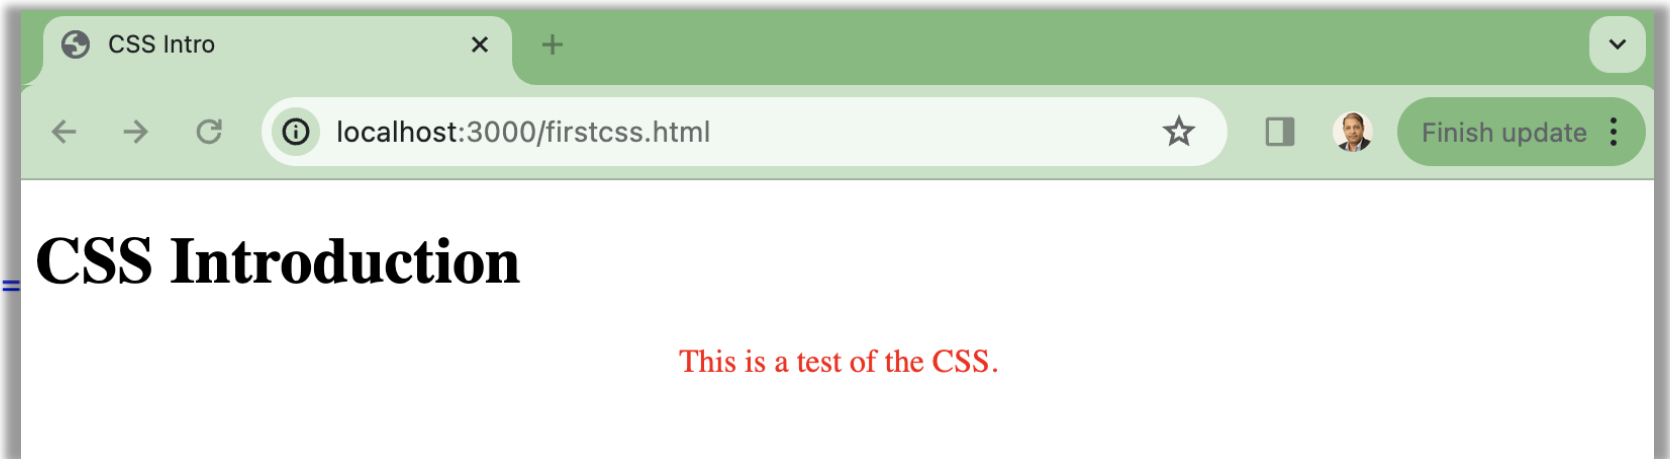

How CSS?


Three ways to insert CSS

- Inline
- Internal
- External

Inline CSS

- Inserting the style information within the TAG

```
<body style="background-color:rgb(194, 212, 231);">
<h1 style="background-color:DodgerBlue;">Hello Color World</h1>
<p style="background-color:Tomato;">This is a paragraph with
background color.</p>
</body>
```

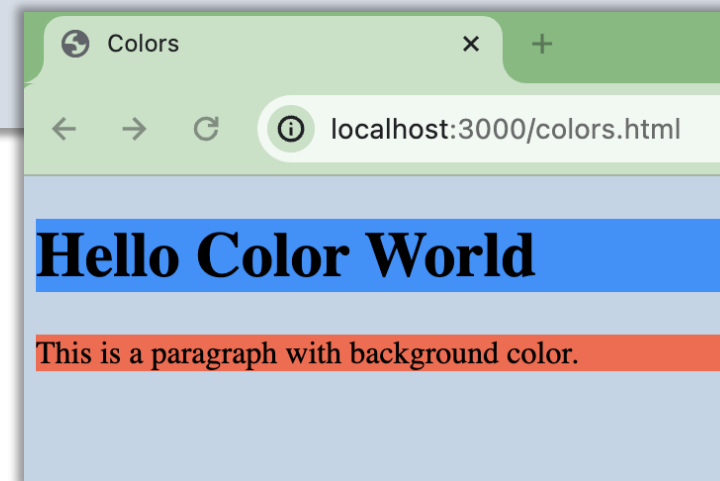

Inline CSS

- Inserting the style information within the TAG


```
<body style="background-color:rgb(194, 212, 231);">
<h1 style="background-color:DodgerBlue; color:white;">Hello Color
World</h1>
<p style="background-color:Tomato; color:blue">This is a paragraph
with background color.</p>
</body>
```

Hello Color World

This is a paragraph with background color.

Internal CSS

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>CSS Intro</title>
  <style>
    p {
      color: red;
      text-align: center;
    }
  </style>
</head>
<body>
  <h1>CSS Introduction</h1>
  <p>This is a test of the CSS.</p>
</body>
</html>
```

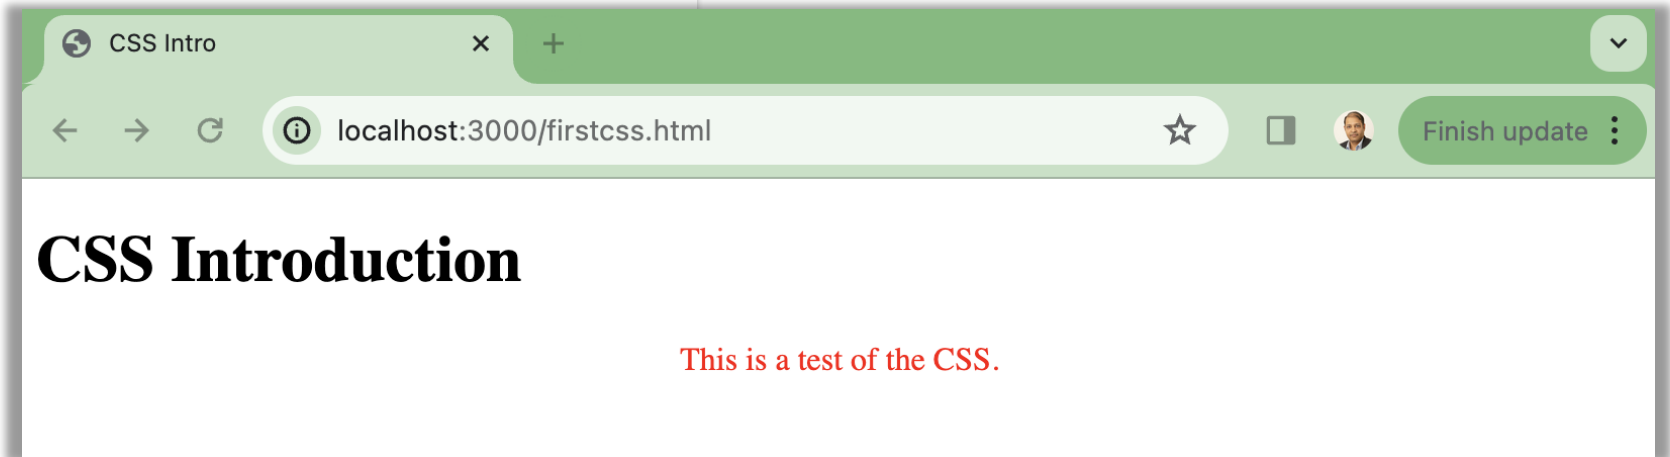

Internal CSS

```

1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <title>Link Color</title>
7      <style>
8          a:link {
9              color: green;
10             background-color: transparent;
11             text-decoration: none;
12         }
13
14         a:visited {
15             color: green;
16             background-color: transparent;
17             text-decoration: none;
18         }
19
20         a:hover {
21             color: red;
22             background-color: transparent;
23             text-decoration: underline;
24         }
25
26         a:active {
27             color: yellow;
28             background-color: transparent;
29             text-decoration: underline;
30         }
31     </style>
32 </head>
33 <body>
34     <h1>Link Colors</h1>
35     <p>
36         <a href="hyperlink.html"> HyperLinks</a>
37     </p>
38 </body>
39 </html>

```

External CSS

- Saving all style information in an external file
- CSS file
- Edit one file and look of entire website changes
- Need to include a reference to CSS file in HTML page in the header section - `<link>` tag

External CSS

```
<> firstcss.html # firstcss.css externalcss.html
Week 04 > Code > css > # firstcss.css > ...
1  body {
2    background-color: lightblue;
3  }
4
5  h1 {
6    color: navy;
7    margin-left: 20px;
8  }
9
10 p {
11   color: red;
12   text-align: center;
13 }
14
15 a:link {
16   color: red;
17   background-color: transparent;
18   text-decoration: none;
19 }
20
21 a:visited {
22   color: green;
23   background-color: transparent;
24   text-decoration: none;
25 }
26
27 a:hover {
28   color: yellow;
29   background-color: transparent;
30   text-decoration: underline;
31 }
32
33 a:active {
34   color: plum;
35   background-color: transparent;
36   text-decoration: underline;
37 }
```

```
<> firstcss.html # firstcss.css externalcss.html X
Week 04 > Code > externalcss.html > html > body > p > a
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4    <meta charset="UTF-8">
5    <meta name="viewport" content="width=device-width, initial-scale=1.0">
6    <title>External CSS</title>
7    <link rel="stylesheet" href="css/firstcss.css">
8  </head>
9  <body>
10   <h1>First Use of External CSS File</h1>
11   <p>
12     We are using the first external css file and applying the styles defined in
13     <a href="firstcss.html">Our First File with Internal CSS File.</a>
14   </p>
15 </body>
16 </html>
```




CSS Selector

- Selects the HTML element(s) you want to style
- Five Categories
 1. Element Name
 2. id selector
 3. class selector
 4. Universal Selector
 5. Group Selector

Element Name Selector

- Use element to style

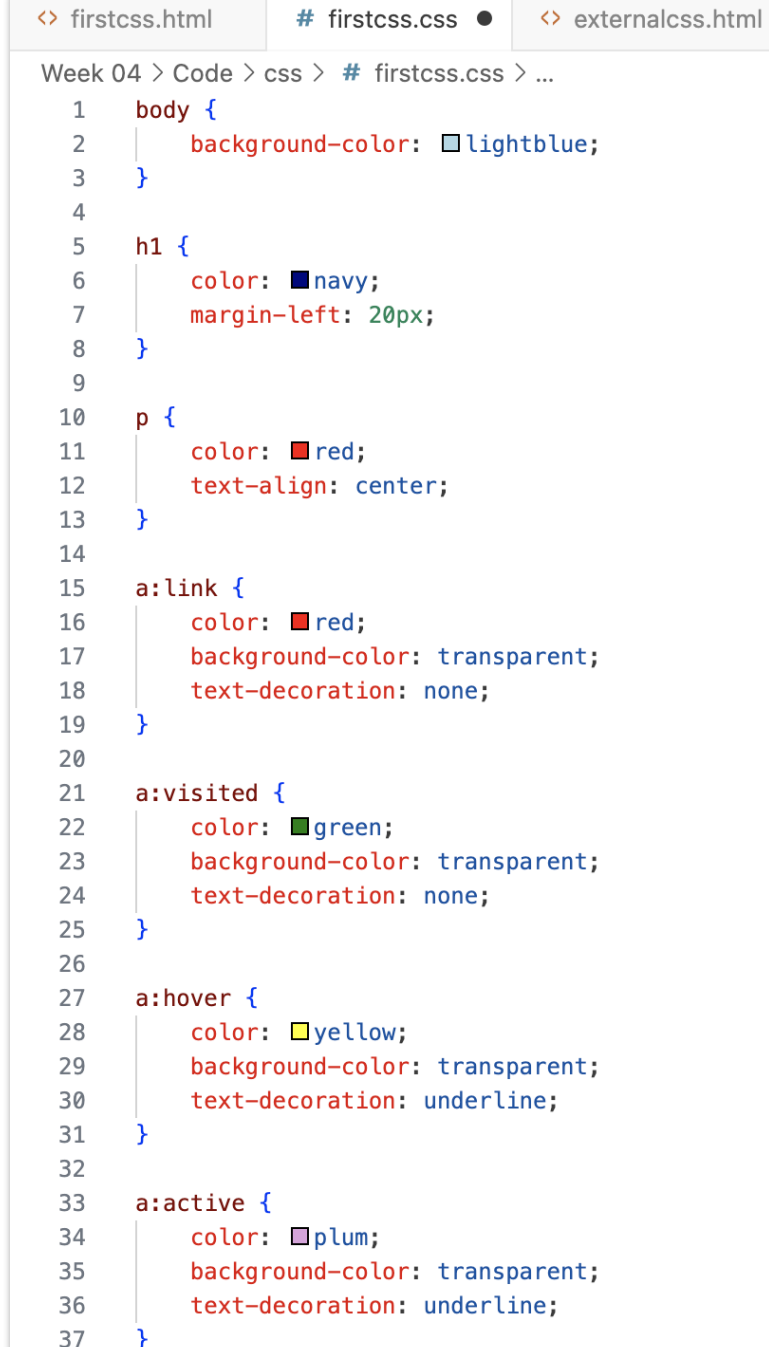

The screenshot shows a code editor with three tabs: 'firstcss.html', '# firstcss.css', and 'externalcss.html'. The active tab is '# firstcss.css'. The code is as follows:

```
Week 04 > Code > css > # firstcss.css > ...
1  body {
2      background-color: lightblue;
3  }
4
5  h1 {
6      color: navy;
7      margin-left: 20px;
8  }
9
10 p {
11     color: red;
12     text-align: center;
13 }
14
15 a:link {
16     color: red;
17     background-color: transparent;
18     text-decoration: none;
19 }
20
21 a:visited {
22     color: green;
23     background-color: transparent;
24     text-decoration: none;
25 }
26
27 a:hover {
28     color: yellow;
29     background-color: transparent;
30     text-decoration: underline;
31 }
32
33 a:active {
34     color: plum;
35     background-color: transparent;
36     text-decoration: underline;
37 }
```


ID Selector

- Uses the **id** attribute of an HTML element
- Selector = **#**{id_name}


```

→ #maintext{
    color: blue;
    text-align: justify;
    background-color: bisque;
}

→ #maintext:hover{
    color: yellow;
    background-color: black;
}
    
```

```

<p id="maintext">
    This is paragraph with id = maintext.
    This is paragraph with id = maintext.
    This is paragraph with id = maintext.
    This is paragraph with id = maintext.
    This is paragraph with id = maintext.
    This is paragraph with id = maintext.
    This is paragraph with id = maintext.
    This is paragraph with id = maintext.
    This is paragraph with id = maintext.
</p>
    
```

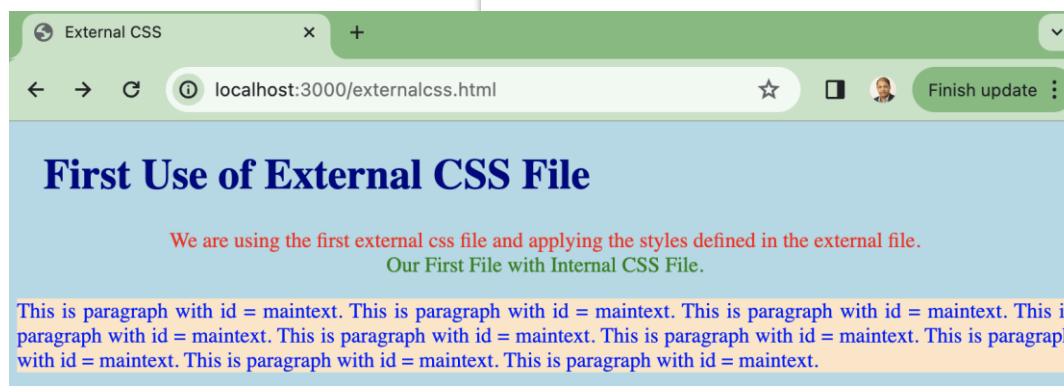

ID Selector

The image shows a code editor on the left and a web browser on the right. The code editor displays the following HTML code:

```

1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6   <title>External CSS</title>
7   <link rel="stylesheet" href="css/firstcss.css">
8 </head>
9 <body>
10  <h1>First Use of External CSS File</h1>
11  <p>
12    We are using the first external css file and applying the styles defined in the
13    <a href="firstcss.html">Our First File with Internal CSS File.</a>
14  </p>
15  <p id="maintext">
16    This is paragraph with id = maintext.
17    This is paragraph with id = maintext.
18    This is paragraph with id = maintext.
19    This is paragraph with id = maintext.
20    This is paragraph with id = maintext.
21    This is paragraph with id = maintext.
22    This is paragraph with id = maintext.
23    This is paragraph with id = maintext.
24    This is paragraph with id = maintext.
25  </p>
26 </body>
27 </html>

```

The web browser on the right shows the rendered page with the title "First Use of External CSS File". The text "We are using the first external css file and applying the styles defined in the external file." is displayed in red. Below it, the text "Our First File with Internal CSS File." is displayed in green. The paragraph with id="maintext" is highlighted in orange and contains the text: "This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext."

Class Selector

- Uses the **class** attribute of an HTML element
- Selector = `.{class_name}`

```
.mainHead {
  color: ■brown;
  font-family: Arial, Helvetica, sans-serif;
  background-color: □cornsilk;
}
```

```
<h1 class="mainHead">A new H1 Heading</h1>
```

First Use of External CSS File

We are using the first external css file and applying the styles defined in the external file.
Our First File with Internal CSS File.

This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext.

A new H1 Heading

Class Selector for Element

```
p.mainHead {
  color: red;
  background-color: antiquewhite;
  font-size: larger;
  font-family: Arial, Helvetica, sans-serif;
}
```

`<p class="mainHead">`This is the class selector for p element.`</p>`

First Use of External CSS File

We are using the first external css file and applying the styles defined in the external file.
Our First File with Internal CSS File.

This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext.

A new H1 Heading

This is the class selector for p element.

Universal Selector

- Effect every element on html page

```
* {  
  text-align: center;  
  color: blue;  
}
```

CSS Grouping Selector

- Applying same style on more than one elements

```
h1 {
  text-align: center;
  color: red;
}
```

```
h2 {
  text-align: center;
  color: red;
}
```

```
p {
  text-align: center;
  color: red;
}
```



```
h1, h2, p {
  text-align: center;
  color: red;
}
```

CSS Comments

- Comment between `/* Your comments */`

```
/* This is a single-line comment */  
p {  
    color: red;  
}
```

Background

- background-color
- background-image
- background-repeat
- background-attachment
- background-position
- background

background-image, repeat

```
body {  
  background-image: url("paper.gif");  
}
```

```
body {  
  background-image: url("gradient_bg.png");  
  background-repeat: repeat-x;  
}
```

```
background-repeat: repeat-y;
```

```
background-repeat: no-repeat;
```

[More details on Repeat](#)

background-position, attachment

- Starting position of the image

```
body {  
    background-image: url('w3css.gif');  
    background-repeat: no-repeat;  
    background-attachment: fixed;  
    background-position: left top;  
}
```


Border

- **dotted** - Defines a dotted border
- **dashed** - Defines a dashed border
- **solid** - Defines a solid border
- **double** - Defines a double border
- **groove** - Defines a 3D grooved border. The effect depends on the border-color value
- **ridge** - Defines a 3D ridged border. The effect depends on the border-color value
- **inset** - Defines a 3D inset border. The effect depends on the border-color value
- **outset** - Defines a 3D outset border. The effect depends on the border-color value
- **none** - Defines no border
- **hidden** - Defines a hidden border

Border Width

```
p.one {  
    border-style: solid;  
    border-width: 5px;  
}  
  
p.two {  
    border-style: solid;  
    border-width: medium;  
}  
  
p.three {  
    border-style: dotted;  
    border-width: 2px;  
}  
  
p.four {  
    border-style: dotted;  
    border-width: thick;  
}
```

Border

- Color
- Sides
- Rounded Borders



```
p {  
  border-top-style: dotted;  
  border-right-style: solid;  
  border-bottom-style: dotted;  
  border-left-style: solid;  
}
```

```
border-radius: 5px;
```

Margin & Padding

Padding

Margin

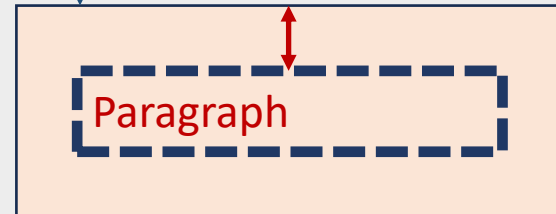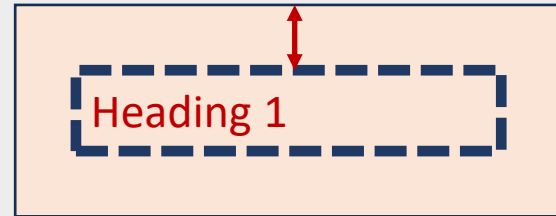

Margin

```
p {  
  margin-top: 100px;  
  margin-bottom: 100px;  
  margin-right: 150px;  
  margin-left: 80px;  
}
```

```
p {  
  margin: 25px 50px 75px 100px;  
}
```

Top Right Bottom Left

[Learn More on Margin](#)

Padding

```
div {  
  padding-top: 50px;  
  padding-right: 30px;  
  padding-bottom: 50px;  
  padding-left: 80px;  
}
```

[Learn more on Padding](#)

Top Right Bottom Left


```
div {  
  padding: 25px 50px 75px 100px;  
}
```

Height and Width

- Set width and height of an element
 - Length - defines in px, cm, etc.
 - % - defined as percentage of available space
- max-width & min-width - used to set maximum or minimum width of an element


[More details](#)

Box Model

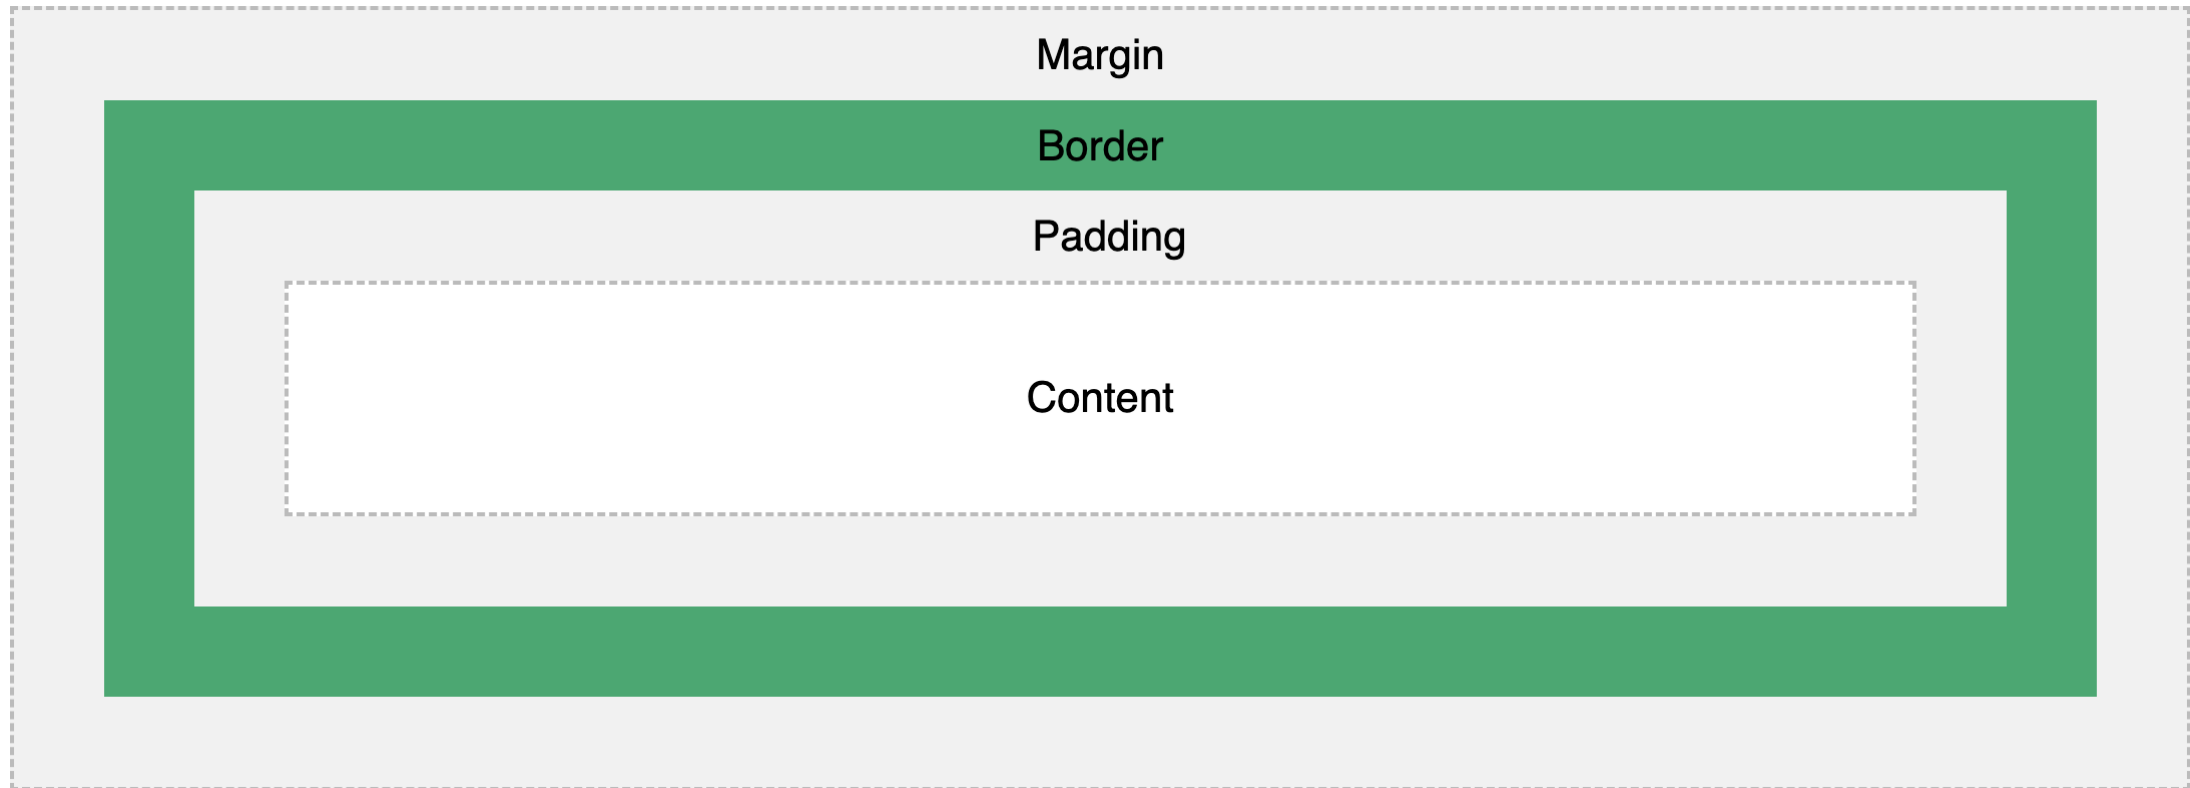

Outline

outline-style
outline-color
outline-width
outline-offset
outline

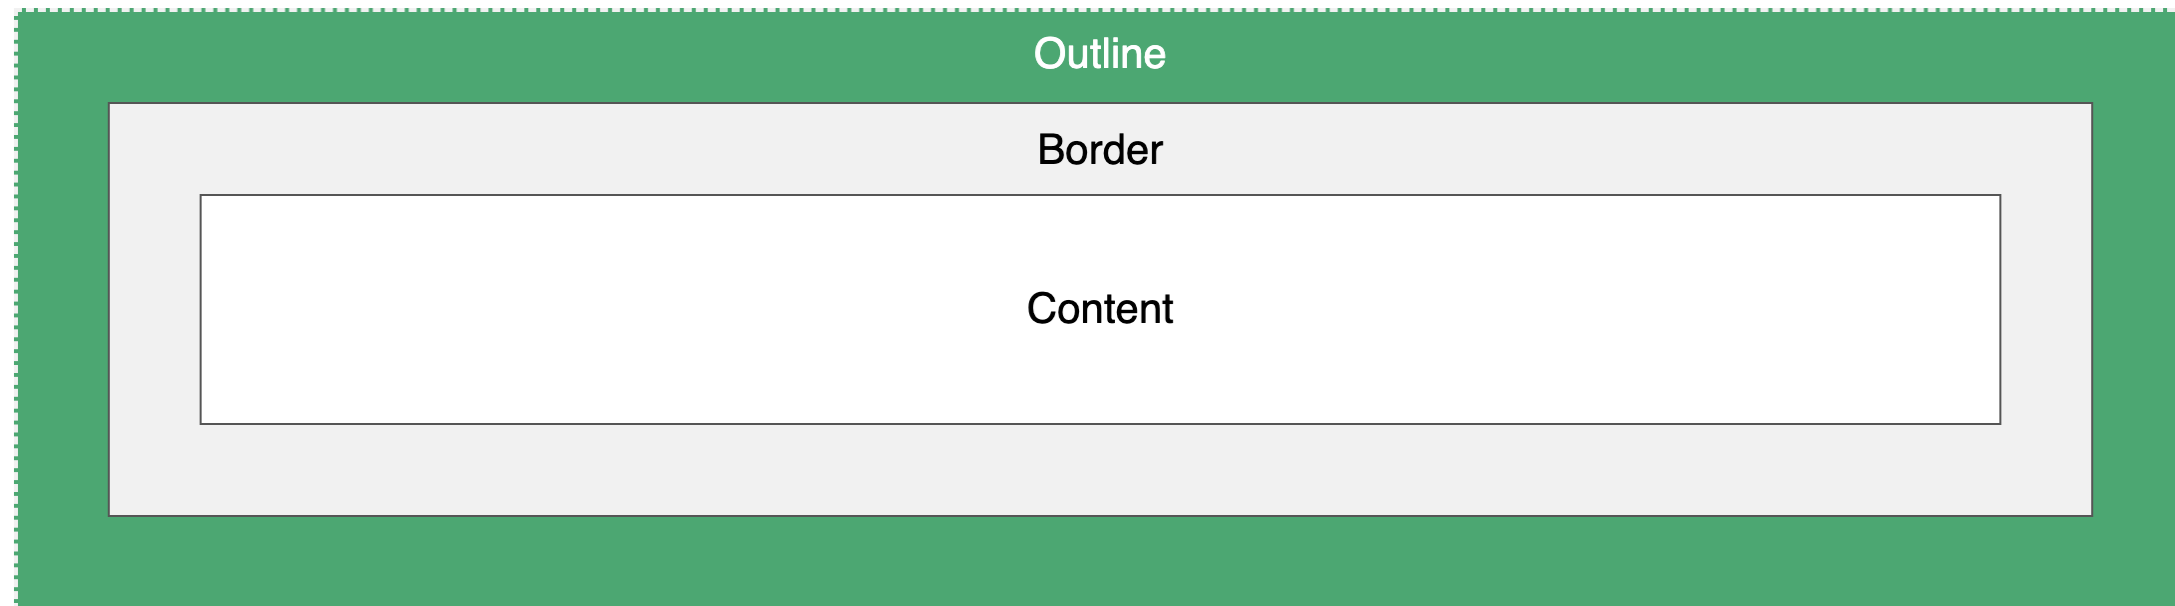

Text

- color

- Alignment `text-align: center | left | right | justify`

`text-align-last:`

[Learn more text-align](#)

- Vertical Alignment

`vertical-align: baseline | text-top | text-bottom | sub | sup`

[Learn more vertical-align](#)

Text - direction

- direction

```
direction: rtl | ltr
```

- decoration

```
text-decoration-line: underline;  
text-decoration-color: yellow;  
text-decoration-style: dashed;  
text-decoration-thickness: 10px;
```


First Use of External CSS File

[Learn more](#)

Text - transformation

- **text-transformation**: uppercase | lowercase | capitalization

Text Spacing

- Text Indentation
 - Specify the indentation of the first line of a text

```
p {  
  color: red;  
  text-align: justify;  
  text-indent: 30px;  
}
```

This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext. This is paragraph with id = maintext.

Text Spacing

- Letter Spacing
 - Specify the space between the characters in a text

```
p {  
  color: red;  
  text-align: justify;  
  text-indent: 30px;  
  letter-spacing: 5px;  
}
```

We are using the first external css file and applying the styles defined in the external file.

Text Spacing

- Line Height
 - Specify the space between text lines

```
p {  
color: red;  
text-align: justify;  
text-indent: 30px;  
Line-height: 2;  
}
```

[illegible]

Text Spacing

- Word Spacing
 - Specify the space between words in text

```
p {  
color: red;  
text-align: justify;  
text-indent: 30px;  
Line-height: 2;  
Word-spacing: 10px;  
}
```

We are using the first external css file and applying the styles defined in the external file.

`white-space: nowrap;`

[More on text spacing](#)

HyperLink Style

[Learn more on Links](#)

```

1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <title>Link Color</title>
7      <style>
8          a:link {
9              color: green;
10             background-color: transparent;
11             text-decoration: none;
12         }
13
14         a:visited {
15             color: green;
16             background-color: transparent;
17             text-decoration: none;
18         }
19
20         a:hover {
21             color: red;
22             background-color: transparent;
23             text-decoration: underline;
24         }
25
26         a:active {
27             color: yellow;
28             background-color: transparent;
29             text-decoration: underline;
30         }
31     </style>
32 </head>
33 <body>
34     <h1>Link Colors</h1>
35     <p>
36         <a href="hyperlink.html"> HyperLinks</a>
37     </p>
38 </body>
39 </html>

```

Lists Style

- `list-style-type`

```
ul.a {  
    list-style-type: circle;  
}  
  
ul.b {  
    list-style-type: square;  
}  
  
ol.c {  
    list-style-type: upper-roman;  
}  
  
ol.d {  
    list-style-type: lower-alpha;  
}
```

Lists Style

- `list-style-image`

```
ul {  
    list-style-image: url('sqpurple.gif');  
}
```

Lists Style

• list-style-position

```
ul.a {  
    list-style-position: outside;  
}
```

- | |
|---|
| • Coffee - A brewed drink prepared from roasted coffee beans... |
| • Tea |
| • Coca-cola |

Lists Style

- **list-style-position**

```
ul.a {
  list-style-position: inside;
}
```

- | |
|---|
| <ul style="list-style-type: none"> • Coffee - A brewed drink prepared from roasted coffee beans... |
| <ul style="list-style-type: none"> • Tea |
| <ul style="list-style-type: none"> • Coca-cola |

[More details on List](#)

Table Style

- Border

```
table, th, td {  
    border: 1px solid;  
}
```

- Width

```
table {  
    width: 100%;  
}
```

```
table {  
    border-collapse: collapse;  
}
```

[More on Table Styles](#)

HTML FORMS

HTML FORM

- Used to collect user input
- Data is **sent to Server** for **processing**
 - **User registration** - user information is sent to server for storing in the database for later user and user validation
- `<form> ... </form>` tag

FORMS

Student Registration Form

First Name:

Enter your first name

Last Name:

Enter your last name

Email:

it should contain @,.

Mobile:

only 10 digits are allowed

Gender:

☐ Male ☐ Female

Date Of Birth:

mm/dd/yyyy

Address:

City:

Area PIN:

State:

Qualification:

Select Qualification: ▾

Specialization:

☐ Computer Science

☐ Information Technology

☐ Computer Architecture

☐ Tele Communication

Password:

Registered

FORM Elements

INPUT - `<input>`

- Most used element in HTML FORMS

text input field, radio button, check boxes, button, etc.

FORM Elements

- INPUT - `<input>`

Type	Description
<code><input type="text"></code>	Displays a single-line text input field
<code><input type="radio"></code>	Displays a radio button (for selecting one of many choices)
<code><input type="checkbox"></code>	Displays a checkbox (for selecting zero or more of many choices)
<code><input type="submit"></code>	Displays a submit button (for submitting the form)
<code><input type="button"></code>	Displays a clickable button

Label and Text Fields

```
<form>
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" name="fname"><br>
  <label for="lname">Last name:</label><br>
  <input type="text" id="lname" name="lname">
</form>
```

Bind label and input together

Name attribute is required to send data to server for processing

First name:

Last name:

Radio Button

```
<form>
  <input type="radio" id="html" name="fav_language" value="HTML">
  <label for="html">HTML</label><br>
  <input type="radio" id="css" name="fav_language" value="CSS">
  <label for="css">CSS</label><br>
  <input type="radio" id="javascript" name="fav_language" value="JavaScript">
  <label for="javascript">JavaScript</label>
</form>
```

- ☐ HTML
- ☐ CSS
- ☐ JavaScript

Checkboxes

```
<form>
  <input type="checkbox" id="vehicle1" name="vehicle1" value="Bike">
  <label for="vehicle1"> I have a bike</label><br>
  <input type="checkbox" id="vehicle2" name="vehicle2" value="Car">
  <label for="vehicle2"> I have a car</label><br>
  <input type="checkbox" id="vehicle3" name="vehicle3" value="Boat">
  <label for="vehicle3"> I have a boat</label>
</form>
```

- ☐ I have a bike
- ☐ I have a car
- ☐ I have a boat

Submit Button

Form-handler contains scripts to process user input.

```
<form action="/action_page.html">
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" name="fname" value="John"><br>
  <label for="lname">Last name:</label><br>
  <input type="text" id="lname" name="lname" value="Doe"><br><br>
  <input type="submit" value="Submit">
</form>
```

First name:

Last name:

Name Attribute

- Input field must have a **name** attribute to be submitted
- If the **name** attribute is **omitted**, the value of the input field will not be sent at all

```
<form action="/action_page.html">  
  <label for="fname">First name:</label><br>  
  <input type="text" id="fname" value="John"><br><br>  
  <input type="submit" value="Submit">  
</form>
```

Form Attributes

action

- Defines the action to be performed when the form is submitted
- Form data is sent to a file on the server when the user clicks on the submit button
- Usually define a file name on server to receive data and process it

Form Attributes

target

- Specifies where to display the response that is received after submitting the form
- `_blank`, `_self`, ...

Form Attributes

method

- Specifies the HTTP method to be used when submitting the form data
- Defines how data is sent to server

```
<form action="/action_page.php" method="get">
```

```
<form action="/action_page.php" method="post">
```

Form Attributes

```
<form action="/action_page.php" method="get">
```

method - get

- Form-data is sent as URL variables as name value pairs
- NEVER use GET to send sensitive data
- Length of a URL is limited
- Good for non-secure data - search string

Form Attributes

```
<form action="/action_page.php" method="post">
```

method - post

- Appends the form data inside the body of the HTTP request
- POST has no size limitations

Form Elements

- `<input>`
- `<label>`
- `<select>`
- `<textarea>`
- `<button>`
- `<fieldset>`
- `<legend>`
- `<datalist>`
- `<output>`
- `<option>`
- `<optgroup>`

<select>

```
<label for="cars">Choose a car:</label>
<select id="cars" name="cars">
  <option value="volvo">Volvo</option>
  <option value="saab">Saab</option>
  <option value="fiat">Fiat</option>
  <option value="audi">Audi</option>
</select>
```

```
<select id="cars" name="cars" size="3">
```

```
<select id="cars" name="cars" size="4" multiple>
```

Choose a car:

Choose a car:


Saab
Fiat
Audi

Choose a car:
Saab
Fiat

<textarea>

```

<textarea name="message" rows="10" cols="30">
The cat was playing in the garden.
</textarea>
    
```

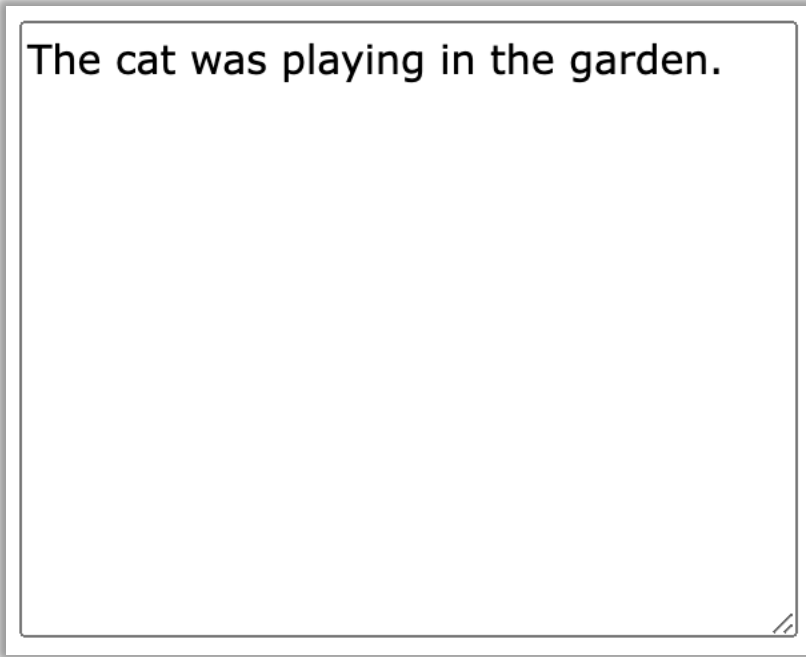

The cat was playing in the garden.

Button - clickable

```
<button type="button" onclick="alert('Hello World!')">  
Click Me!</button>
```



Click Me!

User side data validation script

<fieldset> and <legend>

- Used to group related data in a form
- Defines a caption for the <fieldset> element

```
<form action="/action_page.php">
  <fieldset>
    <legend>Personalia:</legend>
    <label for="fname">First name:</label><br>
    <input type="text" id="fname" name="fname" value="John"><br>
    <label for="lname">Last name:</label><br>
    <input type="text" id="lname" name="lname" value="Doe"><br><br>
    <input type="submit" value="Submit">
  </fieldset>
</form>
```


Personalia: _____

First name:

Last name:

<datalist>

- specifies a list of pre-defined options for an <input> element

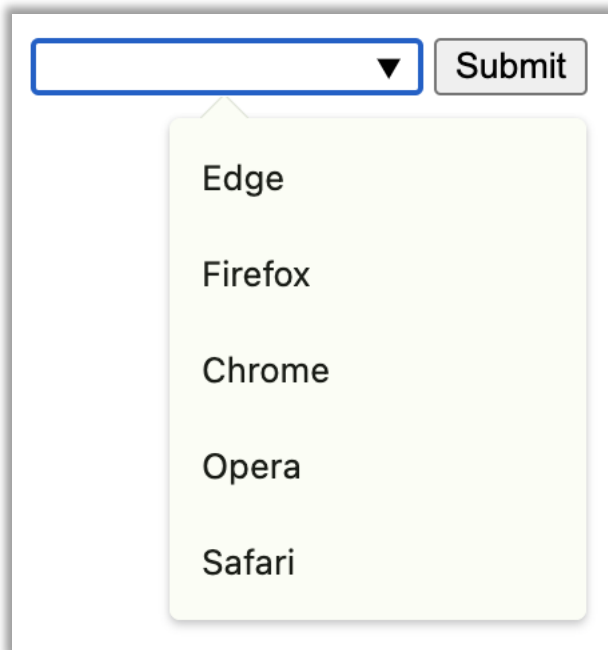

```
<form action="/action_page.php">
  <input list="browsers">
  <datalist id="browsers">
    <option value="Edge">
    <option value="Firefox">
    <option value="Chrome">
    <option value="Opera">
    <option value="Safari">
  </datalist>
</form>
```

<output>

- Show some output to user in the form

```
<form action="/action_page.php"
oninput="x.value=parseInt(a.value)+parseInt(b.value)">
  0
  <input type="range" id="a" name="a" value="50">
  100 +
  <input type="number" id="b" name="b" value="50">
  =
  <output name="x" for="a b"></output>
  <br><br>
  <input type="submit">
</form>
```


0 100 + = 75

Input Types

- Button
- Checkbox
- Color
- Date
- Datetime-local
- Email
- File
- Hidden
- Image
- Month
- Numbe
- Password
- Radio
- Range
- Reset
- Search
- Submit
- Tel
- Text
- Time
- url
- Week


COLOR

Select your favorite color:



Submit

Note: type="color" is not s

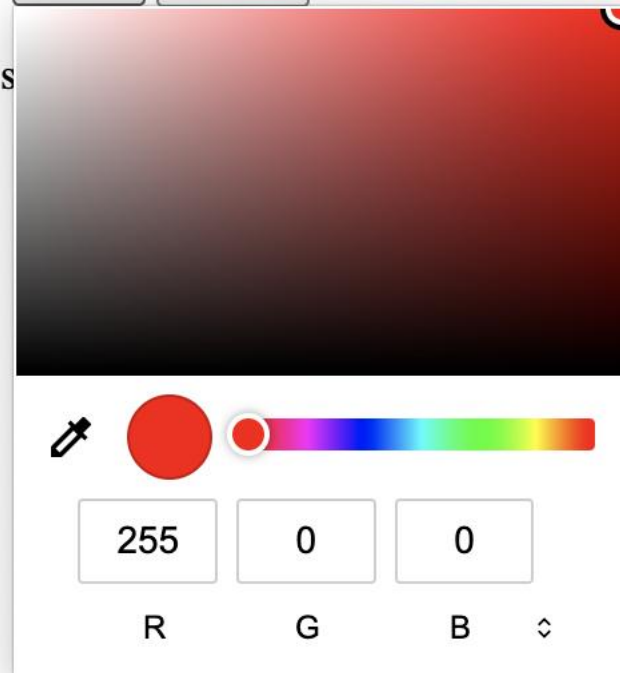

Date

Can also define min and max date

Birthday:

Note: type **January 2024**

S	M	T	W	T	F	S
31	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28	29	30	31	1	2	3
4	5	6	7	8	9	10

Datetime-local

Birthday (date and time):

Note: type="datetime-local"

January 2024 ▾

↑

↓

04

09

PM

S	M	T	W	T	F	S	05	10	AM
31	1	2	3	4	5	6	06	11	
7	8	9	10	11	12	13	07	12	
14	15	16	17	18	19	20	08	13	
21	22	23	24	25	26	27	09	14	
28	29	30	31	1	2	3	10	15	
4	5	6	7	8	9	10			

Clear

Today

File

Select a file: No file chosen

Month

Birthday (month and year):

Note: type="month" is not supported in Internet Explorer 11.

2024

Jan	Feb	Mar	Apr
May	Jun	Jul	Aug
Sep	Oct	Nov	Dec

Clear

This month

Number

Quantity (between 1 and 5):

Tel

Enter a phone number:

Format: 123-45-678

Time

Select a time: 

Note: type="time"

04	16	PM
05	17	AM
06	18	
07	19	
08	20	
09	21	
10	22	

Internet Explorer 11.

Week

Select a week: Week ,

Note: type="w

January 2024

↑

↓

Week	S	M	T	W	T	F	S
1	31	1	2	3	4	5	6
2	7	8	9	10	11	12	13
3	14	15	16	17	18	19	20
4	21	22	23	24	25	26	27
5	28	29	30	31	1	2	3
6	4	5	6	7	8	9	10

Clear

This week

Internet Explorer 11.

Input Attributes

- Value - initial value for the input field
- Readonly
- Disabled
- Size
- Maxlength
- Min & Max
- Multiple

[Learn more on attributes](#)

Form Attribute

- Action
- Method

[Learn more on form attributes](#)

Reference

- <https://www.w3schools.com/css/default.asp>
- <https://www.w3schools.com/cssref/index.php>
- <https://www.w3schools.com/html/default.asp>
- <https://www.w3schools.com/tags/>