

# Network Science

---

## Lecture 05: Social Context and Link Formation

Prof. Dr. Michael Granitzer

Dr. Kanishka Ghosh Dastidar

Dr. Jelena Mitrovic

# From Structure to Context


In Lectures 03 and 04 we classified edges (strong vs. weak) and groups (communities). The graph was colorless — every node was interchangeable. Today we ask: what happens when nodes carry *attributes* and edges carry *reasons*?

Consider a small classroom.

# A Motivating Scenario

## A small classroom: friendships and attributes

circles = students · color = track (blue = STEM, orange = Arts) · lines = friendships

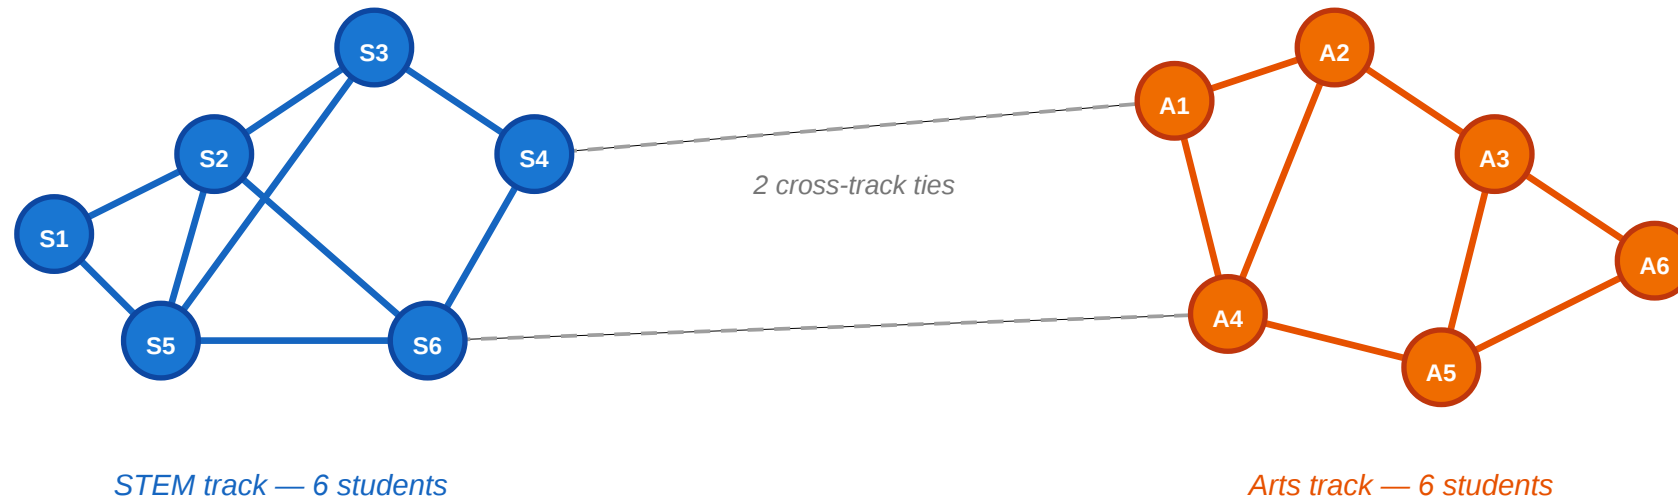


### Questions we'd like to answer from this picture

- ① Is the within-track clustering more than we'd expect by chance?
- ② Did students choose friends from the same track, or did they become more alike after befriending?
- ③ Could shared classes (foci) explain the clustering without any personal preference?
- ④ Would mild preferences suffice to create this pattern?

Twelve students, split equally between STEM (blue) and Arts (orange). Most friendships are within-track; only two cross-track ties exist. The clustering is visible — but why is it there?

# Four Questions from One Picture

1. **Measurement.** Is the within-track clustering more than we would expect by chance — or could it happen under random mixing?
  2. **Mechanism.** Did students choose friends from the same track (**selection**), or did friends influence each other to pick the same track (**socialization**)?
  3. **Context.** Could shared classes or labs (**foci**) explain the clustering without any personal preference for similarity?
  4. **Dynamics.** If every student has only a mild preference for same-track friends, could that suffice to produce this sharp segregation?
- Every concept in today's lecture answers one of these.

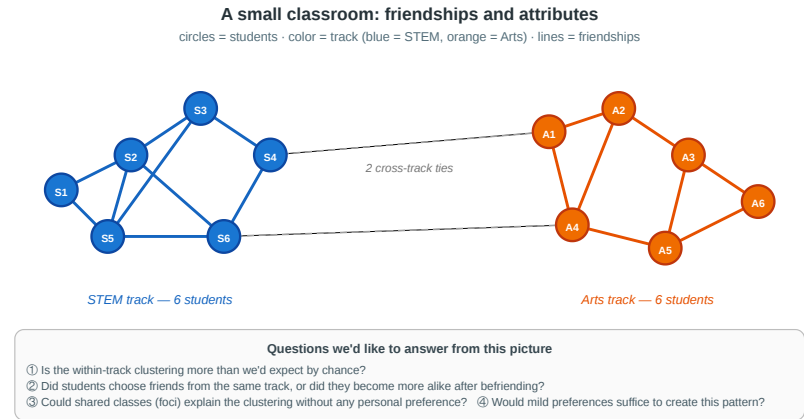

# A Different Kind of Gap

In L03–L04 the gap between theory and measurement was **computational**: MaxSTC and modularity maximization are NP-hard, so we used polynomial-time heuristics.

In L05 the gap is **causal**: even with infinite compute, a cross-sectional snapshot cannot tell us *why* a tie formed. The fix is not a better algorithm — it is richer data.

| Question                    | What we want to know                            | What a snapshot shows       | What we need                   |
|-----------------------------|-------------------------------------------------|-----------------------------|--------------------------------|
| Homophily?                  | Is tie formation biased toward similarity?      | Within-group edge fraction  | Random-mixing baseline         |
| Selection or socialization? | Which came first — similarity or the tie?       | Both present simultaneously | Longitudinal data              |
| Foci or preference?         | Did shared context cause the tie?               | Shared memberships and ties | Affiliation network model      |
| Local → global?             | Can mild preferences produce sharp segregation? | A segregated pattern        | A generative model (Schelling) |



# Takeaway

L03–L04 asked "what structure is there?" and hit a computational wall. L05 asks "why is the structure there?" and hits a causal wall. Network analysis requires both algorithmic tools and causal reasoning about the mechanisms behind the observed graph.

# Homophily

**Guiding Question:** Do people form ties because they are similar — and how would we know?

# Homophily — Formal Definition

**Homophily.** Edge formation is biased toward similarity in a node attribute  $x$ . Formally, for a categorical attribute with class shares  $p_1, \dots, p_k$ :

- **Random-mixing baseline:** the probability that a random tie connects same-class nodes is

$$H_{\text{base}} = \sum_{i=1}^k p_i^2$$

- **Observed homophily:** the fraction of actual ties that connect same-class nodes,  $H_{\text{obs}}$ .
- **Homophily index:** how much the observed same-class rate exceeds the random baseline, normalized:




$$r = \frac{H_{\text{obs}} - H_{\text{base}}}{1 - H_{\text{base}}}$$

$r = 0$ : random mixing.  $r = 1$ : perfect segregation.  $r < 0$ : heterophily (preference for *different* attributes).

# Visual Intuition

Homophily as similarity-biased tie formation

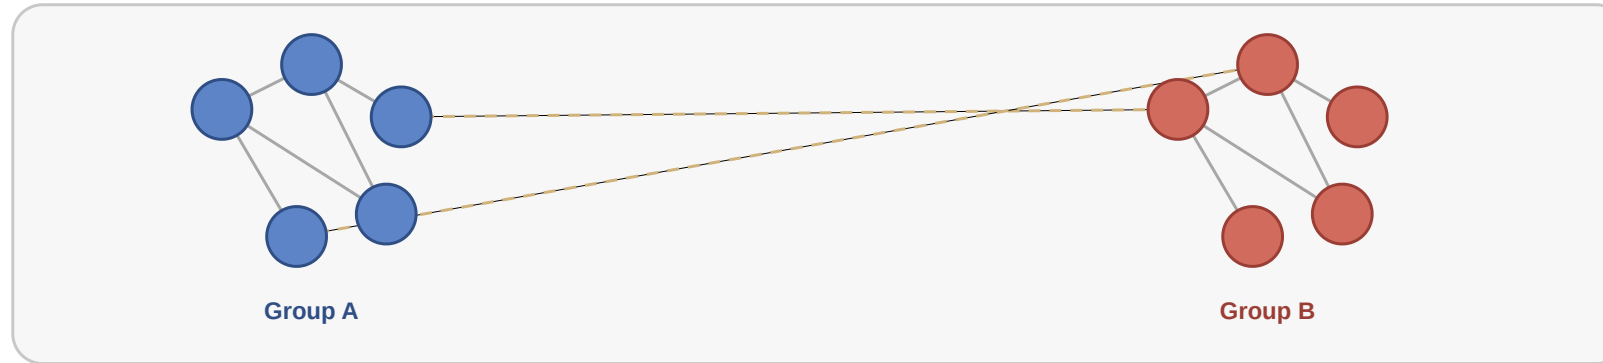

Solid edges are frequent within-group ties; dashed edges are rarer cross-group ties.

Within-group edges (colored) are far more frequent than cross-group edges (gray). But frequency alone is insufficient — we need the random-mixing baseline to decide whether this exceeds chance.

# Back to the Classroom

In the scenario, both tracks have 6 students ( $p_{\text{STEM}} = p_{\text{Arts}} = 0.5$ ).

- $H_{\text{base}} = 0.5^2 + 0.5^2 = 0.50$
- The figure has 17 within-track edges out of 19 total:  $H_{\text{obs}} = 17/19 \approx 0.89$
- $r = (0.89 - 0.50)/(1 - 0.50) = 0.78$

# Back to the Classroom

In the scenario, both tracks have 6 students ( $p_{\text{STEM}} = p_{\text{Arts}} = 0.5$ ).

- $H_{\text{base}} = 0.5^2 + 0.5^2 = 0.50$
- The figure has 17 within-track edges out of 19 total:  $H_{\text{obs}} = 17/19 \approx 0.89$
- $r = (0.89 - 0.50)/(1 - 0.50) = 0.78$

The homophily index  $r = 0.78$  is strong — far above random mixing. But it does not tell us *why*. Is it selection, socialization, or shared context?

# Quick Check

In a school of 200 students, 60% are in track A and 40% in track B. Of all friendships, 78% are within-track.

1. Compute the random-mixing baseline  $H_{\text{base}}$ .
2. Compute the homophily index  $r$ .
3. Is  $r$  strong evidence of homophily? What could make it misleading?

# Quick Check — Solution

$$H_{\text{base}} = 0.6^2 + 0.4^2 = 0.36 + 0.16 = 0.52$$

$$r = \frac{0.78 - 0.52}{1 - 0.52} = \frac{0.26}{0.48} \approx 0.54$$

$r = 0.54$  is moderate-to-strong evidence of homophily. It could be misleading if:

- students were                      to tracks based on pre-existing friend groups (reverse causation)

# Quick Check — Solution

1.  $H_{\text{base}} = 0.6^2 + 0.4^2 = 0.36 + 0.16 = 0.52$

$$r = \frac{0.78 - 0.52}{1 - 0.52} = \frac{0.26}{0.48} \approx 0.54$$

$r = 0.54$  is moderate-to-strong evidence of homophily. It could be misleading if:

- students were                      to tracks based on pre-existing friend groups (reverse causation)

# Quick Check — Solution

1.  $H_{\text{base}} = 0.6^2 + 0.4^2 = 0.36 + 0.16 = 0.52$

2.  $r = \frac{0.78 - 0.52}{1 - 0.52} = \frac{0.26}{0.48} \approx 0.54$

$r = 0.54$  is moderate-to-strong evidence of homophily. It could be misleading if:

- students were                      to tracks based on pre-existing friend groups (reverse causation)



# Quick Check — Solution

1.  $H_{\text{base}} = 0.6^2 + 0.4^2 = 0.36 + 0.16 = 0.52$

2.  $r = \frac{0.78 - 0.52}{1 - 0.52} = \frac{0.26}{0.48} \approx 0.54$

3.  $r = 0.54$  is moderate-to-strong evidence of homophily. It could be misleading if:

- students were                      to tracks based on pre-existing friend groups (reverse causation)

# Quick Check — Solution

1.  $H_{\text{base}} = 0.6^2 + 0.4^2 = 0.36 + 0.16 = 0.52$

2.  $r = \frac{0.78 - 0.52}{1 - 0.52} = \frac{0.26}{0.48} \approx 0.54$

3.  $r = 0.54$  is moderate-to-strong evidence of homophily. It could be misleading if:

- the two tracks occupy different buildings (shared context, not personal preference)
- students were assigned to tracks based on pre-existing friend groups (reverse causation)

# Quick Check — Solution

1.  $H_{\text{base}} = 0.6^2 + 0.4^2 = 0.36 + 0.16 = 0.52$

2.  $r = \frac{0.78 - 0.52}{1 - 0.52} = \frac{0.26}{0.48} \approx 0.54$

3.  $r = 0.54$  is moderate-to-strong evidence of homophily. It could be misleading if:

- the two tracks occupy different buildings (shared context, not personal preference)
- students were *assigned* to tracks based on pre-existing friend groups (reverse causation)

# Quick Check — Solution

1.  $H_{\text{base}} = 0.6^2 + 0.4^2 = 0.36 + 0.16 = 0.52$

2.  $r = \frac{0.78 - 0.52}{1 - 0.52} = \frac{0.26}{0.48} \approx 0.54$

3.  $r = 0.54$  is moderate-to-strong evidence of homophily. It could be misleading if:

- the two tracks occupy different buildings (shared context, not personal preference)
- students were *assigned* to tracks based on pre-existing friend groups (reverse causation)
- a third factor (e.g. family background) causes both track choice and friendship patterns (confounding)

# Takeaway

Homophily is not just a visual pattern — it is a statistical claim that tie formation is biased toward similarity *relative to a random-mixing baseline*. The homophily index  $r$  quantifies the excess, but it cannot identify the mechanism.

# Selection and Socialization

**Guiding Question:** How can we distinguish whether similarity caused the tie or the tie caused the similarity?

# Selection and Socialization

**Guiding Question:** How can we distinguish whether similarity caused the tie or the tie caused the similarity?

homophily = selection + socialization + context

# Three Mechanisms, One Pattern

**Selection.** People choose to form ties with others who are *already* similar to them. Similarity precedes the tie.



**Socialization (social influence).** People become *more similar* to their contacts after the tie forms. The tie precedes similarity.

**Contextual correlation.** A shared environment (school, workplace, neighborhood) independently causes both the attribute and the tie. Neither causes the other directly.



# Causal Diagrams

Why observed similarity can arise in different ways

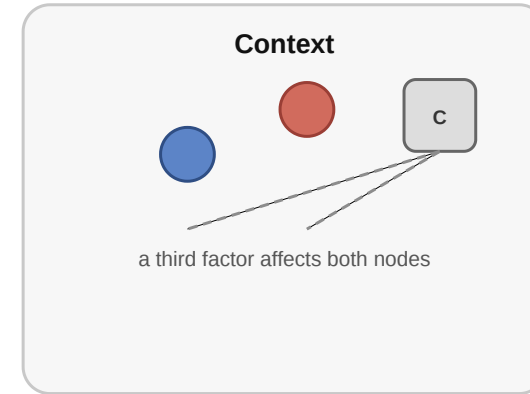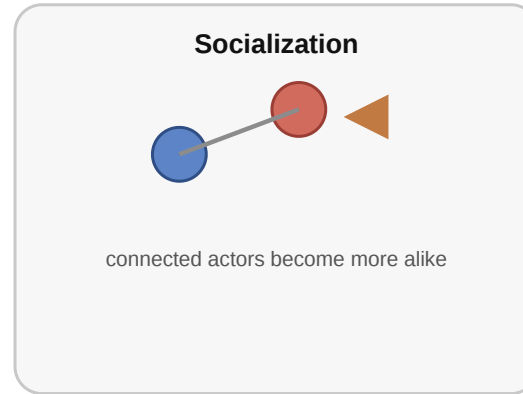

# Empirical Test: Christakis & Fowler — Obesity in Social Networks

Christakis & Fowler (2007), *The Spread of Obesity in a Large Social Network Over 32 Years*, [New England Journal of Medicine 357, 370–379](#).

They analyzed the **Framingham Heart Study** social network — 12 067 people tracked over **32 years** with repeated measurements of both friendship ties and body mass index. This made it possible to observe the *temporal sequence* of tie formation and weight change.

# Empirical Test: Christakis & Fowler — Obesity in Social Networks

Christakis & Fowler (2007), *The Spread of Obesity in a Large Social Network Over 32 Years*, [New England Journal of Medicine 357, 370–379](#).

They analyzed the **Framingham Heart Study** social network — 12 067 people tracked over **32 years** with repeated measurements of both friendship ties and body mass index. This made it possible to observe the *temporal sequence* of tie formation and weight change.

**Headline result.** A person's probability of becoming obese increased by **57%** if a friend became obese in the same interval. The effect was stronger for mutual friends and showed **directionality** — it operated in the direction of the friendship nomination, suggesting socialization (influence) rather than pure selection.

# What the Study Could Not See

- 1. Confounders.** Cohen-Cole & Fletcher (2008) and Lyons (2011) showed that the same statistical method would "detect" social contagion of **height** and **acne** — traits that clearly do not spread through social influence. The method may confuse *shared environment* with *social influence* when the confounders evolve over time.
- 2. Homophily in tie formation.** The study adjusted for *existing* attribute similarity but could not fully exclude the possibility that people selectively *formed* or *maintained* ties with others on similar weight trajectories — a dynamic form of selection invisible to static controls.
- 3. Missing network.** The Framingham data records nominated friends, not the full social network. Influence may flow through unobserved ties (coworkers, family, neighbors) that correlate with both friendship nominations and weight change.

# Quick Check

You observe that smokers tend to befriend other smokers in a college dorm.

1. What kind of data would you need beyond a single snapshot to distinguish selection from socialization?
2. Sketch one observation pattern that would favor *selection* and one that would favor *socialization*.
3. Even with longitudinal data, what kind of confound would remain hard to rule out?

# Quick Check — Solution

Longitudinal observations — friendships and smoking status at multiple time points, with newly formed ties and newly adopted behavior visible.

- : New friendships disproportionately form between people who already share smoking status.
- : People who befriend smokers become more likely to start smoking in the next observation period.

3. Shared — e.g. dorm floor placement causing both friendship and smoking exposure simultaneously. Even with temporal data, confounders that evolve over time alongside both the network and the attribute are hard to rule out without randomization.

# Quick Check — Solution

1. Longitudinal observations — friendships and smoking status at multiple time points, with newly formed ties and newly adopted behavior visible.

- : New friendships disproportionately form between people who already share smoking status.
- : People who befriend smokers become more likely to start smoking in the next observation period.

3. Shared — e.g. dorm floor placement causing both friendship and smoking exposure simultaneously. Even with temporal data, confounders that evolve over time alongside both the network and the attribute are hard to rule out without randomization.

# Quick Check — Solution

1. Longitudinal observations — friendships and smoking status at multiple time points, with newly formed ties and newly adopted behavior visible.

2.

- : New friendships disproportionately form between people who already share smoking status.
- : People who befriend smokers become more likely to start smoking in the next observation period.

3. Shared — e.g. dorm floor placement causing both friendship and smoking exposure simultaneously. Even with temporal data, confounders that evolve over time alongside both the network and the attribute are hard to rule out without randomization.



# Quick Check — Solution

1. Longitudinal observations — friendships and smoking status at multiple time points, with newly formed ties and newly adopted behavior visible.
2.
  - *Selection*: New friendships disproportionately form between people who already share smoking status.
  - : People who befriend smokers become more likely to start smoking in the next observation period.
3. Shared — e.g. dorm floor placement causing both friendship and smoking exposure simultaneously. Even with temporal data, confounders that evolve over time alongside both the network and the attribute are hard to rule out without randomization.

# Quick Check — Solution

1. Longitudinal observations — friendships and smoking status at multiple time points, with newly formed ties and newly adopted behavior visible.
2.
  - *Selection*: New friendships disproportionately form between people who already share smoking status.
  - *Socialization*: People who befriend smokers become more likely to start smoking in the next observation period.
3. Shared — e.g. dorm floor placement causing both friendship and smoking exposure simultaneously. Even with temporal data, confounders that evolve over time alongside both the network and the attribute are hard to rule out without randomization.

# Quick Check — Solution

1. Longitudinal observations — friendships and smoking status at multiple time points, with newly formed ties and newly adopted behavior visible.
2.
  - *Selection*: New friendships disproportionately form between people who already share smoking status.
  - *Socialization*: People who befriend smokers become more likely to start smoking in the next observation period.
3. Shared *environment* — e.g. dorm floor placement causing both friendship and smoking exposure simultaneously. Even with temporal data, confounders that evolve over time alongside both the network and the attribute are hard to rule out without randomization.


# Takeaway

Cross-sectional data cannot distinguish selection from socialization — the same homophily index  $r$  is consistent with both. Longitudinal network data is far more informative, but even multi-decade panel studies cannot fully eliminate confounding by evolving shared environments.

# Affiliation Networks

**Guiding Question:** How do we represent the social settings — classes, clubs, workplaces — in which ties form?

# Bipartite Affiliation Model

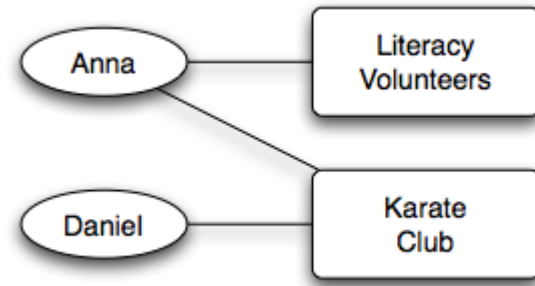

Source: Easley & Kleinberg 2010


An **affiliation network** is a bipartite graph  $G = (P \cup F, E)$ :

- $P$ : actor nodes (persons)
- $F$ : focus nodes (groups, locations, classes, organizations)
- $E$ : edges only between  $P$  and  $F$  — "person  $p$  participates in focus  $f$ "


Two persons sharing a focus creates a *potential* for a person–person tie.

# Example




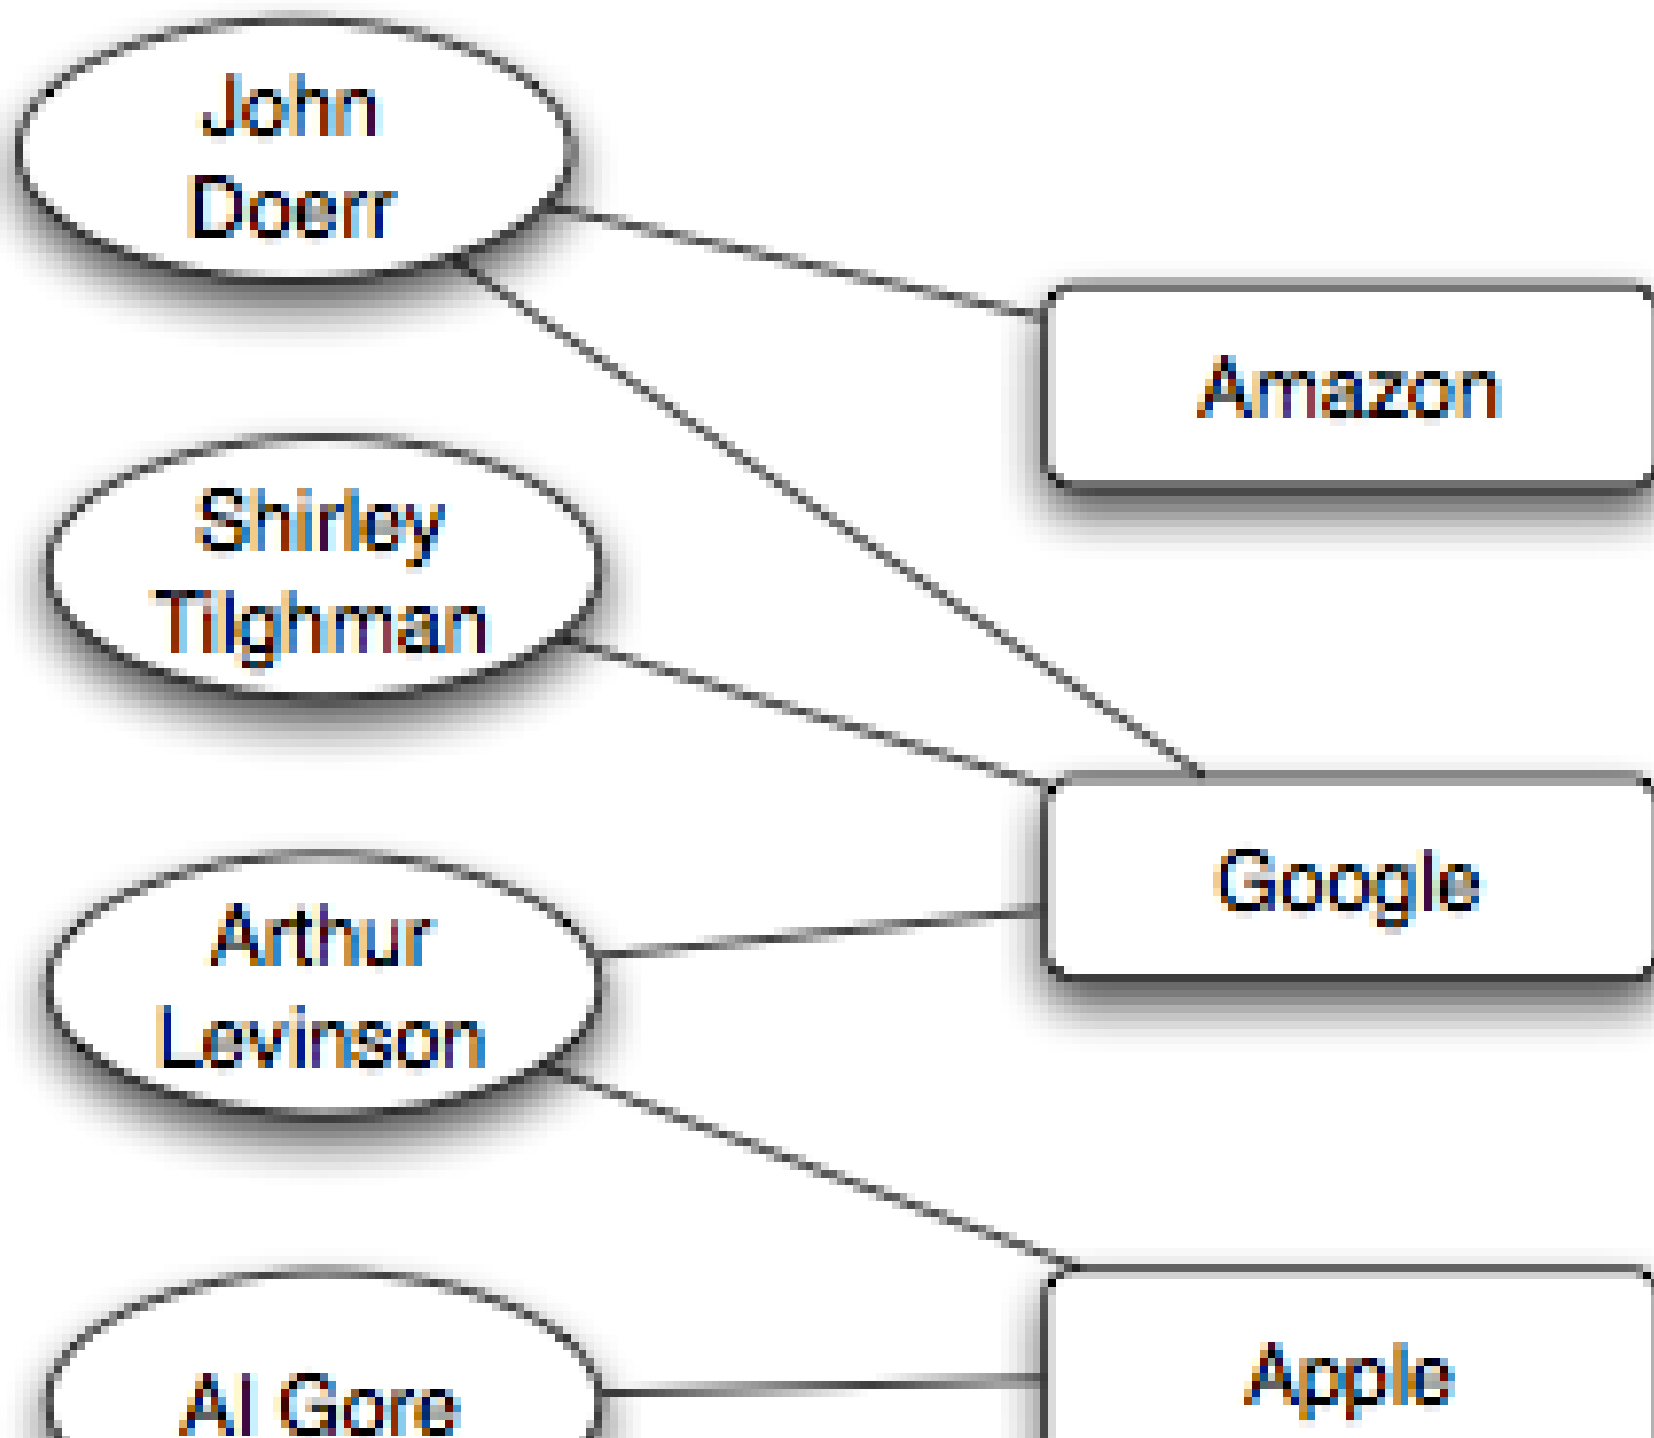




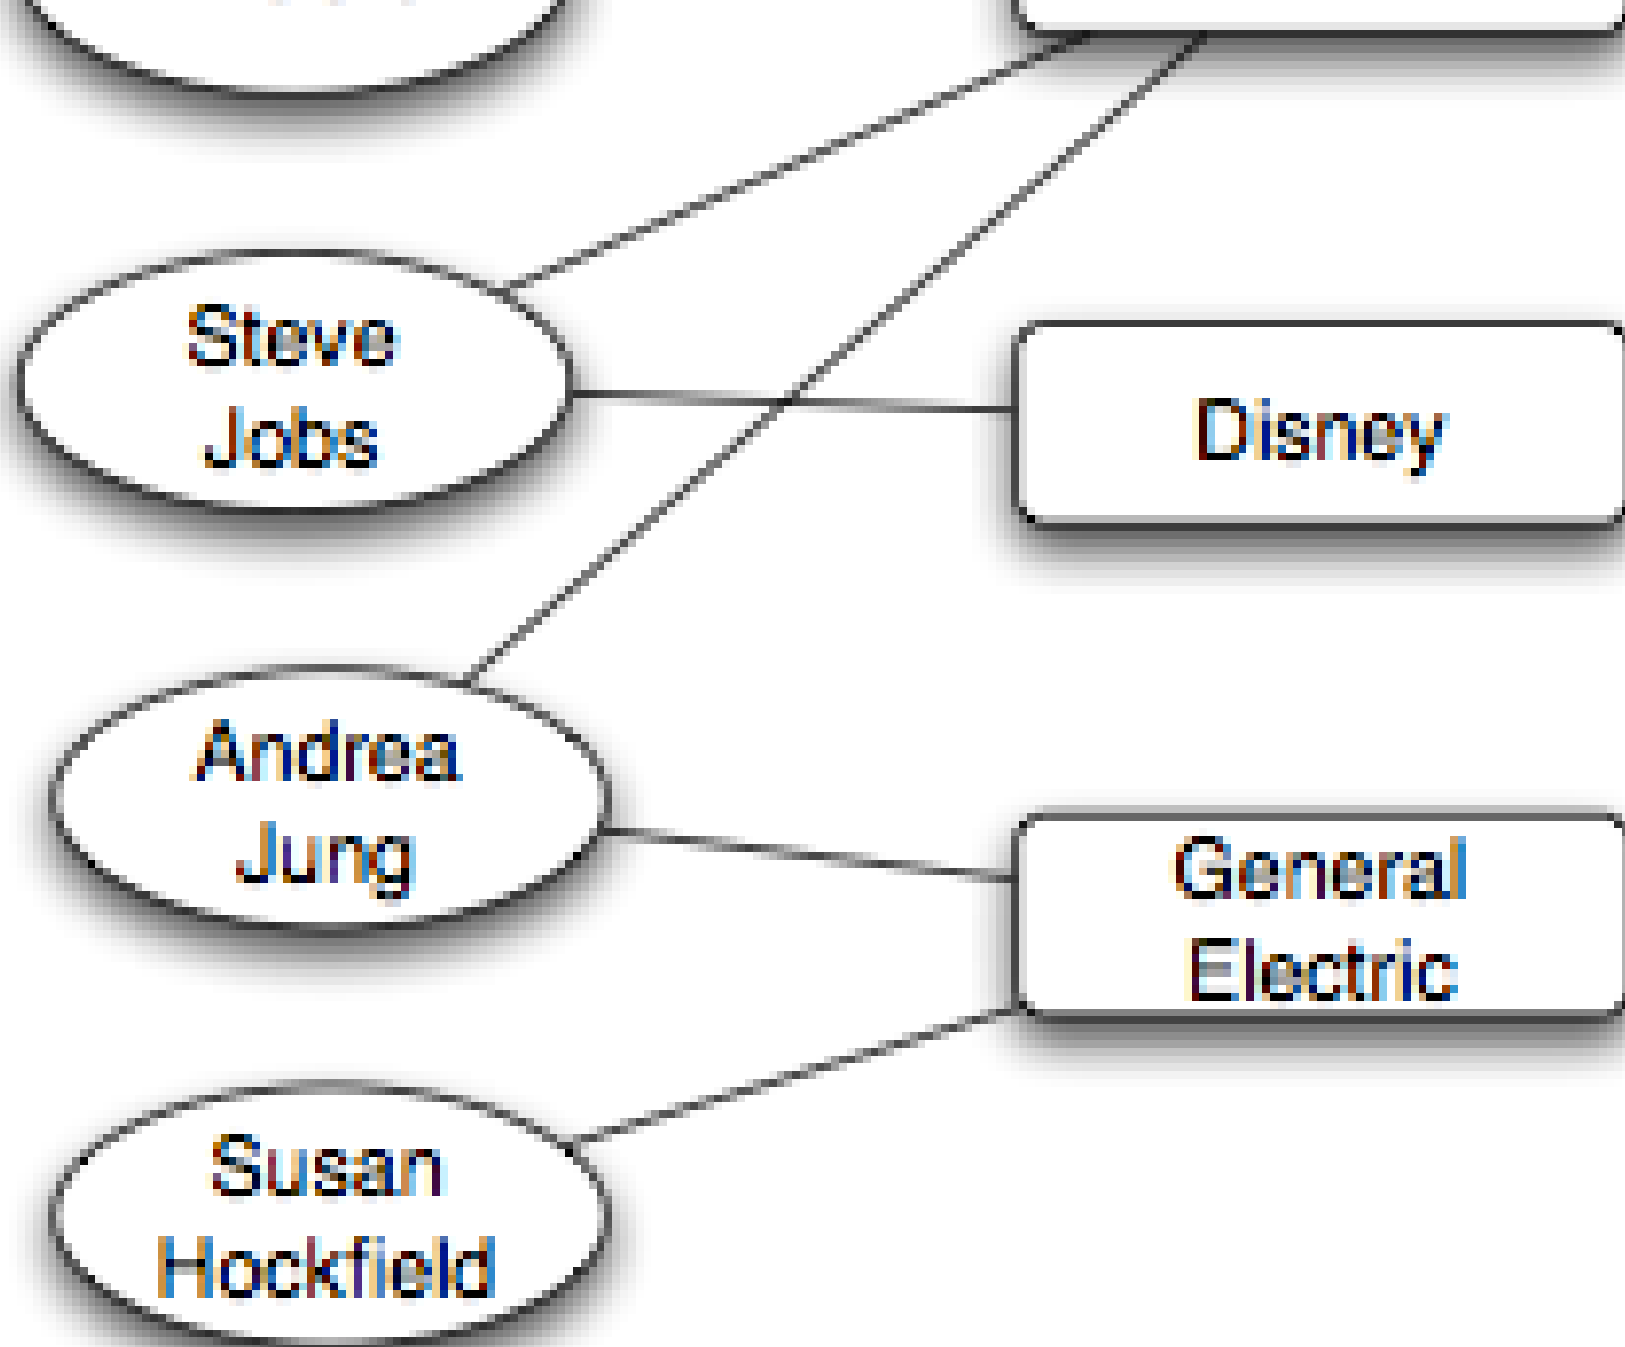


# Three Closure Processes

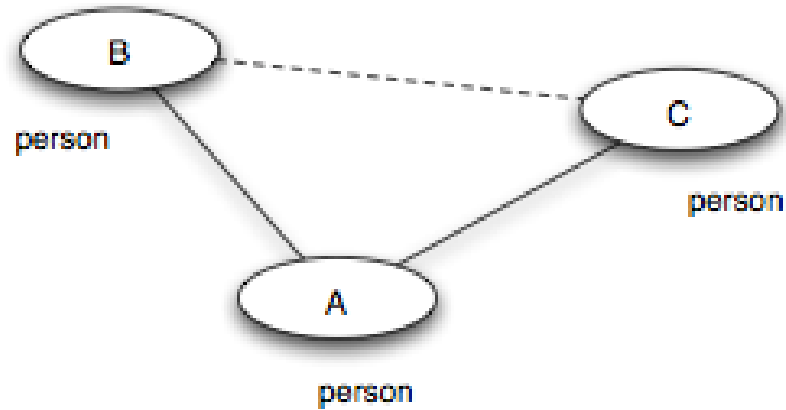

(a) *Triadic closure*

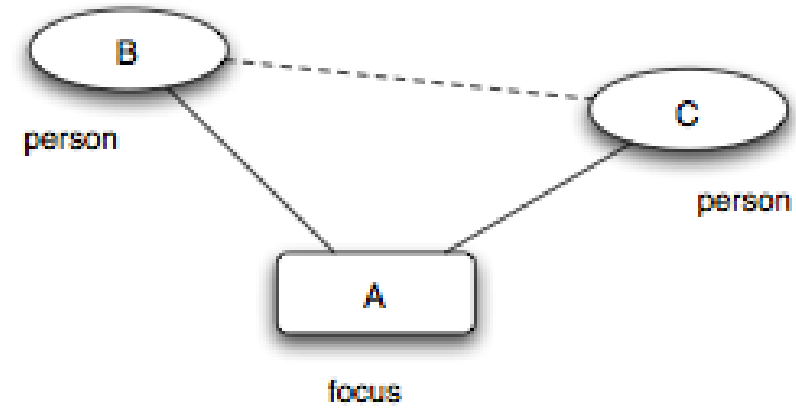

(b) *Focal closure*

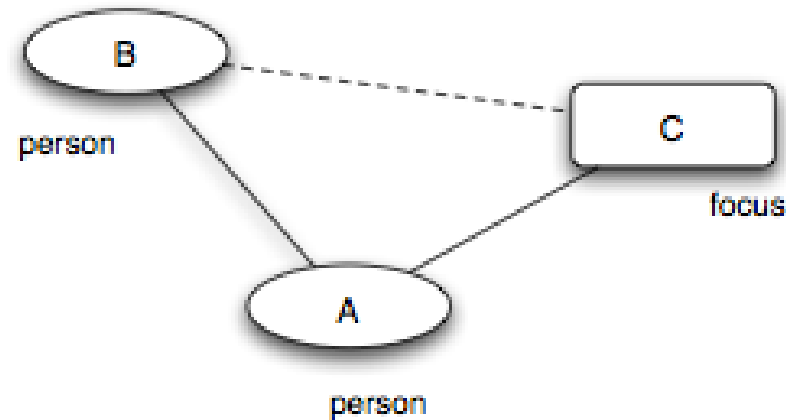

Source: Easley & Kleinberg 2010

**Triadic closure.** Friend-of-friend becomes friend — a person–person–person path closes into a triangle. (Same mechanism as Lecture 03.)

**Focal closure.** Two persons sharing a focus become friends — a person–focus–person path closes into a person–person tie. (*New — the focus mediates the introduction.*)

**Membership closure.** A friend introduces you to a focus you did not belong to — a person–person–focus path closes into a person–focus tie. (*New — the friend mediates membership.*)

# Quick Check

For each scenario, identify whether triadic, focal, or membership closure is at work.

1. Two students take the same elective and become friends.
2. A new graduate student joins the same lab as her advisor's other student, who introduces her.
3. A friend invites you to their book club, and you join.

# Quick Check — Solution

1. — the elective is the shared focus that brings them into contact.
2. — the advisor is the shared friend that closes the triangle.
3. — your friend brings you into a focus you did not previously belong to.

# Quick Check — Solution

1. **Focal closure** — the elective is the shared focus that brings them into contact.
2. — the advisor is the shared friend that closes the triangle.
3. — your friend brings you into a focus you did not previously belong to.

# Quick Check — Solution

1. **Focal closure** — the elective is the shared focus that brings them into contact.
2. **Triadic closure** — the advisor is the shared friend that closes the triangle.
3. — your friend brings you into a focus you did not previously belong to.

# Quick Check — Solution

1. **Focal closure** — the elective is the shared focus that brings them into contact.
2. **Triadic closure** — the advisor is the shared friend that closes the triangle.
3. **Membership closure** — your friend brings you into a focus you did not previously belong to.




# Takeaway

Affiliation networks make social context explicit. Focal closure and membership closure are distinct tie-formation mechanisms that can produce homophily-like patterns without any personal preference for similarity — making them a critical alternative explanation in any homophily analysis.

# Online Link Formation

**Guiding Question:** What can large-scale online data teach us about how ties form over time?

# Triadic Closure at Scale

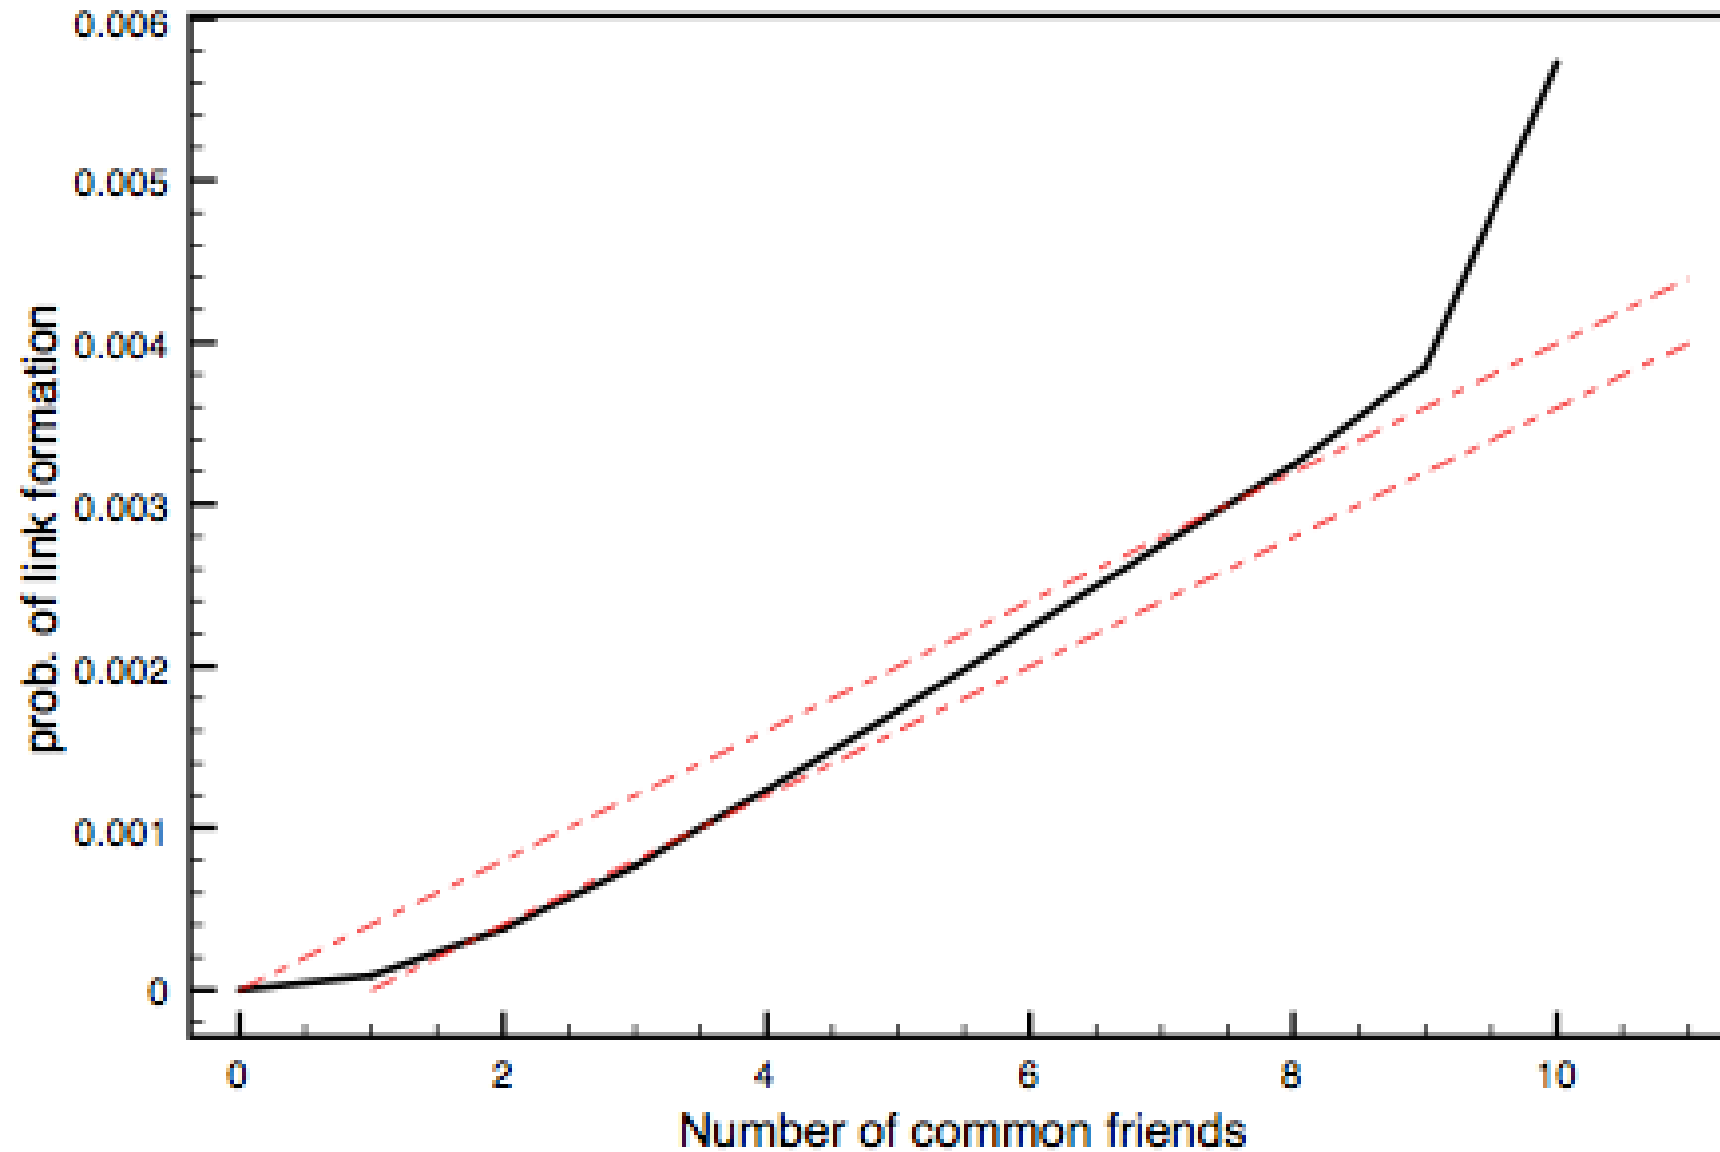

Source: Easley & Kleinberg 2010

The probability of a new edge rises with the number of shared contacts — but with **diminishing returns**.


# A Toy Model for the Shape

If each shared contact independently offers an introduction opportunity with probability  $q$ , then the probability of closure given  $k$  shared contacts is:


$$P(\text{new tie} \mid k \text{ shared}) = 1 - (1 - q)^k$$

This *saturating* curve rises steeply at first and flattens as  $k$  grows — matching the empirical shape qualitatively. But real curves often flatten *faster* than this model predicts, suggesting that shared contacts are not fully independent.

# Focal and Membership Closure at Scale

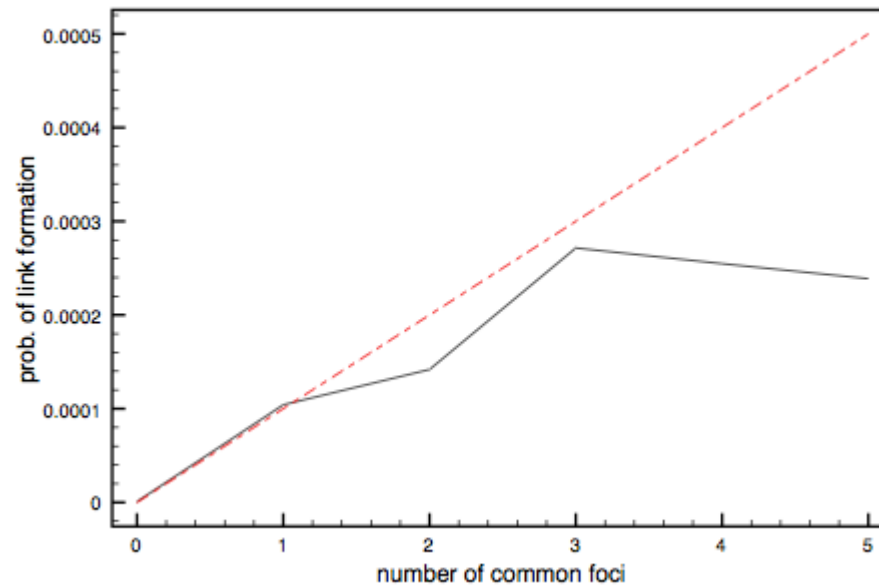

Source: Easley & Kleinberg 2010

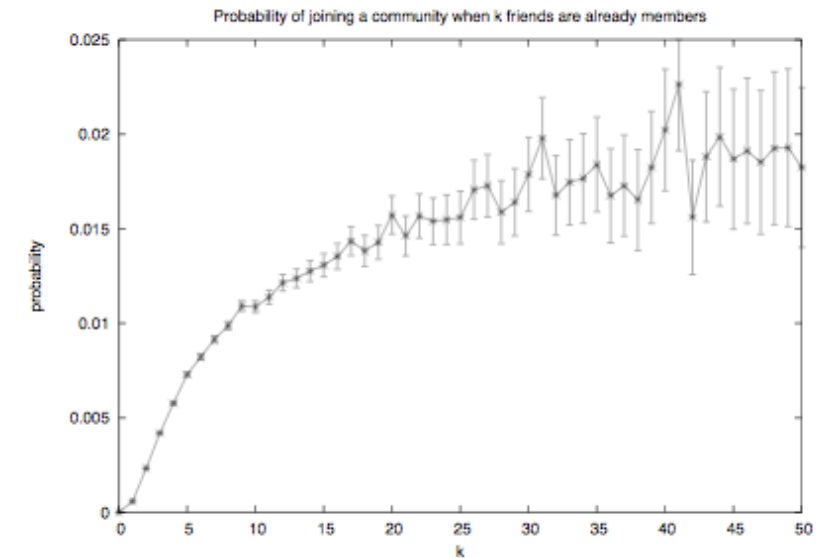

Source: Easley & Kleinberg 2010

Shared foci (left) and friend-mediated memberships (right) both raise the probability of new ties — again with diminishing returns. The shapes are qualitatively similar to triadic closure, reinforcing that all three closure mechanisms share a common structural logic.

# Quick Check

A study finds that the probability of two coworkers becoming Facebook friends rises from 1% (no shared friends) to 20% (one shared friend) to 30% (two) to 33% (three or more).

1. Describe the shape of the curve.
2. Fit the independent-opportunity model: what value of  $q$  gives  $P = 0.20$  at  $k = 1$ ?
3. Does the model predict the observed  $P = 0.30$  at  $k = 2$ ? What does the mismatch tell you?

# Quick Check — Solution

Steep initial rise from 1% to 20%, then much smaller gains (30%, 33%).

At  $k = 1$ ,  $P \approx 0.20 \Rightarrow q \approx 0.20$ .

3. At  $k = 2$  the independent model predicts  $1 - (1 - 0.20)^2 = 0.36$ , but we observe 0.30 — a shortfall. The shared friends are (typically embedded in the same group), so they provide less independent opportunity than the model assumes. The diminishing returns are steeper than independence predicts.



# Quick Check — Solution

**1. Shape:** Steep initial rise from 1% to 20%, then much smaller gains (30%, 33%).

$$\text{At } k = 1, P \approx 0.20 \Rightarrow q \approx 0.20.$$

**3. At  $k = 2$  the independent model predicts  $1 - (1 - 0.20)^2 = 0.36$ , but we observe 0.30 — a shortfall.** The shared friends are (typically embedded in the same group), so they provide less independent opportunity than the model assumes. The diminishing returns are steeper than independence predicts.

# Quick Check — Solution

1. **Shape:** Steep initial rise from 1% to 20%, then much smaller gains (30%, 33%).
2. **Estimating  $q$ :** At  $k = 1$ ,  $P \approx 0.20 \Rightarrow q \approx 0.20$ .
3. **At  $k = 2$  the independent model predicts  $1 - (1 - 0.20)^2 = 0.36$ , but we observe 0.30 — a shortfall.** The shared friends are (typically embedded in the same group), so they provide less independent opportunity than the model assumes. The diminishing returns are steeper than independence predicts.

# Quick Check — Solution

1. **Shape:** Steep initial rise from 1% to 20%, then much smaller gains (30%, 33%).
2. **Estimating  $q$ :** At  $k = 1$ ,  $P \approx 0.20 \Rightarrow q \approx 0.20$ .
3. **At  $k = 2$  the independent model predicts  $1 - (1 - 0.20)^2 = 0.36$ , but we observe 0.30 — a shortfall.** The shared friends are *correlated* (typically embedded in the same group), so they provide less independent opportunity than the model assumes. The diminishing returns are steeper than independence predicts.

# Takeaway

Online data turns link formation into a measurable, time-stamped process. Empirical closure curves show saturation — the first shared contact matters most, and additional contacts are redundant rather than independent.

# From Local Preferences to Global Segregation

**Guiding Question:** Can weak local preferences generate strong global segregation?

# Schelling's Threshold Model

**Setup.** Agents of two types are arranged on a grid (or network). Each agent  $i$  has a threshold  $\tau \in [0, 1]$  — the minimum fraction of same-type neighbors it needs to be "satisfied".

**Update rule.**

1. Identify all *unsatisfied* agents (fewer than fraction  $\tau$  of neighbors are same-type).
2. Each unsatisfied agent moves to a random vacant cell (or rewires a random tie in a network setting).
3. Repeat until no agent wants to move — or until a stable oscillation is reached.

# Schelling's Threshold Model

**Setup.** Agents of two types are arranged on a grid (or network). Each agent  $i$  has a threshold  $\tau \in [0, 1]$  — the minimum fraction of same-type neighbors it needs to be "satisfied".

**Update rule.**


1. Identify all *unsatisfied* agents (fewer than fraction  $\tau$  of neighbors are same-type).
2. Each unsatisfied agent moves to a random vacant cell (or rewires a random tie in a network setting).
3. Repeat until no agent wants to move — or until a stable oscillation is reached.

**Schelling's insight (1971).** Even  $\tau$  as low as  $1/3$  — "I just want a third of my neighbors to be like me" — produces **sharply segregated** global patterns.

# One Step of the Model

## Schelling's threshold model — one step


Each agent wants at least  $\tau = 3/8$  of its neighbors to be same-type. Unhappy agents relocate.

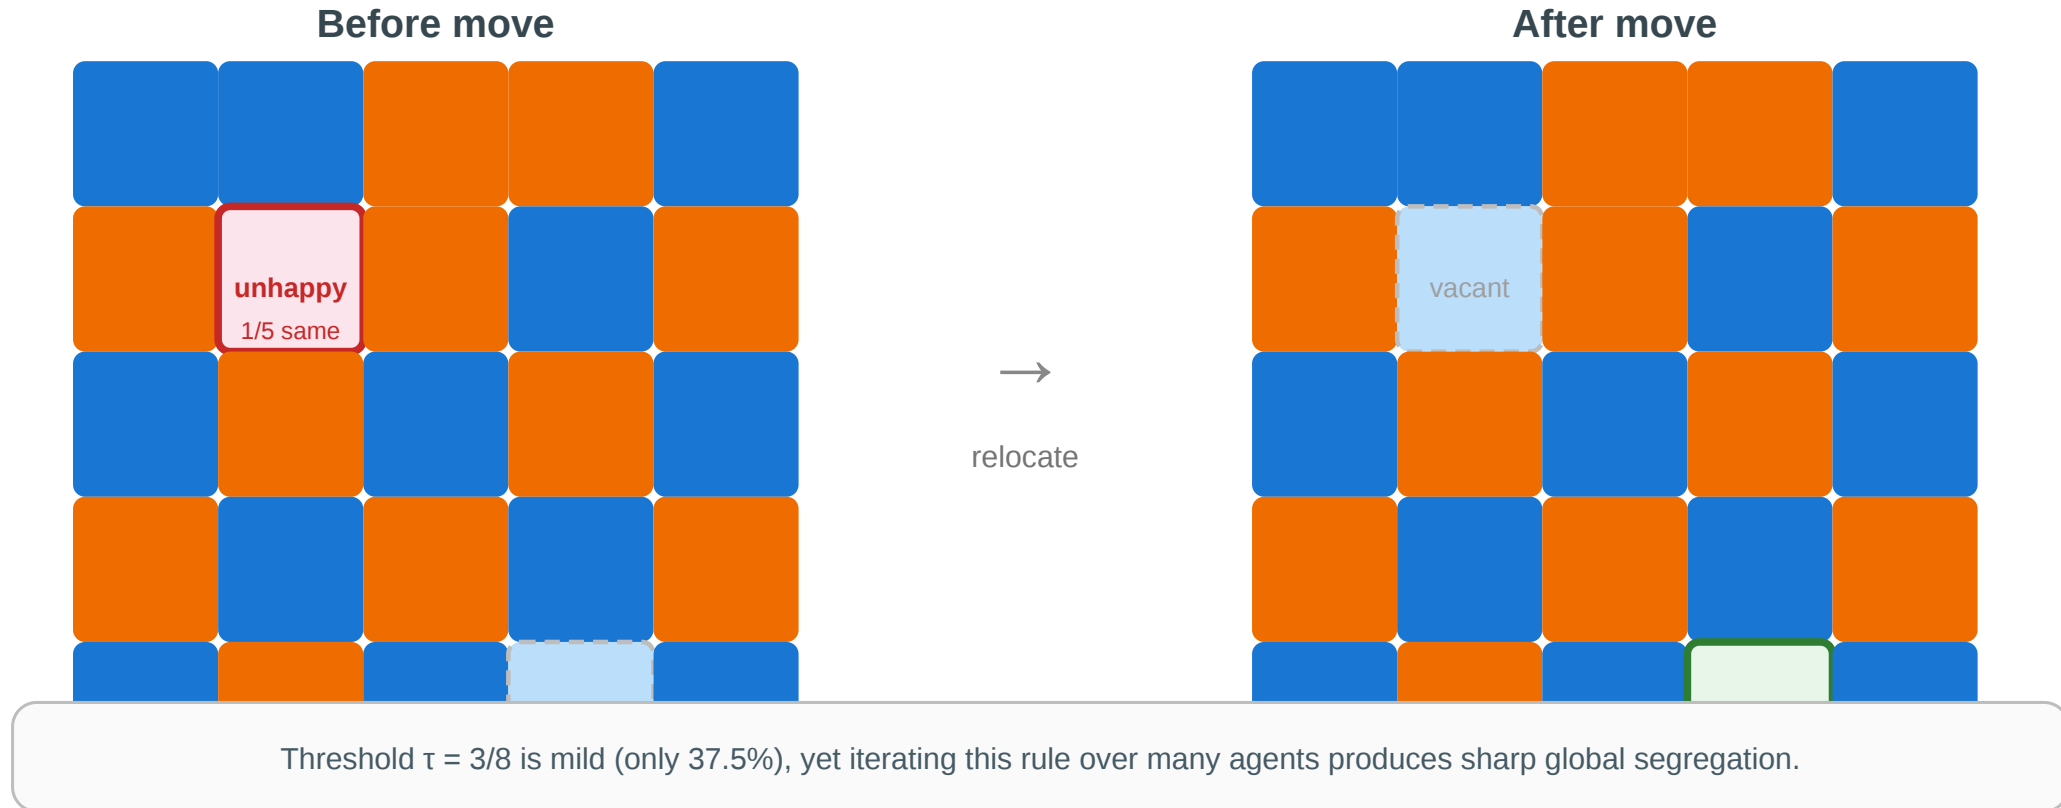

The blue agent at (1,1) has 1/5 same-type neighbors — below  $\tau = 3/8$ . It relocates to vacant cell (4,3), where 3/5 neighbors are same-type — satisfied. Repeat across all unsatisfied agents until equilibrium.



# Empirical Motivation

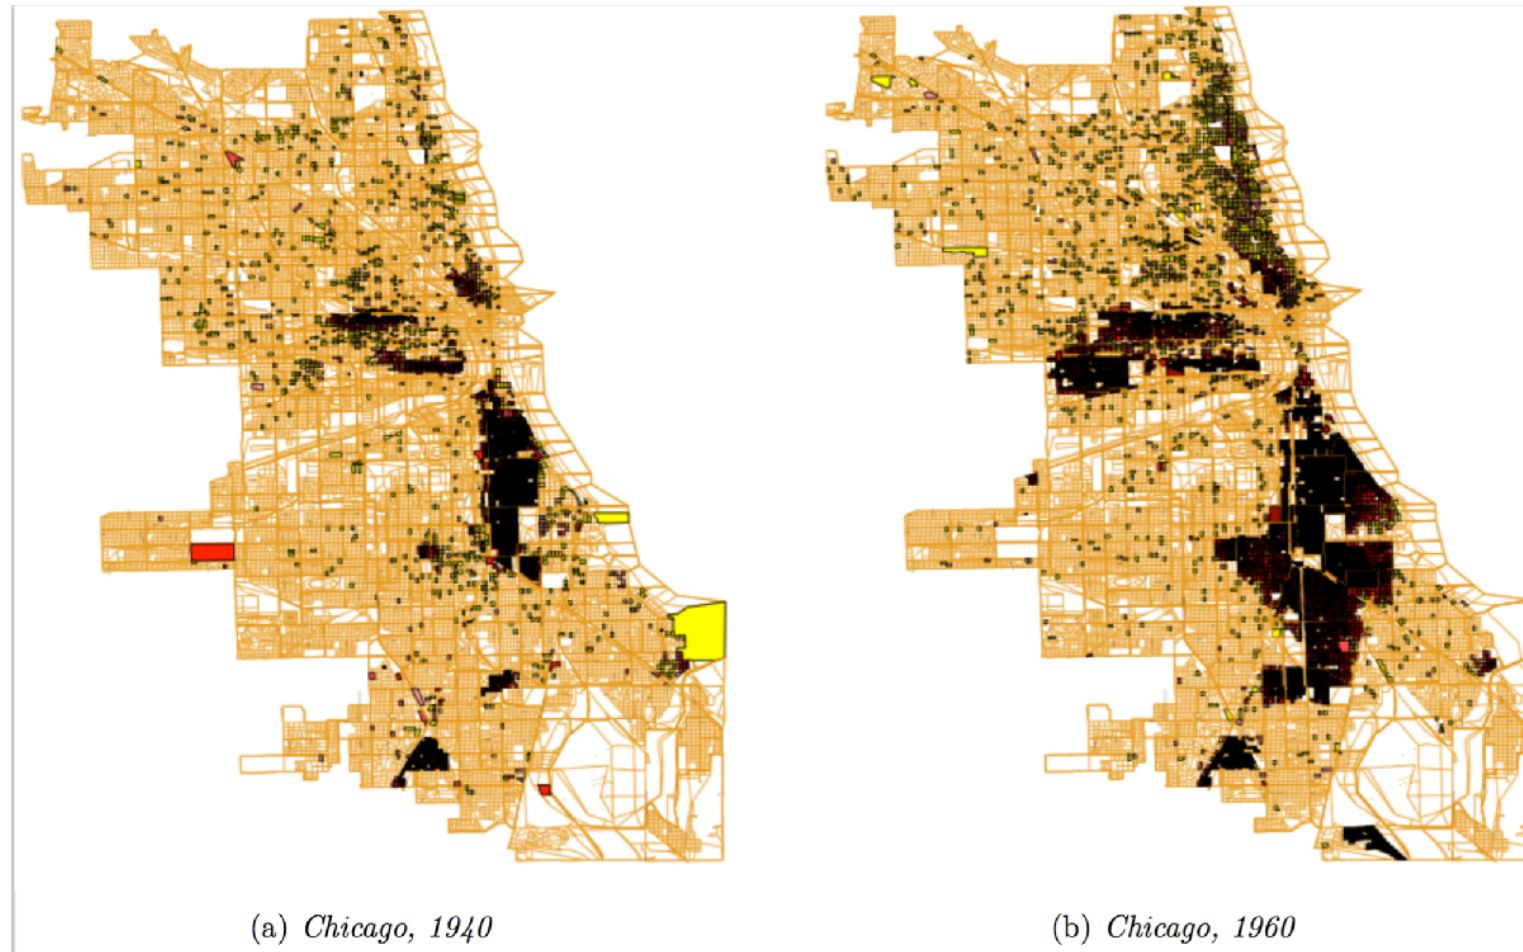

Source: Easley & Kleinberg 2010

Residential segregation in Chicago by race/ethnicity. The sharp boundaries between neighborhoods are consistent with Schelling dynamics: each household's mild preference for "some" same-type neighbors, iterated over decades of moves, produces stark global segregation.

# From Grids to Networks

In a network setting, Schelling's model becomes a **rewiring** process:

- "neighbors" are graph-adjacent nodes
- "moving" becomes dropping a tie to a dissimilar contact and forming a new tie to a similar contact
- the threshold  $\tau$  controls how much same-type concentration triggers rewiring

# From Grids to Networks

In a network setting, Schelling's model becomes a **rewiring** process:

- "neighbors" are graph-adjacent nodes
- "moving" becomes dropping a tie to a dissimilar contact and forming a new tie to a similar contact
- the threshold  $\tau$  controls how much same-type concentration triggers rewiring

**Implication for recommendation algorithms.** If a platform suggests contacts who are *similar* to your current contacts, it acts as an automated Schelling rewirer — accelerating homophily-driven segregation even beyond what individual preferences would produce alone.

# Quick Check

Translate Schelling's spatial model into a network setting.

1. What plays the role of "neighbor" in a network rather than a grid?
2. What plays the role of "moving"?
3. A social media platform recommends friends similar to your existing friends. In Schelling terms, what is the platform doing — and would you expect it to amplify or weaken homophily?

# Quick Check — Solution

A graph-adjacent node — your immediate contacts.

Rewiring — dropping ties to dissimilar contacts and forming new ones with similar contacts.

**3. The platform is an automated Schelling rewirer.** It surfaces similar people, which is equivalent to offering each agent a move toward a higher same-type fraction. This homophily — the local rule ("recommend similar") is mild, but at machine speed it produces sharp global outcomes (filter bubbles, echo chambers).

# Quick Check — Solution

**1. Network neighbor:** A graph-adjacent node — your immediate contacts.

Rewiring — dropping ties to dissimilar contacts and forming new ones with similar contacts.

**3. The platform is an automated Schelling rewirer.** It surfaces similar people, which is equivalent to offering each agent a move toward a higher same-type fraction. This homophily — the local rule ("recommend similar") is mild, but at machine speed it produces sharp global outcomes (filter bubbles, echo chambers).

# Quick Check — Solution

1. **Network neighbor:** A graph-adjacent node — your immediate contacts.
2. **Moving:** Rewiring — dropping ties to dissimilar contacts and forming new ones with similar contacts.
3. **The platform is an automated Schelling rewirer.** It surfaces similar people, which is equivalent to offering each agent a move toward a higher same-type fraction. This homophily — the local rule ("recommend similar") is mild, but at machine speed it produces sharp global outcomes (filter bubbles, echo chambers).

# Quick Check — Solution

1. **Network neighbor:** A graph-adjacent node — your immediate contacts.
2. **Moving:** Rewiring — dropping ties to dissimilar contacts and forming new ones with similar contacts.
3. **The platform is an automated Schelling rewirer.** It surfaces similar people, which is equivalent to offering each agent a move toward a higher same-type fraction. This *amplifies* homophily — the local rule ("recommend similar") is mild, but at machine speed it produces sharp global outcomes (filter bubbles, echo chambers).



# Takeaway

Global polarization can emerge without anyone explicitly aiming for it. Mild local preferences plus iterated local updates produce sharp large-scale structure — and recommendation algorithms now run this process at scale.

# Wrap-Up — The Three Gaps

Across Lectures 03–05, the course has exposed three kinds of gap between what we *want to know* about a network and what the data *actually shows*:

| Lecture | Gap type      | Theoretical ideal                       | Practical limitation            | Strategy                                 |
|---------|---------------|-----------------------------------------|---------------------------------|------------------------------------------|
| L03     | Computational | True tie labels (MaxSTC)                | NP-hard                         | Polynomial proxies (clustering, overlap) |
| L04     | Computational | Optimal partition ( $\max Q$ )          | NP-hard                         | Heuristics (GN, Louvain, Leiden)         |
| L05     | Causal        | Mechanism (selection vs. socialization) | Not identifiable from snapshots | Longitudinal data, affiliation models    |

Every concept in the three lectures occupies one cell of this table.

## Looking Ahead: Lecture 06

If signs (positive and negative) — not just connection strengths — matter, how do whole social structures stabilize or destabilize? Structural balance theory turns the question of friend-and-enemy

relations into a graph-theoretic claim with measurable predictions.

## Reading

Chapter 4 of Easley & Kleinberg (2010) covers homophily, selection, and socialization. McPherson, Smith-Lovin & Cook (2001), *Birds of a Feather*, is the definitive review of homophily research. Christakis & Fowler (2007) is the Framingham obesity study; Lyons (2011) provides the methodological critique.

## Image Credits & References

Easley, David and Kleinberg, Jon (2010). Networks, Crowds, and Markets: Reasoning About a Highly Connected World. *Cambridge University Press*. <https://www.cs.cornell.edu/home/kleinber/net-works-book/>