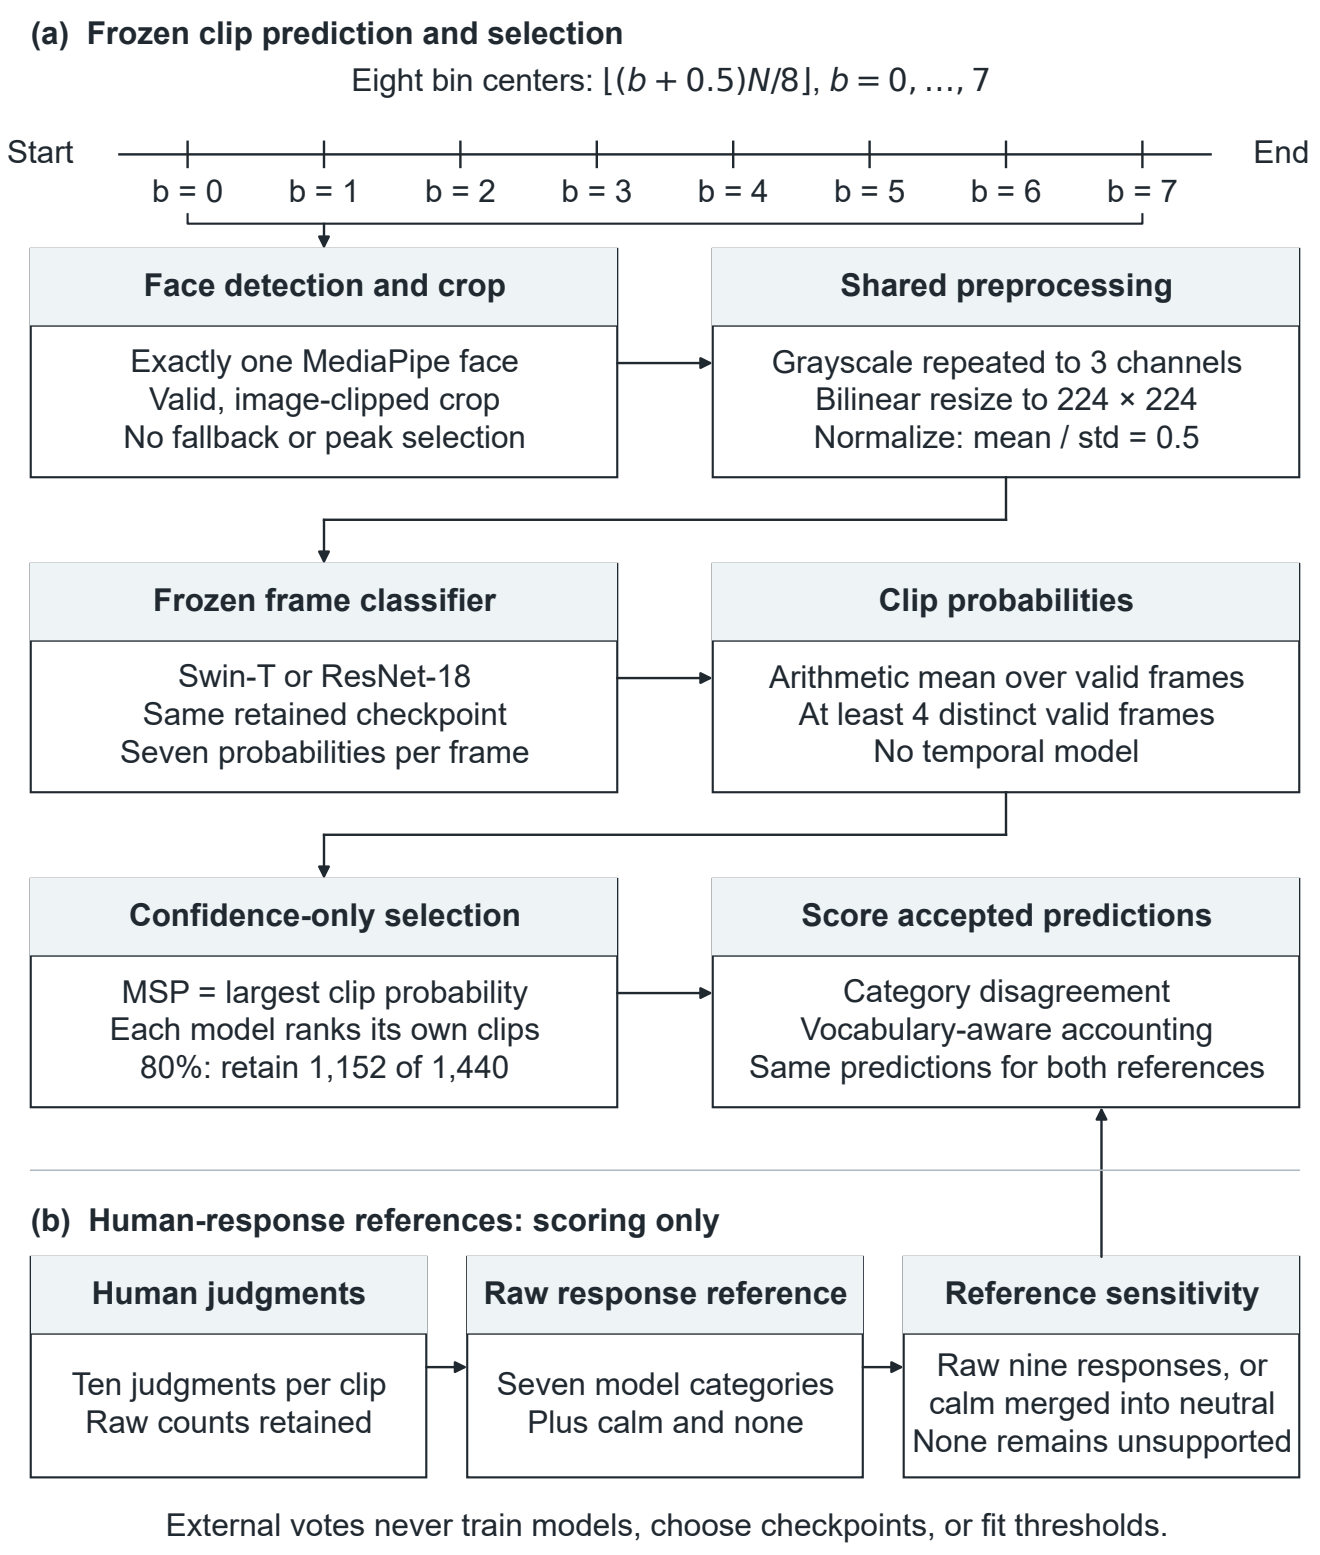

(a) Frozen clip prediction and selection
Eight bin centers: $\lfloor (b + 0.5)N/8 \rfloor$, $b = 0, \ldots, 7$
Start
End
b = 0
b = 1
b = 2
b = 3
b = 4
b = 5
b = 6
b = 7
Face detection and crop
Exactly one MediaPipe face
Valid, image-clipped crop
No fallback or peak selection
Shared preprocessing
Grayscale repeated to 3 channels
Bilinear resize to 224 × 224
Normalize: mean / std = 0.5
Frozen frame classifier
Swin-T or ResNet-18
Same retained checkpoint
Seven probabilities per frame
Clip probabilities
Arithmetic mean over valid frames
At least 4 distinct valid frames
No temporal model
Confidence-only selection
MSP = largest clip probability
Each model ranks its own clips
80%: retain 1,152 of 1,440
Score accepted predictions
Category disagreement
Vocabulary-aware accounting
Same predictions for both references
(b) Human-response references: scoring only
Human judgments
Ten judgments per clip
Raw counts retained
Raw response reference
Seven model categories
Plus calm and none
Reference sensitivity
Raw nine responses, or
calm merged into neutral
None remains unsupported
External votes never train models, choose checkpoints, or fit thresholds.