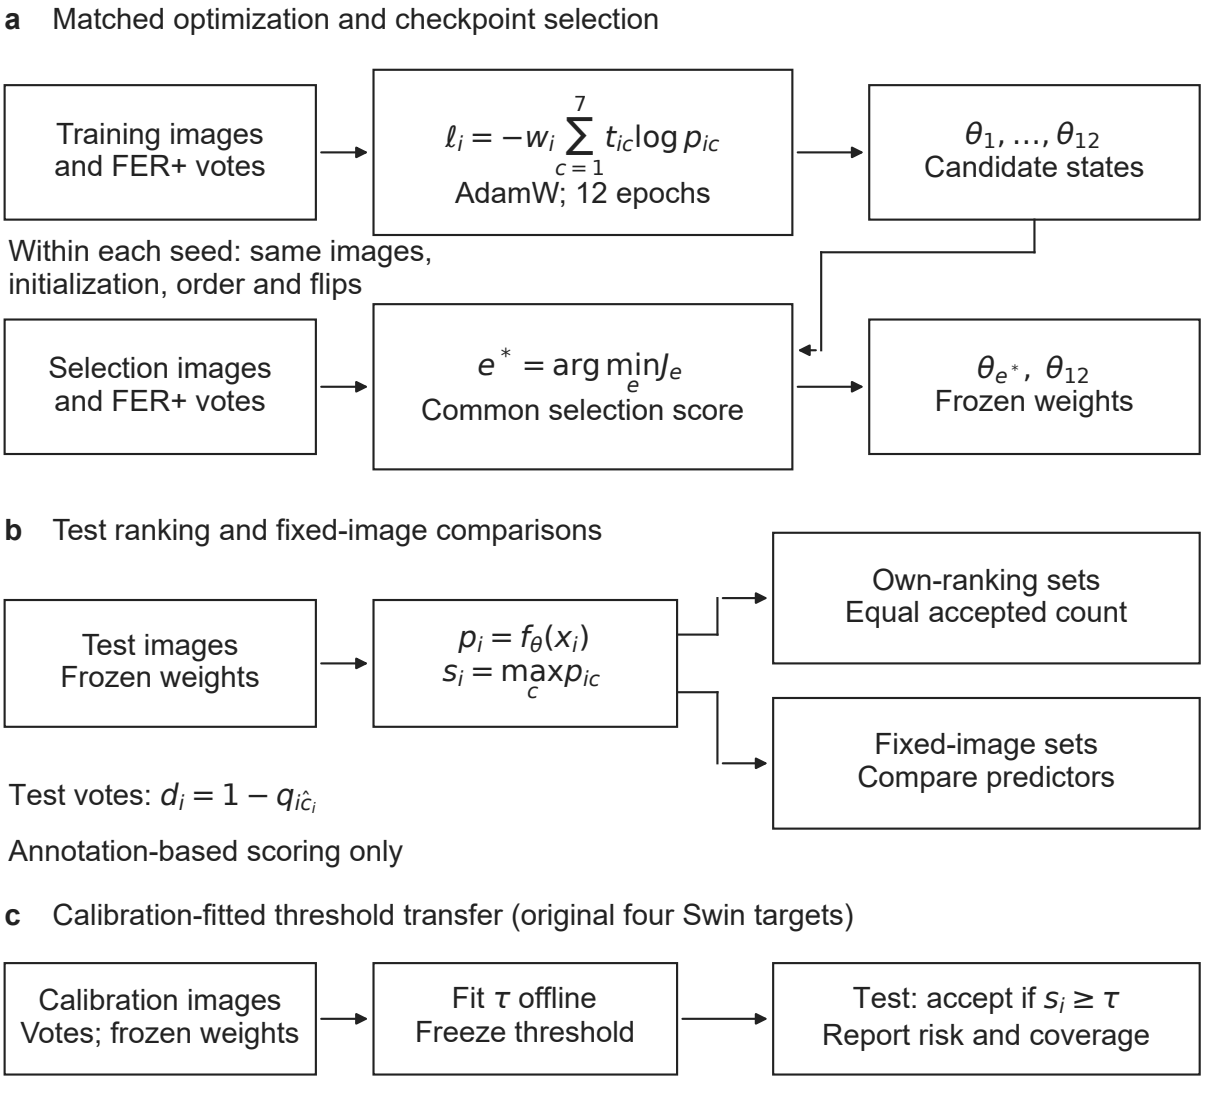

a Matched optimization and checkpoint selection
Training images and FER+ votes
$\ell_i = -w_i \sum_{c=1}^{7} t_{ic} \log p_{ic}$
AdamW; 12 epochs
$\theta_1, \ldots, \theta_{12}$
Candidate states
Within each seed: same images, initialization, order and flips
Selection images and FER+ votes
$e^* = \arg\min_e J_e$
Common selection score
θ_{e^*}, θ_{12}
Frozen weights
b Test ranking and fixed-image comparisons
Test images
Frozen weights
$p_i = f_\theta(x_i)$
$s_i = \max_c p_{ic}$
Own-ranking sets
Equal accepted count
Fixed-image sets
Compare predictors
Test votes: $d_i = 1 - q_{i\hat{c}_i}$
Annotation-based scoring only
c Calibration-fitted threshold transfer (original four Swin targets)
Calibration images
Votes; frozen weights
Fit τ offline
Freeze threshold
Test: accept if $s_i \geq \tau$
Report risk and coverage