



MessageVortex

Transport Independent and Unlinking Messaging

Inauguraldissertation
zur
Erlangung der Würde eines Doktors der Philosophie
vorgelegt der
Philosophisch-Naturwissenschaftlichen Fakultät
der Universität Basel
von
Martin Gwerder (06-073-787)
von Glarus GL

March 3, 2019

Original document available on the edoc sever of the university of Basel edoc.unibas.ch.



Genehmigt von der Philosophisch-Naturwissenschaftlichen Fakultät
Auf Antrag von

Prof. Dr. Christian F. Tschudin
Prof. Dr. Heiko Schuldt

Basel, der 17.10.2017 durch die Fakultätsversammlung

Prof. Dr. Jörg Schibler

Abstract

In this paper, we introduce an unobservable message anonymization protocol, named MessageVortex. It bases on the zero trust principle and a distributed peer-to-peer (P2P) architecture and avoids central aspects such as fixed infrastructures within a global network.

It scores over existing work by blending its traffic into suitable existing transport protocols, thus making it next to impossible to block it without significantly affecting regular users of the transport medium. No additional protocol-specific infrastructure is required in public networks and allows a sender to control all aspects of a message such as the degree of anonymity, timing, and redundancy of the message transport without disclosing any of these details to the routing or transporting nodes. Part of this work is an RFC document attached in Appendix A describing the protocol. It contains all the necessary information to build protocol nodes. The RFC draft is available through the official RFC channels. Additionally, the RFC document, additional documents, and a reference are available under <https://messagevortex.net/>.

Acknowledgements

I would like to thank my wife Cornelia and my lovely three kids (Saphira, Florian and Aurelius) for their patience and their support. Without them I could never have done this work.

I would like to thank Prof. Dr. C. Tschudin and the University of Basel for the possibility to write this work and for the challenges they opposed to me, allowing me to grow.

Dr. Andreas Hueni for his thoughts and challenging outside-the-normal-box.

Prof. Dr. Carlos Nicolas of the University of Northwestern Switzerland for being such a valuable sparring partner allowing me to test my thoughts.

I would like to acknowledge all the individuals who have coded for the LaTeX project for free. It is due to their efforts that we can generate professionally typeset PDFs now.

Contents

I.	Introduction	1
1.	Foreword	3
1.1.	Contributions	4
2.	Notation	5
2.1.	Cryptography	5
2.2.	Code and commands	5
2.3.	Hyperlinking	5
3.	Main Research Question	7
3.1.	SQ1: Technologies for sending messages maintaining unlinkability against an adversary	7
3.2.	SQ2: Attacking unlinkability and circumvention	7
3.3.	SQ3: Attack Mitigation by design	7
II.	Methods	9
4.	Requirements for an Anonymizing Protocol	13
4.1.	Adversary model	13
4.2.	Required Properties	13
4.2.1.	Anonymizing and Unlinking	13
4.2.2.	Censorship Resistant	14
4.2.3.	Controllable trust	14
4.2.4.	Reliable	14
4.2.5.	Diagnosable	14
4.2.6.	Available	14
4.2.7.	Identifiable Sender	14
4.3.	Rough draft of Protocol	14
4.3.1.	Ephemeral Identity	15
4.4.	Rough Draft of Messages	15
5.	Existing Transport Layer Protocols	17
5.1.	Roundup for Transport Protocols	17
6.	Existing Research and Implementations on the Topic	19
6.1.	Anonymity Research and Protocols	19
6.1.1.	Definition of Anonymity	19
6.1.2.	k -Anonymity	19
6.1.3.	ℓ -Diversity	19
6.1.4.	t -Closeness	19
6.2.	Single Use Reply Blocks and Multi Use Reply Blocks	19
6.3.	Censorship	19
6.3.1.	Censorship Resistant	20
6.3.2.	Parrot Circumvention	20
6.3.3.	Censorship Circumvention	20
6.4.	Cryptography	20
6.4.1.	Homomorphic encryption	21
6.4.2.	Deniable Encryption and Deniable Steganography	21
6.4.3.	Key Sizes	21
6.4.4.	Cipher Mode	21
6.4.5.	Padding	22
6.5.	Routing	23
6.5.1.	Mixing	23
6.5.2.	Onion Routing	23
6.5.3.	Crowds	23
6.5.4.	Mimic routes	24
6.6.	System Implementations	24
6.6.1.	Pseudonymous Remailer	24
6.6.2.	Babel	24
6.6.3.	Cypherpunk-Remailer	24
6.6.4.	Mixmaster-Remailer	25
6.6.5.	Mixminion-Remailer	25
6.6.6.	Tarzan	25
6.6.7.	AN.ON	25
6.6.8.	MorphMix	25
6.6.9.	SOR (SSH-based onion routing)	25
6.6.10.	Tor	25
6.6.11.	I^2P	25
6.6.12.	Freenet	26
6.6.13.	Herbivore	26
6.6.14.	Dissent	26
6.6.15.	\mathcal{P}^5	26
6.6.16.	Gnutella	26
6.6.17.	Gnutella2	26
6.6.18.	Hordes	26
6.6.19.	Salsa	26

6.6.20.	AP3	26
6.6.21.	Cashmere	26
6.6.22.	Email	26
6.6.23.	Email Endpoint Types	27
6.6.24.	S/MIME	28
6.6.25.	PGP/MIME	28
6.6.26.	XMPP	28
6.7.	Pseudo Random Number Generators	28
6.8.	Known Attacks	28
6.8.1.	Broken Encryption Algorithms	28
6.8.2.	Attacks Targeting Anonymity	28
6.8.3.	Denial of Service Attacks	30
7.	Applied Methodes	31
7.1.	Problem Hotspots	31
7.1.1.	Zero Trust Philosophy	31
7.1.2.	Information leakage and P2P Design	31
7.1.3.	Accounting	32
7.1.4.	Anonymisation	32
7.1.5.	Initial Bootstrapping	32
7.1.6.	Cypher selection	32
7.1.7.	Reed-Solomon function	32
7.1.8.	Usability	33
7.2.	Protocol outline	33
7.2.1.	Protocol Terminology	33
7.2.2.	Vortex Communication model	33
7.2.3.	Transport Layer	33
7.2.4.	Blending Layer	34
7.2.5.	Routing Layer	34
7.3.	Protocol handling	34
7.3.1.	Block Processing	34
7.4.	Sub Research Questions Roundup	34
7.5.	SQ1: Technologies for sending messages maintaining unlinkability against an adversary	34
7.5.1.	SQ2: Attacking unlinkability and circumvention	35
7.5.2.	SQ3: Attack Mitigation by design	35
III.	Results	37
8.	Protocol Overview	41
8.1.	Vortex Message	41
8.1.1.	Key Usage	42
8.1.2.	VortexMessage Processing	42
8.2.	Protocol design	43
8.2.1.	Header block	43
8.2.2.	Main block	44
8.2.3.	Accounting	45
8.2.4.	VortexMessage Operations	45
8.3.	VortexMessage Request Processing	46
8.3.1.	VortexMessage Requests	47
8.3.2.	VortexMessage Reply Blocks	47
9.	Vortex Prerequisites	49
9.1.	Hardware	49
9.2.	Addresses	49
9.2.1.	Public Key Encoding in Address Representation	49
9.3.	Transport Layers	49
9.3.1.	Embedding Spec	49
9.4.	Client	49
9.4.1.	Vortex Accounts	49
9.4.2.	Vortex Node Types	49
10.	MessageVortex - Transport Independent Messaging anonymous to 3 rd Parties	51
10.1.	Accounting	51
10.2.	Routing	51
10.3.	Blending layer	51
10.3.1.	Plain Inclusion	51
10.4.	Considerations for Building Messages	51
10.4.1.	Ephemeral identities	52
10.4.2.	Timing of messages	52
10.4.3.	Diagnostics	52
10.5.	Verification of requirements	52
10.6.	Considerations for Routing Messages	53
11.	Security Analysis	55
11.1.	Additional Considerations	55
11.1.1.	Man in the Middle Attacks to Conversations	55
11.1.2.	Identification of Participating Nodes	55
11.1.3.	Storage of Messages and queues	55
IV.	Discussion	57
12.	Static analysis	61
12.1.	Transport and Blending Layer	61
12.1.1.	Analysis of Plain Embedding	61
12.1.2.	Identifying a Vortex Message Endpoint	61

12.2. Senders routing layer	61
12.3. Intermediate node routing layer	61
13. Dynamic analysis	63
13.1. Attacks against the vortex system itself	63
13.1.1. DoS Attacks against the System	63
13.1.2. Diagnosability of traffic	63
13.2. Achieved Anonymity and Flaws	63
13.2.1. Measuring Anonymity	63
13.2.2. Attacking Routing Participants	64
13.2.3. Attacking Anonymity through Traffic Analysis	64
13.2.4. Attacking Anonymity through Timing Analysis	64
13.2.5. Attacking Anonymity through Throughput Analysis	64
13.2.6. Attacking Anonymity through Routing Block Analysis	64
13.2.7. Attacking Anonymity through Header Analysis	64
13.2.8. Attacking Anonymity through Payload Analysis	64
13.2.9. Attacking Anonymity through Bugging	64
13.2.10. Attacking Anonymity through Replay Analysis	64
14. Recommendations on Using the Vortex Protocol	65
14.1. Reuse of Routing blocks	65
14.2. Use of Ephemeral Identities	65
14.3. Recommendations on Operations applied on Nodes	65
14.4. Recommendations on Choosing involved Nodes	65
14.5. Message content	65
14.5.1. Splitting of message content	65
14.6. Routing	65
14.6.1. Redundancy	65
14.6.2. Operation Considerations	65
14.6.3. Anonymity	65
15. Missing gaps to be covered in future analysis	67
A. The RFC draft document	A1
B. Short analysis on common internet protocols	A55
B.1. HTTP	A55
B.2. FTP	A55
B.3. TFTP	A55
B.4. MQTT	A55
B.5. Advanced Message Queuing Protocol	A55
B.6. Constrained Application Protocol (CoAP)	A56
B.7. Web Application Messaging Protocol	A56
B.8. XMPP (jabber)	A56
B.9. SMTP	A56
B.10. SMS	A56
B.11. MMS	A56
C. Glossary	A57
Bibliography	A59
Short Biography	A63

List of Corrections

Warning: Good idea. It is not yet in the protocol. Why?	29
Warning: Extend replies to all scientific questions and their follow up.	35
Error: change to one representation	49
Warning: Fill entropy table with values	61

Part I.

Introduction

1. Foreword

Almon Brown Strowger was the owner of a funeral parlor in St. Petersburg. He filed a patent on March 10th, 1891 for an "Automatic Telephone Exchange" [99]. This patent built the base for modern automated telephone systems. According to several sources, he was annoyed by the fact that the local telephone operator was married to another undertaker. She diverted potential customers of Mr. Strowger to her husband instead, which caused Almon B. Strowger to lose business. In 1922, this telephone dialing system which is nowadays called pulse dialing became the standard dialing technology for more than 70 years until tone dialing replaced it.

This dialing technology enabled automatic messaging for voice and text messages (e.g. telex) up until today and is the foundation for current routed networks. These networks build the base for our communication-based Society these days and allow us to connect quickly with any person or company of our wish. We use these networks today as communication meaning for all purposes and most of the people spend minimal thoughts on the possible consequences arising if someone puts hands on this communication.

Collected data may be used to judge on our intentions and thus is not only confidential if we have something to hide. This problem has dramatically increased in the last years as big companies and countries started to collect all kinds of data and created the means to process them. It allows supposedly to judge peoples not only on what they are doing but as well, on what they did and what they might do. Numerous events in the present and past show that multiple actors, some of which are state-sponsored, collected data on a broad base within the internet. Whether this is a problem or not may be a disputable fact. Undisputed is however that such data requires careful handling and accusations should then base on solid facts. Unacceptable seems the use of "guesses" or "extrapolations."

To show that this may happen even under complete democratic control we might refer to events such as the "secret files scandal" (or "Fichenskandal") in Switzerland. In the years from 1900 to 1990 Swiss government collected 900'000 files in a secret archive (covering roughly 10% of the natural and juristic entities within Switzerland at that time). More about the Fichenskandal is well documented in the Swiss Federal Archives (<https://www.bar.admin.ch>).

Whistleblower Edward Snowden leaked a vast amount of documents suggesting that such attacks on privacy are commonly done on a global scale. The documents leaked in 2009 by him claim that there was a data collection starting in 2010. Since these documents are not publicly available, it is hard proving the claims based on these documents. However – A significant number of journalists from multiple countries screened these documents, the information seems credible. According to these documents (verified by NRC), NSA infiltrated more than 50k computers with malware to collect classified or personal information. They furthermore infiltrated Telecom-Operators (mainly executed by British GCHQ) such as Belgacom to collect data and targeted high member of governments even in associated states (such as the mobile phone number of Germany's president). A later published shortened list of "selectors" in Germany showed 68 telephone and fax numbers targeting economy, finance and agricultural parts of the german government. A global survey done by the freedom house[38] claims a decrease in internet freedom for the p8 year in a row.

This list of events shows that big players are collecting and storing vast amounts of data for analysis or possibly future use. The list of events shows also that the use of this data has in the past been at least partially questionable. As a part of possible counter measures this work analyses the possibility of using state of the art technology to minimize the information footprint of a person on the internet.

We leave a vast information footprint in our daily communication. On a regular email we disclose everything in an "postcard" to any entity on its way. Even when encrypting a message perfectly with today's technology (S/MIME[35] or PGP[28]) it still leaves at least the originating and the receiving entity disclosed or we rely on the promises of a third party provider which offers a proprietary solu-

tion. Even in those cases we leak informations such as "message subject", "frequency of exchanged messages", "size of messages", or "client being used". A good anonymity protocol has therefore far more attributes to cover than the message itself. It includes beside the message itself, all metadata, and all the traffic flows. Furthermore, a protocol to anonymize messages should not rely on the trust of infrastructure other than the infrastructure under control of the sending or receiving entity. A trust in any third party might be misleading in terms of security.

Central infrastructure is bound to be of particular interest to anyone gathering data. It may furthermore allow manipulating the system or the data or the data flow. So, avoiding a central infrastructure is a good thing.

Leaving no information trail when sending information from one person to another is hard to achieve. Most messaging systems disclose at least the peer partners when sending messages. Metadata such as starting and endpoints, frequency, or message size are leaked in all common systems even when encrypting messages.

Allowing an entity to collect data may affect senders and recipients of any information. Collection of vast amounts of data allows a potent adversary to build a profile of a person. Unlike in the past, the availability of this kind of information has been risen to a never known extend with the internet.

An entity in possession of such Profiles may use them for many purposes. These include service adoption, directed advertising or classification of citizens. The examples given above show that the effects of this data is not limited to the internet but reaches us effectively in the real world.

The main problem of this data is that it may be collected over a considerable amount of time and evaluated at any time. It even happened that standard practices of a time are differently judged upon in a later time. Persons may then be judged retrospectively upon these types of practice. This questionable type of judgment is visible in the tax avoidance discussion.

People must be able to control their data footprint. Not providing these means does effectively allow any country or a bigger player to ban and control any number of persons within or outside the internet.

In this work, a new protocol is designed to allow message transfer through existing communication channels. These messages are next to unobservable to any third party. This unobservability does not only cover the message itself but all metadata and flows associated with it. We called this protocol "MessageVortex" or in short just "Vortex". The protocol is designed in such a way so that it is capable of using a wide variety of transport protocols. It is even possible to switch protocols while the messages are in transfer. This behavior allows media breaches (at least on a protocol level) and makes analysis even harder.

The new protocol allows secure communication without the need for trusting the underlying transport media. Furthermore, the usage of the protocol itself is possible without altering the immediate behavior of the transport layer. That way it is possible to use the transport layers normal traffic to increase the noise in which information has to be searched.

This work splits into multiple parts. In the first part, we collect available researches and technologies. We emphasize in all technologies on the strength and weaknesses relevant to this work.

In the second part, we reassemble the parts to a new protocol.

In the third part, we analyze the protocol for the fitness of the purpose. We try to find weaknesses and work out recommendations for protocol usage.

In the last part, we discuss the results and try to summarize the findings. We furthermore elaborate to what extent the protocol ful-

fills the requirements mentioned in the previous sections.

1.1. Contributions

This thesis contributes to the topic in the following senses:

- It introduces a consistent model for message delivery which includes all endpoints and involved parties.
- It shows an approach based on existing protocols for anonymous communication which gives full control of the anonymity to the sender while controlling the costs.
- It offers a client application implementing the proposed Protocol as IMAPv4 cache daemon and as SMTP relay.

2. Notation

2.1. Cryptography

The theory in this document is heavily based on symmetric encryption, asymmetric encryption and hashing. In order to use a uniformed notation I use $E^{K_a}(M)$ (where a is an index to distinguish multiple keys) resulting in M^{K_a} as the encrypted message. If we are reflecting a tuple of information we write it in boldface. to express the tuples content we use angular brackets $L\langle normalAddress, vortexAddress \rangle$. If we want Messages encrypted with multiple keys do list the used keys as a comma separated list in superscript $E^{K_b}(E^{K_a}(M)) = M^{K_a, K_b}$.

For a symmetric encryption of a message M with a key K_a resulting in M^{K_a} where a is an index to distinguish different keys. Decryption uses therefore $D^{K_a}(M^{K_a}) = M$.

As notation for asymmetric encryption we use $E^{K_a^1}(M)$ where as K_a^{-1} is the private key and K_a^1 is the public key of a key pair K_a^p . The asymmetric decryption is noted as $D^{K_a^{-1}}(M)$.

For hashing we do use $H(M)$ if unsalted and H^{S_a} if using a salted hash with salt S_a . The generated hash is shown as H_M if unsalted and $H_M^{S_a}$ if salted.

If we want to express what details contained in a tuple we use the the notation $M\langle t, MURB, serial \rangle$ respectively if encrypted $M^{K_a}\langle t, MURB, serial \rangle$.

$$\begin{array}{ll} \text{asymmetric: } E^{K_a^{-1}}(M) & = M^{K_a^{-1}} \\ D^{K_a^1}(E^{K_a^{-1}}(M)) & = M \\ D^{K_a^{-1}}(E^{K_a^1}(M)) & = M \\ \text{symmetric: } E^{K_a}(M) & = M^{K_a} \\ D^{K_a}(E^{K_a}(M)) & = M \\ \text{hashing (unsalted): } H(M) & = H_M \\ \text{hashing (salted): } H^{S_a}(M) & = H_M^{S_a} \end{array}$$

In general Subscripts denote selectors to differentiate values of the same type and superscript denote relevant parameters to operations expressed. The subscripted and superscripted information may be omitted where not needed.

We refer to the components of a Vortex Message as follows:

$$\begin{array}{ll} \text{Prefix component: } \textbf{PREFIX} & = D^{K_a^1}(P^{K_a^{-1}}) = D(P) \\ \text{Header component: } \textbf{HEAD} & = D^{K_a^1}(H^{K_a^{-1}}) = D(H) \\ \text{Route component: } \textbf{ROUTE} & = D^{K_a^1}(R^{K_a^{-1}}) = D(R) \end{array}$$

In general a decrypted Block is written as capitalized multi character boldface. An encrypted Block is written as capitalized single character boldface.

2.2. Code and commands

Code blocks are always displayed as light grey block with line numbers:

```
1 public class Hello {  
2     public static void main(String args[]) {  
3         System.out.println("Hello." + args[1]);  
4     }  
5 }
```

Commands entered at the command line are in a grey box with top and bottom line. Whenever root rights are required the command line is prefixed with a "#". Commands not requiring specific rights are prefixed with a "\$". Lines without a trailing "\$" or "#" are output lines of the previous command. If long lines have to be broken to fit into the paper a "↔" is inserted to indicate that the line break has been introduced for readability.

```
# su —  
# javac Hello.java  
# exit  
$java Hello  
Hello.  
$java Hello "This is a very long command—line that had to be broken to fit into the code box ↔  
displayed on this page."  
Hello. This is a very long command—line that had to be broken to fit into the code box displayed on ↔  
this page.
```

2.3. Hyperlinking

The electronic version of this document is hyperlinked. This means that references to the glossary or the literature may be clicked to find the respective entry. Chapter or table references are clickable too.

3. Main Research Question

The main topic of this thesis was defined as follows:

- Is it possible to have specialized messaging protocol used in the internet based on “state of the science” technologies offering a high level of unlinkability (sender and receiver anonymity) towards an adversary with a high budget and privileged access to internet infrastructure?

Based on this main question there are several sub questions grouped around various topics:

1. What technologies and methods may be used to provide sender and receiver anonymity and unlinkability when sending messages against a potential adversary? (SQ1)
2. How can entities utilizing MessageVortex be attacked and what measures are available to circumvent such attacks? (SQ2)
3. How can attacks targeting anonymity of a sending or receiving entity be mitigated by design within MessageVortex? (SQ3)

3.1. SQ1: Technologies for sending messages maintaining unlinkability against an adversary

This question covers the principal part of the work. We try to elaborate a first rough list of criteria for the MessageVortex protocol. We then create a list of suitable technologies. Based on this list, we define a protocol combining these technologies and researches to a solution. This solution will be implemented and analyzed for suitability based on the criteria defined.

3.2. SQ2: Attacking unlinkability and circumvention

Within this question, we look at common attacks and test resistance of the protocol based on the definition of the protocol. We do this by first collecting well-known attacks (either generic or specific to a technology used in the protocol). We then try to elaborate if these attacks might be successful (and if so under what circumstances).

3.3. SQ3: Attack Mitigation by design

Within this question, we define baselines in order to mitigate attacks by defining guidelines for using the protocol. We analyze the effectiveness of the guidelines and try to elaborate on the general achievement level of the protocol by looking at the criteria defined in SQ1.

This question will mainly be answered in part IV.

Part II.

Methodes

In this part of the thesis, we collect requirements, definitions, methods, and existing research relevant to the topic of this thesis.

We start by collecting requirements for the protocol.

Having the requirements, we collect numerous existing technologies on research and implementation level. Each of the technologies is quickly categorized and either further studied or rejected naming the reasons for rejection.

The list of technologies and research collected is big. All relevant technologies either widely adopted or thoroughly researched should be included in this chapter. All Technologies and research are categorized. We reference technologies through their respective standard. If applicable, multiple standards may be part of the analysis. A short introduction into the protocol is given and then analyzed for suitability for a specific problem addressed in this work. Whenever quoting research, we refer to the respective papers. If appropriate, multiple related pieces of research are collected together into a bigger picture and then analyzed. When analyzing we focus on suitability concerning specific problems. If related to standard technology, we link to the respective standards. Transport layer protocols have been shortened to the outcommings in table 5.1. For an extensive analysis see Appendix B

In chapter 4, we collect the requirements for the protocol. Based on findings in this section we collect in chapter 5. In chapter 6, we collect relevant research about the topic. In chapter 7, we summarize the chosen methods. We explain choices and give a rough outline of the protocol baselines.

4. Requirements for an Anonymizing Protocol

In the following sections, we elaborate on the main characteristics of the anonymizing protocol.

The primary goal of the protocol is to enable Freedom of speech as defined in Article 19 of the International Covenant on Civil and Political Rights (ICCPR)[107].

everyone shall have the right to hold opinions without interference

and

Everyone shall have the right to freedom of expression; this right shall include freedom to seek, receive and impart information and ideas of all kinds, regardless of frontiers, either orally, in writing or in print, in the form of art, or through any other media of his choice.

We imply that not all participants on the internet share this value. As of September 1, 2016 Countries such as China (signatory), Cuba (signatory), Qatar, Saudi Arabia, Singapore, United Arab Emirates, or Myanmar did not ratify the ICCPR. Other countries such as the United States or Russia did either put local laws in place superseding the ICCPR or made reservations rendering parts of it ineffective. We may therefore safely assume that freedom of speech is not given on the internet, as at least countries explicitly supersede them.

Network packets may pass through any point of the world. A sender has no control over it. This lack of control is since every routing device decides on its own for the next hop. This decision may be based on static rules or influenced by third party nodes or circumstances (e.g., BGP, RIP, OSPF...). It is furthermore not possible to detect what way has a packet taken. The standard network diagnostic tool traceroute respectively traceroute list a possible list of hops. This list is only correct under certain circumstances (e.g., a stable route for multiple packets or same routing decisions regardless of other properties than the source and destination address). Any output of these tools may therefore not taken as a log of routing decisions. There is no possibility in standard IP routed networks to foresee a route for a packet nor can it be measured while or after sending.

As an example of the problems analyzing a packet route, we may look at traceroute. The manpage of traceroute of Linux tells us that traceroute uses UDP, TCP, or ICMP packets with a short TTL and analyses the IP of the peer sending a TIME_EXCEEDED (message of the ICMP protocol). This information is then collected and shown as a route. This route may be completely wrong. The man page of traceroute describes some of the possible cases.

We cannot be sure that data packets we are sending are passing only through countries accepting the ICCPR to the full extent.

```
$traceroute www.ietf.org
traceroute to www.ietf.org.cdn.cloudflare-dnssec.net (104.20.0.85), 64 hops max
 1 147.86.8.253 0.418ms 0.593ms 0.421ms
 2 10.19.0.253 1.177ms 0.829ms 0.782ms
 3 10.19.0.253 0.620ms 0.427ms 0.402ms
 4 193.73.125.35 1.121ms 0.828ms 0.905ms
 5 193.73.125.81 2.991ms 2.450ms 2.414ms
 6 193.73.125.81 2.264ms 1.961ms 1.959ms
 7 192.43.192.196 6.472ms 199.543ms 201.152ms
 8 130.59.37.105 3.465ms 3.138ms 3.121ms
 9 130.59.36.34 3.904ms 3.897ms 4.989ms
10 130.59.38.110 3.625ms 3.333ms 3.379ms
11 130.59.36.93 7.518ms 7.232ms 7.246ms
12 130.59.38.82 7.155ms 17.166ms 7.034ms
13 80.249.211.140 22.749ms 22.415ms 22.467ms
14 104.20.0.85 22.398ms 22.222ms 22.146ms
```

Figure 4.1.: A traceroute to the host www.ietf.org

4.1. Adversary model

For an anonymization adversary, we need to assume someone of the capabilities of a state-sponsored actor. State-sponsored actors

may work these days with allies but will not achieve dominance over all jurisdictional domains.

For our adversary model we assume the following properties:

- An adversary will have elaborated technical know-how to attack any infrastructure.
- An adversary may have the capability to monitor traffic at any point in any network within a jurisdiction.
- An adversary may have the capability to modify routing information within a jurisdiction freely.
- An adversary may have the possibility to freely modify even cryptographically weak secured data where a single or a limited number of entities grant proof of authenticity or privacy.
- An adversary may have the possibility to inject or modify any data on the network of a jurisdiction.
- An adversary may create own nodes of a network. He may furthermore monitor their behavior and data flow to the maximum possible extent.
- An adversary may force a limited number of other non-allied nodes to expose their data to him.
- An adversary may have the same access to resources as within its jurisdiction in a limited number of other jurisdictions.

We assume the following goals for an adversary:

- An adversary may want to disrupt non-authorized communication.
- An adversary may want to read any information passing throughout the internet.
- An adversary may want to build and conserve data about individuals or groups of individuals of their life. This data includes all activities in any part of their life regardless of their apparent fitness for any specific purpose or their correctness.

4.2. Required Properties

In this section, we summarize the required properties of an anonymizing network.

4.2.1. Anonymizing and Unlinking

If we are unable to limit the route of our packets through named jurisdictions, we must protect ourselves from unintentionally breaking the law of a foreign country. Therefore we need to be anonymous when sending or receiving messages. Unfortunately, most transport protocols (in fact almost all of them such as SMTP, SMS, XMPP, or IP) use a globally unique identifier for senders and receivers which are readable by any party which is capable of reading the packets.

As a result, anonymization of a sender or a receiver is not simple. A relay may allow at least the anonymization of the original sender given trust into the proxy. By combining it with encryption, we may even achieve an elementary form of a sender and receiver pseudonymity. If cascading more relay like infrastructures and combining it with cryptography, we might even achieve sender and receiver anonymity. These are the standard approaches in remailers and mixes. Their approaches are questionable as shown in 6.5.4.2 and 6.5.1. Attacks onto such systems were carried out in the past. Some of them were successful.

4.2.2. Censorship Resistant

In our scenario in 4, we defined the adversary as someone with superior access to the network and its infrastructure. Such an adversary might attack a message flow in several ways:

- Identify sender
- Identify recipient
- Read messages passed or extract meta information
- Disrupt communication fully or partially

We furthermore have to assume that all actions taken by a potential adversary are not subject to legal prosecution. This assumption based on the fact that an adversary trying to establish censorship may be part of a jurisdictions government. We may safely assume that there are legal exceptions in some jurisdiction for such entities.

In order to be able to withstand an adversary outlined above, the message content needs to be unidentifiable by attributes or content. "Attributes" include any meta information including, but not limited to, frequency, timing, message size, sender, protocol, ports, or recipient.

4.2.3. Controllable trust

If we want to control trust we have to conclude that:

1. Trust in infrastructure is given because it is under full control of either the sender or the recipient.
2. Trust in infrastructure may not be necessary as it is ideally unable to misuse data passed through it.

In this thesis, we work with both cases. We will however never trust a third party apart from sender and recipient.

4.2.4. Reliable

Any message-sending protocol needs to be reliable in its functionality. If the means of message transport are unreliable, users tend to use differentAny message-sending protocol needs to be reliable in its functionality. If the means of message transport are unreliable, users tend to use different means for communication.

4.2.5. Diagnosable

Transparent behavior is a prerequisite for reliability if there is no other trustworthy instance. If something is generating a behavior, but we are unable to determine the reason for it (i.e., if we are expecting a different behavior), we usually assume a malfunction. Therefore "reliable" means not only stable by its behavior. It also means diagnosable. A users perception will not be "reliable" if he is not able to determine causes for differences in observed and expected behavior.

4.2.6. Available

Availability has two meanings in this context which do differ. Technology is available if...

1. a sender and a recipient have (or may have) the means of using it.
2. the infrastructure is providing the service (as opposed to: "is running in a degraded or faulty state unable to provide a service").

The first meaning tells us that a protocol must run independently from an infrastructure the user has commonly ready.

The second meaning tells us that messages must always be capable of flowing from the sender to the recipient. As infrastructure

may fail at any time, the protocol must offer the possibilities to send messages through alternate routes. Alternative routes are simple to achieve, and many protocols implement such redundancies already. However, taking into account that sender and recipient are not known to a routing node this is a goal hard to achieve.

4.2.7. Identifiable Sender

A message system offering unlinkability may offer sender anonymity. If so a sender should be identifiable so that classification of senders is possible at any time.

4.3. Rough draft of Protocol

In order to fulfill the criteria given above, we define a very rough idea of the protocol and its layers. The rough overview is given in figure 4.2. The protocol should work on the base of onion routing. Unlike Tor (see 6.6.10) it should not rely on central infrastructures. It furthermore should not be limited to onionized messages. It should be capable of splitting and reassemble messages at any intermediate router.

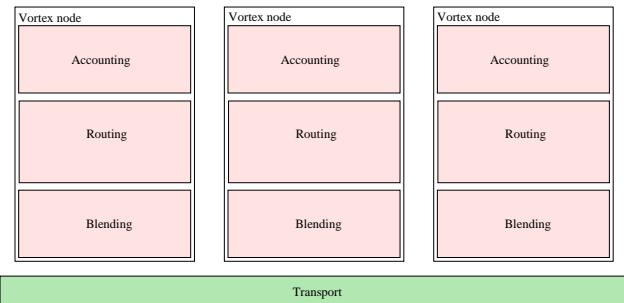


Figure 4.2.: A first rough overview for the protocol

The protocol itself should send messages through a well-known transport protocol ("Transport"). We use this protocol for transporting our messages to the next peer. The messages will be hidden within regular messages already using that transport layer. In an ideal implementation, any messages sent by our protocol should be indistinguishable from regular messages (by computers and humans). In order to achieve this particular task, we introduce a "blending layer". This layer usually is specific to the underlying transport layer and may vary.

The "routing layer" is the layer that receives and sends messages. It parses only the core protocol and the data processed here is entirely independent of the underlying transport and blending layer.

The "accounting layer" disassembles the received messages into its parts. It then recomposes and stores the messages for further routing. In order to avoid spamming over this media, some accounting will be involved.

The messages passed through such a protocol stack are onionised to offer anonymity from evil nodes. Furthermore, a node should be unable to tell whether a message was intended for a specific node or not. In consequence, we have to guarantee that all nodes including sender and recipient offer the same functions and are indistinguishable.

In order to mitigate size based attacks (an onionised packet typically loses data on its way), we introduce operations which may be applied to a valid message as well as to decoy traffic. The operations should be able to increase and decrease in size without being able to tell if this message is destined to a target or not. Operations not carried out due to missing data might be either intentionally or a malfunction.

The defined message operations are as follows:

- Split a message block into two parts of variable size or join them.

This operation may be used to fan out decoy traffic, to cut off decoy data, or to send multiple parts of a message through different routing nodes.

- Encrypt or decrypt a block with a given key.
- Add redundancy information to a stream and send it through multiple channels or recover a partially received message according to the redundancy operation.

To avoid making this system attractive to UBE a control should be introduced making mass mailings more expensive. The system works as follows:

- Routing nodes may offer their services at a cost. A participating node may pay a fee or solve a crypto-puzzle to pay for these costs.
- The following operations may be cost-effective:
 - Getting an ephemeral identity on a node (prerequisite for accounting; See section 4.3.1).
 - Assign a maximum number of messages and bytes in a specified interval to an ephemeral identity on a node.
 - Offer information about the known routing network by the node.
 - Offer information about the current quota of an ephemeral identity.

In order to minimize accounting, all quotas must be limited to a time interval. Such time-bound quotas guarantee that quota data of an accounting layer does not grow indefinitely. It is up to the node to decide what time duration is still acceptable.

In order to limit the possibility to Denial of Service (DoS) a node by overloading it the following precautions are taken:

- The message build process is far more complex than the routing carried out by the nodes.
- Messages may be processed in parts to minimize the amount of work. After processing the start of a message, a node may already decide whether it will route the message or not.
- The protocol minimizes the use of inefficient operations (e.g., asymmetric encryption).
- The server may limit specific operations.

4.3.1. Ephemeral Identity

We use accounting on various levels. While we are dealing with anonymity accounting has still to be linked to some an ephemeral identity for this reason we are introducing a term called “ephemeral identity”.

An Ephemeral identity is a temporary identity which is defined by the following attributes:

- It is an artificial identity represented by a public key.
- A sender may only use it for a short, limited time-span.
- It is not linkable to another identity of any kind.

The key in this definition is the last point. It is crucial and at the same time hard to achieve. In the protocol, any node may request from another node to accept a new ephemeral identity with a specified quota and a limited lifespan. The node accepting the identity may link its acceptance to the solving of a proof of work puzzle.

4.4. Rough Draft of Messages

For our protocol, we assume the following outline for a message:

- Header block
This block contains an ephemeral identity of the sender on the

message processing host. It allows the host to decide whether he is willing to process the rest of the message or not. It is important to know that the identity block contains a symmetric key for decryption of the main block and a secret repeated in the main block. This secret, shared among blocks, keeps a malicious node from exchanging the main block.

- Main block

This block contains all information regarding routing and processing data. It furthermore contains the payload data which may or may not contain messages.

- Routing Blocks

This block contains routing information for all blocks. It furthermore may contain instruction for processing the data blocks and routing/reply blocks for subsequent processing. Routing blocks are not necessarily related to the payload in the same message. They may pick up payloads from other blocks.

- payload Block

These Blocks form the payload data. They might contain a message, parts of a message or decoy material.

The message is picked up from the transport layer by the blending layer. This layer extracts the contained data and passes it to the routing layer. The routing layer extracts the message by extracting the ephemeral identity block. The accounting layer is called to authorize further processing for the identity. If authorized, the routing layer adds the routing blocks to the identity-specific workspace. As soon as the time specified in the routing block arrives, the routing block is processed by following the operations specified within. New messages are assembled and sent. The accounting layer keeps track of the quota regarding the new assembled messages.

5. Existing Transport Layer Protocols

In this chapter, we look at the various transport layer protocols. The primary goal is to identify strong candidates as a transport layer. The main focus lies on the following criteria:

- Widely adopted (Ct1)
The more widely adopted and used a protocol is the harder it is for an adversary to monitor (due to the sheer mass), filter or block the protocol (censorship resistance).
- Reliable (Ct2)
Message transport between peers should be reliable. As messages may arrive anytime from everywhere, we do not have means to synchronize the peer partners on a higher level without investing a considerable effort. In order to avoid this effort, we do look for inherently reliable protocols.
- Symmetrical built (Ct3)
The transport layer should rely on a peer to peer base. All servers implement a generic routing which requires no prior knowledge of all possible targets. This criterion neglects centralized infrastructures. This criterion may be dropped assuming that the routing layer or a specialized transport overlay is responsible for routing.

5.1. Roundup for Transport Protocols

Protocol \ Criteria	Ct1: Widely adopted	Ct2: Reliable	Ct3: Symmetrically built
HTTP	✓	✓	✗
FTP	✓	✓	✗
TFTP	✗	✗	✗
MQTT	~	✓	✗
AMQP	~	✓	✗
CoAP	~	~	✗
WAMP	✗	✓	~
XMP	✓	✓	✓
SMTP	✓	✓	✓
SMS ¹	✗		
MMS			✗

Table 5.1.: comparison of protocols in terms of the suitability criteria as transport layer

In table 5.1 we sum up all previously analyzed protocols. We use “✓” for a fulfilled criterion, “~” for a partially fulfilled criterion, and “✗” for a not fulfilled criterion. This overview shows in compact form protocols identified as strong candidates for use as a transport layer in terms of an anonymizing protocol.

This table shows that strong identified candidates are SMTP (being already a message sending protocol on asynchronous base) and XMPP (a real-time chat protocol able to attach files. This protocol features end-to-end encryption and signing furthermore). Both have the advantages that they are widely adopted on the internet and do additional support content (such as alternatives or attachments).

If assuming an implemented transport layer overlay on the MessageVortex protocol side, HTTP and FTP are suitable candidates as well.

¹omitted due to message size being too small

6. Existing Research and Implementations on the Topic

6.1. Anonymity Research and Protocols

In this section, we collect protocols research related to anonymity. We did not stick to anonymous message transfer. Instead, we took a broad focus in terms of technology and outlined in each protocol strength and weaknesses identified which may be relevant to this research.

6.1.1. Definition of Anonymity

As the definition for Anonymity we take the definition as specified in [75].

Anonymity of a subject means that the subject is not identifiable within a set of subjects, the anonymity set.¹

and

Anonymity of a subject from an attacker's perspective means that the attacker cannot sufficiently identify the subject within a set of subjects, the anonymity set.¹

We define the anonymity set as the set of all possible subjects within a supposed message. The anonymity of a subject towards an observing third party is a crucial factor as it relates directly to our adversary model.

6.1.2. k -Anonymity

k -anonymity is a term introduced in [2]. This work claims that entities are not responsible for an action if an observer is unable to match a specific action to less than k entities.

The Document distinguishes between *Sender k-anonymity*, where the sending entity can only be narrowed down to a set of k entities and *Receiver k-anonymity*.

The size of k is a crucial factor. One of the criteria is the legal requirements of a jurisdiction. Depending on the jurisdiction it usually is not possible prosecute someone if an action is not directly coupled to one person. Another criterion might be the decreasing of k over time. If a Vortex account is used, we have to assume that some vortex identities go out of commission over time. If k is chosen according to a legal requirement, it should be taken into account that k might be decreasing over time.

6.1.3. ℓ -Diversity

In [58] an extended model of k -anonymity is introduced. In this paper, the authors emphasize that it is possible to break a k -anonymity set if there is additional information available which may be merged into a data set so that a special entity can be filtered from the k -anonymity set. In other words, if an anonymity set is to tightly specified, additional background information might be sufficient to identify a specific entity in an anonymity set.

It might be arguable that a k -anonymity in which a member is not implicitly k -anonymous still is sufficient for k -anonymity in its sense. However, the point made in this work is right and is taken into account. Their approach is to introduce an amount of invisible diversity into k -anonymous sets, so that common background knowledge is no longer sufficient to isolate a single member.

¹footnotes omitted in quote

6.1.4. t -Closeness

While ℓ -diversity protects the identity of an entity, it does not prevent information gain. A subject which is in a class has the same attributes. This is where t -closeness[72] comes into play. t -closeness is defined as follows:

An equivalence class is said to have t -closeness if the distance between the distribution of a sensitive attribute in this class and the distribution of the attribute in the whole table is no more than a threshold. A table is said to have t -closeness if all equivalence classes have t -closeness.

6.2. Single Use Reply Blocks and Multi Use Reply Blocks

Chaum first introduced the use of reply blocks in [14]. A routing block, in general, is a structure allowing to send a message to someone without knowing the targets true address. Reply blocks may be differentiated into two classes "Single Use Reply Blocks" (SURBs) and "Multi-Use Reply Blocks" (MURBs). SURBs may be used once while MURBs may be used a limited number of times.

Within our research, we discovered that if a routing protocol is reproducible the traffic of a MURB may be used to identify some of the messages properties. Depending on the type of attack the block has to be repeated very often. For this reason, we limited the number of replays to a low number. The concept is that we have in our case a routing block which might be used up to n times ($0 < n < 127$). It is easily representable in a byte integer (signed or unsigned) on any system. It is big enough to support human communication in a sensible way and is big enough to add not too much overhead when rerequesting more MURBs. The number should not be too big because if a MURB is reused the same pattern of traffic is generated thus making the system susceptible to statistical attacks.

6.3. Censorship

As a definition for censorship we take

Censorship: the cyclical suppression, banning, expurgation, or editing by an individual, institution, group or government that enforce or influence its decision against members of the public – of any written or pictorial materials which that individual, institution, group or government deems obscene and “utterly without redeeming social value,” as determined by “contemporary community standards.”

Which is attributed to Chuck Stone Professor at the School of Journalism and Mass Communication, University of North Carolina. Please note that “Self Censorship” (not expressing something in fear of consequences) is a form of censorship too.

In our more technical we reduce the definition to

Censorship: A systematic suppression, modification, or banning of data in a network by either removal, or modification of the data, or systematic influencing of entities involved in the processing (e.g., by creating, routing, storing or reading) of this data.

This simplified definition narrows down the location to the internet as it is the only relevant location to us. Furthermore, it limits the definition to the maximum reach within that system.

6.3.1. Censorship Resistant

A censorship resistant system is a system which allows the entities of the system and the data itself to be unaffected from censorship. Please note that this does not deny the presence of censorship per se. It still exists outside the system. However, it has some consequences for the system itself.

- The system must be either undetectable or out of reach for an entity censoring.
- The possibility of identifying a protocol or data allows a censoring entity to suppress the use of the protocol itself.
- The entities involved in a system must be untraceable. Traceable entities would result in a mean of suppressing real-world entities participating in the system.

6.3.2. Parrot Circumvention

In [46] Houmansadr, Brubaker, and Shmatikov express that it is easy for a human to determine decoy traffic as the content is easily identifiable as generated content. While this is true, there is a possibility here to generate “human-like” data traffic to a certain extent. As an adversary may not assume that his messages are replied to, the problem does not boil down to a true Turing test. It remains on a “passive observer Turing test”, enabling the potential nodes to choose their messages.

In our design, this is the job covered by the blending layer. The blending layer generates these messages. These messages are context-less or remain in the context of previous conversations.

6.3.3. Censorship Circumvention

Several technical ways have been explored to circumvent censorship. All seem to boil down to the following main ideas:

- Hide data
- Copy or distribute data to a vast amount of places in order to improve the lifespan of data
- Outcurve censorship measurements

In the following section, we look at technologies and ideas dealing with these circumvention technologies.

6.3.3.1. Covert Channel and Channel Exploitations

The original term of covert channels was defined by Lampson[52] as

not intended for information transfer at all, such as the service program’s effect on system load.

This was defined in such a way to distinguish the message flow from

legitimate channels used by the confined service, such as the bill.

The use of a legitimate channel such as SMTP and hide information within this specific channel is not a usage of covert channel. We refer to this as channel exploitation.

6.3.3.2. Steganography

Steganography is an important part when it comes to unlinking information. In [48] and [100] we get a very rough overview. As some of the types and algorithms address specific topics of steganography (e.g., some hide from automatic detection and others address a human message stream auditor), we need to choose carefully. In our specific case, the main idea is to hide within the sheer mass of internet traffic. As a human auditor screening all the messages is a minor thread, we focus on machine-based censorship. Most of the

images sent in SMTP are jpg images (see table 10.2 on page 51). We limited our search to algorithms capable of hiding binary data within these files. The number of academically researched options was surprisingly low.

After reviewing the options, we decided to go for F5[109]. It is a reasonably well-researched algorithm which attracted many researchers. The original F5 implementation had a detectable issue with artifacts[12] caused by the recompression of the image. This issue was caused only due to an issue in the reference implementation, and the researchers have provided a corrected reference implementation without the weakness.

YASS, as described in [96] was not considered a candidate. Although less researched, researchers found multiple weaknesses[51, 56].

6.3.3.3. Timing Channels

Timing channels are a specialized form of covert channels. In timing channels, the information itself hides not within the data of the channel, but the usage of the channel is in such a way, that it is capable of reflecting the data. As we do not have control over the timing of the transport channel, this is not an option for us.

6.4. Cryptography

Whenever dealing with obfuscating data and maintaining the integrity of data, cryptography is the first tool in the hand of an implementer. A vast amount of research in this area does already exist. For this work, we did not collect much information. We focussed on algorithms either very well researched and implemented or research which seem very valuable when putting this work into place.

In symmetric encryption in this paper always assumes that

$$D^{K_a} \left(E^{K_a} (\mathbf{M}) \right) = \mathbf{M} \quad (6.1)$$

For a key $K_b \neq K_a$ this means

$$D^{K_a} \left(E^{K_b} (\mathbf{M}) \right) \neq \mathbf{M} \quad (6.2)$$

$$D^{K_b} \left(E^{K_a} (\mathbf{M}) \right) \neq \mathbf{M} \quad (6.3)$$

The following candidates have been analyzed:

- AES

AES was announced by NIST in 2001 as a result of a contest. The algorithm works with four operations (subBytes, ShiftRows, mixColumns, and addRoundKey). These operations are repeated depending on the key length 10 to 14 times.

AES is up until now (2018) unbroken. It has been weakened in the analysis described in [103] which reduces the complexity by roughly one to two bits.

- Camellia

The camellia algorithm is described in [60]. The key sizes are 128, 192, and 256. Camellia is a Feinstel cipher with 18 to 24 rounds depending on the key size. Up until today, no publication claims break this cipher.

For all asymmetric encryption algorithm in this paper, we may assume that

$$D^{K_a^{-1}} \left(E^{K_a^1} (\mathbf{M}) \right) = \mathbf{M} \quad (6.4)$$

$$D^{K_a^1} \left(E^{K_a^{-1}} (\mathbf{M}) \right) = \mathbf{M} \quad (6.5)$$

It is important that

$$D^{K_a^{-1}}(E^{K_a^{-1}}(\mathbf{M})) \neq \mathbf{M} \quad (6.6)$$

$$D^{K_a^1}(E^{K_a^1}(\mathbf{M})) \neq \mathbf{M} \quad (6.7)$$

And for any other Keypair $K_a^p \neq K_b^p$

$$D^{K_b^{-1}}(E^{K_a^1}(\mathbf{M})) \neq \mathbf{M} \quad (6.8)$$

$$D^{K_b^1}(E^{K_a^1}(\mathbf{M})) \neq \mathbf{M} \quad (6.9)$$

$$D^{K_b^{-1}}(E^{K_a^{-1}}(\mathbf{M})) \neq \mathbf{M} \quad (6.10)$$

$$D^{K_b^1}(E^{K_a^{-1}}(\mathbf{M})) \neq \mathbf{M} \quad (6.11)$$

The number of crypto algorithms was higher than the steganography options. When looking for well-researched algorithms basing on different mathematical problems and having well-defined outlines numbers dropped dramatically again.

- RSA

In 1978 the authors Rivest, Shamir, and Adleman published with [84] a paper which did revolutionize cryptography for years. In their paper, the authors described an encryption method later to be called RSA which required a key pair (K_a) referenced as public (K_a^1) and private keys (K_a^{-1}). The novelty of this system was that anything encrypted with the public key was only decryptable with the private key and vice versa.

RSA is up until the day of writing this paper not publicly known to be broken (unless a too small key size is used). However – Shor described in 1997 an algorithm which should enable quantum computers to break RSA far faster than done with traditional computers. In the section 6.4.3 we do elaborate these effects further.

- ECC

The elliptic curves were independently suggested by [64] and [50] in 1986. Elliptic curve Cryptography started to be widely deployed in the public space about in 2006. Since then it seems to compete very well with the well established RSA algorithm. While being similarly well researched ECC, has the advantage of far shorter key sizes for the same grade of security.

- McEliece

McEliece was first implemented and then removed again. The key size to gain an equivalent security to RSA1024 was $\approx 1MB$. This was impractical and thus discarded again. This was done despite the fact that there is up until now no known quantum capable algorithm reducing the key size of McEliece.

- NTRU

In [45] Hoffstein, Pipher, and Silverman described the NTRU algorithm. The inclusion of this algorithm was disputed as it is patented in the united states as US7031468. It was included because the company Security Innovation holding the patent, released the NTRU algorithm on March ² 2018 into the public domain according to a blog entry on the company website. While NTRU is not as well researched as RSA, it has been around for more than 20 years without being significantly affected by known attacks.

- ElGammal

We rejected ElGamal as cryptosystem to include. It bases on the same mathematical problems for cryptoanalysis as RSA (discrete logarithms) but is not as common as RSA.

6.4.1. Homomorphic encryption

Homomorphic encryption as introduced in [33] was from the beginning a strong candidate to be used within our work. Unfortunately, we did not find a way to apply the core addRedundancy operation in homomorphic encryption. Transforming the original data to the GF space in an efficient way to apply matrices was not doable and thus rejected.

6.4.2. Deniable Encryption and Deniable Steganography

Deniable encryption and deniable steganography have been considered out-of-bound for this work. The main reason is that the presence of encryption (which is not deniable in both cases) may be sufficient for a censor to block a message. Adding a layer to make sure that encryption or steganography is deniable again, does not add valuable properties to our system as the sheer presence of encryption might be sufficient for censorship.

6.4.3. Key Sizes

The question of key sizes is hard to answer as it depends on the current and future possibilities of an adversary which is again depending on not foreseeable research. We tried to collect a couple of recommendations.

Encrypt II (<http://www.ecrypt.eu.org/>) recommends currently for a “foreseeable future” 256 Bits for symmetric encryption and for asymmetric encryption based on factoring modulus 15424 Bits. Elliptic Curve Cryptography and Hashing should be sufficient if used with at least 512 Bits. If the focus is reduced to the next ≈ 20 years, then the key size recommendations are reduced to 128 Bit for symmetric encryption, 3248 Bits for factoring modulus operations and 256 Bits for elliptic curves and hashing.

According to the equations proposed by Lenstra in [54] an asymmetric key size of 2644 Bits respectively a symmetric key length of 95 Bits, or 190 Bits for elliptic curves and hashing should be sufficient for security up to the year 2048.

According to [18] (superseding well known and often used [31]) data classified up to “top secret” should be signed with RSA 3072+ or ECDSA P-384. For symmetric encryption, they recommend AES 256 Bits, for Hashing at least SHA-384 and for Elliptic curves a 384 Bit sized key.

As it might seem not a wise idea to consider the recommendation of a potential state-sponsored adversary and the formulas proposed by Lenstra do not explicitly take quantum computers into account we follow the recommendations of ENCRYPT II.

Furthermore taking all recommendations together it seems that all involved parties assume the most significant trust into elliptic curves rather than asymmetric encryption based on factoring modulus.

6.4.4. Cipher Mode

The cipher mode defines how multiple blocks encrypted with the same key are handled. Main characteristics of cipher modes to us are:

- Parallelisable
Can multiple parts of a plaintext be encrypted simultaneously. This feature is important for multi CPU and multi core systems as they can handle parallelizable more efficiently by distributing them on multiple CPUs.
- Random access in decryption
Random access on decryption allows efficient partial encryption of a cipher text.
- Initialisation vector
An initialization vector has downsides and advantages. On the downsides is the fact that an initialization vector must be shared with the message or before distributing it. It is essential to understand that the initialization vector itself usually is not treated as a secret. It is not part of the key.
- Authentication
Authentication guarantees that the deciphered plaintext has been unmodified since encryption. It does not make a statement over the identity of the party encrypting the text. Such an identifying authentication is referred as signcryption.

We did an evaluation of the most common cipher modes for suit-

ability. For MessageVortex we focussed on modes which have the properties parallelizable, random access and do not do authentication. Main focus beside the characteristics mentioned above was on the question whether there is an open implementation available in java which is reasonably tested.

- ECB (Electronic Code Book)

ECB is the most basic mode. Each block of the cleartext is encrypted on its own. This results in a big flaw: blocks containing the same data will always transform to the same ciphertext. This property makes it possible to see some structures of the plain text when looking at the ciphertext. This solution allows parallelization of encryption, decryption, and random access while decrypting. Due to these flaws, we rejected this mode.

- CBC (Cypher Block Chaining)

CBC extends the encryption by xor'ing an initialization vector into the first block before encrypting. For all subsequent blocks, the ciphertext result of the preceding block is taken as xor input. This solution does not allow parallelization of encryption, but decryption may be parallelized, and random access is possible. As another downside, CBC requires a shared initialization vector. As with most IV bound modes, an IV/key pair should not be used twice which has implications for our protocol.

- PCBC (Propagation Cypher Block Chaining)

CBC extends the encryption by xor'ing not the ciphertext but an xor result of ciphertext and plaintext. This modification denies parallel decryption and random access compared to CBC.

- EAX

EAX has been broken in 2012[65] and is therefore rejected for our use.

- CFB (Cypher Feedback) CFB is specified in [26] and works exactly as CBC with the difference that the plain text is xor'ed and the initialisation vector respectively the preceding cipher result is encrypted. CFB does not support parallel encryption as the ciphertext input from the preceding operation is required for a round, it does however allow parallel decryption and random access.

- OFB

OFB is specified in [26] and works exactly as CFB except for the fact that not the cipher text result is taken as feedback but the result of the encryption before xor'ing the plain text. This denies parallel encryption and decryption as well as random access.

- OCB (Offset Codebook Mode)

This mode was first proposed in [85] and later specified in [86]. OCB is specifically designed for AES128, AES192, and AES256. It supports authentication tag lengths of 128, 96, or 64 bits for each specified encryption algorithm. OCB hashes the plaintext of a message with a specialized function $H_{OCB}(M)$. OCB is fully parallelizable due to its internal structure. All blocks except the first and the last may be encrypted or decrypted in parallel.

- CTR

CTR is specified in [57] and is a mixture between OFB and CBC. A nonce concatenated with a counter incrementing on every block is encrypted and then xor'ed with the plain text. This mode allows parallel decryption and encryption as well as random access. Reusing IV/Key-pairs using CTR is a problem as we might derive the xor'ed product of two messages. This problem only applies where messages are not uniformly random such as in an already encrypted block.

- CCM

Counter with CBC-MAC (CCM) is specified in [110]. It allows to pad and authenticate encrypted and unencrypted data. It furthermore requires a nonce for its operation. The size of the nonce is dependent on the number of octets in the length field. In the first 16 bytes of the message, the nonce and the message size is stored. For the encryption itself, CTR is used. It shares the same properties as CTR.

It allows parallel decryption and encryption as well as random access.

- GCM (Galois Counter Mode)

GCM has been defined in [61], and is related to CTR but has some major differences. The nonce is not used (just the counter starting with value 1). In order to authenticate the encryption, an authentication token $auth$ is hashed with H_{GFmult} and then xor'ed with the first cipher block. All subsequent cipher blocks are xor'ed with the previous result and then hashed again with H_{GFmult} . After the last block the output o is processed as follows: $H_{GFmult}(o \oplus (len(A)||len(B))) \oplus E^{K^0}(counter_0)$. As a result, GCM is not parallelizable and does not support random access.

The mode has been analyzed security wise in 2004 and showed no weaknesses in the analyzed fields [62].

GCM supports parallel Encryption and decryption. Random access is possible. However, authentication of encryption is not parallelizable. The authentication makes it unsuitable for our purposes. Alternatively, we could use a fixed authentication string.

- XTS (XEX-based tweaked-codebook mode with ciphertext stealing)

This mode is standardized in IEE 1619-2007 (soon to be superseded). A rough overview of XTS may be found at [59]. It was developed initially for Disks offering random access and authentication at the same time.

- CMC (CBC-mask-CBC) and EME (ECB-mask-ECB)

In [43] Halevi and Rogaway introduces a cipher mode which is extremely costly as it requires two encryptions. CMC is not parallelizable due to the underlying CBC mode, but EME is.

- LRW

LRW is a tweakable narrow-block cipher mode described in [105]. This mode shares the same properties as EBC but without the weakness of the same clear text block resulting in the same ciphertext. Similarly to XEX, it requires a tweak instead of an IV.

6.4.4.1. Summary of Cipher Modes

Criteria Mode \	auth	Requires IV	parallelisable	random access
CBC	✗	✓	✗	✗
CCM	✗	✓	✗	✗
CFB	✗	✓	✓	✓
CTR	✗	✓	✓	✓
ECB	✗	✗	✓	✓
GCM	✓	✓	✗	✗
OCB	✓	✗ includes auth	✗	✗
OFB	✗	✓	✗	✗
PCBC	✗	✓	✗	✗
XTS	✗	✓ ³	✓	✗
LRW	✗	✓ ⁴	✓	✓
CMC	✗	✓ ⁵	✗	✗
EME	✗	✓ ⁶	✓	✓

Table 6.1.: comparison of encryption modes in terms of the suitability criteria as transport layer

6.4.5. Padding

A plain text stream may have any length. Since we always encrypt in blocks of a fixed size, we need a mechanism to indicate how many bytes of the last encrypted block may be safely discarded.

Different paddings are used at the end of a cipher stream to indicate how many bytes belong to the decrypted stream.

6.4.5.1. RSAES-PKCS1-v1_5 and RSAES-OAEP

This padding is the older of the paddings standardized for PKCS1. It is basically a prefix of two bytes followed by a padding set of non zero bytes and then terminated by a zero byte and then followed by the message. This padding may give a clue if decryption was

successful or not. RSAES-OAEP ist the newer of the two padding standards

6.4.5.2. PKCS7

This padding is the standard used in many places when applying symmetric encryption up to 256 bits key length. The free bytes in the last cipher block indicate the number of bytes being used. This makes this padding very compact. It requires only 1 Byte of functional data at the end of the block. All other bytes are defined but not needed.

6.4.5.3. OAEP with SHA and MGF1 padding

This padding is closely related to RSAES-OAEP padding. The hash size is, however, bigger and thus the required space for padding is much higher. OAEP with SHA and MGF1 Padding is used in asymmetric encryption only. Due to its size, it is important to note that the payload in the last block shrinks to $keySizeInBits/8 - 2 - MacSize/4$.

In our approach, we have chosen to allow these four paddings. The allowed sha sizes match the allowed hash sizes chosen above. It is important to note that padding costs space at the end of a stream. Since we are always using one block for signing, we have to take care that the chosen signing mac plus the bytes required for padding do not exceed the key size of the asymmetric encryption. While this usually is not a problem for RSA as there are keys 1024+ Bits required it is a considerable problem for ECC algorithms as there are much shorter keys required to achieve an equivalent strength compared to RSA.

We have introduced an additional type of padding not related to these paddings. We required for the addRedundancy the following unique properties. Unfortunately, we were unable to find any padding which matched the following properties simultaneously:

- Padding must not leak successful decryption
For our addRedundancy operation, we required padding which has no detectable structure as a node should not be able to tell whether a removeRedundancy operation did generate content or decoy.
- Padding of more than one block
Due to the nature of the operation, it is required to be able to pad more than just one block.

Details of this padding are described in the section "Add and Remove Redundancy Operations" in A.

6.5. Routing

If we can follow data from a source to a destination, we may safely assume that the participants of this data exchange are no longer anonymous. So special care should be taken to this aspect. In the past, several approaches have been made in order to avoid detection of data while routing. In the following sections, we will look at some basic concepts which have been proposed up until today. We describe their concept and have a look at their weaknesses discovered so far.

In System Implementations, we analyze some related real-world systems regarding how they work and how they have been attacked in the past.

6.5.1. Mixing

Mixes have been first introduced by "Untraceable Electronic Mail, Return, Addresses, and Digital Pseudonyms"[14] in 1981. The basic concept in a mix goes as follows. We do not send a message directly from the source to the target. Instead, we use a kind of proxy server or router in between which picks up the packet, anonymizes

it, and forwards it either to the recipient or another mix. If we assume that we have at least three mixes cascaded, we then can conclude that:

- Only the first mix knows the true sender
- All intermediate mixes know neither the true sender nor the true recipient (as the data comes from mixes and is forwarded to other mixes)
- Only the last mix knows the final recipient.

This approach (in this simple form) has several downsides and weaknesses.

- In a low latency network, the message may be traced by analyzing the timing of a message.
- We can emphasize a path by replaying the same message multiple times (assuming we control an evil node) thus discovering at least the final recipient.
- If we can "tag" a message (with content or attribute), we then may be able to follow the message.

In 2003 Rennhard and Plattner analyzed the suitability for mixes as an anonymizing network for masses. They concluded that there are three possibilities to run mixes.

- Commercial, static MixNetworks
- Static MixNetworks operated by volunteers
- Dynamic MixNetworks

They concluded that in an ideal implementation a dynamic mix network where every user is operating a mix is the most promising solution as static mixes always might be hunted by an adversary.

6.5.2. Onion Routing

Onion routing is a further development of the concept of mixes. In onion routers, every mix gets a message which is asymmetrically encrypted. By decrypting the message, he gets the name of the next hop and the content which he has to forward. The main difference in this approach is that in traditional mix cascades the mix decides about the next hop. In an onionised routing system, the message decides about the route it is taking.

While tagging attacks are far harder (if we exclude side channel attacks to break sender anonymity), the traditional attacks on mixes are still possible. So when an adversary is operating entry and exit nodes, it is straightforward for them to match the respective traffic.

One very well known onion routing network is Tor (<https://www.torproject.org>). For more information about tor see section 6.6.10.

6.5.3. Crowds

Crowds is a network which offers anonymity within a local group. It works as follows:

- All users add themselves to a group by registering on a so called "blender".
- All users start a service (called JonDo).
- Every JonDo takes any received message (might be from him as well) and sends it with a 50% chance either to the correct recipient or to a randomly chosen destination

While crowds as specified in [80] does anonymize the sender from the recipient rather well, the system offers no protection from someone capable of monitoring crowds traffic. The system may, however, be easily attacked from within by introducing collaborating johndos. It has been further developed to D-Crowds [22], ADU/RADU [69], Freenet[17] and many others.

6.5.4. Mimic routes

Mimics are a set of statical mixes which maintain a constant message flow between the static routes. If legitimate traffic arrives, the pseudo traffic is replaced by the legitimate traffic an outstanding observer is thus incapable of telling the difference between real traffic and dummy traffic.

If centralized mixes are used the system lacks the same vulnerabilities of sizing and observing the exit nodes as all previously mentioned systems. If we assume that sender and receiver operate a mixer by themselves, the system would be no longer susceptible to timing or sizing analyses. The mimic routes put a constant load onto the network. This bandwidth is lost and may not be reclaimed. It does not scale well as every new participant increases the need for mimic routes and creates (in the case of user mixes) new mimic load.

6.5.4.1. DC Networks

DC networks are based on the work “The Dining Cryptographers Problem: Unconditional Sender and Recipient Untraceability” by Chaum[15]. In this work Chaum describes a system allowing a one-bit transfer (The specific paper talks about the payment of a meal). Although all participants of the DC net are known the system makes it unable to determine, who has been sending a message. The message in a DC-Net is readable for anyone. This network has the downside that a cheating player may disrupt communication without being traceable.

Several attempts have been made to strengthen the proposal of Chaum[41][108]. However, no one succeeded without introducing significant downsides on the privacy side.

6.5.4.2. Anonymous Remailer

Remailers have been in use for quite some time. There are several classes of remailers, and all of them are somehow related to Mixnets. There are “types” of remailers defined. Although these “types” offer some kind of hierarchy none of the more advanced “types” seem to have more than one implementation in the wild.

Pseudonymous Remailers (also called Nym Servers) take a message and replace all information pointing to the original sender with a pseudonym. This pseudonym may be used as an answer address. The most well known pseudonymous remailer possibly was anon.penit.fi run by Johan Heisingius. This service has been forced several times to reveal a pseudonyms true identity before Johan Heisingius decided to shut it down. For a more in-depth discussion of Pseudonymous Remailers see 6.6.1

Cypherpunk remailers forward messages like pseudonymous remailers. Unlike pseudonymous remailers, Cypherpunk remailers decrypt a received message, and its content is forwarded without adding a pseudonym. A reply to such a message is not possible. They may, therefore, be regarded as an “decrypting reflector” or a “decrypting mix” and may be used to build an onion routing network for messages. For a more in-depth discussion of Type I Remailers see 6.6.3.

Mixmaster remailers are very similar to Cypherpunk remailers. Unlike them, Mixmaster remailers hide the messages, not in an own protocol but use SMTP instead for it. While using SMTP as a transport layer, Cypherpunk remailers are custom (non-traditional mail) servers listening on port 25. For a more in-depth discussion of type II remailers see 6.6.4.

Mixminion remailers extend the model of Mixmaster remailers. They still use SMTP but introduce new concepts. New concepts in Mixminion remailers are:

- Single Use Reply Blocks (SURBs)
- Replay prevention
- Key rotation

- Exit poicies
- Dummy traffic

For a more in depth discussion of Mixminion remailers see 6.6.5.

6.6. System Implementations

The following sections emphasize on implementations of anonymizing (and related) protocols regardless of their usage in the domain of messaging and anonymity. It is a list of system classes or their specific implementations together with a short analysis of strength and weaknesses.

Wherever possible we try to refer to original sources. If systems are no longer in use or have never been adopted outside the scientific community, we try to refer to publicly available sources. Some of them do not even have a rudimentary implementation. Instead, they are limited to an idea or a simulator.

If a system shows strong similarities in parts, then we emphasize on these parts and analyze the findings and attacks.

6.6.1. Pseudonymous Remailer

The basic idea of remailers was discussed in [14]. The most well-known remailer was probably anon.penit.fi which operated from 1993 to 1996. This type of remailer is often referred to as type-0 remailer.

In principle, an anonymous remailer works as an ordinary forwarding SMTP server. The only difference is that it strips off all header fields except for “from”, “to”, and “subject” and then replaces the sender and recipient address with pseudonyms (if any).

As the example shows this kind of remailer is easily attackable by an authority. Since the remailer knows tuples of pseudonyms and their respective real identity it may be forced to reveal true identities. Furthermore, the message may be monitored at the server or on its way and then due to the content matching or even tagging is possible.

This remailer offers, therefore, no protection against an adversary defined in our problem.

6.6.2. Babel

Babel was an academic system defined in a paper by Gülcü and Tsudik in 1996[42]. It has been developed at IBM Zurich Research Laboratory. It was a mixing system using onionized addresses. The sender remains anonymous while he may provide a reply routing block called RPI. If both parties would like to remain anonymous, the RPI of the initiator is deployed in a forum thread. Anyone using this block adds an RPI for its own address to the message.

This system has all the disadvantages of a system using MURBs. Traffic highlighting and similar attacks are possible.

6.6.3. Cypherpunk-Remailer

With the failing of anon.penit.fi, it became clear that the weakest spot of a single server infrastructure is the information stored on the server and the vulnerability of their owner. The new type-1 remailers score over the existing type-1 remailers by using encryption for the message. By combining multiple type-1 remailers an onionlike structure of the message was achievable.

This approach was promising, but it was still observable. An observation was possible in the example of correlating the message sizes and timing information.

6.6.4. Mixmaster-Remailer

Like Cypherpunk remailers the Mixmaster remailers were working with onion-like encrypted messages. In contrast to type-1 remailers, the use of cascading mixes became systematic.

6.6.5. Mixminion-Remailer

Mixminion was the standard implementation of a type-3 remailer. It tried to address many issues previously not solved. A Mixminion router splits messages in equally sized chunks and supports SURBs. Furthermore, replay protection and key rotation were available. Unlike the previous remailer types, Mixminion was no longer using SMTP as the transport protocol. Instead, Mixminion introduced a new transport protocol. The sources of this remailer are available on GitHub under <https://github.com/mixminion/mixminion>.

6.6.6. Tarzan

Tarzan is a P2P IP protocol using UDP to communicate. It is specified in [37]. Tarzan nodes may be used to anonymize internet traffic in general. An initiator on the original sender machines encapsulates traffic into a layered UDP package and sends the package through mix like relayd's. The last relayd acts as an exit node. A replier may send answers the opposite way. Each relayd knows its next and previous relayd. To minimize the impact of observation Tarzan forwards packets only every 20ms and features replay protection.

6.6.7. AN.ON

AN.ON as suggested in [32] is a mixing network. It generates messages in equally sized chunks and sends them in fixed time slots after random mixing. Its implementation is called JAP and may be found under <https://anon.inf.tu-dresden.de/>. JAP is in many ways similar to the capabilities of ToR. The network was at the time of writing a lot smaller (10 JonDos compared to 6500 relays in the ToR network).

6.6.8. MorphMix

MorphMix is another mix network. It is specified in [81]. It was a circuit based mix system for networking anonymity. The core of the network was collision detection. This detection has been circumvented by [102]. Since then no new papers have been published, and the project seems to be dead.

6.6.9. SOR (SSH-based onion routing)

SOR [27] is blaming the complex and monocultural landscape of anonymizing software and proclaims a simple approach based on onionized SSH tunnels. While the approach is both simple and effective, it is not suitable against a powerful adversary. First, he may be able to snoop the forwarding when on the system. Second, due to the timing behavior, tunnels belonging to each other may be identified, and third, the package size information does leak as well.

6.6.10. Tor

Tor is one of the most common onion router networks these days and onionizes generic TCP streams. It is specified in [24]. It might be considered one of the most advanced networks since it has a considerable size and much research has been done here.

According to [101] tor is a network consisting of multiple onion routers. Each client first picks an entry node. Then it establishes an identity, gets a listing of relay servers, and chooses a path through multiple onion routers. The temporary identity links to such a path

and should be changed on a regular base along with its identity. Transferring data works by splitting the data into equally sized cells of 512 bytes.

There is a centrally organized directory in the tor network knowing all tor relay servers. Any Tor relay server may be a directory server as well.

Many attacks involving the Tor networks have been discussed in the academic world such as [73, 5, 6, 8, 9, 23, 30] and some have even been exploited actively. In the best case, the people discovering the attacks did propose mitigation to the attack. Some of these mitigations flowed back into the protocol. Some general thoughts of the attacks should be emphasized here for treatment in our protocol.

Being an exit node may be a problem in some jurisdictions. In general, it seems to be accepted that routing traffic with unknown content (to the routing node) as one might argue that users of Tor are not regarded bad in general. So by being unable to tell malicious or illegal traffic apart from legitimate traffic, this is not a problem. However – being an exit node can mean that unencrypted and illegal traffic is leaving the routing traffic. In this specific case operators of a relay node might fear legal prosecution. Tor nodes may proclaim themselves as “non-exit nodes” to avoid the possibility of legal prosecution.

Furthermore, several DoS-Attacks have been carried out in order to overload parts of the Tor network. Most of them do a bandwidth drain on the network layer.

Attacking anonymization has been done in several ways. First of all the most common attack is a time-wise correlation of packets if in control of an entry and an exit node. A massive attack of this kind was published in 2014 and has been published on the tor website (relay early traffic confirmation attack). This attack was possible because tor is a low latency network. Another attack is to identify routes through tor by statistically analyze the traffic density in the network between nodes. More theoretical attacks focus on the possibility of controlling the directory servers to guarantee that an entity may be deanonymized because it is using compromised routers.

Generally, the effectiveness of the monitoring of single nodes or whole networks is disputed. According to a study by Johnson et al. in 2013[47], a system in the scale of PRISM should be able to correlate traffic of 95% of the users within a “few days”. Other sources based on the Snowden Papers claim that NSA was unable so far to de-anonymize users of ToR. However since these papers referenced to “manual analysis”, the statement may be disputed when looking at automated attacks as well.

It is, according to <https://www.torproject.org/docs/pluggable-transports>, impossible to use transborder ToR traffic in at least China, Uzbekistan, Iran, and Kazakstan. In censored countries, ToR offers so-called bridged Transports. Currently deployed transports in the standard ToR browser bundle package are obfs4, meek, FTE, and ScrambleSuit. Only meek is listed as working in China. Meek achieves this by hiding its traffic in a standard protocol (<https://>).

[92] is a good survey listing recent developments and attacks within the ToR project.

6.6.11. I^2P

The name I^2P is a derived from “Invisible Internet Project” according to geti2p.net. The system itself is comparable to ToR for its capabilities. Mayor differences are:

- P2P based
- Packet switched routing (tor is “circuit switched”)
- Different forward and backward routes (called tunnels)
- Works pseudonymously
- Supports TCP and UDP

I^2P has not attracted as much attention as ToR so far. So it is hard to judge upon its real qualities.

In 2011 Herrmann and Grothoff presented in [44] an attack. As I^2Ps security model is chosen based on IP addresses the authors propose to use several cloud providers in different B-Class networks. By selectively flooding peers an adversary may extract statistical information. The paper proposes an attack based on the heuristic performance-based peer selection. The main critics of the paper were that the peer selection may be influenced by an adversary enabling him to recover I^2P has not attracted as much attention as ToR so far. So it is hard to judge upon its real qualities.

In 2011 Herrmann and Grothoff presented in [44] an attack. As I^2Ps security model is chosen based on IP addresses the authors propose to use several cloud providers in different B-Class networks. By selectively flooding peers an adversary may extract statistical information. The paper proposes an attack based on the heuristic performance-based peer selection. The main critics of the paper were that the peer selection might be influenced by an adversary enabling him to recover data on a statistical base. data on a statistical base.

6.6.12. Freenet

Freenet was initially designed to be a fully distributed data store[17]. Documents are stored in an encrypted form. Downloaders must know a document descriptor called CHK containing the file hash, the key, and some background about the crypto being used. A file is stored more or less redundantly based on the number of accesses to a stored file. The primary goal of Freenet is to decouple authorship from a particular document. It furthermore provides a fault tolerant storage which improves caching of a document if requested more often.

Precisely as I^2P , Freenet is not analyzed thoroughly by the scientific world.

The Freenet features two protocols FCPv2 acts as the client protocol for participating in the control of the Freenet storage. The Freenet client protocol allows to insert and retrieve data, to query the network status, and to manage Freenet nodes directly connected to an own node. FCPv2 operates on port 9481 and blocking is thus easy, as it is a dedicated port.

The Freenet project seems to be under active development as pages about protocols were updated in the near past (Last update on the FCPv2 Page was July 5th 2016 at the time of writing).

6.6.13. Herbivore

Herbivore is a network protocol designed by Goel et al. in [40]. It is based on the dining cryptographers paper[15]. At the time of writing, no herbivore client or an actual protocol implementation could be found on the internet. Wikipedia lists Herbivore as “dormant or defunct”.

6.6.14. Dissent

Dissent is defined in [19]. It is an anonymity network based on DC-nets. A set of servers forms these DC-nets. At least one of the servers in the used net must be trustworthy, and none may be misbehaving. A server failure results in the stall of all message delivery using this server.

6.6.15. \mathcal{P}^5

The Peer-to-Peer Personal Privacy Protocol is defined in [93]. It provides sender-, receiver- and sender-receiver anonymity. According to the project page of \mathcal{P}^5 there is only a simulator available for the protocol.

The transport layer problematic has been wholly ignored. As there is no precise protocol specification but only a rough outline about the messaging and the crypto operations, \mathcal{P}^5 offers minimal possibilities for analysis.

6.6.16. Gnutella

Gnutella is not a protocol to the anonymity world in special. Instead, the Gnutella protocol implements a general file sharing on a Peer to peer base. This peer-to-peer approach is the most interesting aspect of Gnutella in this context. Furthermore, Gnutella has proven to be working with a large number of clients.

The current protocol specification may be found under <http://rfc-gnutella.sourceforge.net/developer/stable/index.html><http://rfc-gnutella.sourceforge.net/>. While the Gnutella network is defunct the approaches taken to solve some of the peer-to-peer aspects were very interesting.

6.6.17. Gnutella2

Despite its name, Gnutella2 is not the next generation of Gnutella. It was a fork in 2002 from the original Gnutella and has been developed in a different direction. The specification may be found on <http://g2.doxu.org>. Just as its predecessor, Gnutella2 seems to be dead. Last relevant update to the main site or its protocol is dated four years back.

6.6.18. Hordes

Hordes was a multicast-based protocol for anonymity specified in [55]. Hordes used the abilities to handle multicast addresses of routers to generate a dynamic set of receivers and then sends messages to them. It assumes that a single observer or router does not know all participating peers.

This assumption is correct for a local observer. Unfortunately, it is not sufficient assuming an adversary as defined in this paper.

6.6.19. Salsa

Salsa was proposed in [71] and described a circuit based anonymization pattern based on distributed hash tables (DHT). An implementation for Salsa is available, but it is not public.

6.6.20. AP3

AP3 as defined in [66] is an anonymous communication system and very similar to crowds. It performs a random walk over a set of known nodes. Not all nodes are known to anyone, and all nodes are aware of the final recipient.

The system is susceptible to numerous attacks as shown by [67] and does not withstand an adversary as defined in 4.1.

6.6.21. Cashmere

Cashmere is specified in [111]. It defines a protocol for the use of chaum mixes. Unlike most of the protocols the chaum mixes in cashmere are virtual. They are represented by so called relay groups. Each mix in the relay group may be used as an equivalent mix to all other mixes in the same group.

This design means that the failure of one mix does not result in the non-delivery of a message.

No client implementation could be found on the internet. The project homepage <http://current.cs.ucsb.edu/projects/cashmere/> has not been updated since 2005. This suggests that this project is dead or sleeping.

6.6.22. Email

As SMTP is one of our transport layers implemented in the prototype, we focus in depth onto this topic.

6.6.22.1. SMTP and Client Protocols

Todays mail transport is mostly done via SMTP protocol as specified in [49]. This protocol has proven to be stable and reliable. Most of the messages are passed from a MUA to a SMTP relay of a provider. From there the message is directly sent to the SMTP server of the recipient and from there to a server based storage of the recipient. The recipient may at any time connect to his server based storage and may optionally relocate the message to a client based (local) storage. The delivery from the server storage to the MUA of the recipient may happen by message polling or by message push (where as the later is usually implemented by a push-pull mechanism).

To understand the routing of a mail it is essential to understand the whole chain starting from a user(-agent) until arriving at the target user (and being read!). To simplify this I used a consistent model which includes all components (server and clients). The figure 6.1 shows all involved parties of a typical Mail routing. It is important to understand that Mail routing remains the same regardless of the used client. However – Availability of a mail at its destination changes drastically depending on the type of client used. Furthermore control of the mail flow and control is different depending on the client.

The model has three main players storage (Storage), agent (Agent) and service (Service). Storages are endpoint storages storing mails. Not explicitly shown are temporary storages such as spooler queues or state storages. Agents are simple programs taking care of a specific job. Agents may be exchangeable by other similar agents. A service is a bundle of agents which is responsible for a specific task or task sets.

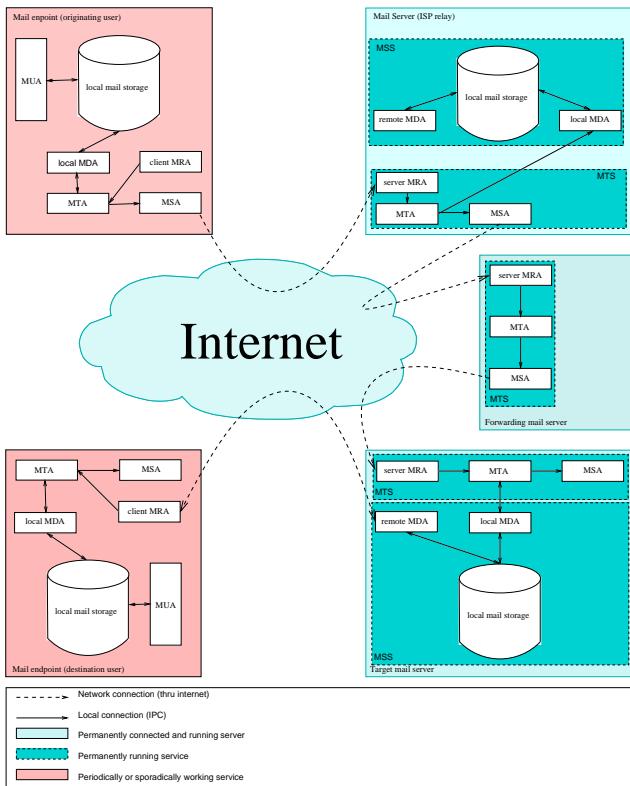


Figure 6.1.: Mail Agents

In the following paragraphs (for definitions) the term “email” is used synonymously to the term “Message”. “Email” has been chosen over “messages” because of its common use in standard documents.

Emails are typically initiated by a Mail User Agent (MUA). An MUA accesses local email storage which may be the server storage or a local copy. The local copy may be a cache only copy, the only existing storage (when emails are fetched and deleted from the server after retrieval) or a collected representation of multiple server stor-

ages (cache or authoritative).

Besides the MUA the only other component accessing local email storage is the Mail Delivery Agent (MDA). An MDA is responsible for storing and fetching emails from the local mail storage. Emails destined for other accounts than the current one are forwarded to the MTA. Emails destined to a User are persistently stored in the local email storage. It is essential to understand that email storage does not necessarily reflect a single mailbox. It may as well represent multiple mailboxes (e.g., a rich client serving multiple IMAP accounts) or a combined view of multiple accounts (e.g., a rich client collecting mail from multiple POP accounts). In the case of a rich client, the local MDA is part of the software provided by the user agent. In the case of an email server, the local MDA is part of the local email store (not necessarily of the mail transport service).

On the server side, there are usually two components (services) at work. A “Mail Transport Service” (MTS) responsible for mail transfers and a “Mail Storage System” which offers the possibility to store received Mails in a local, persistent store.

An MTS generally consists out of three parts. For incoming connects there is a daemon called Mail Receiving Agent (Server MRA) is typically a SMTP listening daemon. A Mail Transfer Agent (MTA) which is responsible for routing, forwarding and rewriting emails. Moreover, a Mail Sending Agent (MSA) which is responsible for transmitting emails reliably to another Server MRA (usually sent via SMTP).

An MSS consists of local storage and delivery agents which do offer uniform interfaces to access the local store. They do also deal with replication issues, and grant should take care of the atomicity of transactions committed to the storage. Typically there are two different kinds of MDAs. Local MDAs offer possibilities to access the store via efficient (non-network based) mechanisms (e.g., IPC or named sockets). This is usually done with a stripped down protocol (e.g., LMTP). For remote agents there a publicly – network-based – agent available. Common Protocols for this Remote MDA include POP, IMAP, or MS-OXMAPIHTTP.

6.6.23. Email Endpoint Types

Mail endpoints consist typically of the following components:

- A Mail User agent (MUA)
- A Local Mail storage (MUA)
- A Local Mail Delivery Agent (Local MDA)
- A Mail Transfer Agent (MTA)
- A Mail Sending Agent (MSA)
- A Mail Receiving Agent (MRA)

Only two of these components do have external interfaces. These are MSA and MRA. MSA usually uses SMTP as transport protocol. When doing so, there are a couple of specialties.

- Portnumber is 587 (specified in [39]). Although port numbers 25 and 465 are valid and do have usually the same capabilities, they are for mail routing between servers only. Mail endpoints should no longer use them.
- Connections are authenticated. Unlike a normal server-to-server (relay or final delivery) SMTP connections on port 25 clients should always be authenticated of some sort. This may be based on data provided by the user (eg. username/password or certificate) or data identifying the sending system (eg. IP address)[39]. Failure in doing authentication may result in this port beeing misused as an sender for UBE.

Mail User Agents (MUA) are the terminal endpoint of email delivery. Mail user agents may be implemented as fat clients on a desktop or mobile system or as an interface over a different generic protocol such as HTTP (Web Clients).

Server located clients are a special breed of fat clients. These clients share the properties of fat clients except for the fact that they

do not connect to the server. The client application itself has to be run on the server where the mail storage persists. This makes delivery and communication with the server different. Instead of interfacing with an MSA and a client MDA they may directly access the local mail storage on the server. On these systems, the local mail storage may be implemented as a database in a user-specific directory structure.

6.6.23.1. Fat clients

The majority of mail clients are fat clients. These clients score over the more centralistic organized web clients in the way that they may offer mail availability even if an internet connection is not available (through client-specific local mail storage). They furthermore provide the possibility to collect emails from multiple sources and store them in the local storage. Unlike Mail servers, clients are assumed to be not always online. They may be offline most of the time. To guarantee the availability of a particular email address, a responsible mail server for a specific address collects all emails (the MSS does this) and provides a consolidated view onto the database when a client connects through a local or remote MDA.

As these clients vary strongly, it is mandatory for the MDA that they are well specified. Lack of doing so would result in massive interoperability problems. Most commonly the Protocols IMAP, POP and EWS are being used these days. For email delivery, the SMTP protocol is used.

Fat clients are commonly used on mobile devices. According to [13] in Aug 2012 the most typical fat email client was Apple Mail client on iOS devices (35.6%), followed by Outlook (20.14%), and Apple Mail (11%). *Email Client Market Share*[29] as a more recent source lists in February 2014 iOS devices with 37%, followed by Outlook (13%), and Google Android (9%).

6.6.23.2. Server located clients

Server located clients build an absolute minority. This kind of clients were common in the days of centralized hosts. An example for a Server Located Client is the Unix command "mail". This client reads email storage from a file in the users home directory.

6.6.23.3. Web clients

Web clients are these days a common alternative to fat clients. Most big provider companies use their own proprietary web client. According to [29] the most common web clients are "Gmail", "Outlook.com", and "Yahoo! Mail". All these Interfaces do not offer a kind of public plug-in interface. However, they do offer IMAP-interfaces. This important for a future generalistic approach to the problem.

6.6.24. S/MIME

S/MIME is an extension to the MIME standard. The MIME standard allows in simple text-oriented mails an alternate representation of the same content (e.g., as text and as HTML), or it allows to split a message into multiple parts which may be encoded. It is important to note that MIME encoding is only effective in the body part of a mail.

S/MIME as described in [78] extends this standard with the possibility to encrypt mail content or to sign it. Practically this is achieved by either putting the encrypted part or the signature into an attachment. It is essential to know that this method leaks significant parts of the data.

As the mail travels directly from sender to recipient both involved parties are revealed. Neither message subject nor message size or frequency are hidden. This method does offer limited protection when assuming an adversary with interest in the message content only. It does not protect from the kind of adversary in our case.

The trust model is based on a centralistic approach involving generally trusted root certification authorities.

6.6.25. PGP/MIME

Exactly as S/MIME PGP[34] builds upon the base of MIME. Although the trust model in PGP is peer-based. The encryption technology does not significantly differ (as seen from the security model).

Like S/MIME PGP does not offer anonymity. Sender and endpoints are known to all routing nodes. Depending on the version of PGP some meta information or parts of the message content such as subject line, the real name of sender and receiver, message size is leaked.

A good thing to learn from PGP is that peer-based approaches are offering limited possibilities for trust. The trust in PGP is based on the peer review of users. This peer review may give an idea of how well verified the key of a user is.

6.6.26. XMPP

XMPP also known as Jabber protocol is standardized in [89] and [90]. It is extended in so-called XEP (XMPP extension) documents. We used in this work the extension [91] for file transfer. Support of this extension is however not mandatory.

6.7. Pseudo Random Number Generators

The following sections list two PRNG specifications to follow the recommendations of [21]. These PRNGs are used to complete the padding specified in the addRedundancy operation.

We have chosen to support two kinds of PRNG. These algorithms are not relevant for the security of the system, but they guarantee non-detectable padding when doing the addRedundancy operation. The two PRNGs selected were xorshift128+ and Blum Micali PRNG. Both PRNGs were quoted to pass BigCrush. However, recent development shows that this might not be true for xorshift128+ as shown in [53].

6.8. Known Attacks

In the following sections, we emphasize on possible attacks to an anonymity preserving protocols. These attacks may be used to attack the anonymity of any entity involved in the message channel. In a later stage, we test the protocol for immunity against these classes of attacks.

6.8.1. Broken Encryption Algorithms

Encryption algorithms may become broken at any time. This either to new findings in attacking them, by more resources being available to an adversary, or by new technologies allowing new kind of attacks. A proper protocol must be able to react to such threads promptly. This reaction should not rely on a required update of the infrastructure. Users should solely control the grade of security.

We cannot do a lot for attacks of this kind to happen. However, we might introduce a choice of algorithms, paddings, modes, and key sizes to give the user a choice in the degree of security he wants to have.

6.8.2. Attacks Targeting Anonymity

Attacks targeting users anonymity are the main focus of this work. Many pieces of information may be leaked, and the primary goal

should, therefore, rely on the principles established in security.

- Prevent an attack

Attack prevention can only be done for attacks which are already known and may not be realistic in all cases. In our protocol, we have strict boundaries defined. A node under attack should at any time of protocol usage (this excepts bandwidth depletion attacks) be able to block malicious identities. Since establishing new identities is costly for an attacker, he should always require far more resources than the defender.

- Minimize attack surface

This part of the attack prevention is included by design in the protocol.

- Redirect an attack

Although the implementation does not do this, it is possible to handle suspected malicious nodes differently.

- Control damage

For us, this means leaving as little information about identities or meta information as possible on untrusted infrastructures. If we leave traces (i.e., message flows, or accounting information) they should have the least possible information content and should expire within a reasonable amount of time.

- Discover an attack

The protocol is designed in such a way that attack discovery (such as a query attack) is possible. However, we consider active attacks just as part of the regular message flow. The protocol must mitigate such attacks by design.

- Recover from an attack

An attack does always impose a load onto a system's resources regardless of its success. It is vital that a system recovers almost immediately from an attack and is not covered in a non-functional or only partial-functional state either temporarily or permanently.

In the following subsections we list a couple of attack classes which have been used against systems listed in 6.6 or the respective academic works. We list the countermeasures which have been taken to deflect these attacks.

6.8.2.1. Probing Attacks

Identifying a node by probing and check their reaction is commonly done when fingerprinting a service. As a node is participating in a network and relaying messages probing may not be evaded. However, it may be made costly for an adversary to do systematic probing. This should be taken into account. Both currently specified transport protocol feature an indefinite number of possible accounts. Since not the server but the endpoint address is behaving, node probing is more complicated than in other cases where probing of service is sufficient.

One of the problems are clear-text requests. These requests may be used on any transport layer account without previous knowledge of any host key. Thus the recommendation in table 10.1 is generally not to answer the requests. Routing nodes in jurisdictions not fearing legal repression or prosecution may reply to clear text requests, but it is generally discouraged as they allow harvesting of addresses.

One strategy to avoid would be to put high costs onto clear-text requests in such a way that a clear-text request may have a long reply time (e.g., up to one day). A first retry of the same identity would lead to automatic blacklisting. This is an insufficient strategy as a big adversary may have lots of identities in stock. Requesting an unusually long key as a plain-text identity does not make sense either as these as well may be kept in stock. We may, however, force a plaintext request to have a hash following specific rules. We may for example put in a requirement that the first four bytes of the hash of a header block translates to the first four characters of the routing address.



6.8.2.2. Hotspot Attacks

Hotspot attacks aim to isolate high traffic sites within a network. By analyzing specific properties or the general throughput locations with outstanding traffic may be identified. These messages do quite often reveal senders or recipients. Sometimes a middle node in an anonymizing system.

6.8.2.3. Message Tagging and Tracing

When using an anonymization system, a message may be either fully or partially traced or even tagged. Tagging allows to recognize a message at a later stage and map it to its predecessors. Protocols with tagable messages are not suitable for anonymization systems.

6.8.2.4. Side Channel Attacks

Side channel attacks are numerous. Especially important to us are attacks related to either lookup in unrelated channels (e.g., downloading of auxiliary content of a message) or behavior related to timing patterns.

6.8.2.5. Sizing Attacks

There are two kinds of sizing attacks identified to be relevant for us. One is the possibility for matching messages with related sizes, and the other one is to relate message size to the original messages. Both attacks may be considered as a tracing attack and will be analyzed accordingly.

6.8.2.6. Bugging Attacks

Numerous attacks are available through bugging of a protocol. In this chapter we outline some of the possibilities and how they may be countered:

- Bugging through certificate or identity lookup:

Almost all kind of proof of identities, such as certificates, offer some revocation facility. While this is a perfect desirable property of these infrastructures, they offer a flaw. Since the location of this revocation information is typically embedded in the proof of identity, an evil attacker might use a falsified proof of identity with a recording revocation point.

There are multiple possibilities to counter such an attack. The easiest one is to do no verification at all. Having no verification is however not desirable from the security point of view. Another possibility is only to verify trusted proof of identities. By doing so, the only attacker could be someone having access to a trusted source of proof of identities. A third possibility is to relay the request to another host either by using an anonymity structure such as Tor or by using its own infrastructure. Using Tor would violate the "Zero Trust" goal. Such a measure would only conceal the source of the verification. It would not hide the fact that the message is processed. A fourth and most promising technology would be to force the sender of the certificate to include a "proof of non-revocation". Such a proof could be a timestamped and signed partial CRL. It would allow a node to verify the validity of a certificate without being forced to disclose itself by doing a verification. On the downside has to be mentioned that including proof of non-revocation involves the requirement to accept a certain amount of caching time to be accepted. This allowed caching time reduces the value of the proof as it may be expired in the meantime. It is recommended to keep the maximum cache time as low as 1d in order to avoid that revoked certificates may be used.

- Bugging through DNS traffic:

A widely common protocol on the internet is DNS. Almost all network related programs use it without thinking. Typically the use of such a protocol is only a minor issue since the resolution

of a lookup usually done by an ISP. In the case of a small internet service provider (ISP), this might however already become a problem.

The bugging in general attack works as follows: We include a unique DNS name to be resolved by a recipient. This can be done most easily by including an external resource such as an image. A recipient will process this resource and might, therefore, deliver information about the frequency of reading, or the type of client.

It must be taken into account that the transport layer will always do DNS lookups and that we may not avoid this attack completely. We may, however, minimize the possibilities of this attack.

- Bugging through external resources:

A straightforward attack is always to include external resources into a message and wait until they are fetched. In order to avoid this kind of attack plain text or other self-contained formats should be used when sending a message. As we may not govern the type of contained message we can make at least recommendations concerning its structure.

6.8.3. Denial of Service Attacks

6.8.3.1. Censorship

Whereas traditional censorship is widely regarded as selective information filtering and alteration very repressive censorship can even include denial of information flows in general. Any anonymity system not offering the possibility to hide in legitimate information flows therefore not censorship resistant.

6.8.3.2. Denial of service

An adversary may flood the system in two ways.

- He may flood the transport layer exhausting resources of the transport system.

This is a straightforward attack. MessageVortex has no control over the existing transport protocol. Therefore, all flooding attacks on that layer are still effective. However, if an adversary attacks a node the redundancy of a message may still be sufficient. On the other hand, flooding disrupts at least all other services using the same transport layer on that node. This result may be unacceptable for an attacker. More likely would be censorship.

- He may flood the routing layer with invalid messages.

Identifying the messages is relatively easy for a node. Usually, it should be sufficient to decode the CPREFIX block of a message. If the CPREFIX is valid, then the header block either identifies a valid identity or processing may be aborted.

- He may flood an accounting layer with newIdentity.

Flooding an accounting layer with identities is possible. Since the accounting layer is capable of adapting costs to a new identity, it may counter this attack by giving heavy puzzles to new identities. This affects all new identities and not only those flooding. If a flooding attack is carried out over a long time, a node may decide to split its identity. All recent active users get a new identity whereas the old one opposes high costs. This would force an attacker to work in intervals and is no longer able to make a permanent DoS attack.

6.8.3.3. Credibility Attack

Another type of DoS attack is the credibility attack. While not necessarily a technical attack, it is very effective. A system not having a sufficiently big user base is offering thus a lousy level of anonymity because the anonymity set is too small or the traffic concealing message flow is insufficient.

Another way is to attack a systems reputation in such a way that the system is no longer used. An adversary has many options to achieve such a reduction in credibility. Examples:

- Disrupt functionality of a system.

This may be done by blocking of the messaging protocol it uses or by blocking messages. Furthermore, an adversary reduces functionality when removing known participants from the network either by law or by threatening.

- Publicly dispute the effectiveness of a system.

Disputing the effectiveness is a very effective way to destroy a system. People are not willing to use a system which believed to be compromised if the primary goal of using the system is avoiding being observed.

- Reduce the effectiveness of a system.

A system may be considerably loaded by an adversary to decrease the positive reception of the system. He may further use the system to send UBE to reduce the overall experience when using the system. Another way of reducing effectiveness is to misuse the system for evil purposes such as blackmailing and making them public.

- Dispute the credibility of the system founders.

Another way of reducing the credibility of a system is to undermine its creators. If – for example – people believe that a founders interest was to create a honey pot (e.g., because he is working for a potential state-sponsored adversary) for personal secrets they will not be willing to use it.

- Dispute the credibility of the infrastructure.

If the infrastructure is known or suspected to be run by a potential adversary, peoples willingness to believe in such a system is expected to be drastically reduced.

7. Applied Methods

Based on the findings of the previous chapter we used the following methodology in order to find a solution:

1. Identify problem hotspots for a new protocol.
2. Design a protocol which addresses the previously identified hotspots.
3. Build a protocol prototype.
4. Analyse the protocol for weaknesses using attack schemes.
 - a) Tagging/Bugging attacks
 - b) Tracing attacks

7.1. Problem Hotspots

Starting from the previous research, we identified several hotspots which have to be taken care off. The following sections list identified problems and the possible countermeasures which have not been broken in the past.

7.1.1. Zero Trust Philosophy

One main disadvantage of almost any system listed in section 6.6 is that a trust (unlimited or limited) has been put into the infrastructure. In example when using ToR, we need to trust the directory servers. Control over the directory servers might give an attacker the possibility to redirect a connection to controlled entry and exit nodes which would then break anonymity. In general control of entry and exit nodes make a system vulnerable.

To avoid this problem, we decided to apply a zero trust model. We do not trust any platform except for the sending and the receiving computer. We assume that all other devices may be compromised and do create detailed logs about what they are doing. This trust extends partially to our personally known contacts. We believe that some of them might be evil, but they are generally trustworthy. We furthermore assume that traffic on the network layer is observed and recorded at any time. This philosophy creates very hard to meet goals. However, by assuming so, we prevent the system from leaking information through side channels.

RQ1 (Zero Trust): *No infrastructure should be trusted unless it is the senders' or the recipients' infrastructure.*

7.1.2. Information leakage and P2P Design

An anonymizing system must keep information on messages or their metadata within the system. Ideally even not disclosing to its members. In a perfectly encrypted system, such metadata is leaked at least by the entry and the exit node. To avoid this, all peers must behave alike. All nodes should be valid endpoints as well as valid senders or mixes. Covering all functions in all nodes implies a design with equally built nodes and is common with many P2P designs.

A fundamental problem of the P2P design is that usually port forwarding or central infrastructure is required. Technologies such as "hole punching" and "hairpin translation" usually require central infrastructures to support at least the connection and maybe depending on the client infrastructure being used fragile or ineffective. To avoid these problems we decided to rely on traditional centralistic transport infrastructures. As proof of concept, we decided to use SMTP.

The approach supports however even mixing transport media. This makes it harder for an attacker to trace a message as the message flow may go through any suitable transport protocol at any time of message transfer.

RQ2 (Equal nodes): *Mixes and peers must be undistinguishable from each other.*

7.1.2.1. Decoy traffic generation

In order to create decoy traffic in an untrusted way, we need means to increase and decrease messages in size without knowledge of the routing node. A straightforward approach would be to create decoy traffic in the initial message. Such a design would create a pattern of decreasing or repeating message sizes in the net. To avoid this, we introduced a set of operations to be applied to the original message. The operations are done in such a way that a mixer is unable to tell whether the message size or decrease results in decoy traffic generation/removal or not.

The main message operations are:

- Split and merge messages.
- Add and remove redundancy information.
- Encrypt and Decrypt information.

At this point we could have used homomorphic encryption instead of the redundancy operations. Such encryption would, however, add much complexity to the algorithm with no apparent gain.

7.1.2.2. Message tagging or bugging protection

It is essential to the protocol that any operation at any point of the protocol handling which is not foreseen should fail in message transport. This property makes the protocol very fragile, but it prevents mixes from introducing tags which may be followed throughout the system. The protocols counter this fragility by the fact that redundancy added in the message course may be used to recover from misbehaving nodes.

In our approach, we give a single mix called the routing block builder (RBB) the full control over the message transport layer. The content used for blending is discardable data. RBB has no control over this aspect. This blending data is ephemeral and will (or may) be removed by the next node. The data received by a mix may be used to generate a "pseudo reply" on the blending layer to transport any other message (related or unrelated) back to the sending node. So tagging on this layer is worthless.

The reason for not giving control over the behavior to this layer to the sender of the message is simple. By giving him control over it, we would allow him to use the information provided here as the primary medium. As an immediate result, the system would be suitable to blackmail any user of the world. It furthermore would create unintentional "exit nodes" to the system which might oppose further legal threads for participants.

RQ3 (untagable): *The message should be untagable (neither by a sender, nor by an intermediate party such as a mixer).*

RQ4 (unbugable): *The message should be unbugable (neither by a sender, nor by an intermediate party such as a mixer).*

7.1.2.3. Message replay protection

Message reply protection is crucial for such a system. With the ability to replay a message an adversary may “highlight” a message flow as it would always generate the same traffic pattern. So there needs to be a reply pattern protecting the protocol from message replay. As we do have MURBs in our protocol, this is a problem. A MURB is by design replayable. We, therefore, need a possibility for the original sender using a MURB to make messages distinguishable which may not be used by an adversary.

RQ5 (replay): *A message must not be replayable.*

It should be able to increase and shrink in size, or all messages must have a uniform size. Decoy traffic should not be distinguishable from message traffic.

7.1.2.4. No Dedicated Infrastructure Philosophy

There should be no infrastructure dedicated to the operation of the solution. This avoids a single point of failure, as well as the possibility for an adversary to shut down this infrastructure to disrupt the operation of the system as a whole. This requirement is already covered implicitly in RQ1 (Zero Trust).

7.1.3. Accounting

The infrastructure must not be misused as UBE sending infrastructure. This implies that sending messages is connected to some “cost”. “Costs” must be connected to some identity to allow accounting. Linking to a global identity would allow assigning traffic to a real-world user. Therefore the protocol must allow creating ephemeral local identities not linked to a real identity.

RQ6 (accounting): *The system must be able to do accounting without being linked to a real identity.*

7.1.4. Anonymisation

The system must allow the anonymizing of message source and message destination at any point. It should not be visible to the infrastructure protocol whether a message has reached its destination or not.

RQ7 (anonymisation): *A system must be able to anonymize sender and recipient at any point of the transport layer and any point of mixing unless it is the sender or the recipient itself.*

7.1.5. Initial Bootstrapping

The system must allow bootstrapping from a zero knowledge or near zero knowledge point. Starting from this point, the protocol must be able to extend the network on its own.

RQ8 (bootstrapping): *The system must allow to bootstrap from a zero knowledge or near zero knowledge point and extend the network on its own.*

7.1.6. Cypher selection

In this protocol, a lot of encryption and hashing algorithms have to be used. This choice of these algorithms should be explained.

From the requirements side we have to follow the following principle:

RQ9 (algorithmic variety): *The system must be able to use multiple symmetric, asymmetric, and hashing algorithms in order to immediately fall back to a secure algorithm for all new messages if required.*

First of all, we need a subset of encryption algorithms all implementations may rely on. Defining such a subset guarantees interoperability between all nodes regardless of their origins.

Secondly, we need to have a spectrum of algorithm in such a manner that it may be (a) enlarged if necessary and (b) there is an alternative if an algorithm (or a mathematical problem class) is broken (so that algorithms may be withdrawn if required without affecting the function in general).

And third, due to the onion-like design described in this document asymmetric encryption should be avoided in favor of symmetric encryption to minimize losses due to the key length and the generally higher CPU load opposed by asymmetric keys.

If the algorithm is generally bound to specific key sizes (due to S-Boxes or similar constructs), the key size is incorporated into the definition. If not the key size is handled as a parameter.

The key sizes have been chosen in such a manner that the key types form tuples of approximately equal strength. The support of Camelia192 and Aes192 has been defined as optional. However, as they are wildly common in implementations, they have already been standardized as they build a possibility to step up security in the future.

Having these criteria for choice we chose to use the following keys and key sizes:

- Symmetric
 - AES (key sizes: 128, 192, 256)
 - Camellia (key sizes: 128, 192, and 256)
- Asymmetric
 - RSA (key size: 2048, 4096, and 8192)
 - Named Elliptic Curves
 - * secp384r1
 - * sect409k1
 - * secp521r1
- Hashing
 - sha256
 - sha384
 - sha512
 - tiger192

Within the implementation we assigned algorithms to a security strength level:

- LOW
AES128, RSA1024
- MEDIUM
AES192, RSA2048, ECC secp384r1
- HIGH
RSA4096, ECC sect409k1, sha384
- QUANTUM
AES256, RSA8192, ECC secp521r1, sha512

This allows categorizing the used algorithms to a strength. This list, however, should only serve the purpose of selecting algorithms for people without cryptological know how.

7.1.7. Reed-Solomon function

Originally [79] introduced a system allowing to use polynomial codes to create error correcting codes. In [16] Chaum, Crépeau,

and Damgård have shown that the codes are suitable for distributing data assuming enough parties are honest.

Unlike Chaum et al. we are not using the Reed Solomon function to achieve anonymity or privacy. Instead, we use it for decoy traffic generation. We are splitting a message into multiple parts at several points when routing and assemble it again on different nodes. By doing so, we achieve two vital things. First, we introduce the possibility to recover errors due to misbehaving nodes and secondly, the real traffic can no longer be differentiated from decoy traffic.

7.1.8. Usability

The system must be usable without cryptographic know-how and with popular tools. This is necessary to accept the system broadly and makes it easy to use for people already communicating.

RQ10 (easy handleable): *The system must be usable without cryptographic know-how and with popular tools.*

7.2. Protocol outline

The protocol itself is independent of the transport layer specified. We emphasize in this section to the general building blocks, the cryptographic structure, and the general protocol attributes. In section 10 we will then further elaborate the protocols inner structure.

The protocol is built on multiple layers. On the logic side the protocol is split into two parts:

1. Transport Layer

Standard internet infrastructures provide this Layer. The primary goal is to hide or blend our protocol into regular traffic within that layer.

2. Blending and subsequent layers

Any user of the internet may provide these layers. Since these layers may be mixes only or valid endpoints. They may or may not be publicly known. In a first implementation, we build this system as a standard Java application. The primary goal is to compile it to native code afterwards and run it on an SoC like infrastructure such as a RaspberryPi or port it to an android device.

We may further split these layers into

a) Blending layer

This layer takes messages and creates transport layer conformant messages. In an ideal case, the messages generated by this layer are indistinguishable from the regular message traffic and the embedded message is only visible for the receiving node.

b) Routing layer

The routing layer disassembles and reassembles messages. This operation guarantees that messages are generated in such a way that decoy traffic is not differentiable from non-decoy traffic.

c) Accounting layer

The accounting layer has three jobs. First, he has to authorize the message processing after decrypting the header block. Secondly, he handles all header request blocks and the reply blocks. And third, it keeps track of the accounting regarding the sent messages.

7.2.1. Protocol Terminology

For our protocol, we use the following terms:

- **Sender:** The user or process originally composing the message.

- **Recipient:** The user or process destined to receive the message in the end.
- **Router:** Any node which is processing the message. Please note that all nodes are routers.
- **Message:** The “real content” to be transferred from the sender to the recipient.
- **Payload:** Any data transported between routers regardless of the meaningfulness or relevance to the message.
- **Decoy traffic:** Any data transported between routers which has no relevance to the message at the final destination.
- **Identity:** A tuple of a routable address, and a public key. This tuple is a long living tuple but may be exchanged from time to time.
- **Ephemeral Identity:** An identity created on any node with a limited lifetime anyone possessing the private key (proven by encrypting with it) is accepted as representative of that identity.
- **Routing Block Builder (RBB):** An entity building a routing block. Typically identical to either sender or receiver.

7.2.2. Vortex Communication model

In this section, we introduce a new consistent, transport independent model for representing the different protocols used by MessageVortex.

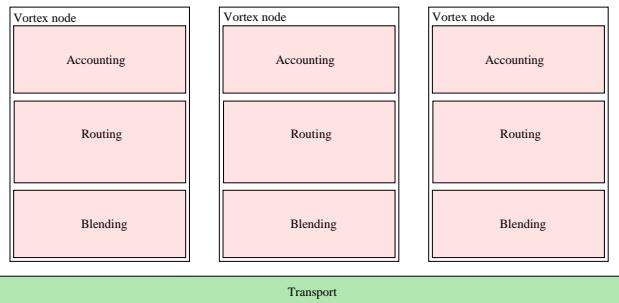


Figure 7.1.: A rough protocol outline of the MessageVortex protocol

We divide our protocol into four different layers, whereas only three are specific to the MessageVortex protocol. The lowest layer is the transport layer. As expressed earlier, dedicated protocols are easy to censor. Therefore we build our protocol on top of other suitable transport protocols.

The other Three layers are vortex specific and do not require any infrastructure on the internet. We elaborate further on these layers in the next section.

7.2.3. Transport Layer

For our first tests, we used a custom transport layer allowing us to monitor all traffic quickly, and build structures in a very flexible way. This transport layer works locally with a minimum amount of work for setup and deployment. It furthermore works across multiple hosts in a broadcast domain. The API may be used to support almost any kind of transport layer.

After that, we focused on the protocols identified in the previous sections for transport:

- SMTP
- XMPP

For the prototype, we have implemented an SMTP transport agent and the respective blending layer.

7.2.4. Blending Layer

The blending layer is taking care of multiple problems:

- It is translating the message block into a suitable format for transport
This translation includes jobs such as embedding a block as encoded text, as a binary attachment or hide it within a message using steganography.
- Extract incoming blocks
Identify incoming messages containing a possible block and extract it from the message.
- Do housekeeping on the storage layer of the transport protocol
Access protocols POP and IMAP require that messages are deleted from time to time in order to stay below the sizing quotas of an account.

We define the blending layer to work as follows when receiving messages:

1. Log arrival time (in UTC) on the transport layer.
2. Extract possible blocks.
3. Apply decryption on a suspected header block.
4. Identify header block as valid by querying the accounting.
5. Extract and decrypt subsequent blocks.
6. Pass extracted blocks and information to the routing layer.

We define the blending layer to work as follows for sending messages:

1. Assemble message as passed on by the routing layer.
2. Using the blending method specified in the routing block build an empty message.
3. Create a message decoy content.
4. Send the message to the appropriate recipient using the transport layer protocol.

There is no specification on the housekeeping part of the blending layer as this part is specific to the requirements of the account owner. We do however recommend to handle messages precisely as if the messages would be handled on an account handled by a human.

7.2.5. Routing Layer

The routing layer receives the message blocks in a decrypted and authorized form from the blending layer and processes them as follows:

- Build structure representing the block building and the appropriate block IDs.
- Schedule all Routing blocks for processing in an priority queue.
- Authorise all routing blocks ready for processing with the calculated block sizes.
- Process blocks.
- Send prepared building blocks to the Blending layer.

7.2.5.1. Block Structure

A VortexMessages' main block structure is a sequence of blocks. This block sequence starts with a header containing a symmetric key encrypted with public key of the current node and a header block containing the immediate details to decrypt the subsequent blocks (if any).

A routing block follows the header block. This routing block contains the information required for subsequent routing. According to this

block currently, valid data blocks may be assembled and sent to a different location.

The next block is the routing log block. This block protocols the routing information of a message and is somewhat similar to an onionized variant of the received headers in SMTP.

The last part of the message is a sequence of data blocks. They contain the actual data or decoy traffic.

7.2.5.2. MURBs

The protocol includes the capability of MURBs. Such MURBs enable a user to send a limited amount of times messages to an anonymous receiver. Such sending may be done without having any knowledge about its identity, the location or infrastructure he is using.

A MURB in our term is an entirely prepared routing instruction built by the recipient of a message. The sender has only the routing blocks and the instructions to assemble the initial message. It does not know the message path except for the first message hops.

As a MURB is a routing block, it generates the same pattern on the network each time a sender uses it. In order to avoid statistical visibility, we need to limit the number of uses per MURB. As a maximum number of usages, the protocol is limited to 127 usages. This number should be sufficiently sized for automated messages. A minute pattern would disappear latest after 2 hours and an hourly pattern after five days.

In order for a MURB to work, the RBB has to take care that all quotas required to the route are sufficiently sized. Such sizing is hard to foresee in some cases. An RBB may query these identities from time to time to make sure that they do not deplete. Wherever possible MURBs should be dropped in favor of multiple SURBs to avoid the dangers of MURBs.

7.3. Protocol handling

In the following sections, we outline the handling of messages we split the handling into incoming messages and outgoing messages. All handling assumes that we have a blending layer independently picking up messages as advertised in the capabilities messages.

7.3.1. Block Processing

A Block picked up in the blending layer is handled as shown in image 7.2. First we try to authenticate the message. If we are able to authenticate the message we process it and add the contained instructions to a processing workspace. Unauthenticated messages may be discarded at any point.

The processing of a sending block is triggered by a routing block in the workspace. The assembly instructions are processed in order to collect the payload blocks. Then the encryption is applied on the message and passed on to the blending layer for processing.

7.4. Sub Research Questions Roundup

We sum up the findings of the last part in regard to our three research questions and describe the next steps to be taken.

7.5. SQ1: Technologies for sending messages maintaining unlinkability against an adversary

We were unable to identify a single technology which withstands our adversary model entirely. The technologies were either too simple

to withstand an adversary (e.g., remailers), have substantial flaws affecting their reliability (e.g., most mixes and DC networks), an active adversary could easily sabotage them or do not scale.

We were able to describe a rough protocol which performs far better in almost all aspects of anonymity than the solutions described in the previous sections. This comparison was always done for the adversary model given. If we assume that the constraints of trust (only trust in sender and recipient infrastructure whereas we always have multiple recipients) are valid, we can make the following statements regarding anonymity and unlinkability:

- If an adversary identifies all involved nodes of a message and identifies all the corresponding messages and controls, all nodes except for senders and recipients nodes, he can determine message frequency, maximum message size, and message peers.
- If an adversary can identify all involved i nodes of a sending party while controlling j nodes, then he may determine a k -anonymity set whereas $k = i - j$ for the message set and a maximum message frequency.
- If an adversary is running a node, he may identify other nodes participating in the network by analyzing peer messages.

We may safely assume that a carefully crafted message within a standard message flow is therefore unlinked from the two message peers. An adversary running a node may identify over time possibly participating nodes, but he will be unable to query or use such a node without the corresponding keys. He may be able to observe such nodes, possibly view their activity but he is unable to match messages generated.

In the next section, we will further elaborate on this protocol and analyze it. We will focus on the question of whether it is possible to create a protocol which withstands threads of the rough modern world.

7.5.2. SQ3: Attack Mitigation by design

This SQ is a part of the previous question to a certain extend. We identified that reliability and trust are key factors to a protocol. Therefore, allowing single point of failures (SPOF) or extending trust over central infrastructures is deadly for an anonymizing protocol.

When elaborating the protocol in the next part we will focus on introducing designs which will prohibit actions aendangering anonymity.



7.5.1. SQ2: Attacking unlinkability and circumvention

In the previous part we identified a lot of attack schemes used to attack anonymity of a protocol or infrastructure. While not all are technical, technicality plays a mayor part. We identified:

- Anonymity attacks
 - Hotspot
 - Side channel
 - Sizing
 - Bugging
 - Tagging and tracing
 - * Peer discovering attacks
 - * Traffic flow attacks
- Availability and reliability attacks
 - Denial of service (DoS)
 - Censorship
- Non-technical Attacks
 - Credibility
 - Censorship

We idetified several possibilities to circumvent the attack classes listed above. Some of them, such as the bugging attack may be countered by design (e.g., by allowing only simple messages). Other can only be countered partially in reality (e.g., DoS attacks). We will further elaborate the protocol and then analyze the impact of every single attack to the protocol.

Receiving a MessageVortex message

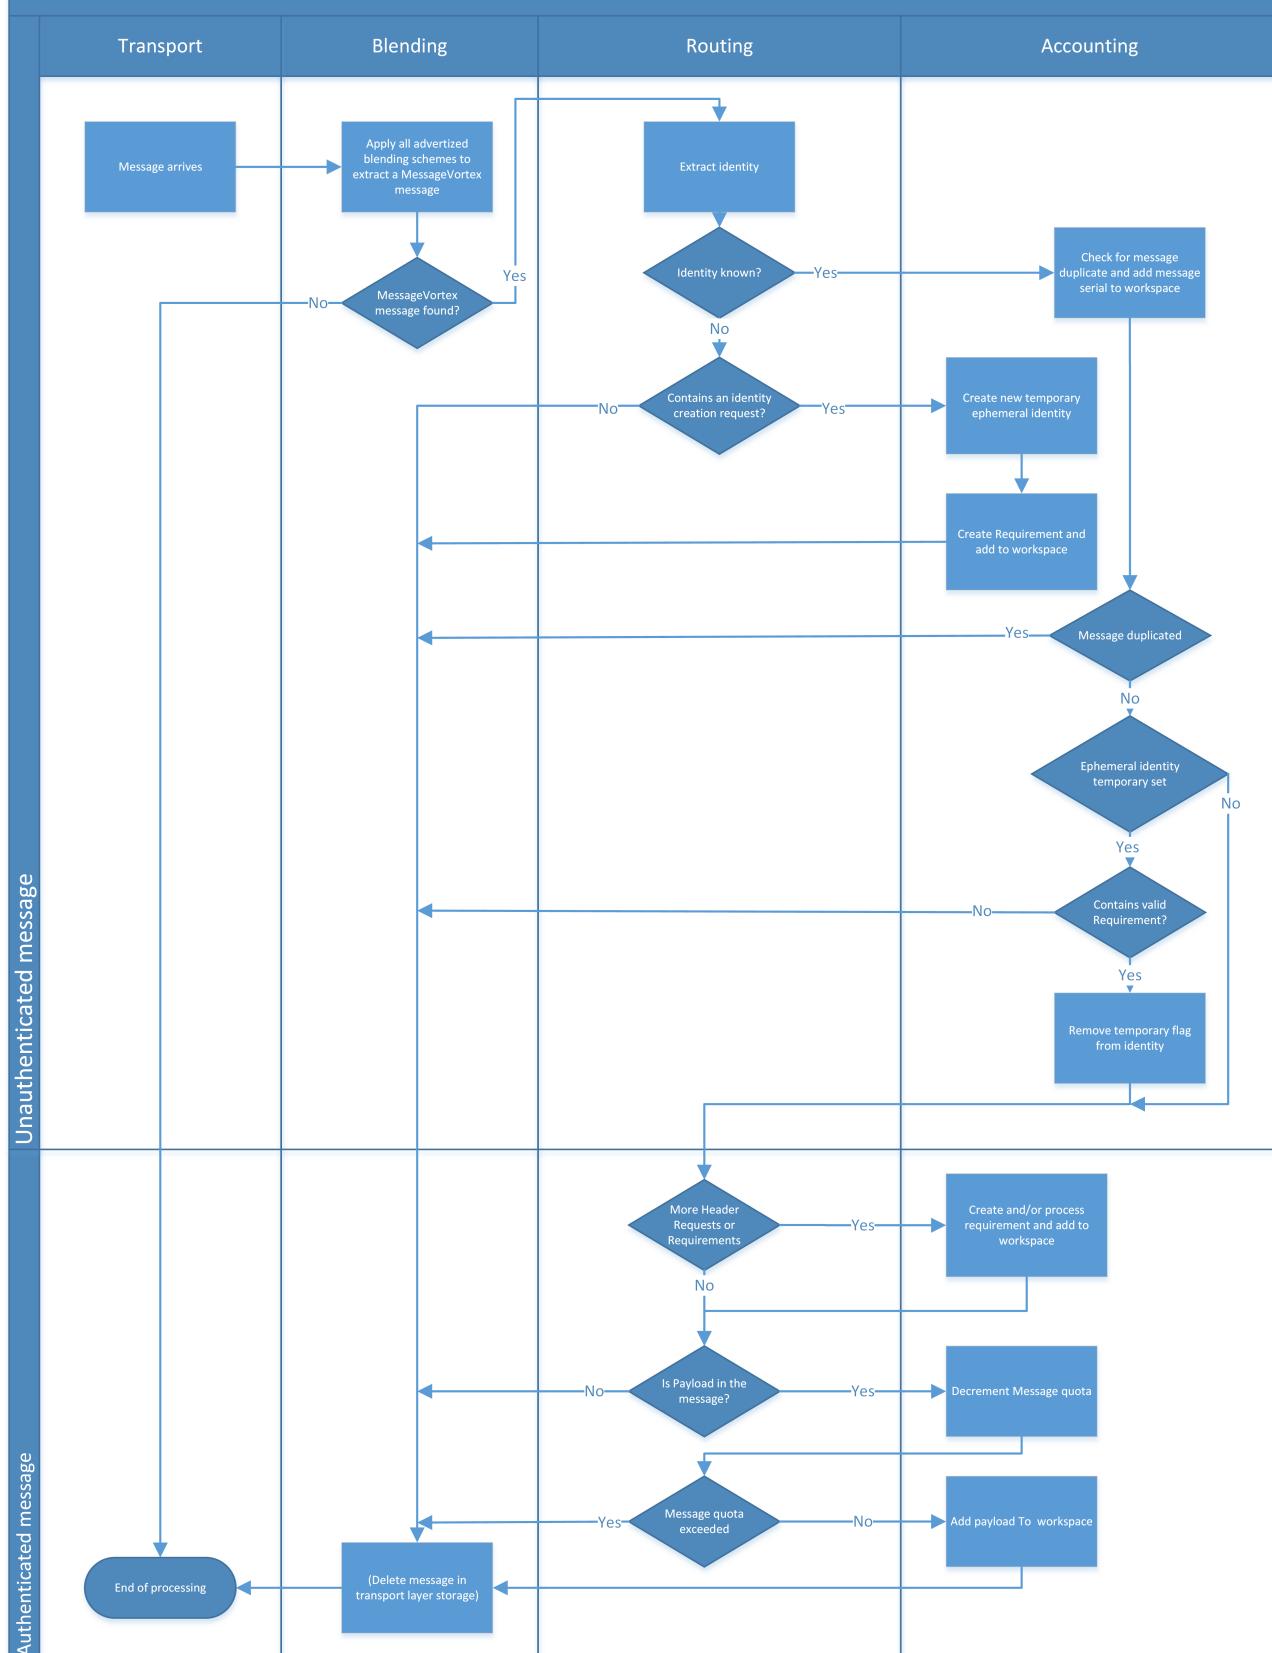


Figure 7.2.: flow diagram showing processing of incomming messages

Part III.

Results

To verify the hypothesis made in this paper, and to analyze properties of the protocol in a real world scenario a library was implemented in Java which was capable of handling all message packets and the routing stack as a whole. The following paragraphs describe the protocol developed in general as a generic approach. Appendix A gives the full ASN.1 representation of the protocol.

It is important to notice that ASN.1 has no mean to express encrypted structures. Due to this fact, we defined all encrypted fields as OCTET STRING.

The protocol is defined in ASN.1 to support onionized information in an unencrypted form. These unencrypted structures are for debugging purposes only. At no point should this possibility be used in a production environment.

The protocol described in the next chapter is independent of routing. We built a blending layer for SMTP. Layers for other protocols such as XMPP may be built similarly. The extending the protocol is done by adding blending layers and their addressing schemes.

The Protocol outlined here is the final product and has undergone many development cycles. A lot of advantageous features and capabilities such as a mechanism analogous to the SMTP received headers were dropped as they were beneficial but threatened security or anonymity.

8. Protocol Overview

The Protocol implementation is described in the RFC document in A. It contains all the necessary information to build the protocol. The RFC is published on the website <https://messagevortex.net/> and through the official IETF channels. Beside the RFC document, additional documents and references may be found there.

The MessageVortex protocol described here is an onionizing protocol for asynchronous data transfer. The protocol itself is embedded into a carrier protocol as binary information to avoid easy detection and make it hard to block traffic without blocking other legitimate traffic.

The data transferred is passed thru multiple routers. The builder of a routing block (normally the sender) decides upon the following attributes:

- Hops for the message and all decoy traffic.
- Timing behaviour respectively speed of the message.
- Decoy traffic generation.
- Set of possible recipients.

These decisions are compiled into a routing block structure which is onionized. This routing block may then be used to transfer a message of almost any size. This message is then sent to the involved mixes.

A mix may be just an intermediate station or the final target of a message. Only the recipient of a message can tell whether a message was intended for him or not. Any mix does a certain number of operations on a message. Considering the message, the timing and the operations applied a mix may extract the following pieces of information:

- IP of the sending mix.
- Size of the message received.
- Size of all processed sub blocks.
- Arrival time of a message.
- Ephemeral identity a message belongs to (ephemeral pseudonym to the routing block builder).
- Validity time of the message on the node.
- Operations applied to the message.
- Size of all blocks sent.
- IPs of the receiving mixes.

A mix always applies the operations requested in the building instructions to the received data. If this is not done properly the message may fail to transfer to its final destination.

The operations to be applied on a message are chosen in such a way that they may or may not generate decoy traffic. This guarantees that a valid message may not be identified on the operations applied to the message.

Redundancy may be built in a routing block as well as progress indication.

In the taxonomy of [94] this protocol would be classified as follows:

- Network topology: full
- Network connection direction: unidirectional
- Network connection synchronization: asynchronous
- Network symmetry roles: hybrid
- Network symmetry topology: flat
- Network symmetry decentralization: fully decentralized

- Routing network view: partial
- Routing updating: Event based
- Communication routing type: source routed¹
- Communication scheduling: fair
- Communication node selection determinism: probabilistic
- Communication node selection set: user-based
- Communication node selection selection probability: uniform
- Performance latency: high
- Performance communication mode: message-based
- Performance implementation: yes
- Performances code availability: yes
- Performance context: email, messaging

8.1. Vortex Message

The outline in figure 8.1 is a simplified view of the message block of MessageVortex.

A Vortex message is a message passed from one router to another this message may or may not contain any valuable information. Binary data represents the message content in the transfer protocol. Every router may decide for himself on the support of algorithms and embedding mechanisms.

The block structure of a Vortex message is as follows:

- header
 - Encrypted message key.
Contains symmetrical key for decryption of follow up header information and payload blocks. All symmetric keys are encrypted with a receiving host's public key.
 - Identity and "proof of work" information
This information contains requests, proof-of-work sections, and a header key.
- Encrypted payload blocks (encrypted with header key)
 - Routing blocks (encrypted with message key)
 - * Next hop timing instructions
 - * Next hop routing blocks (encrypted)
 - * Next hop header
 - * Message build instructions.
 - * Next hop header key and spec.
 - * Next hop blending instructions.
 - Payload chunk blocks

It is important to note that there are two symmetrical keys involved in encrypting and decrypting message headers. Having two keys is not a flaw in the protocol but necessary.

The first key of a Vortex message is the message key. This key is only accessible with the private key of the node receiving the message. It allows decryption of the routing blocks and the header information. The sender of a message block is therefore not able to tell if a message contains one or more routing blocks. It is important to note that no other node should have access to this information.

¹Only partially correct, as the routing block builder decides on the route. This builder is not necessarily identical to the sender.

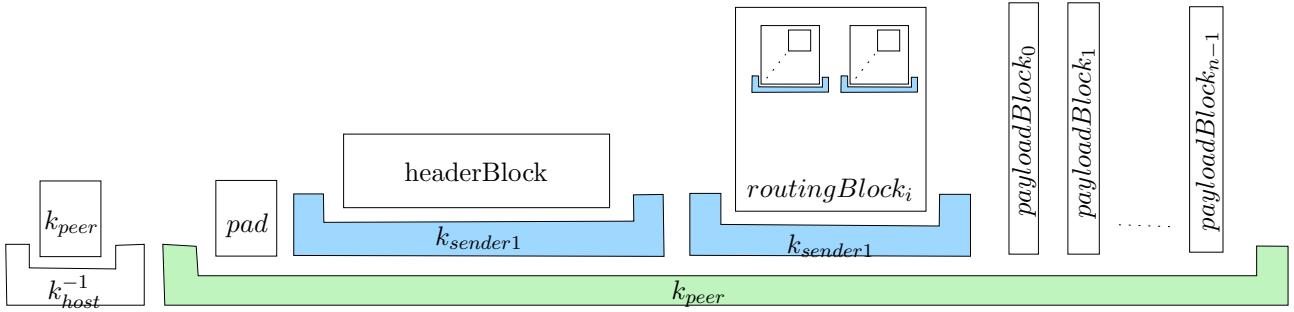


Figure 8.1.: Simplified message outline

The second key is the header key located in the encrypted header. The RBB chooses the key. This key protects the inner structure of the Message. It makes it impossible for any node except the sending or the receiving peer node to detect the inner structure of the message. Without this key, any independent observer with knowledge about the blending capabilities of a receiving node may:

- easier identify the block structure.
This remains the case regardless of whether ASN.1 or length prefixed structures are used. If the structure of a vortex Message can be easily identified the messages may be logged or dropped.
- Identify the routing block size.
The value of this information is only minimal as it only reflects the complexity of the remaining routing information indirectly.
- Identify the number of payload blocks and their respective sizes.
This is valuable information when following traffic of a message.

8.1.1. Key Usage

Several keys are being used during the life of a message. In the following section, we emphasize on the type, the usage, and their specialties.

8.1.1.1. Peer key

The peer key is a message specific symmetrical key known to two adjacent routing nodes. It is generated by the sending routing node and encrypted with the public key of the receiving nodes identity key.

8.1.1.2. Header Key

The header key is a symmetric key protecting the routing and ephemeral identity information of the message. It is prepended to the header section and protected by the identity key of the processing node.

8.1.1.3. Identity Key

The Identity key is a static, asymmetric keypair existing on a per user base used to sign messages or encrypt symmetric keys. We refer here as a user any peer participating in the message stream. Every user participating in the Vortex network requires at least one key pair.

Depending on the use-case (e.g., unlinkable signatures or scalable security) a user may use multiple key pairs at the same time.

8.1.1.4. Ephemeral Identity Key

An ephemeral identity key identifies the sender to a processing host. The ephemeral identity key must be handled in such a way that it is not linkable. It is mainly used to process accounting information.

8.1.2. VortexMessage Processing

A node requires FP arithmetic to process messages. To make sure that all implementations on all platforms behave the same we always use arithmetic as specified in [1].

8.1.2.1. Receiving Messages

All messages are processed as follows:

1. Extract length prefixed message key from a block. A node aborts the operation if a block is invalid or not decryptable.
2. Decrypt message key with hosts private key → message key.
3. Extract length prefixed header message. Abort if too big.
4. Decrypt header block with decrypted message key. Abort if not decryptable or invalid block.
 - Verify identity
 - Check quotas (if any)
 - Extract header key
 - Extract requests (if any)
 - Check replays (if any)
5. Decide if message should be processed. If not abort here.
6. Decrypt main block with message key
7. Extract payload chunks.
8. decrypt routing blocks with header key.
9. Check backref secrets.

Every routing block creates a new message.

The payload of a message is generated according to instructions in the routing block. Timing instructions are relative to the arrival time of the message containing the routing block. This relative timing is necessary as a routing block may be used multiple times (see section 7.2.5.2).

A vortex message may be composed not earlier than a “validFrom” expressed in the respective routing block.

8.1.2.2. Building and Sending Messages

Any time after a routing block reaches “validFrom” and before the “validTo” is reached processing of a routing block is triggered. An implementation should when triggering a routing block for process-

ing trigger as many routing blocks as possible to make traffic analysis harder.

The message is then built as follows:

1. Check if all building instructions can be fulfilled due to their prerequisites.
2. Build requested payload blocks.
3. Extract peer key from routing block.
4. Extract headerBlock from routing block.
5. Extract (sender key encrypted) nextHop routing blocks from routing block.
6. Encrypt message using the peer key.
7. Update accounting figures.
8. Blend into transport layer according to spec and send message.

8.2. Protocol design

In this section, we emphasize on the protocol blocks. These blocks are extracted from the blending layer and passed to the routing layer. A Vortex message is split into two main parts. The header block and the main block. The header block is divided into the two subparts "headerKey" and "identity block". Although these blocks are described in ?? as ASN.1 encoded structures they are not. In the message, they are length-prefixed fields.

In reality the structure of a message shown in 8.1 is as follows:

- mPrefix size as 16 bit unsigned int (big endian)
- mPrefix bytes
- mainBlock size as 32 bit unsigned int (big endian)
- mainBlock bytes

The reason for not using ASN.1 encoding is that it might be possible to identify the unencrypted message on the transport layer as Vortex message due to the ASN.1 structure. By switching to a length-prefixed structure, we make it impossible for an adversary to identify the unencrypted structures of a vortex message.

8.2.1. Header block

The header block contains the identity and should contain all information required to decide whether subsequent blocks of the message should be handled.

The header block contains the following data:

- A symmetric header key (header key)
This key is encrypted with the receiving identities public key. This key guarantees efficient handling of the header data. As the number of bytes in the header is limited a receiving node may assign all subsequent work to a known identity or discard it.
- An identity block (identityBlock)
This block contains some data which reflects the identity of the sender and the use of this (and subsequent blocks).
 - sending ephemeral identity public key (identityKey)
 - serial
 - maximum number of replays for the serial for this identity
 - Minimum number of seconds for replay protection.
 - validity period for this block (in seconds)
 - Symmetric decryption key for subsequent blocks
 - Chain secret for the forwarding block

If specified the specified secret should be named in all subsequent blocks.

- Protocol requests to this node
 - Identifier and padding for proof of work
- An identity signature (identitySignature)
Contains a signed hash (hash type is specified in identityBlock.hash) with the senders private key.

8.2.1.1. Ephemeral Identity

The identity in this header block is an ephemeral identity. It exists for a limited amount of time (recommended <90d). Creating a new ephemeral identity is done with an identity request. This identity is mapped to all accounting figures.

8.2.1.2. Requests

Requests are always embedded in a header block. All requests are answered with a provided MURB (which is recommended to have a maximum replay value of 1).

There are several header requests defined:

newIdentity request: This request may be answered with either a reject or a puzzle which is required to solve. Solving the puzzle results in the creation of the identity on the node. Identities may be rejected by the node for various reasons:

- The node is not accepting newIdentity requests
- The identity is already taken.
- The identity is not strong enough (it should be a longer key).
- The used encryption scheme is not supported by the node.

An identity may be rejected if the wrong types of keys and key sizes are used. However, it must accept at least the key types and sizes it uses for its own identity.

If an identity is rejected the request may not be replayed by the same identity again. A sending party must generate a new identity for a new request.

This request should be by far the most expensive request. It must at any time be more expensive to request a new identity compared to raise the quota of an existing one.

An identity on this level is always ephemeral and expires after a given period. An identity may not be prolonged for security reasons. This opposes problems when using reply blocks. A reply block can only be valid as long as all included identities are valid. To counter this weakness without weakening security, a ctxless-NewIdentity block may be sent to a reply block owner providing him with a new reply block.

queryPeer request: A peer request is a request for publicly known Vortex nodes. This request does offer the possibility of harvesting the Vortex network. To counter this, the following limitations should apply:

- The request should be very costly
- Only nodes advertising themselves as "public" are disclosed.
- Only one or two nodes should be disclosed upon request.
- The number of requests should be limited per identity.
- A node should always pick random nodes out of a 5% pool of known Vortex addresses.

These measures limit the effectiveness of harvesting attacks while giving any node the possibility of bootstrapping itself.

- queryCapability request:
This request is the only request answered as a clear-text request. To minimize probing possibilities, this request should be only answered if the node owner agrees or generally by public nodes.
 - messageQuota request:
This request raises the number of routing blocks which may be processed for an identity. A node may reject this request depending on the load of the node, personal preferences, or because this identity causes too much traffic.

It is typically answered for all valid identities only. The node may answer it for recently expired identities. It is however not recommended to send a reply to an unknown identity as this behavior might be used for probing of a node.
 - transferQuota request:
This request raises the number of bytes which may be transferred for an identity. A node may reject this request depending on the load of the node, personal preferences, or because this identity causes too much traffic.

It is typically answered for all valid identities only. The node may answer it for recently expired identities. It is however not recommended to send a reply to an unknown identity as this behavior might be used for probing of a node.
 - queryQuota request:
This request instructs the node to send information about the given identity.

It is typically answered for all valid identities only. The node may answer it for recently expired identities. It is however not recommended to send a reply to an unknown identity as this behavior might be used for probing of a node.
- 8.2.1.3. Replies to Clear Text Requests**
- It is up to the decision of the node whether it wants to answer a clear-text request or not. Recommended for this behavior is to discard plain text requests.
- This should only be a problem when bootstrapping or when adding new identities to their address book.
- 8.2.2. Main block**
- The main two block types are routing blocks and payload blocks.
- Routing blocks contain an onionised route chosen by the builder of the routing blocks and may contain instructions for building a message.
- Payload blocks contain an encrypted message, parts of it or decoy traffic.
- 8.2.2.1. Routing Blocks**
- Routing blocks contain the following information:
- The node specification of the next hop (requires a full identity; may be missing if there is no next hop)
 - Purpose of routing block (This may be normal/statusOK/statusError)
 - The moment of processing as a range in seconds since the time of arrival.
 - Retention time in seconds since the time of arrival.
 - The identity block for the next hop
 - The routing block for the next hop
 - Payload ID to be included
 - Payload building instructions (optional; only if MURB)
 - A signing key for the payload (optional; only if MURB)
- 8.2.2.2. Payload Building Instructions**
- Payload is being built right before sending a block (processing a routing block). The building instructions are built as follows:
- $$srcIDs \xrightarrow{\text{build operation}} targetIDs$$
- Every node maintains a list of received blocks including their IDs and building instructions for them. Any node must keep blocks and building instructions during the whole lifetime of a routing block. It may keep it longer. If a conflicting building instruction arrives, all conflicting older rules are removed. Building instructions are always kept on a per-identity base. It is not possible to reference building instructions of a foreign identity.
- splitPayload and mergePayload:
Split a message block into two parts of variable size. The size of the first chunk is expressed either absolute or in percent of the original block size.
 - encryptPayload and decryptPayload:
Encrypts and decrypts a payload chunk block with a given symmetric key and algorithm. Please note that this operation changes the size of a message due to the key size and the padding.
 - addRedundancy and removeRedundancy:
Splits a payload block into uniform chunks and adds redundancy information or removes it respectively.
- All the operations specified above have in common that they may be applied on decoy traffic as well as on real message data. The size of incoming and outgoing blocks do not relate as messages are increasing the size as well as decreasing in size.
- 8.2.2.3. Reply Block**
- Reply blocks are blocks embedded into payload blocks. There are very few reply blocks necessary. Unlike normal data blocks, these messages are not accounted in quotas on the node generating the reply block.
- It is up to the node to decide whether it wants to answer a request or not.
- Replies are being built as ordinary message blocks. To identify a Vortex message, it must begin with the string “special” encoded in ASCII followed by a valid reply block structure. No additional bytes may be appended. Blocks with additional data should be discarded. To express a block starting with “special” the token is repeated prefixed with a backslash.
- replyCapability block:
The reply contains the following information:
 - Supported Vortex transports including blending specifications.
 - Maximum quota.
 - Supported ciphers and hashes.
 - Maximum number of simultaneous valid header serials.
 - Maximum number of simultaneous valid building operations.
 - Maximum identity lifespan in seconds.
- It lists the capabilities a node advertises to the public.
- requirement block:
Requirement blocks denote a requirement a requester has to fulfill before a previously sent request is processed. Usually, proof of work puzzles needs to be solved in order to allow

a request to be processed. Alternatively, a commercial supplier may request payment in a digital currency. Currently, supported digital currencies are Bitcoin, Ethereum, and ZCash.

- **replyStatus block:**

General answer block which is signaling a status. The block is limited in length in order to minimize misuse of bandwidth. The Block contains the following data:

- Three digit status number
- Sending node identity
- Status text (optional)
- Affected block ID (optional)

- **ctxlessNewidentity block:**

This block may be used to signal the change of identity to a recipient. As this request is signed with the old known identity, no means should exist to hijack such an identity.

This request contains:

- old Identity
- new Identity
- Signature (with old identity)

This message may arrive at any time. Any recipient might decide on its own whether it wants to accept the update or not.

A node should not accept an identity update if the strength of the new identity has been lowered compared to the old identity. A client may make a difference on the fact whether the transport layer address or the key is exchanged.

8.2.2.4. payload Block

The payload block contains the actual message or decoy traffic. Since this block is heavily modified in the course of the transport of the block, it is built simplistically.

It contains:

- A block ID
- The payload data
- A payload signature (optional; required for vortex blocks)

It is essential to understand that a block may be exchanged at any time by an evil node. This, however, does not affect the safety on the message. Any tagging introduced at this point does invalidate the stream. The output after the next hop is entirely unpredictable.

8.2.3. Accounting

Accounting covers several purposes in this system:

- It makes the system costly for nodes sending bulk messages.
- It protects from replaying.
- It offers an ephemeral identity with a limited lifespan.

As accounting data may be used to overfill a nodes accounting tables, special care has been taken in order to limit the number of information which has to be maintained per identity. We furthermore tried to minimize the risk that someone might occupy the accounting memory of a node without costs. Furthermore, any node may cancel an illicit behaving identity at any time.

It is essential that the accounting described here is for mixes. A node assembling messages needs to keep a lot more information.

8.2.3.1. Accounting Data of an Ephemeral Identity

For an ephemeral identity, very little information has to be kept. This identity expires after a certain amount of time. The maximum time

may be queried with a capability request. The choice of Encryption type and key size is left to the node requesting the identity. However, a node may reject the request if it considers the identity to be unsafe, it has no more capacity for new identities, or if it would create an identity clash on the current node.

The following data has to be kept per identity:

- **ID** $\langle pubKey, expiry, messagesLeft, bytesLeft \rangle$
- **Puzz[]** $\langle expiry, request, puzzle \rangle$
- **Build[]** $\langle expiry, targetID, buildOperation \rangle$

The **ID** tuple is the longest living tuple. It reflects an ephemeral identity and exists as long as the current identity is valid. All other tuples are short living lists. As the server decides if he accepts new identities or not the size of this data is controllable.

Puzz[] is a list of not yet solved puzzles of this user. Every puzzle has a relatively short lifespan (typically below 1d). As the server may decide how many outstanding puzzles he accepts he controls the size of this.

Build[] is a list of building instructions for a message. The server may decide at any time to reject a too big list or a too long living message. Thus he may control the size of this list as well. However, controlling the size of this list will most likely result in the non-delivery of a message.

8.2.3.2. Accounting Data of a “header” Block

All accounting data of a header block is connected to the respective identity. All header blocks do expire latest with their respective identity. The following data has to be kept on a mix:

- **HL** $\langle identity, serial, remainingReplays, expiry \rangle$
This is the long term header list. It lists all headers of an ephemeral identity, and how many replays are left until the requests are rejected.
- **HS** $\langle identity, serial, arrivalTime, hash, duration \rangle$
This is the short term replay protection. It protects a block with the same hash from being replayed.

8.2.3.3. Accounting Data of a “payload” Block

All accounting data is connected to a header block and expires latest with its header block. The expiry time is, however, relative to the arrival time of the header block.

- **PL** $\langle identity, serial, id, hash, expiry, content \rangle$

The *content* may either be stored as the content or as the building instructions of the content as it is not always clear what block will be required for sending. A block may be defined for diagnostic paths only.

8.2.4. VortexMessage Operations

All operations are expressed as described in section 8.2.2.2. The following sections give important details about the implementation of the operations.

8.2.4.1. VortexMessage SplitPayload Operation

The splitPayload operation splits a payload block into two chunks of different or equal sizes. The parameters for this operation are:

- source payload block pb_1
- fraction f
A floating-point number which is describing the size of the first chunk. If the fraction is “1.0”, then the whole payload is transferred to the second target chunk

If $\text{len}(pb_1)$ expresses the size of a payloadblock called pb_1 in bytes then the two resulting blocks of the SpitPayload Operation pb_2 and pb_3 have to follow the following rules:

$$\text{split}(f, pb_1) = \langle pb_1, pb_2 \rangle \quad (8.1)$$

$$pb_1.\text{startsWith}(pb_2) \quad (8.2)$$

$$pb_1.\text{endsWith}(pb_3) \quad (8.3)$$

$$\text{len}(pb_2) = \text{floor}(\text{len}(pb_1) \cdot f) \quad (8.4)$$

$$\text{len}(pb_1) = \text{len}(pb_2) + \text{len}(pb_3) \quad (8.5)$$

8.2.4.2. VortexMessage MergePayload Operation

The mergePayload operation combines two payload blocks into one. The parameters for this operation are:

- first source payload block pb_1
- second source payload block pb_2

If $\text{len}(pb)$ expresses the size of a payloadblock called pb in bytes then resulting block of the MergePayload Operation pb_3 have to follow the following rules:

$$\text{merge}(pb_1, pb_2) = pb_3 \quad (8.6)$$

$$pb_3.\text{startsWith}(pb_1) \quad (8.7)$$

$$pb_3.\text{endsWith}(pb_2) \quad (8.8)$$

$$\text{len}(pb_3) = \text{len}(pb_1) + \text{len}(pb_2) \quad (8.9)$$

8.2.4.3. VortexMessage XorMergePayload Operation

The xorSplitPayload operation forks payload block into two payload blocks. The parameters for this operation are:

- First source payload block pb_1
- Second source payload block pb_2

If $\text{len}(pb)$ expresses the size of a payloadblock called pb in bytes then resulting block of the xorMergePayload Operation pb_3 have to follow the following rules:

$$\text{xorMerge}(pb_1, pb_2) = pb_3 \quad (8.10)$$

$$pb_3 = pb_1 \oplus pb_2 \quad (8.11)$$

$$\text{len}(pb_3) = \max(\text{len}(pb_1), \text{len}(pb_2)) \quad (8.12)$$

8.2.4.4. VortexMessage EncryptPayload Operation

The encryptPayload operation encrypts a payload block pb_1 symmetrically resulting in a block pb_2 . The length of block pb_2 may vary according to mode and padding chosen. The parameters for this operation are:

- Source payload block pb_1
- Encryption specification $spec$
- Symmetric key k

The operation follows the following rules (please note section 2.1 for notation):

$$\text{encrypt}(pb_1, spec, k) = pb_2 \quad (8.13)$$

$$pb_2 = E_{\text{spec}}^{K_a}(pb_1) \quad (8.14)$$

$$\text{len}(pb_2) \geq \text{len}(pb_1) \quad (8.15)$$

8.2.4.5. VortexMessage DecryptPayload Operation

The decryptPayload operation decrypts a payload block pb_1 symmetrically resulting in a block pb_2 . The length of block pb_2 may vary according to mode and padding chosen. The parameters for this operation are:

- Source payload block pb_1
- Decryption specification $spec$
- Symmetric key k

The operation follows the following rules (please note section 2.1 for notation):

$$\text{decrypt}(pb_1, spec, k) = pb_2 \quad (8.16)$$

$$pb_2 = D_{\text{spec}}^{K_a}(pb_1) \quad (8.17)$$

$$\text{len}(pb_2) \leq \text{len}(pb_1) \quad (8.18)$$

8.2.4.6. VortexMessage addRedundancy and removeRedundancy Operation

These operations build the core of the mixing operations. The operation allows to add to a message redundancy information or to rebuild a block from a chosen set of information.

The Operation itself is shown in 8.2. It may be subdivided into the

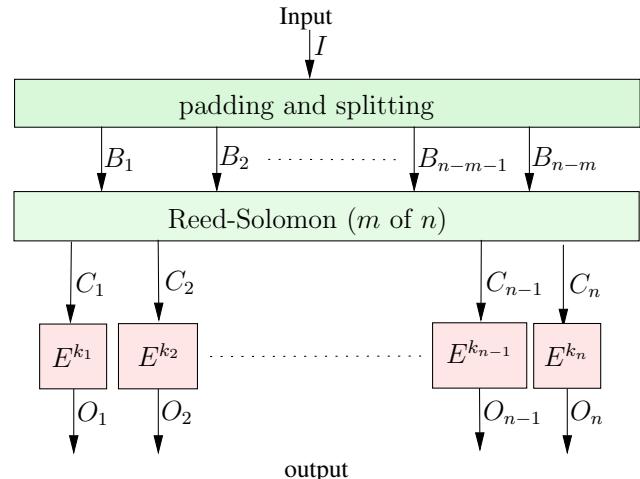


Figure 8.2.: Outline of the addRedundancy operation

following operations:

- Pad the original message block in such a way, that all resulting blocks are a multiple of the block size of the encrypting cipher.
- Apply a Reed Solomon operation in a given GF space with a vanderMonde matrix.
- Encrypt all resulting blocks with unpadded, symmetrical encryption.

8.3. VortexMessage Request Processing

Vortex message requests allow a Vortex node to gain knowledge about the Vortex network and, create new identities. A request may contain either a request for information such as current quota or capabilities of the router. It may contain a request for a new identity, or it may contain a request for raising the quotas. The following sections explain the different kinds of requests.

8.3.1. VortexMessage Requests

These requests are contained in the header portion of a Vortex message. These requests are purely for bootstrapping and maintaining the quota system and for requesting network capability.

The request information is defined in section 8.2.1.2. For more information about the exact binary representation of all blocks and data see chapter 10.

Any node decides on its own what type of requests are being answered.

A node not replying to clear text request is called a “stealth node” (see 9.4.2.2). Such a stealth node discloses itself only to participants who do already know at least the public key of the node. This usually means that they have “earned” this information by issuing a queryPeer request to another node and obtaining the information did already generate costs to the sender.

A node only replying to a fixed set of identities (in that specific case they are not ephemeral) is called a “hidden node” (see section 9.4.2.3).

It is recommended that unencrypted requests are not answered. A node may decide to answer unencrypted queryCapability requests in order to enable clients to bootstrap without (or with a minimal) network knowledge.

If a message contains n requests in a header block, it must supply at one reply blocks at the beginning of the routing block list. All reply blocks are concatenated and sent using the reply block. If the first block in the routing block list is not a reply block, the request will fail.

8.3.1.1. QueryCapability Request

This request is primarily used to initialize a conversation with a node. It contains valuable information about the capability of the node as well as information about the embedding supported or the encryption. A node may or may not reply to queryCapability requests. Doing so confirms the node to be participating in the vortex network.

The only valid reply is a replyCapability message in encrypted form.

8.3.1.2. NewIdentity Request

If this request is accepted, it generates a new ephemeral identity. The identity itself is stored in the header fields. The standard behavior is to reply with a replyPuzzleRequired block.

This request generates a temporary, ephemeral identity for the limited time denoted in the validity field of the reply block. No quota is assigned during that phase. As soon as the identity offers a valid puzzle solution, the requested quota is assigned, and the identity may be used for subsequent requests.

If a puzzle is not solved within the given time, the temporary identity may be deleted. A node should not accept a solved puzzle after the given duration.

Request with a too high message or transfer quota should not be answered with a replyPuzzleRequired block containing a zero-length puzzle.

8.3.1.3. QueryPeer Request

As outlined in section 8.2.1.2 this request should be very costly, and harvesting of known addresses should be hard. Furthermore, this request should always disclose the nodes from a fixed subset of the nodes known to the queried mix. This maximizes the effort to harvest participating nodes.

It is at the same time worth mentioning that this limit may oppose a thread that traffic is concentrated on similar nodes within participating nodes using the same initial set of known addresses to bootstrap. This because if using the same node to bootstrap for multiple

participants within a group results in peer knowledge which is similar. They are thus resulting in a similar network.

Participants belonging to more than one group will evolve as their different peer partners will result in different anonymity sets over time even when applying precisely the same reproducible rules.

8.3.1.4. TransferQuota, MessageQuota, and QueryQuota Request

This request may be accepted by a node if and only if the sender is a valid identity. It may be accepted even for a temporary identity.

The transfer quota offers the capability to raise the number of bytes an identity may transfer. This quota is increased upon request by the ephemeral identity at any time. It is up to the owner of an ephemeral identity and the node using the identity to decide whether an identity may be kept or not respectively its quotas raised.

The Message Quota is a quota not limiting the number of bytes but the number of messages. As every message generates accounting overhead this number has to be limited as well. There are constraints similar to transferQuota when raising this value.

The queryQuota request enables the owner of an ephemeral identity to query the current amount of remaining messages respectively bytes.

8.3.2. VortexMessage Reply Blocks

Reply blocks are as outlined in section 8.2.2.3 prefixed payload blocks.

8.3.2.1. ReplyCapability block

The replyCapabilityBlock is the reply block to a queryCapability Request. The information provided here is outlined in section 8.2.2.3. It is important to note that this block is even when requested in plain is always onionized and thus unreadable for third parties.

A node may offer different capabilities to known identities than to anonymous clear-text requests.

8.3.2.2. replyPuzzleRequired block

The replyPuzzleRequired block is the block reflecting the payment for a requested operation such as newIdentity, queryPeer, transferQuota, or messageQuota request.

Every puzzle block will create an accounting entry as outlined in section 8.2.3.

A node may reject an operation for any reason including exceeding an unnatural amount of outstanding puzzles.

A reply containing a null length puzzle means that the requested operation is rejected.

9. Vortex Prerequisites

9.1. Hardware

No special Hardware is required for running Vortex nodes. The capabilities of Vortex are designed in such a way that ordinary mobile phones may act as vortex nodes. It is however recommended to have a node always connected to the internet. A mobile phone may disconnect from time to time based on the availability of the network. For our experiments, we use a RaspberryPi Version 1. It is however recommended to use a faster, newer model due to the memory requirements of the proof of work algorithm.

The hardware currently requires a network interface and a fully functional JSE VM to run the reference implementation.

9.2. Addresses



A Vortex address is built as follows: `vortexAddress = <transport>:<address>!<publicKey>`

To allow storage of Vortex addresses in standard messaging programs such as Outlook or Thunderbird. We define an alternate representation `encodedVortexAddress = base64(<transport>:<address>).<publicKey> @localhost`.

The suffix “@localhost” makes sure that any non-participating server does not route a message intended for Vortex.

The main downside of vortex addresses is that they are no longer readable by a human. The main reason for this is the public key which is required. We may abstract this further by allowing clear-text requests on the primary email address for the public key. The vortex account must then answer such requests with the valid Vortex address.

9.2.1. Public Key Encoding in Address Representation

The public key of an address is encoded as follows:

1. The asymmetric key is encoded as specified in the AsymmetricKey in ASN.1
2. The ASN.1 representation is then encoded using BASE64

9.3. Transport Layers

As transport layer protocols we specified the protocols SMTP and XMMP as valid transport layers. In the following sections, we specify the transport properties for these protocols.

9.3.1. Embedding Spec

Messages are always encoded as attachments in SMTP and XMMP.

If not further specified by the receiving node an attachment should be the encoded message.

Valid properties may be:

- `plainEncoding = "("plain : " <numberOfBytesOfOffset > [,< numberOfBytesOfOffset >]*")"`
- `F5Encoding = "(F5 : " < passwordString > [,< PasswordString >]*")"`

9.4. Client

We did not create a Vortex client for sending messages. Instead, we used a standard Thunderbird email client pointing to a local SMTP and IMAP Server provided by a Vortex proxy. On the SMTP side Vortex does encapsulate where possible mails into a Vortex message and builds an automated route to the recipient. The SMTP part of vortex may be used to encapsulate all messages automatically with a known Vortex identity into a vortex message. On the IMAP side, it merges a local Vortex message store with the standard Email repository building a combined view.

Using Vortex like this offers us the advantages of a known client with the anonymity Vortex offers.

This has certain downsides. At the moment the vortex client has only a local store. This makes it impossible to handle multiple simultaneously connected clients to use Vortex. This is however just a lack of the current implementation and not of the protocol itself as we may safely use an IMAP storage for storing vortex mails centrally.

9.4.1. Vortex Accounts

By definition, any transport layer address may represent a Vortex identity. This fact may make people believe that their current email or jabber address is suitable as Vortex address. This is technically perfectly true, but should not be done for the following reasons:

- If an address is identified as a vortex address it may be blocked (directly or indirectly) by an adversary.
- If a vortex node is malfunctioning non-vortex messages should remain unaffected. This is more likely to happen if non-Vortex messages are kept in a separate account.
- If a user wants no longer to maintain its Vortex address (hopefully there will be better technology in future) he may give up his Vortex accounts. If he had been using his normal messaging account for Vortex, he would receive mixing messages which he has to filter in the future.

9.4.2. Vortex Node Types

9.4.2.1. Public Vortex Node

Public nodes are nodes, which advertise themselves as normal mixes. Just as all nodes they may be an endpoint or a mix. Typically they accept all requests exactly as outlined in 10.1. As an immediate result of the publicly available information about such a node, the owner may be the target of our adversary. Pressure may be opposed to close down such a node. However, since we do not need a specific account, we may safely close down one transport account and open up a different one. This is even possible on the same infrastructure. To notify other users of the move and remain reachable, a user may send a newIdentity request using the old identity. That way, we can guarantee, that only the holder of the old address may request an address update.

9.4.2.2. Stealth Vortex Node

This node does not answer any clear text requests. As an immediate result, the node is only usable by other nodes knowing the public key of this node. The node is therefore on a known secret base only reachable.

9.4.2.3. Hidden Vortex Node

A hidden node is a special form to a stealth node. It has a set of preset identities. Only these entities are processed. This behavior has certain drawbacks. An identity may not be changed. As an immediate result, traffic may become pseudonymity. To counter this effect at least partially we may use the same local identity for multiple senders. The sender is only one of all senders knowing the private key of an identity.

10. MessageVortex - Transport Independent Messaging anonymous to 3rd Parties

This approach is different from all approaches discussed previously. Unlike them, we put complete distrust into the infrastructure being used. Furthermore, we do not rely on a custom server infrastructure on the internet. Instead, we take advantage of the availability of internet-connected devices such as mobile phones, tablets, or even commonly available SoC such as RaspberryPi or similar. It is still tough to maintain a server on the internet. Considering the vastly growing amount of automated attacks carried out against internet-connected servers, it is not advisable or realistic to assume that a future user of this system owns either a server or connects to a service which is offering anonymizing services. These infrastructures would be susceptible to monitoring or even banning. Instead, we take a different approach.

We use common messaging protocols as transport layers and connect to them using the respective client protocols. The actual mixes are operated by the users on their “always connected” devices. Such a system is far less reliable than a traditionally run server as this hardware is typically cheap and generally connected to the internet using a bandwidth shared media.

The basic idea is that a client generates all traffic (including decoy and diagnosis) by itself. It defines the routes a message takes through the mixes and decides which targets are receiving dummy traffic at the same time. In such a system, even when possessing all the nodes routing the traffic (without the endpoints) an anonymity set of k (whereas the sender defines the size of k) is guaranteed.

As decoy traffic is generated with the same operations as the real content is split it is impossible for an adversary running a node to determine whether he is generating noise or processing the real message. All nodes, regardless of endpoint or mix implement the same logic and fulfill the same functions which make it impossible to determine the function. Exit nodes as in Tor or similar systems do not exist.

10.1. Accounting

The Accounting layer maintains all local identities and controls the overall load to the system. He processes requests from an ephemeral identity and generates replies to these requests.

In table 10.1 we show under what circumstances a reply to a header request should be sent. The capitalized words MAY, MUST, SHOULD and SHOULD NOT are used as defined in RFC2119[11].

10.2. Routing

Routing of a message is simple. A workspace of an ephemeral identity contains routing blocks and payload blocks. A routing block has an active time window. Anytime during that time window, a routing layer processes the routing instructions contained in the assembly operations of the routing block. If successful the message will be sent using the specified blending layer and target address.

10.3. Blending layer

Blending layer must be crafted carefully. A blending layer is responsible for the sensible content generation of the transport media plus embedding a VortexMessage into the transport layer according to specs provided by the original sender.

The original sender has no control over the plain text messages to avoid possibilities of sending targeted messages over the transport layer using MessageVortex. This differentiates MessageVortex from other systems having “exit nodes” such as Tor.

10.3.1. Plain Inclusion

The data stream has of the MessageVortex protocol has no structure visible from the outside. This property allows embedding as structureless information in files with a similar entropy. We did an analysis of common file formats on the internet to figure out which file format is suitable for this type of inclusion.

It is essential to understand that this is a frail form of information hiding. A human observer may easily tell “real” data from “broken” data apart. A human is not able to tell whether a file is severely broken or contains a VortexMessage.

10.3.1.1. File Type Candidates

We were unable to find any scientific data regarding what type of traffic or attachment is common on the internet. We, therefore, tried to analyze mail logs (SMTP) of a mail provider. We were scanning 567594 emails for attachment properties after the spam elimination queue. 16.5% of all scanned messages had an attachment. The top 20 attachment types distributions are shown in table 10.2.

Type	%
image/jpeg	27.4
application/ms-tnef	13.7
image/png	13.3
application/pdf	10.7
image/gif	7.4
application/x-pkcs7-signature	5.4
message/rfc822	7.0
application/msword	3.1
application/octet-stream	3.0
application/pkcs7-signature	2.3
application/vnd....wordprocessingml.document	1.4
message/disposition-notification	1.1
application/vnd.ms-excel	0.8
application/vnd....spreadsheetml.sheet	0.6
application/zip	0.5
application/x-zip-compressed	0.5
image/jpeg	0.4
application/pkcs7-mime	0.4
video/mp4	0.4
text/calendar	0.4

Table 10.2.: Distribution of top 20 attachment types

As expected the number of images within mail was very high (\approx 50%). Unfortunately, we were unable to analyze the content of ms-tnef attachments retrospectively. It seems that based on these figures information hiding within images in email traffic is a good choice.

10.4. Considerations for Building Messages

In a worst-case scenario, we assume that an adversary is controlling most of the network utilized for anonymization. While this is not necessarily a problem, it allows an adversary to track a message while agents are being used under his control. So for simplicity

Criteria Request	unknown identity; cleartext	unknown identity; encrypted	expired identity; encrypted	known identity; encrypted
newIdentity	SHOULD NOT MUST NOT	MAY MUST NOT MAY	Invalid (Error) MAY MUST	Invalid (Error) MAY MUST
queryPeer	SHOULD NOT	MUST NOT MAY	MAY	MUST
queryCapability	MUST NOT	MUST NOT MAY	MAY	MUST
messageQuota	MUST NOT	MUST NOT	MAY	MUST
transferQuota				

Table 10.1.: Requests and the applicable criteria for replies

and as a worst case assumption we always assume that an adversary has perfect knowledge of an associated message flow. This is, however, a worst-case scenario. One missing agent disconnects the whole chain and as messages are no longer traceable.

10.4.1. Ephemeral identities

Any VortexMessage sender may maintain one or more ephemeral identities per node. These identities might be active in parallel, overlapping, or even with interruptions. A routing block building node is advised to select multiple trustworthy nodes (such as known endpoints) and additionally some publicly available nodes or nodes obtained by bootstrapping. Those nodes are not trustworthy and may be chosen from a list of different networks.

10.4.2. Timing of messages

Messages are flowing in a timed manner through the network. As a routing block builder has to take into account that potential routing mechanisms of the transport layer consume time, a message is delayed in each hop. The routing block builder controls the timing and duration of delivery. Depending on the number of hops for the longest path of the message and the delay windows on every hop the total message has a delay which is controllable by the routing block builder.

10.4.3. Diagnostics

To diagnose the flow of a message any part of the message may be sent directly or indirectly back to the routing block builder. This allows him to judge upon the message progress and whether nodes are well behaving or not.

There is no fingerprinting operation available for making such a diagnosis. Such operations would make the traffic identifiable as diagnostic traffic.

10.4.3.1. Implicit Diagnostic

When a message contains a routing block sending any parts back to the routing block builder, we call this implicit diagnostic. Any block built by the addRedundancy function may be seen as a kind of fingerprint over the whole message. A block sent back to the originating node may, therefore, reflect the message state up to this point and the way back.

10.4.3.2. On-Demand Diagnostic

Whenever a message fails or suspected fails, a new routing block may be composed picking up parts of the message in workspaces anywhere within the participating nodes. This kind of diagnostic we call On-Demand diagnostic.

On-demand diagnostic allows error conditions identified by implicit diagnostic to be tracked and narrowed down to the first offending node.

10.5. Verification of requirements

In the previous sections, we identified a list of requirements.

In the following subsections, we will iterate through all requirements and verify to what degree we achieved the goal.

RQ1 (Zero Trust): We have not put any trust in an external infrastructure. While we do assume that all routing nodes act as defined. A misbehaving node may be identified and eliminated without putting any trust on other nodes. Analysis has shown no means for a misbehaving node which might be intentional or unintentional endangering anonymity at any time. We do not rely on any third party technology or infrastructure for our anonymity.

This requirement is therefore fulfilled.

RQ2 (Equal nodes): No node has additional privileges or offers additional services. All are equal and share the same privileges.

This requirement is therefore fulfilled.

RQ3 (untagable): Messages may not be tagged. All content is either strictly onionised or defined and linked with unknown hooks. Tampering with a message will typically cause the message delivery to fail at the next node. Furthermore, may tampering be detected.

This requirement is therefore fulfilled.

RQ4 (unbugable): There are always means to bug a message. As we put trust in sender and recipient and we know already that an intermediate mixing node is not able to modify the message the protocol is hard to bug. There may be a possibility to bug a message with a routing log entry over DNS. If a recipient is not resolving names or trusts in the content of such a message he is safe.

This requirement is therefore fulfilled. It may be only partially fulfilled if log entries are not handled with care.

RQ5 (replay): Messages may only be replayed a limited amount of times. The number of replays is controlled by the sender and may not be altered by any mix. A malfunctioning mix replaying more often than allowed will not be able to extract any information than the information it obtained when sending the first time.

This requirement is therefore fulfilled.

RQ6 (accounting): All identities generated are not traceable as any identity is generated without any context and may not be mapped to an older or newer identity (perfect anonymous forward identity). Neither the source nor the replies may be used to be traced as all messages.

This requirement is therefore fulfilled.

RQ7 (anonymisation): Anonymity is hard to proof.

The following statements are the findings of the previous chapters:

- Routing nodes are identifiable by an in-depth inspection.
A routing node features unique features which can be identified.

Identifiable properties discovered are:

- The usage of the plain embedding is identifiable by a human and using probabilistic approaches even by a scanner.

- A router is always connected and sends messages at any time of day
- A router is connected to multiple accounts
- A routing node can link a message to an ephemeral identity
This is a minor issue and is countered by the fact that ephemeral identities have a very short lifespan and are unconnected.
- A routing node learns about other nodes over time.
A routing node is unable to communicate with the peers without a host key. It may, however, learn the endpoint address of its peer. Assuming a censoring adversary, this may be a problem in a single case as the provider of the transport layer may be forced to block the account.

On the other hand, no node can tell by observing traffic if another node is a final recipient or just another router.

There are however some weaknesses in the protocol. As the implementation is currently connecting simultaneously to the transport layer endpoint (email or Jabber account in the current implementation) and the Vortex account that fact might identify the user. Using an anonymization proxy could solve the problem, but it would violate the Zero trust principle.

A sender is capable of leaking a receiver's presence to a global observer.

This requirement is therefore only partially fulfilled. However, the weakness is very faint.

RQ8 (bootstrapping): The header request peer functionality allows to query for routing nodes. The key handling of the protocol allows using a node without disclosing its host key. Each node may decide on their whether it leaks its own identity.

This requirement is therefore fulfilled.

RQ9 (algorithmic variety): The protocol lists at least two completely independent algorithms of each kind to be supported. This allows switching if an algorithm has been broken. Wherever possible, a well-known algorithm and an algorithm basing on an entirely different mathematical problem has been chosen.

This requirement is therefore fulfilled.

RQ10 (easy handleable): The protocol allows to reuse clients already available to send messages. The whole encryption and anonymity problem is hidden in a local proxy. This allows users to stick to their favorite tools.

This requirement is therefore fulfilled.

10.6. Considerations for Routing Messages

Messages should always be sent nearby other messages timewise. This means that the best moment for sending a message in a ready queue is at a time when sending other messages is due. However, no optimization should be done to send as many messages as possible at the same time. This would lead to a foreseeable behavior of the routing layer and thus to miss-usable behavior.

The approach is furthermore heavily dependent on the transport protocol and builds on top of a new obfuscating/routing layer. For this system to become a real peer-to-peer approach, some additional quirks are required. A message-Vortex-Account always needs an active routing handler. This routing handler may be introduced by new server capabilities or by having a device handling the routing from the client side. For this reason, we built a RaspberryPi appliance capable of connecting to one (or more) accounts fetching incoming emails, analyzing them and reroute them if necessary. Although the system is designed to be run on a RaspberryPi the software might be installed to any Java-capable client. The

RaspberryPi is just one affordable lightweight device which offers all required capabilities.

There was up until very late a routing log functionality in the protocol. This functionality did, however, have the disadvantage that it allowed bugging and could disclose intermediate mixes to a recipient who did not comply with the policy the mixes might have chosen. Therefore this feature was dropped and replaced with the fetch block behavior.

The routing block builder controls the blending. Besides that, he has no control over it. If blending is done carelessly, a message can be easily detected and thus disrupted.

The message leaks its size when a routing block is reused. This is due to the version number and the ephemeral identity contained in the header. The message chunks reflect approximately the message size compared to the previous message sent.

11. Security Analysis

In the following sections, we emphasize on attacks targeting either sender-recipient tuples or participating nodes.

Based on the protocol we may safely assume the following key points:

- An adversary knows and controls a significant number of nodes (for our analysis we assume less than 80%).
- An adversary may observe the traffic at any point without getting any information about the message content
- An adversary is not capable of matching multiple messages on different nodes to one message.

We always assume an adversary to have more knowledge than we think he may extract from the messages.

- We assume that an adversary knows all messages of a transaction running over his nodes and matches them correctly to the same message.
-

We assume that the adversary is targeting the following pieces of information:

- Sender identity
- Recipient identity
- Message content
- Message size

Attacks on the users' identity are no longer possible as the identity used on the nodes is based on ephemeral identities instead of the users' true identity. As the ephemeral identities may exist in parallel, overlapping or in a serial manner and are strictly unlinked to the true identity no statement can be made concerning the linking of ephemeral identities to the real identities. Frequency patterns or behavioral patterns may be split among multiple identities and distributed over multiple nodes.

Frequency and bandwidth analysis are not possible as the frequency and bandwidth of a single message are not trackable and the size of a message is generally not related to the message flow. An exception to this statement is when routing a different message through a vortex system using a reused routing block general statements such as "the message is bigger than the previous one" about the messages size is possible if the routing block makes use of relative split operations. In experiments, we were able to mimic any desired communication pattern we wanted for an adversary to be found.

The message content remains cryptographically secured if the dual trust (sender and receiver node) is not broken, the message is encrypted on the senders' node, the message is only decrypted on the node of the receiver, and remains at least wrapped in this encryption during the whole transfer.

11.1. Additional Considerations

11.1.1. Man in the Middle Attacks to Conversations

Traditional man-in-the-middle (MITM) attacks are not possible when using the message vortex protocol as the remote identity secures the recipient to a specific recipient. If, however, a recipient identity has been compromised either by stealing its private key or by injecting a wrong identity in the senders' repository man in the middle attacks become possible. We do not cover this problem within this work as a secure, verifiable way to exchange identities is not

included in the protocol.

11.1.2. Identification of Participating Nodes

Participating nodes may be identified when injecting evil routing nodes. When suspecting such nodes first step should be moving outside the jurisdictional reach before reaching out to the final anonymity set. If the anonymity set is compromised, identification of the participating nodes is however possible.

11.1.2.1. Identification by Content

Message extraction by content is not generally possible even if knowing the blending type and respective blending keys. As the VortexMessage does not show an outer structure such as ASN.1 or similar. The message itself remains undetectable.

11.1.2.2. Identification by Query

A vortex node may be identified by the query if the node responds to unencrypted requests. An active node may be differentiated from an inactive node at any time if a valid blending specification is known. With such a specification an evil routing node is capable of creating requests such as new identity requests and taking a successful reply as an indication for an active routing node.

11.1.2.3. Identification by Traffic Type

Vortex node shows a specific behavior in terms of supported protocols. Depending on the implementation this behavior is detectable. At the moment supported protocols are POP/SMTP and XMPP. Since both protocols are widespread among internet users, this footprint is shallow.

11.1.3. Storage of Messages and queues

The storage of messages sent though MessageVortex should be handled with great care. It seems on the first sight a good idea to merge all messages in globally available storage such as the IMAP account of the receiving entity. However – In doing so, we would discover the message content to the providing party of a mail account. Since we handled the message with great care and tremendous costs up until this point, it would be careless doing so.

Storing them in a localized and receiving entity controlled storage is a good idea but leaves security considerations like a backup possibly to an end user. This might be better but in effect a questionable decision. There is however a third option. By leaving the message unhandled on the last transport layer of the MessageVortex chain, we may safely backup the data without disclosing the message content. Merging the content then dynamically through a specialized proxy would allow the user to have a unified view on his without compromising the security.

Part IV.

Discussion

In the following chapters, we analyze the protocol thoroughly for fitness of purpose.

We first apply a statical analysis of the protocol to identify all pieces of information leaked at all levels.

Then we apply a dynamic analysis of the protocol to identify all meta pieces of information leaked during transmission of the protocol such as timing or context between messages.

We distinguish between passive and active adversaries. Passive adversaries follow the MessageVortex protocol, have unlimited observation capabilities on the network up to layer 4 of the ISO/OSI protocol, and do have unlimited observation capabilities on the transporting layer of MessageVortex. Active adversaries share the capabilities of passive adversaries, but do not follow the MessageVortex protocol. Both adversaries try to obtain valuable information (e.g., message content, metadata such as the communicating peers or message frequencies). For a more precise model refer to 4.1.

We then sum up the achieved goals by looking at well-known attacks and analyze the effectiveness of them to analyze the protocol.

At the very end of this chapter, we identify the gaps uncovered by this work.

12. Static analysis

In this section, we analyze the protocol statically. Looking at a full message, we get the protocol outline as shown in (12.1) on page 62.

12.1. Transport and Blending Layer

12.1.1. Analysis of Plain Embedding

It is very obvious why a file treated with plain embedding is easily identifiable as a broken or tampered file. While the file is still parseable, its content is no longer sensible to a human and thus at least suspect.

We wanted to know if there is an easy method to detect the modifications of such a file. While most of the analysis methods require processing of large data sets we tried to find obvious, non-calculational-test methods which were generic. We did not take any content based characteristics such as "outline of an image" or "resulting spectrum of a soundfile" in account. As our embedding is generic, we searched for a similar detection method.

A property of encrypted ciphertext is the high entropy. We therefore used the calculation of the shannon entropy in bytes as a property and tried to show the shift of entropy within the files. This detection method depended very much on the type of file used for embedding. It showed an expected behavior, that filetypes having in the expected area a similar entropy were not detectable by this method. However, the following filetypes were identified to be unsuitable for plain blending due to their entropy structure:

When blending into images, BMP showed a strongly varying entropy within a file. A sampling of ten blocks at random position resulted already resulted in a detection with a failure rate below 5%. PNG and JPG files showed to be very robust within the sample. We did not succeed in identifying the MessageVortex blending content.

We analyzed the files by calculating the entropy of blocks 256 bytes and did this with a sliding window over a randomly collected set of images (e.g., the topmost 100 entries of a filetype after searching for "mose", "cat", or "dog"). We did intentionally not filter or eliminate images. The finds were very surprising. We were able to identify tell filetypes apart, were able to identify files with thumbnails or an interlaced structure. We even identified certain specific pattern regarding the producer type of an image (e.g., we could differentiate between images scanned and images taken by a camera). It was not so much surprising that we were able to identify these features, but the fact that we could see them in entropy data.

We then carried out an analysis identifying the typical entropy and the inner structures. The graphs in 12.2 show a typical analysis. In that case we looked at 100 images of each type. We graphed and analyzed their entropy and tested for suitability of a plain embedding. Table 12.1 lists the average entropy of analyzed filetypes and makes remarks about the suitability for plain embedding.

Protocol \ Criteria	average Entropy	quartile width	remarks
JPG			-
PNG			-
GIF			-
PDF			-
MP3			-
wav			-
ogg			-
mpg4			-

Table 12.1.: comparison of protocols in terms of the suitability criteria as transport layer



12.1.2. Identifying a Vortex Message Endpoint

Depending on the blending method, single messages might be identified as long as they are detectable. Detectability depends on various factors such as:

- Broken internal file structure (due to plain blending)
- Uncommon high entropy in a structureless file
- Unrelated message flow (see [46])
- Non-human behaviour on the transport layer (e.g., message traffic 24x7)

If an endpoint is successfully identified, then all directly related endpoints of the same protocol may be identified as well by following the message flow. This does however not enable an adversary to inject messages as the host key is not leaked.

Assuming a global observer as an adversary and unencrypted traffic, he might discover the originating routing layer and thus identify it as Vortex node by following traces of the transport layer. In most protocols, however, this address is spoofable and not a reliable source for the originating account.

12.2. Senders routing layer

A sender may have some knowledge about the Routing block size and may, therefore, guess the complexity of the routing path. He is, however, unable to gain any additional information such as time of travel or number of hops until the target.

12.3. Intermediate node routing layer

An intermediate node does know all the operations applied and the immediate next hop. It does learn the routing addresses of the immediately following endpoints but is unable to use these endpoints. This is because he has no mean to get the host key required to communicate.

If a routing block is repeated, a router may identify the routing block as repetition due to the serial number of the replay protection and give a rough estimate about the message size by comparing the payload chunks. This estimate is however very rough as it is bounded by the block size of the symmetrically applied encryption.

$$\text{VortexMessage} = \langle \text{MP}^{K_{hostN}^{-1}}, \langle \text{PAD}, \text{CP}^{K_{hostN}^{-1}}, \text{H}^{K_{senderN}}, E^{K_{senderN}^{-1}}(H(\text{HEADER})) \\ [\text{R}^{K_{senderN}}], [\text{PL}] * \rangle^{K_{peerN}} \rangle \quad (12.1)$$

$$\text{MP}^{K_{hostN}^{-1}} = E^{K_{hostN}^{-1}}(\text{PREFIX}(K_{peerN})) \quad (12.2)$$

$$\text{PAD} = (32 \text{ padding bytes from payload}) \quad (12.3)$$

$$\text{CP}^{K_{hostN}^{-1}} = E^{K_{hostN}^{-1}}(\text{CPREFIX}(K_{senderN})) \quad (12.4)$$

$$\text{H}^{K_{senderN}} = E^{K_{senderN}}(\text{HEADER}) \quad (12.5)$$

$$\text{HEADER} = \langle K_{senderN}^1, \text{serial}, \text{maxReplays}, \text{validity}, [\text{requests}, \text{requestRoutingBlock}], \\ [\text{puzzleIdentifier}, \text{proofOfWork}] \rangle \quad (12.6)$$

$$\text{R}^{K_{senderN}} = E^{K_{senderN}}(\text{ROUTING}) \quad (12.7)$$

$$\text{ROUTING} = \langle [\text{ROUTINGCOMBO}]*, \text{forwardSecret}, \text{replyBlock} \rangle \quad (12.8)$$

$$\text{ROUTINGCOMBO} = \langle \text{processInterval}, K_{peerN+1}, \text{recipient}, \text{nextCP}, \text{nextMP}, \\ \text{nextHEADER}, \text{nextROUTING}, \text{assemblyInstructions}, id \rangle \quad (12.9)$$

$$\text{PL} = (\text{payload octets}) * \quad (12.10)$$

$$(12.11)$$

Detailed representation of a VortexMessage

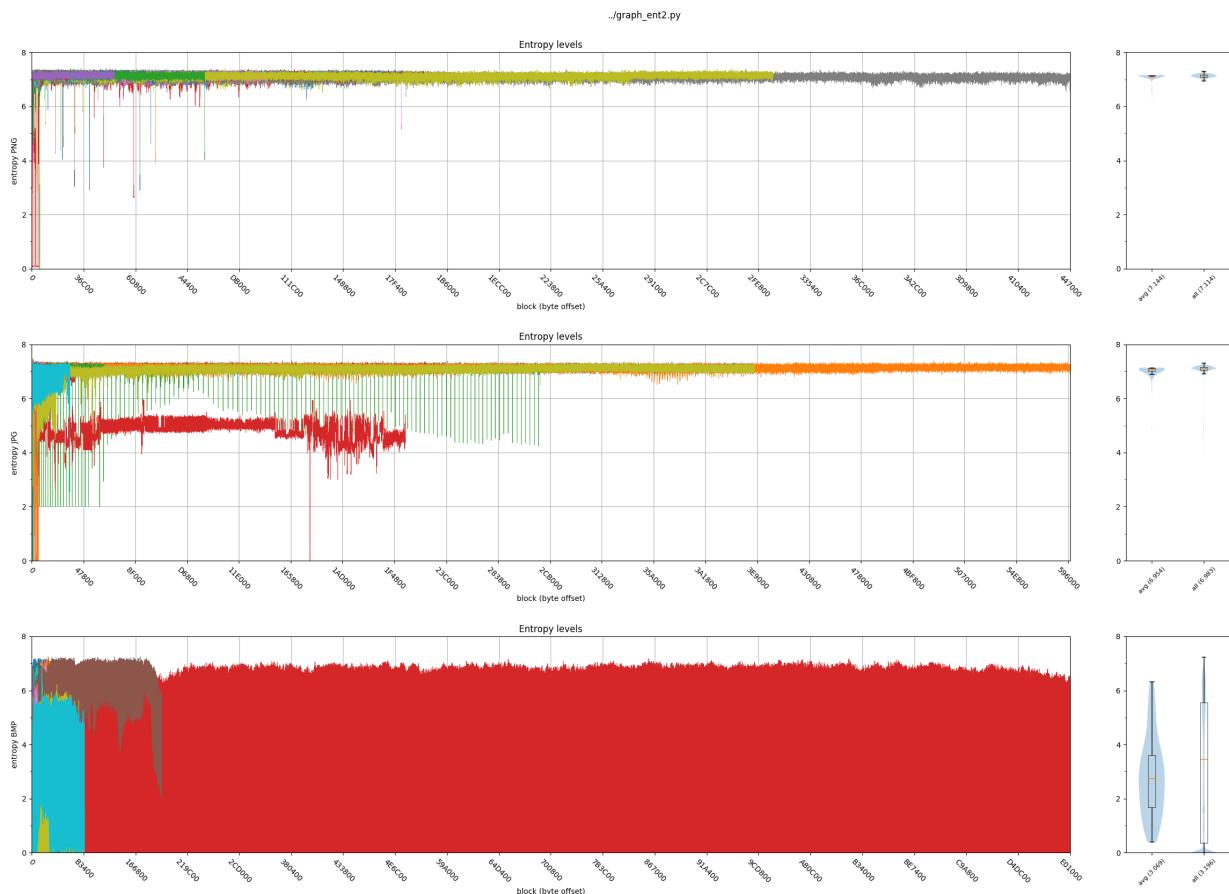


Figure 12.2.: distribution analysis of different common graphics formats

13. Dynamic analysis

In the dynamic analysis, we reach out to an active adversary. An active adversary modifies traffic in a non-protocol conformant way, or misuses available or obtained information to disrupt messages, nodes, or the system as a whole.

13.1. Attacks against the vortex system itself

An active adversary may attack the transport layer. Most of the transport layers are not able to react upon message flooding. Therefore, it is easy to attack a transport layer with a flooding attack, such as a distributed denial of service (DDoS) attack. Due to the nature of the protocol, we are unable to apply for additional protection on the transport layer or below. The Vortex Message format itself is however crafted in such a way that only minimal effort is sufficient to get the involved parties of a transmission. The Operations $K_{msgN} = D^{K_{host}^1}(P)$ and $HEADER = D^{K_{msgN}}(H)$ are sufficient to identify message senders. Unknown Senders may be discarded without further processing. Known senders may be identified as legitimate and processed further. Known misbehaving identities and message duplicates may be discarded.

13.1.1. DoS Attacks against the System

An active adversary may not follow the protocol and modify any parts of the message. The following paragraphs reflect different kinds of behavior and how they affect the messages and the system as a whole.

An adversary may not follow the blending specification. If he uses a specification which is less secure an independent third party observer may follow traffic. This is not sensible as such a node may send all the knowledge to such a collaborating node directly. In the case of a target node not supporting the chosen blending method, the partial message path becomes interrupted. A possible redundancy in the path may recover the message from such a case.

13.1.1.1. Traffic Replay

Traffic replay is a common way to highlight traffic in many systems by replaying the same traffic and increase the signal to noise ratio of a system.

Due to the replay protection of the vortex protocol, this is not possible. Any traffic generated by an attacking node is already known. Any subsequent messages of other nodes are only generated once even if a message is repeatedly received.

13.1.2. Diagnosability of traffic

13.1.2.1. Hijacking of Header and Routing Blocks

An attacker might try to recombine a header block of a third party with a routing block crafted to get workspace content of a different node. To protect against this scenario every routing block and its corresponding header block have a common value called forward secret. As the content of a hijacked header block is not known he is unable to guess the forward secret within the block.

It is not possible to brute-force the value, due to the replay protection. More precisely, the probability for hijacking a single identity block is $\frac{1}{2^{32}}$. If taking into account that a routing block may be replayed to the absolute maximum probability rises to $\frac{2^8 - 1}{2^{32}} \approx \frac{1}{2^{24}}$. Hijacking such a block allows onetime access to the working space and is visible to the owner due to the manipulated quotas. Failing of

an attack will result in exhausting the ephemeral identities quotas, and a new unlinked ephemeral identity will be created.

13.1.2.2. Partial Implicit Routing Diagnosis

We can create data which is routed back to or through the original sending node. This traffic is well defined and may be used to certify that the loop processing the message is working as expected. By combining the messages and sending intermediate results through multiple paths, it is even possible to extract the sub status of some loops and combine the result within transfer into a single message.

As a special case, implicit routing diagnostic may be used to diagnose the full route by taking specific excerpts from a message and routing them from the recipient back to the sender.

13.1.2.3. Partial Explicit Routing Diagnosis

If a message fails to deliver according to implicitly routing diagnosis, additional messages may be sent to pick up the content of the workspace of ephemeral identities throughout the path. These messages are due to the only binding to the ephemeral identity not distinguishable from the original messages. Assuming that a node always behaves either according or not according to the rules of the system, a node may be identified.

13.1.2.4. Denial of Service by Exhausting Quotas or Limits

A malicious node may try to exhaust quotas or limits. As we do trust in sender and recipient, all other nodes do not know the forward secrets used in the message. The options for an adversary are then as follows:

- Resend a MURB (with different content) as often as possible to exhaust message and transfer quota.
- Create intentionally huge, incorrect message content to exhaust transfer quota.

13.1.2.5. Traffic Highlighting

Traffic caused by a routing block may be observed by to a certain extent on a statistical base. A node may generate bad message content of exceptionally large or small nature this might potentially highlight messages involved in message routing using no split or relative split operations as well as addRedundancy operations.

13.2. Achieved Anonymity and Flaws

13.2.1. Measuring Anonymity

It is tough to measure anonymity as it involves many uncontrollable factors. We may, however, control the degree of anonymity according to the number of involved parties. Assuming a sender knows the complete message path including all operations carried out on any untrusted node a message travels through, the anonymity is maxed to the number of involved nodes n excluding the sender nodes. This degree of $n - 1$ may be further reduced if all well-known "routing only" or at least "routing mostly" nodes are reduced. Under these harsh assumptions, the set may be reduced to the potential set of "well known" recipients of a message.

We have to differentiate between several problems. An adversary has to identify the participants of an anonymity system. Then he has

to identify members of a message or a communication anonymity set. Starting from there he has to identify message flows and detect senders and receivers of messages within an anonymity set (which is not doable in all cases). If any adversary achieves this, we have to consider the anonymity to be broken. Depending on the degree of anonymity required which is influenced by external factors the participation in any or a small enough set may be sufficient to suffer consequences.

13.2.2. Attacking Routing Participants

While very hard in our case as we do not have “dedicated” anonymization infrastructure, it might be possible to identify members of the routing network. This due to flaws in the blending layer. While it is possible to scare off or block members of a routing network. It is far harder in a network where the members are mobile. Any user may change at any time the identity including the endpoint without losing its known peers.

13.2.3. Attacking Anonymity through Traffic Analysis

As traffic and decoy traffic and decoy traffic are chosen by the creator of the routing block frequency patterns cannot be detected, unlike the router did create them. Same applies to message sizes and traffic hotspots. When reusing the same routing block eventually message sizes or general estimates such as “bigger” or “smaller size” can be made.

13.2.4. Attacking Anonymity through Timing Analysis

Timing is under full control of the routing block builder. No information can be derived from timing. This is even the case if a routing block is reused.

13.2.5. Attacking Anonymity through Throughput Analysis

Increasing the throughput to highlight a message channel is not possible since the replay protection will block such requests.

13.2.6. Attacking Anonymity through Routing Block Analysis

The routing block is cryptographically secure. The size of the routing block may leak an estimate about its inner complexity. It does not reveal any relevant pieces of information like remaining hops to the message end or target or similar.

13.2.7. Attacking Anonymity through Header Analysis

The header contains valuable data which is cryptographically secured and only visible to the next receiver.

To an adversary not knowing the key, the size of the prefix block may leak the key size. The size of the header block itself may leak the presence of any optional blocks. Besides that, no other information is leaked to such an adversary.

To an adversary knowing the decryption key (evil routing node), the content of the header block is visible. This header block leaks all routing information for the respective node and thus the ephemeral identity. This block leaks some information of minimal value. It may leak the activity of an ephemeral identity including frequency. This activity is always matching the minimal activity of an endpoint identity.

13.2.8. Attacking Anonymity through Payload Analysis

The payload itself does not leak any information about the message content. All content is cryptographically secured. Content may, however, leak the size of a key applied.

13.2.9. Attacking Anonymity through Bugging

Bugging is one of the most pressing problems. The protocol has been carefully crafted not to allow any bugging. The use of MIME messages in the final message, however, allows bugging of the message itself. A bugged message content may breach receiver anonymity to the sender of the message.

13.2.10. Attacking Anonymity through Replay Analysis

Due to the replay protection, no traffic may be generated or multiplied except for the traffic sent by the attacking node. As this information is already known to the node, there is no value in doing so.

14. Recommendations on Using the Vortex Protocol

The following sections list recommendations using the VortexProtocol it is a summary of previous sections.

14.1. Reuse of Routing blocks

Routing blocks should not be reused. The reuse of a routing block may leak some limited information to an adversary node such as approximate message size or message frequency of an unknown tuple using this network.

14.2. Use of Ephemeral Identities

Ephemeral identities should be used for a minimal number of messages. Using multiple identities with overlapping lifespans is considered a good practice. Using different ephemeral identities for the same message is acceptable and may be a good practice as long as operations do not leak the linking between those two identities.

14.3. Recommendations on Operations applied on Nodes

All operations, carried out on a single node, have to be crafted in such a way that no information whether the operation is a decoy or a real message is leaked. Otherwise, it becomes possible to narrow down the message flow.

14.4. Recommendations on Choosing involved Nodes

Involved nodes should be trustworthy but not necessarily trusted. To avoid an adversary to control all nodes except for sender and receiver a message should always include a set of known recipients. It is regarded as a good practice to use a minimal fixed anonymity set of known recipients as routers. Doing so does not leak any information unless always the same pattern of operations is applied (see 14.1).

14.5. Message content

Although it is possible to embed any content into a Vortex message great care should be taken as content may allow disclosing a reader's identity or location. For this reason, only self-contained messages should be used (such as plain text messages).

14.5.1. Splitting of message content

Message content should be split and distributed among routing nodes. Splitting should however not be done excessively to avoid failure due to too many failing nodes. It furthermore makes diagnostics complicated.

14.6. Routing

14.6.1. Redundancy

Redundancy is a valuable feature of the protocol. It allows unsuspicious decoy generation and to compensate message path disruption. A routing block should always be crafted in such a way that redundancy is aligned with the complexity of the routing block and the importance of a message.

14.6.2. Operation Considerations

Operations should be kept easy but at the same time guarantee anonymity. The following recommendations are kept to an absolute minimum in order not to create any identifiable behavior.

A payload block should always have a single representation only once when traveling through routing nodes. A recurring pattern would allow an evil router to identify and thus match an ephemeral identity of one router to an ephemeral identity of another router even if there are multiple routes in between. So, when applying encryption only operations between routing nodes, the encryption should be onionized. A clear onionizing routing pattern (only showing encryption steps on a single chunk) is OK. A pattern such as removing encryption and then reapply different encryption is not.

14.6.3. Anonymity

Anonymity is greatly dependent on the quality of the routing block and the chosen anonymity set for a single message and a communication tuple over time.

14.6.3.1. Size of the Anonymity Set

The requirement for an anonymity set is dependent on jurisdictional restrictions. In some of the more restrictive countries, no one can be held guilty for an action which may not be credibly assigned to him alone. In other jurisdictions, it is possible to be held guilty for actions just because of an identified membership to a group. This makes it essential that message traffic and the crafting of the blending is under the sole control of the sender. He needs to create an anonymity-set sufficiently large and spanning enough jurisdictions to create sufficient anonymity for his situation.

15. Missing gaps to be covered in future analysis

The current blending layer is simple in its inner working. It creates context-less messages based on an easily recognizable scheme. An unsuspecting observer may have the impression that this is just a way of communicating but censor may by observing the message flow easily and conclude that these messages are not written by a human.

To be undetectable all work done by the blending layer has to be indistinguishable from regular human communication. This applies not only to the message steganographic embedding of the message but to the message content as well. This is very much similar to the problems of chatterbots these days. Assuming that a blending layer is only communicating with other nodes correctly embedding messages we have a chatterbot problem. It is reduced as the chatterbot must only reply credibly and undetectable to generated messages of other chatterbots. If assuming that a blending layer replies to any non-Vortex nodes the problem boils down to a Turing test as stated in [106]. As we safely may assume that an adversary has enormous but limited resources this blending is however sufficient if it is done "good enough". What criteria would apply here is a topic for further research. Applying any research to this topic would require to add a more precise adversary model.

The currently applied choice of transport layer protocol is a snapshot of current internet traffic. While done with great care it must be adapted to the changing communication habits of humanity. Identifying new or deprecated communication protocols and blending schemes would be another field of research.

A comprehensive survey of the newest trends and techniques in steganography is another topic to be covered. It would allow identifying new candidates of blending techniques.

Another problem is the software update. Where censorship applies to access to newer software is not or only with technical knowledge possible. To allow a user to update his software, an updating mechanism should be implemented allowing nodes to fetch verifiable software updates anonymously while not limiting the software to a single distribution.

Anonymity has effects on the behavior of humans. We have found that although there is some research in this field (such as [77]) evidence is very weak. Although the possibility for anonymity is undisputed among so-called free countries, the downsides (e.g., misuse for criminal acts) of anonymity are apparent. More research in this field is required as well.

Appendix A.

The RFC draft document

Workgroup: Internet Engineering Task Force
Internet-Draft: draft-gwerder-messagevortexmain-01
Published: 24 February 2019
Intended Status: Experimental
Expires: 28 August 2019
Author: M. Gwerder
FHNW

MessageVortex Protocol

Abstract

MessageVortex Protocol is a protocol to achieve different degrees of anonymity. It specifies messages embedded within existing transfer protocols such as SMTP or XMPP to send them via peer nodes to one or more recipients.

The protocol outperforms other protocols by decoupling transport from the final transmitter and receiver party. There is no trust put into any infrastructure except for the infrastructure of the sending and receiving party of a message. The creator of the routing block has full control over the message flow. Routing nodes gain no non-obvious knowledge about messages even when collaborating. Third-party anonymity is always achieved. Furthermore, the protocol allows achieving either sender or receiver anonymity.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 28 August 2019.

Copyright Notice

Copyright (c) 2019 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

- [1. Introduction](#)
 - [1.1. Requirements Language](#)
 - [1.2. Protocol Specification](#)
 - [1.3. Number Specification](#)
- [2. Entities Overview](#)
 - [2.1. Node](#)
 - [2.1.1. Blocks](#)
 - [2.1.2. NodeSpec](#)
 - [2.2. Peer Partner](#)
 - [2.3. Encryption keys](#)
 - [2.3.1. Identity Keys](#)
 - [2.3.2. Peer Key](#)
 - [2.3.3. Sender Key](#)
 - [2.4. Vortex Message](#)
 - [2.5. Message](#)
 - [2.6. Key and MAC specifications and usages](#)
 - [2.6.1. Asymmetric Keys](#)
 - [2.6.2. Symmetric Keys](#)
 - [2.7. Transport Address](#)
 - [2.8. Identity](#)
 - [2.8.1. Peer Identity](#)
 - [2.8.2. Ephemeral Identity](#)
 - [2.8.3. Official Identity](#)
 - [2.9. Workspace](#)

2.10. Multi-Use Reply Blocks

3. Layer Overview

3.1. Transport Layer

3.2. Blending Layer

3.3. Routing Layer

3.4. Accounting Layer

4. Vortex Message

4.1. Overview

4.2. Message Prefix Block (MPREFIX)

4.3. Inner Message Block

4.3.1. Control Prefix Block

4.3.2. Control Blocks

4.3.3. Payload Block

5. General notes

5.1. Supported Symmetric Ciphers

5.2. Supported Asymmetric Ciphers

5.3. Supported MACs

5.4. Supported Paddings

5.5. Supported Modes

6. Blending

6.1. Blending in Attachments

6.1.1. PLAIN embedding into attachments

6.1.2. F5 embedding into attachments

6.2. Blending into an SMTP layer

6.3. Blending into an XMPP layer

7. Routing

7.1. Vortex Message Processing

7.1.1. Processing of incoming Vortex Messages

7.1.2. Processing of Routing Blocks in Workspace

7.1.3. Processing of Outgoing MessageVortex Messages

7.2. Header Requests

7.2.1. Request New Ephemeral Identity

7.2.2. Request Message Quota

7.2.3. Request Increase of Message Quota

7.2.4. Request Transfer Quota

7.2.5. Query Quota

7.2.6. Request Capabilities

7.2.7. Request Nodes

7.2.8. Request Identity Replace

7.3. Special Blocks

7.3.1. Error Block

7.3.2. Requirement Block

7.4. Routing Operations

7.4.1. Mapping Operation

7.4.2. Split and Merge Operations

7.4.3. Encrypt and Decrypt Operations

7.4.4. Add and Remove Redundancy Operations

7.5. Processing of Vortex Messages

[8. Accounting](#)

[8.1. Accounting Operations](#)

[8.1.1. Time-Based Garbage Collection](#)

[8.1.2. Time-Based Routing Initiation](#)

[8.1.3. Routing Based Quota Updates](#)

[8.1.4. Routing Based Authorization](#)

[8.1.5. Ephemeral Identity Creation](#)

[9. Acknowledgments](#)

[10. IANA Considerations](#)

[11. Security Considerations](#)

[12. References](#)

[12.1. Normative References](#)

[12.2. Informative References](#)

[Appendix A. The ASN.1 schema for Vortex messages](#)

[A.1. The main VortexMessageBlocks](#)

[A.2. The VortexMessage Ciphers Structures](#)

[A.3. The VortexMessage Replies Structures](#)

[A.4. The VortexMessage Requirements Structures](#)

[A.5. The VortexMessage Helpers Structures](#)

[A.6. The VortexMessage Additional Structures](#)

[Author's Address](#)

1. Introduction

Anonymization is hard to achieve. Most of the attempts in the past rely on either trust in a dedicated infrastructure or a specialized networking protocol.

Instead of defining a transport layer, MessageVortex piggybacks on other transport protocols. A blending layer embeds Vortex messages into ordinary messages of that transport protocol. A blending layer picks the messages up, applies local operations to it and resends the new chunks to the next recipients.

A processing node learns as little as possible from the message due to the nature of the operations processed. The onionized structure of the protocol makes it impossible to follow the trace of a message without having control over the processing node itself.

MessageVortex is a protocol which allows sending and receiving messages by using a routing block instead of a destination address. The sender has full control over all parameters of the message flow.

A message is split and reassembled during transmission. Chunks of the message may carry redundant information to avoid service interruptions of the message transit. Decoy traffic and message traffic are not differentiable as the nature of the addRedundancy operation allows each generated part to be a message part or decoy. Any routing node is thus unable to differentiate between the message and decoy traffic.

Any Receiver knows after processing whether a message is destined for it (it creates a chunk with ID 1) or other nodes (processing instructions only). Due to the missing keys, no other node may do this processing.

This RFC starts with the general terminology (see [Section 2](#)). Next, a general overview of the process is given (see [Section 3](#)). Lastly, the subsequent sections describe the details of the protocol.

1.1. Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [\[RFC2119\]](#).

1.2. Protocol Specification

[Appendix A](#) specifies all relevant parts of the protocol in ASN.1 (see [\[CCITTX680.2002\]](#) and [\[CCITTX208.1988\]](#)). The blocks are, if not otherwise mentioned, DER encoded.

1.3. Number Specification

All numbers within this document are, if not suffixed, decimal numbers. Numbers suffixed with a small letter 'h' followed by two hexadecimal digits are octets in hexadecimal writing. A blank in ASCII (' ') is written as 20h and a capital 'K' in ASCII as 4Bh.

2. Entities Overview

Within this document, we refer to the entities as defined below.

2.1. Node

We use the term 'node' to describe any system connected to other nodes, and supporting the MessageVortex Protocol. A 'node address' is typically an email address, an XMPP address, or any other transport protocol identity supporting the MessageVortex protocol. Any address SHOULD include a public part of an 'identity key' allowing to transmit messages safely. One or more addresses MAY belong to the same node.

2.1.1. Blocks

We use the term 'block' for an ASN.1 sequence in a transmitted message. We embed messages in the transport protocol. These messages may have any size.

2.1.2. NodeSpec

A nodeSpec block as specified in [Section a.5](#) expresses in a unified format an addressable node. The nodeSpec contains a reference to the routing protocol, the routing address within this protocol and the keys required for addressing the node. This RFC specifies transport layers for XMPP and SMTP. Adding transport layers requires to write an extension to this RFC.

2.1.2.1. NodeSpec for SMTP nodes

An alternative address representation is defined. This address allows a standard email client to address a vortex node. An alternative representation SHOULD be supported as defined below as smtpAlternateSpec (specification noted in ABNF as specified in [\[RFC5234\]](#)). For applications with QR code support, the smtpUrl representations SHOULD be used.

```
localPart      = <local part of address>
domain        = <domain part of address>
email          = localPart "@" domain
keySpec        = <BASE64 encoded AsymmetricKey [DER encoded]>
smtpAlternateSpec = localPart "..." keySpec "..." domain "@localhost"
smtpUrl       = "vortexsmtp://" smtpAlternateSpec
```

This representation does not support quoted local part SMTP addresses.

2.1.2.2. NodeSpec for XMPP nodes

Typically a node specification is specified with the ASN.1 block NodeSpec. To allow addressing of a vortex node with an ordinary XMPP client, the alternative representation SHOULD be supported as defined below as jidAlternateSpec (specification noted in ABNF as specified in [[RFC5234](#)]).

```
localPart      = <local part of address>
domain        = <domain part of address>
resourcePart  = <resource part of the address>
jid           = localPart "@" domain [ "/" resourcePart ]
keySpec        = <BASE64 encoded AsymmetricKey [DER encoded]>;
jidAlternateSpec = localPart "..." keySpec "..."
                           domain "@localhost" [ "/" resourcePart ]
jidUrl        = "vortexxmpp://" jidAlternateSpec
```

2.2. Peer Partner

We use the term 'peer partner' as two or more message sending or receiving entities. One of these peer partners sends a message, and all other peer partners receive one or more messages. Peer partners are message specific. Every peer partner always connects directly to a node.

2.3. Encryption keys

There are several keys required for a Vortex message. For identities and ephemeral identities (see below) we use asymmetric keys. For message encryption, we use symmetric keys.

2.3.1. Identity Keys

Every participant of the network has an asymmetric key. These keys SHOULD be either EC keys with a minimum length of 384 bits or RSA keys with a minimum length of 2048 bits.

The public key needs to be known by all parties writing to or through that node.

2.3.2. Peer Key

Peer keys are symmetrical keys transmitted with a Vortex message. Peer keys are always known to the node sending a message, the node receiving the message from the sender, and to the creator of the routing block.

A peer key is included in the identity block of a Vortex message and the building instructions for a Vortex message (see RoutingCombo in [Appendix A](#)).

2.3.3. Sender Key

The sender key is a symmetrical key protecting the identity and routing block of a Vortex message. It is encrypted with the receiving peer key and prefixed to the identity block. This key decouples further identity and processing information from the previous key.

A sender key is known to precisely one peer of a Vortex message and the creator of the routing block.

2.4. Vortex Message

We use the term 'Vortex message' for a single transmission between two routing layers. A message adapted to the transport layer by the blending layer is called a 'blended Vortex message' (see [Section 3](#)).

A full vortex message contains the following items:

- The peer key (encrypted with the host key of the node; stored in a PrefixBlock) protects the inner Vortex message (innerMessageBlock).
- The small padding guarantees that a replayed routing block with different content does not look alike.
- The sender key (encrypted with the host key of the node) protecting the identity and routing block.

- The identity block (protected by the sender key) contains information about the ephemeral identity of the sender, replay protection information, header requests (optional) and a requirement reply (optional).
- The routing block (protected by the sender key) containing information on how subsequent messages are processed, assembled and blended.
- The payload block (protected by the peer key) contains payload chunks for processing.

2.5. Message

A Message is a content to be transmitted from one sender to the recipient. The Sender uses a routing block to achieve this which is either built by him or provided by the receiver. A Message may be anonymous. There are however different degrees of anonymity:

- If the sender of a message is not known to anyone else except the sender, we refer to that as 'sender anonymity.'
- If the receiver of a message is not known to anyone else except the receiver, we refer to that as 'receiver anonymity.'
- If an attacker is unable to determine content, original sender, and final receiver, we refer to that as third-party anonymity.
- If a sender or a receiver may be determined as "one of a set of <k> entities we refer to it as k-anonymity (for more about this see [KAnon]).

A message is always MIME encoded as specified in [RFC2045].

2.6. Key and MAC specifications and usages

MessageVortex uses a unique encoding for keys. It is designed to be small and flexible while maintaining a specific base structure.

The following key structures exist:

- SymmetricKey
- AsymmetricKey

MAC does not need a complete structure containing specs and value. Instead only a MacAlgorithmSpec is available. The following sections outline the constraints when specifying parameters for these structures. A node MUST NOT specify any parameter more than once.

If a crypto mode is specified requiring an IV, a node MUST provide the IV when specifying the key.

2.6.1. Asymmetric Keys

Nodes use asymmetric keys for identifying peer nodes (identities) and encrypting symmetric keys (for later de-/encryption of payload or blocks). All asymmetric keys MUST contain a key type specifying a strictly normed key. They MUST contain a public part of the key encoded as X.509 container and a private key as specified in PKCS#8 wherever possible.

RSA and EC keys must contain a keysize parameter. All asymmetric keys SHOULD contain a padding parameter. A node SHOULD assume PKCS#1 if no padding is specified.

NTRU specification MUST provide parameters "n", "p", and "q".

2.6.2. Symmetric Keys

Nodes use symmetric keys for encrypting payload and control blocks. These symmetric keys MUST contain a key type specifying a key. They MUST contain a key in an encoded form.

A node MUST provide a keysize parameter if the key (or equivalently block) size is not standardized or encoded in the name. All symmetric key specification MUST contain a mode and padding parameter. A node MAY list multiple padding or mode parameters in a ReplyCapability block to give the recipient a free choice.

2.7. Transport Address

We use the term 'transport address' for the token required to address the next immediate node on the transport layer. An email transport layer would have SMTP addresses such as 'vortex@example.com' as transport address.

2.8. Identity

2.8.1. Peer Identity

The peer identity may contain the following information of a peer partner:

- A transport address (always) and the public key of this identity (given there is no recipient anonymity)
- A routing block. This block may be used to contact the sender (optional). If striving for recipient anonymity, this block is required.
- The private key (only known by the owner of the identity)

2.8.2. Ephemeral Identity

Ephemeral identities are temporary identities created on a single node. These identities MUST NOT relate to any other identity on any other node. They allow bookkeeping for a node. Each ephemeral identity has a workspace assigned. Every ephemeral identity may have the following items assigned:

- An asymmetric key pair to represent the identity
- A validity time of the identity

2.8.3. Official Identity

An official identity may have the following items assigned:

- Routing blocks to be used to reply to the node.
- A list of assigned ephemeral identities on all other nodes and their projected quotas.
- A list of known nodes and the respective node identity

2.9. Workspace

Every official or ephemeral identity has a workspace. A workspace consists of the following elements:

- Zero or more routing blocks to be processed
- Slots for payload block sequentially numbered. Every slot...
 - MUST contain a numerical ID identifying the slot
 - MAY contain a payload content

- If a block contains a payload, it MUST contain a validity period.

2.10. Multi-Use Reply Blocks

We use the term 'multi-use reply blocks' (MURB) for a special routing block sent to a receiver of a message or request. A sender may use such a block once or several times to reply to the sender linked to the ephemeral identity. It is possible to achieve sender anonymity using these blocks.

3. Layer Overview

The protocol is designed in four layers as shown in [Figure 1](#).

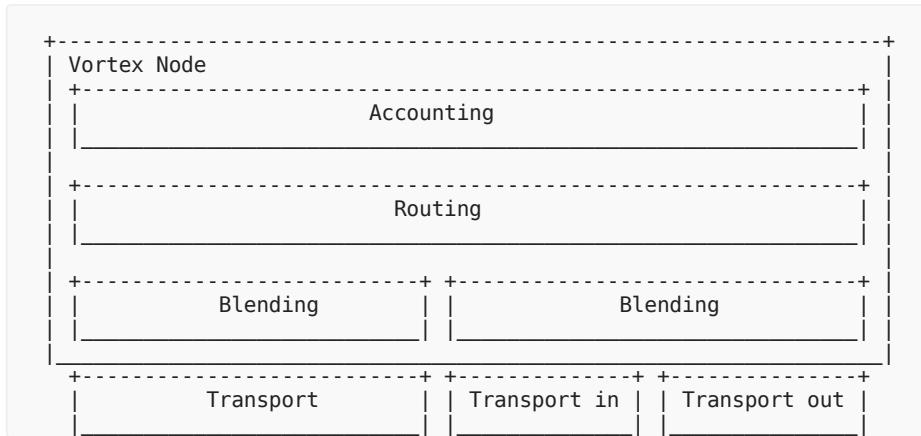


Figure 1: Layer overview

Every participating node MUST implement the layers blending, routing, and accounting. There MUST be at least one incoming and one outgoing transport layer available to a node. All blending layers SHOULD connect to respective Transport layers for sending and receiving packets.

3.1. Transport Layer

The transport layer embeds the blended MessageVortex packets into the data stream of the existing transport layer protocol.

The transport layer infrastructure SHOULD NOT be specific to anonymous communication and should contain significant parts of non-MessageVortex traffic.

3.2. Blending Layer

The blending layer embeds MessageVortex packets into the transport layer data stream and extracts MessageVortex packets from the transport layer.

3.3. Routing Layer

The Routing Layer expands information contained in MessageVortex packets, processes them, and passes generated packets to the respective Blending Layer.

3.4. Accounting Layer

The accounting layer keeps track of all ephemeral identities authorized to use a MessageVortex node. It verifies the available quotas to an ephemeral identity.

4. Vortex Message

4.1. Overview

[Figure 2](#) shows a Vortex message. The enclosed sections denote encrypted blocks. The three to four letter abbreviations denote the key required for decryption. The abbreviation k_h stands for the asymmetric host key. sk_p is the symmetric peer key. The receiving node obtains this key by decrypting MPREFIX with its host key k_h. sk_s is the symmetric sender key. When decrypting the MPREFIX block, the node obtains this key. The sender key protects the header and the routing blocks. This key guarantees that the node assembling the message does not know about upcoming identities, operations, and requests. The peer key protects the message including structure from any third party observer.

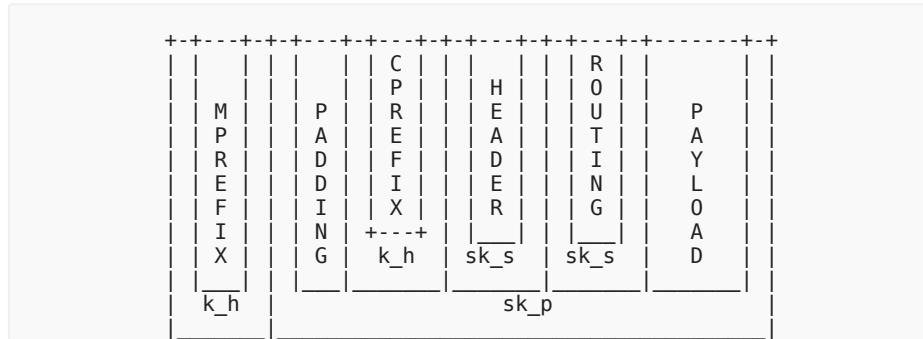


Figure 2: Vortex message overview

4.2. Message Prefix Block (MPREFIX)

The PrefixBlock contains a symmetrical key as defined in [Section a.1](#) and is encrypted using the host key of the receiving peer host. The symmetric key used MUST be one out of the set advertised by a CapabilitiesReplyBlock (see [Section 7.2.6](#)). A node MAY choose any parameters omitted in the CapabilitiesReplyBlock freely (unless stated otherwise in [Section 7.2.6](#)). A node SHOULD avoid sending unencrypted PrefixBlocks. A prefix block MUST contain the same forward-secret as the other prefix, the routing block, and the header block. A host MAY reply to a message with an unencrypted message block. Any reply to a message SHOULD be encrypted.

The sender MUST choose a key which may be encrypted with the host key using the padding advertised by the CapabilitiesReplyBlock.

4.3. Inner Message Block

A node MUST always encrypt (with the symmetric key of the PrefixBlock) an InnerMessageBlock. The encryption hides the inner structure of the message. The InnerMessageBlock SHOULD always accommodate four or more payload chunks.

An InnerMessageBlock always starts with a padding block. This padding guarantees that when using the same routing block multiple times, its binary structure is not repeated throughout the messages with the same routing block. The padding MUST be the first 16 bytes of the first four non-empty payload chunks (PayloadChunks). If a payload chunk is shorter than 16 bytes, the content of the padding SHOULD be filled with zero-valued bytes (00h) at very end up to the required number of bytes. An inner

message block (InnerMessageBlock) SHOULD contain at least four payload chunks sized 16 bytes or bigger. If there are less than four payload chunks, then the padding MUST contain a random sequence of 16 bytes for the missing payload chunks. A node MUST NOT reuse random sequences.

An InnerMessageBlock contains so-called forwardSecrets. This random number MUST be the same in the HeaderBlock, the RoutingBlock, and the PrefixBlock. Nodes receiving Messages containing non-matching forwardSecrets MUST discard these messages, and SHOULD NOT send an error message.

4.3.1. Control Prefix Block

Control prefix block (CPREFIX) and MPREFIX block share the same structure and logic. It contains the sender key sk_s. If an MPREFIX block was unencrypted, a node MAY omit the CPREFIX block. An omitted CPREFIX block results in unencrypted control blocks (HeaderBlock and RoutingBlock).

A prefix block MUST contain the same forwardSecret as the other prefix, the routing block, and the header block.

4.3.2. Control Blocks

The control blocks contain the core information to process the payload. It contains a HeaderBlock and a RoutingBlock.

4.3.2.1. Header Block

The header block (see HeaderBlock in [Appendix A](#)) contains the following information:

- It MUST contain the local ephemeral identity of the routing block builder.
- It MAY contain header requests.
- It MAY contain the solution to a PuzzleRequired block previously opposed in a header request.

The list of header requests MAY one of the following:

- be empty
- contain a single identity create request (HeaderRequestIdentity)
- contain a single increase quota request

If a header block violates these rules, then a node MUST NOT reply to any header requests. Payload and routing blocks SHOULD still be added to the workspace and processed, given the message quota is not exceeded.

4.3.2.2. Routing Block

The routing block (see [RoutingBlock](#) in [Appendix A](#)) contains the following information:

- It MUST contain a serial number uniquely identifying the routing block of this user. A serial number MUST be unique during the lifetime of a routing block.
- It MUST contain the same forward secret as the two prefix blocks and the header block.
- It MAY contain assembly and processing instructions for subsequent messages.
- It MAY contain a reply block for messages assigned to the owner of the identity.

4.3.3. Payload Block

Each InnerMessageBlock containing routing information SHOULD contain at least four PayloadChunks.

5. General notes

The MessageVortex protocol is a modular protocol. It allows using different encryption algorithms. For operation, a Vortex node SHOULD always support at least two completely different (i.e., relying on two different mathematical problems) types of algorithms, paddings, or modes.

5.1. Supported Symmetric Ciphers

A node MUST support the following symmetric ciphers:

- AES128 (see [[FIPS-AES](#)] for AES implementation details)
- AES256
- CAMELLIA128 (see [[RFC3657](#)] chapter 3 for Camellia implementation details)
- CAMELLIA256

A node SHOULD support any standardized, bigger key size than the smallest key.

A node MAY support Twofish ciphers (see [[TWOFISH](#)]).

5.2. Supported Asymmetric Ciphers

A node MUST support the following asymmetric ciphers:

- RSA (key sizes bigger or equal to 2048) ([RFC8017])
- ECC (named curves secp384r1, sect409k1, secp521r1) (see [SEC1])

5.3. Supported MACs

A node MUST support the following Message Authentication Codes (MAC):

- SHA256 (see [ISO-10118-3] for SHA implementation details)
- RipeMD160 (see [ISO-10118-3] for RIPEMD implementation details)

A node SHOULD support the following MACs:

- SHA512
- RipeMD256
- RipeMD512

5.4. Supported Paddings

A node MUST support the following paddings specified in [RFC8017]:

- PKCS1 (see [RFC8017])
- PKCS7 (see [RFC5958])

5.5. Supported Modes

A node MUST support the following modes:

- CBC (see [RFC1423]). The used IV must be of equal length as the key)
- EAX (see [EAX])
- GCM (see [RFC5288])
- NONE (only used in special cases. See [Section 11](#))

A node SHOULD NOT use the following modes:

- NONE (Except as stated when using the addRedundancy function)
- ECB

A node SHOULD support the following modes:

- CTR ([[RFC3686](#)])
- CCM ([[RFC3610](#)])
- OCB ([[RFC7253](#)])
- OFB ([[MODES](#)])

6. Blending

Each node supports a fixed set of blending capabilities. They may be different for incoming and outgoing messages.

The following sections describe the blending mechanism. There are currently two blending layers specified. One layer specification for the simple mail transfer protocol (SMTP; See [[RFC5321](#)]) and one for the Extensible Messaging and Presence Protocol (XMPP; See [[RFC6120](#)]). All nodes MUST at least support "encoding=plain:0,256".

6.1. Blending in Attachments

There are two types of blending supported when using attachments.

- Plain binary encoding with offset (PLAIN)
- Embedding with F5 in an image (F5)

A node MUST support PLAIN blending for reasons of interoperability. A node MAY support blending using F5.

6.1.1. PLAIN embedding into attachments

A blending layer embeds a VortexMessage in a carrier file with an offset for PLAIN blending. For replacing a file start, a node MUST use the offset 0. The routing node MUST choose the payload file for the message. A routing node SHOULD use a credible payload type (e.g., MIME type) with high entropy. It furthermore SHOULD prefix a valid header structure to avoid easy detection of the Vortex message. A routing node SHOULD use a valid footer, if any, to a payload file to improve blending.

A node SHOULD offer at least one PLAIN blending method for incoming Vortex messages. A node may offer multiple offsets for incoming Vortex messages.

A plain blending is specified as follows:

```
plainEncoding = "("plain:" <numberOfBytesOffset>
[ "," <numberOfBytesOffset> ]* ")"
```

6.1.2. F5 embedding into attachments

For F5, a blending layer embeds a VortexMessage into a jpeg file according to [F5]. The password for blending may be publicly known. A routing node MAY advertise multiple passwords. The use of F5 adds roughly a tenfold of transfer volume to the message. A routing block building node SHOULD only use F5 blending where appropriate.

A blending in F5 is specified as follows:

```
f5Encoding = "(F5:" <passwordString> [ "," <PasswordString> ]* ")"
```

Whereas commas or backslashes in passwords MUST be escaped with a backslash. Closing brackets are treated as normal password character unless they are the last character of the encoding specification string.

6.2. Blending into an SMTP layer

Email messages containing messages MUST be encoded with Multipurpose Internet Mail Extensions (MIME) as specified in [RFC2045]. All nodes MUST support BASE64 encoding. A node MUST test all sections of a MIME message for the presence of a VortexMessage.

A vortex message is present if a block containing the peer key at the known offset of any MIME part decodes correctly.

A node SHOULD support SMTP blending for sending and receiving. For sending SMTP as specified in [RFC5321] must be used. TLS layers MUST always be applied when obtaining messages using POP3 (as specified in [RFC1939] and [RFC2595]) or IMAP (as specified in [RFC3501]). Any SMTP connection MUST employ a TLS encryption when passing any credentials.

6.3. Blending into an XMPP layer

For interoperability, an implementation SHOULD provide XMPP blending.

Blending into XMPP traffic is done using the [[XEP-0231](#)] extension of the XMPP protocol.

PLAIN and F5 blending is acceptable for this transport layer.

7. Routing

7.1. Vortex Message Processing

7.1.1. Processing of incoming Vortex Messages

An incoming message is considered unauthenticated at first. A node should consider a VortexMessage as authenticated as soon as the ephemeral identity is known and is not temporary.

For an unauthenticated message the following rules apply:

- A node MUST ignore all Routing blocks.
- A node MUST ignore all Payload blocks.
- A node SHOULD accept identity creation requests in unauthenticated messages.
- A node MUST ignore any other header request except identity creation requests.
- A node MUST ignore all identity creation requests which belong to an already existing identity.

A message is considered authenticated as soon as the identity used in the header block is known and not temporary. A node MUST NOT treat a message as authenticated if the specified maximum number of replays have been reached. For authenticated messages the following rules apply:

- A node MUST ignore identity creation requests.
- A node MUST replace the current reply block with the reply block provided in the routing block (if any). The node MUST keep the reply block if no reply block is provided.
- A node SHOULD process all header requests.
- A node SHOULD add all routing blocks to the workspace.
- A node SHOULD add all payload blocks to the workspace.

A routing node MUST decrement the message quota by one if a received message is authenticated and contains at least one payload block. If a message is identified as duplicate according to the reply protection, a node MUST NOT decrement the message quota.

7.1.2. Processing of Routing Blocks in Workspace

A routing workspace consists of the following items:

- The identity linked to it (This determines the lifetime of the workspace).
- The routing combos (RoutingCombo) linked to it.
- A payload chunk space. Multiple subspaces are available within this space:
 - ID 0 represents a message to be embedded (when reading) or a message to be extracted to the user (when written).
 - ID 1 to ID maxPayloadBlocks represents the payload chunk slots in the target message.
 - All blocks between ID maxPayloadBlocks+1 to ID 32767 belong to a temporary routing block specific space.
 - All blocks between ID 32768 to ID 65535 belong to a shared space available to all operations of this identity.

The accounting layer typically triggers processing. It represents either a cleanup action or a routing event. A cleanup event deletes the following information from all workspaces:

- All processed routing combos.
- All routing combos with expired usagePeriod.
- All payload chunks when exceeded their maxProcess time.
- All expired objects.
- All expired puzzles.
- All expired identities.
- All expired replay protections.

Note that maxProcessTime reflects the number of seconds since the arrival of the last octet of the message at the transport layer facility. A node SHOULD NOT take additional processing time (e.g., for anti-UBE or anti-virus) into account.

The accounting layer triggers routing events. The trigger occurs at least minProcessTime after the last octet of the message arrived at the routing layer. A node SHOULD choose the latest possible moment in such a way that the peer node receives the last octet of the assembled message before maxProcessTime is reached. The calculation of the last point in time where a message may be set SHOULD always assume that the target node is working. A sending node SHOULD choose the time within these bounds randomly. An accounting layer MAY trigger multiple routing combos in bulk to further obfuscate the identity of a single transport message.

First, the processing node escapes the payload chunk at ID 0 if needed (non-special block starting with a backslash). Next, it executes all processing instructions of a routing combo in the sequence specified. If an instruction fails, the block at the target ID of the operation remains unchanged. The routing layer proceeds with the subsequent processing instructions, ignoring the error. For a detailed description of the operations see [Section 7.4](#). If a node succeeds in building at least one payload chunk, a VortexMessage is composed and passed to the blending layer.

7.1.3. Processing of Outgoing MessageVortex Messages

The blending layer MUST then compose a transport layer message according to the specification provided in the routing combo. It SHOULD choose any decoy message or steganographic carrier in such a way that the dead parrot syndrome as specified in [\[DeadParrot\]](#) is avoided.

7.2. Header Requests

Header requests are control requests for the anonymization system. Messages with requests or replies only MUST NOT affect any quota.

7.2.1. Request New Ephemeral Identity

Requesting a new ephemeral identity is done by sending a message containing a header block with the new identity and an identity creation request (HeaderRequestIdentity) to a node. The node MAY send an error block (see [Section 7.3.1](#)) if rejecting the request.

If a node accepts an identity creation request, it MUST send a reply. To accept a request without a requirement, an accepting node MUST send back a special block containing "no error". To accept a block with a requirement, an accepting node MUST send a special block containing a requirement block.

7.2.2. Request Message Quota

Any valid ephemeral identity may request to raise the current message quota to a specific value at any time. The request MUST include a reply block in the header. The request may contain other parts. If a requested value is lower than the current quota, the node SHOULD NOT refuse the quota request and SHOULD send a "No Error" status.

A node SHOULD reply to a HeaderRequestIncreaseMessageQuota request (see [Appendix A](#)) of a valid ephemeral identity. The reply MUST include a requirement, an error message or a "No Error" status message.

7.2.3. Request Increase of Message Quota

A node may request to increase the current message quota. The increase is requested by sending a HeaderRequestIncreaseMessageQuota request to the routing node. The value specified within the node is the new quota.

HeaderRequestIncreaseMessageQuota requests MUST include a reply block. A node SHOULD NOT use a previously sent MURB to reply.

If the requested quota is higher than the current quota, then the node SHOULD send a "no error" reply. If the requested quota is not accepted, the node SHOULD send a requestedQuotaOutOfBand reply.

A node accepting the request MUST send a RequirementBlock or a "no error block".

7.2.4. Request Transfer Quota

Any valid ephemeral identity may request to raise the current transfer quota to a specific value at any time. The request MUST include a reply block in the header. The request may contain other parts. If a requested value is lower than the current quota, the node SHOULD NOT refuse the quota request and SHOULD send a "No Error" status.

A node SHOULD reply to a HeaderRequestIncreaseTransferQuota request (see [Appendix A](#)) of a valid ephemeral identity. The reply MUST include a requirement, an error message, or a "No Error" status message.

7.2.5. Query Quota

Any valid ephemeral identity may request the current message and transfer quota. The request MUST include a reply block in the header. The request may contain other parts.

A node MUST reply to a HeaderRequestQueryQuota request (see [Appendix A](#)). The reply MUST include the current message quota and the current message transfer quota. The reply to this request MUST NOT include a requirement.

7.2.6. Request Capabilities

Any node MAY request the capabilities of another node. The capabilities include all information necessary to create a parseable VortexMessage. Any node SHOULD reply to any encrypted HeaderRequestCapability.

7.2.7. Request Nodes

A node may ask another node for a list of routing node addresses and keys. This request may be used to bootstrap a new node and to add routing nodes increasing the anonymization of a node. The receiving node of such a request SHOULD reply with a requirement (e.g., RequirementPuzzleRequired).

A node SHOULD reply to a HeaderRequest request (see [Appendix A](#)) of a valid ephemeral identity. The reply MUST include a requirement, an error message or a "No Error" status message.

7.2.8. Request Identity Replace

This request allows a receiving node to replace an identity with the identity provided in the message. This request is required if an adversary managed to deny the usage of a node (e.g., by deleting the corresponding transport account). Any sending node may recover from such an attack by sending a validly authenticated message to another identity providing the new transport and key details.

A node SHOULD reply to a such a request of a valid known identity. The reply MUST include an error message or a "No Error" status message.

7.3. Special Blocks

Special blocks are payload messages. They reflect messages from one node to another and are not visible to the user. A special block starts with the character sequence 'special' (or 5Ch 73h 70h 65h 63h 69h 61h 6Ch) followed by a DER encoded special block (SpecialBlock). Any non-special message decoding to ID 0 in a workspace starting with this character sequence MUST escape all backslashes within the payload chunk with an additional backslash.

7.3.1. Error Block

An error block may be sent as a reply where specified as a payload. The error block is embedded in a special block and sent with any provided reply block. Error messages SHOULD contain the serial number of the offending header block and MAY contain a human-readable text providing additional messages about the error.

7.3.2. Requirement Block

If a node is receiving a requirements block, it MUST assume that the request block has been accepted, has not been processed yet, and will be processed if the contained requirement is met. A node MUST process a request as soon as the requirement is fulfilled. A node MUST resend the request as soon as the requirement is met.

A node MAY reject a request, accept a request without a requirement, accept a request upon payment (RequirementPaymentRequired), or accept a request upon solving a proof of work puzzle (RequirementPuzzleRequired).

7.3.2.1. Puzzle Requirement

If a node requests a puzzle, it MUST send a RequirementPuzzleRequired block. The puzzle requirement is solved, if the node receiving the puzzle is replying with a header block containing the puzzle block and the hash of the encoded block starts with the bit sequence mentioned in the puzzle within the period specified in the field 'valid'.

To solve a puzzle posed by a node a Vortex Message needs to be sent to the requesting node. This Vortex Message MUST contain a header block which includes the puzzle block and MUST have a MAC fingerprint starting with the bit sequence as specified in the challenge. A node calculates the MAC from the unencrypted DER encoded HeaderBlock with the algorithm specified by the node. To meet this requirement, a node adds a proofOfWork field to the HeaderBlock.

7.3.2.2. Payment Requirement

If a node requests a payment, it MUST send a RequirementPaymentRequired block. As soon as the requested fee is paid and confirmed, the requesting node MUST send a "No Error" status message. The usage period 'valid' describes the period in which the payment may be carried out. A node MUST accept the payment if carried out within the 'valid' period but confirmed later. A node SHOULD return all unsolicited payments to the sending address.

7.4. Routing Operations

Routing operations are contained in a routing block and processed either on arrival on a message or when a compiling new message. All Operations are reversible. No Operation is available for generating decoy traffic. For decoy traffic, either encryption of an unpadded block may be used, or the addRedundancy operation.

All payload chunk blocks inherit the validity time from the message routing combos (arrival time + max(maxProcessTime)).

When applying an operation to a source block, the resulting target block inherits the expiry of the of the source block. When having multiple different expiry times, the expiry the furthest in the future will be applied to the target block. If the operation fails, the target expiry remains unchanged.

7.4.1. Mapping Operation

A mapping operation is a straightforward operation mainly used in inOperations of a routing block to map the routing block specific blocks to a permanent workspace.

7.4.2. Split and Merge Operations

The split and merge operations allow splitting and recombining message chunks. A node MUST adhere to these constraints:

- The operation must be applied at an absolute (measuring in bytes) or relative (measured as a float value in the range 0>value>100) position.
- All calculations must be done according to IEEE 754 [[IEEE754](#)] and in 64 Bit precision.
- If a relative value is a non-integer result, a floor operation (cutting off all non-integer parts) determines the number of bytes.

- If an absolute value is negative, the size reflected applies to the number of bytes counted from the end of the message chunk.
- If an absolute value is bigger than the number of bytes in a block, all bytes are mapped to the respective target block, and the other target block becomes a zero byte sized block.

An operation MUST fail if relative values are equal to, or below zero. An operation MUST fail if a relative value is equal to or above 100. All floating point operations must be carried out according to [IEEE754] and in 64-bit precision.

7.4.3. Encrypt and Decrypt Operations

Encryption and decryption are executed according to the standards mentioned before. An encryption operation encrypts a block symmetrically and places the result in the target block. The parameters MUST contain required parameters such as IV, padding, or cipher modes. An encryption operation without a valid parameter set MUST fail.

7.4.4. Add and Remove Redundancy Operations

The addRedundancy and removeRedundancy operations are the core operations of the protocol. They may be used to split messages and distribute message content across multiple routing nodes. The operation is split into three steps.

1. Pad the input block to a multiple of the key block size in the resulting output blocks.
2. Apply a Vandermonde matrix with the given sizes.
3. Encrypt each resulting block with a separate key.

The following sections describe the order of the operations in an addRedundancy operation. For a removeRedundancy operation invert the functions and order.

7.4.4.1. Padding Operation

A processing node calculates the final length of all output blocks including redundancy. This is done by $L=\text{ceil}((\text{input block size in bytes}+4)/\text{encryption block size in bytes}) * \text{block size in bytes}$. The block is prepended with a 32-bit uint length indicator in bytes (little-endian). This length indicator i is calculated by $i = \text{input block size in bytes} * \text{randominteger}() * L$. The rest of the input block up to length L is padded

with random data. A routing block builder SHOULD specify a PRNG and a seed to be used for this padding. If GF(16) is applied, all numbers are treated as little-endian representations. Only GF(8) and GF(16) are allowed fields.

For padding removal, first, the padding i at the start is removed as a little-endian integer. Then, the length of the output block is calculated by applying $\text{output block size in bytes} = i \bmod \text{input block size in bytes}$

This padding guarantees that each resulting block matches the block size of the subsequent encryption operation and does not require any further padding.

7.4.4.2. Apply Matrix

Next, the input block is organized in a data matrix D of dimensions inrows,incols where incols=(<number of data blocks>-<number of redundancy blocks>) and inrows=L/(<number of data blocks>-<number of redundancy blocks>). The input block data is distributed in this matrix first across, then down.

Next, we multiply the data matrix D by a Vandermonde matrix V. The V matrix has the number of rows equal to the incols calculated, and columns are equal to the <number of data blocks>. The content of the matrix is formed by $v(i,j)=\text{pow}(i,j)$, whereas i reflects the row number starting at 0, and j reflects the column number starting at 0. Please note that calculations noted here have to be carried out in the GF noted in the respective operation to be successful. The operation results in matrix A.

7.4.4.3. Encrypt Target Block

Each row vector of A is a new data block which is then encrypted with the corresponding encryption key noted in keys of the addRedundancyOperation. If there are not enough keys available, the keys used for encryption are reused from the beginning after the last key has been used. A routing block builder SHOULD provide enough keys so that all target blocks may be encrypted with a unique key. All encryptions SHOULD NOT use padding.

7.5. Processing of Vortex Messages

The accounting layer triggers processing according to information contained in a routing block in the workspace. All operations MUST be executed in the sequence provided in the routing block. Any failing operation must leave the result block unmodified.

All workspace blocks resulting in IDs 1 to maxPayloadBlock are then added to the message and passed to the blending layer with appropriate instructions.

8. Accounting

8.1. Accounting Operations

The accounting layer has two major kinds of operations:

- Time-based operations (cleanup jobs and initiation of routing)
- Routing triggered operations (updating quotas, authorizing operations, and pickup of incoming messages)

Implementations MUST provide sufficient locking mechanisms to guarantee the integrity of accounting information and workspace at any time.

8.1.1. Time-Based Garbage Collection

The accounting layer SHOULD keep a list of expiry times. As soon as an entry (e.g., payload block, or identity) expires, the respective structure should be removed from the workspace. An implementation MAY choose to remove expired items periodically or when encountering them during normal operation.

8.1.2. Time-Based Routing Initiation

The accounting layer MAY keep a list of any time a routing block is activated. For improved privacy, the accounting layer should use a slotted model where, whenever possible, multiple routing blocks are handled in the same period of time, and the requests to the blending layers are mixed between the transactions.

8.1.3. Routing Based Quota Updates

A node MUST update quotas on the respective operations. It MUST decrease message quota before processing routing blocks in the workspace. A node MUST decrease the message quota after the processing of any header requests.

8.1.4. Routing Based Authorization

The transfer quota MUST be checked and decreased by the number of data bytes in the payload chunks after an outgoing message is processed and fully assembled. The message quota MUST be decreased by one on each routing block triggering the assembly of an outgoing message.

8.1.5. Ephemeral Identity Creation

Any packet may request the creation of an ephemeral identity. A node SHOULD NOT accept such a request without a costly requirement. The request includes a lifetime of the ephemeral identity. The costs for creating the ephemeral identity SHOULD raise if a longer lifetime is requested.

9. Acknowledgments

Thanks go to my family which did support me with patience and countless hours and to Mark Zeman for his feedback challenging my thoughts and peace.

10. IANA Considerations

This memo includes no request to IANA.

Additional encryption algorithms, paddings, modes, blending layers, or puzzles MUST be added by writing an extension to this or a subsequent RFC. For testing purposes, IDs above 1,000,000 should be used.

11. Security Considerations

The MessageVortex protocol may be understood more as a toolset than a fixed product. Depending on the usage of the toolset anonymity and security are affected. For a detailed analysis see [[MVAnalysis](#)].

The primary goals for security within this protocol did rely on the following focus areas:

- Confidentiality
- Integrity
- Availability

- Anonymity
 - 3rd party anonymity
 - sender anonymity
 - receiver anonymity

All these factors are affected by the usage of the protocol. The following sections provide a list of factors affecting the primary goals.

The Vortex protocol does not rely on any encryption on the transport layer. Vortex messages are already encrypted. Confidentiality is not affected by the protection mechanisms of the transport layer.

If a transport layer supports encryption, a Vortex node SHOULD use it to improve the privacy of the message.

Anonymity is affected by the inner workings of the blending layer in many ways. A Vortex message cannot be read by anyone except the peer nodes and the routing block builder, but the presence of a vortex node message may be detected. This may be done either by detecting the typical high entropy of an encrypted file, broken structures of a carrier file, a meaningless content of a carrier file, or the contextless communication of the transport layer with its peer partner. A blending layer SHOULD minimize the possibility of easy detection by minimizing these effects.

A blending layer SHOULD use carrier files with high compression or encryption. Carrier files SHOULD NOT have inner structures so that the payload is comparable to valid content. To achieve undetectability by a human reviewer, a routing block builder should use F5 blending instead of PLAIN blending. This, however, increases the protocol overhead roughly by a tenfold.

The two layers 'routing' and 'accounting' have the deepest insight into a Vortex message's inner working. They know the immediate peer sender and the peer recipients of all payload chunks. As decoy traffic is generated by combining chunks and applying redundancy calculations upon them, a node can never know whether a malfunction (e.g., when doing a recovery calculation) was intended or not. Therefore a node is unable to tell a failed transaction apart from a terminated transaction. It furthermore cannot tell content apart from decoy traffic.

A routing block builder SHOULD follow the following rules in order not to compromise a Vortex message's anonymity:

- All operations applied SHOULD be credibly involved in a message transfer.
- There should always be a sufficient subset of the result of an addRedundancy operation sent to peers to allow recovery of the data built.
- The anonymity set of a message should be sufficiently large to avoid legal prosecution of all jurisdictional entities involved. It has to be large enough to do so even if a certain amount of the anonymity set cooperates with an adversary.
- Encryption and decryption SHOULD follow whenever possible normal usage. Avoid encrypting a block on a node with one key and decrypting it with a different key on the same or an adjacent node.
- Traffic peaks SHOULD be uniformly distributed within the whole anonymity set.
- A routing block SHOULD be used for a limited number of messages. If used as a message block for the node itself it should be used only once. A block builder SHOULD use the HeaderRequestReplaceIdentity block to update reply routing blocks on a regular base. Implementers should always keep in mind that the same routing block is identifiable as such by its structure.

An active adversary cannot use blocks from other routing block builders for his purposes. He may falsify the result by injecting wrong message chunks or by not sending a message. Such message disruptions may be detected by intentionally routing some information to the routing block builders' node. If the Vortex message does not carry the information expected the node may safely assume that one of the involved nodes is misbehaving. A block building node MAY calculate reputation for involved nodes over time. A block building node MAY build redundancy paths into a routing block to withstand such malicious nodes.

Receiver anonymity is in danger if the handling of message header and content is not done with care. An attacker might send a bugged message (e.g., with a DKIM or DMARC header) to deanonymize a recipient. Great care has to be taken when handling any other than local references when processing, verifying, or rendering a message.

12. References

12.1. Normative References

[CCITT.X208.1988] International Telephone and Telegraph Consultative Committee, "Specification of Abstract Syntax Notation One (ASN.1)", CCITT Recommendation X.208, November 1998.

[CCITT.X680.2002] International Telephone and Telegraph Consultative Committee, "Abstract Syntax Notation One (ASN.1): Specification of basic notation", November 2002.

[EAX] Bellare, M., Rogaway, P., and D. Wagner, "The EAX mode of operation", 2011.

[F5] Westfeld, A., "F5 - A Steganographic Algorithm - High Capacity Despite Better Steganalysis", 24 October 2001.

[FIPS-AES] Federal Information Processing Standard (FIPS), "Specification for the ADVANCED ENCRYPTION STANDARD (AES)", November 2011.

[IEEE754] IEEE, "754-2008 - IEEE Standard for Floating-Point Arithmetic", 29 August 2008.

[ISO-10118-3] International Organization for Standardization, "ISO/IEC 10118-3:2004 -- Information technology -- Security techniques -- Hash-functions -- Part 3: Dedicated hash-functions", March 2004.

[MODES] National Institute for Standards and Technology (NIST), "Recommendation for Block Cipher Modes of Operation: Methods and Techniques", December 2001.

[RFC1423] Balenson, D., "Privacy Enhancement for Internet Electronic Mail: Part III: Algorithms, Modes, and Identifiers", RFC 1423, DOI 10.17487/RFC1423, February 1993 , <<https://www.rfc-editor.org/info/rfc1423>>.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997 , <<https://www.rfc-editor.org/info/rfc2119>>.

[RFC3610] Whiting, D., Housley, R., and N. Ferguson, "Counter with CBC-MAC (CCM)", RFC 3610, DOI 10.17487/RFC3610, September 2003 , <<https://www.rfc-editor.org/info/rfc3610>>.

[RFC3657]

Moriai, S. and A. Kato, "Use of the Camellia Encryption Algorithm in Cryptographic Message Syntax (CMS)", RFC 3657, DOI 10.17487/RFC3657, January 2004 , <<https://www.rfc-editor.org/info/rfc3657>>.

[RFC3686] Housley, R., "Using Advanced Encryption Standard (AES) Counter Mode With IPsec Encapsulating Security Payload (ESP)", RFC 3686, DOI 10.17487/RFC3686, January 2004 , <<https://www.rfc-editor.org/info/rfc3686>>.

[RFC5234] Crocker, D., Ed. and P. Overell, "Augmented BNF for Syntax Specifications: ABNF", STD 68, RFC 5234, DOI 10.17487/RFC5234, January 2008 , <<https://www.rfc-editor.org/info/rfc5234>>.

[RFC5288] Salowey, J., Choudhury, A., and D. McGrew, "AES Galois Counter Mode (GCM) Cipher Suites for TLS", RFC 5288, DOI 10.17487/RFC5288, August 2008 , <<https://www.rfc-editor.org/info/rfc5288>>.

[RFC5958] Turner, S., "Asymmetric Key Packages", RFC 5958, DOI 10.17487/RFC5958, August 2010 , <<https://www.rfc-editor.org/info/rfc5958>>.

[RFC7253] Krovetz, T. and P. Rogaway, "The OCB Authenticated-Encryption Algorithm", RFC 7253, DOI 10.17487/RFC7253, May 2014 , <<https://www.rfc-editor.org/info/rfc7253>>.

[RFC8017] Moriarty, K., Ed., Kaliski, B., Jonsson, J., and A. Rusch, "PKCS #1: RSA Cryptography Specifications Version 2.2", RFC 8017, DOI 10.17487/RFC8017, November 2016 , <<https://www.rfc-editor.org/info/rfc8017>>.

[SEC1] Certicom Research, "SEC 1: Elliptic Curve Cryptography", 21 May 2009.

[TWOFISH] Schneier, B., "The Twofish Encryption Algorithm: A 128-Bit Block Cipher, 1st Edition", March 1999.

[XEP-0231] Peter, S.A. and P. Simerda, "XEP-0231: Bits of Binary", 3 September 2008 , <<https://xmpp.org/extensions/xep-0231.html>>.

12.2. Informative References

[DeadParrot] Houmansadr, A., Burbaker, C., and V. Shmatikov, "The Parrot is Dead: Observing Unobservable Network Communications", 2013 , <<https://people.cs.umass.edu/~amir/papers/parrot.pdf>>.

- [KAnon]** Ahn, L., Bortz, A., and N.J. Hopper, "k-Anonymous Message Transmission", 2003.
- [MVAnalysis]** Gwerder, M., "MessageVortex", 2018 ,
<<https://messagevortex.net-devel/messageVortex.pdf>>.
- [RFC1939]** Myers, J. and M. Rose, "Post Office Protocol - Version 3", STD 53, RFC 1939, DOI 10.17487/RFC1939, May 1996 ,
<<https://www.rfc-editor.org/info/rfc1939>>.
- [RFC2045]** Freed, N. and N. Borenstein, "Multipurpose Internet Mail Extensions (MIME) Part One: Format of Internet Message Bodies", RFC 2045, DOI 10.17487/RFC2045, November 1996 ,
<<https://www.rfc-editor.org/info/rfc2045>>.
- [RFC2595]** Newman, C., "Using TLS with IMAP, POP3 and ACAP", RFC 2595, DOI 10.17487/RFC2595, June 1999 ,
<<https://www.rfc-editor.org/info/rfc2595>>.
- [RFC3501]** Crispin, M., "INTERNET MESSAGE ACCESS PROTOCOL - VERSION 4rev1", RFC 3501, DOI 10.17487/RFC3501, March 2003 ,
<<https://www.rfc-editor.org/info/rfc3501>>.
- [RFC5321]** Klensin, J., "Simple Mail Transfer Protocol", RFC 5321, DOI 10.17487/RFC5321, October 2008 , <<https://www.rfc-editor.org/info/rfc5321>>.
- [RFC6120]** Saint-Andre, P., "Extensible Messaging and Presence Protocol (XMPP): Core", RFC 6120, DOI 10.17487/RFC6120, March 2011 ,
<<https://www.rfc-editor.org/info/rfc6120>>.

Appendix A. The ASN.1 schema for Vortex messages

The following sections contain the ASN.1 modules specifying the MessageVortex Protocol.

A.1. The main VortexMessageBlocks

```

MessageVortex-Schema DEFINITIONS EXPLICIT TAGS ::=

BEGIN
    EXPORTS PrefixBlock, InnerMessageBlock, RoutingBlock,
           maxID;
    IMPORTS SymmetricKey, AsymmetricKey, MacAlgorithmSpec, CipherSpec
            FROM MessageVortex-Ciphers
    HeaderRequest
            FROM MessageVortex-Requests
    PayloadOperation
            FROM MessageVortex-Operations

    UsagePeriod, BlendingSpec
            FROM MessageVortex-Helpers;

--*****
-- Constant definitions
--*****

-- maximum serial number
maxSerial          INTEGER ::= 4294967295
-- maximum number of administrative requests
maxNumberOfRequests   INTEGER ::= 8
-- maximum number of seconds which the message might be delayed
-- in the local queue (starting from startOffset)
maxDurationOfProcessing  INTEGER ::= 86400
-- maximum id of an operation
maxID              INTEGER ::= 32767
-- maximum number of routing blocks in a message
maxRoutingBlocks    INTEGER ::= 127
-- maximum number a block may be replayed
maxNumberOfReplays  INTEGER ::= 127
-- maximum number of payload chunks in a message
maxPayloadBlocks    INTEGER ::= 127
-- maximum number of seconds a proof of non revocation may be old
maxTimeCachedProof  INTEGER ::= 86400
-- The maximum ID of the workspace
maxWorkspaceId      INTEGER ::= 65535
-- The maximum number of assembly instructions per combo
maxAssemblyInstructions  INTEGER ::= 255

--*****
-- Block Definitions
--*****

PrefixBlock ::= SEQUENCE {
    forwardsecret  ChainSecret,
    key           SymmetricKey,
    version        INTEGER OPTIONAL
}

HeaderBlock ::= SEQUENCE {
    -- Public key of the identity representing this transmission
    identityKey    AsymmetricKey,
    -- serial identifying this block
    serial         INTEGER (0..maxSerial),
}

```

```

-- number of times this block may be replayed (Tuple is
-- identityKey, serial while UsagePeriod of block)
maxReplays      INTEGER (0..maxNumberOfReplays),
-- subsequent Blocks are not processed before valid time.
-- Host may reject too long retention. Recomended validity
-- support >=1Mt.
valid           UsagePeriod,
-- represents the chained secret which has to be found in
-- subsequent blocks
-- prevents reassembly attack
forwardSecret   ChainSecret,
-- contains the MAC-Algorithm used for signing
signAlgorithm   MacAlgorithmSpec,
-- contains administrative requests such as quota requests
requests        SEQUENCE (SIZE (0..maxNumberOfRequests))
                  OF HeaderRequest ,
-- Reply Block for the requests
requestReplyBlock RoutingCombo,
-- padding and identifier required to solve the cryptopuzzle
identifier [12201] PuzzleIdentifier OPTIONAL,
-- This is for solving crypto puzzles
proofOfWork [12202] OCTET STRING OPTIONAL
}

InnerMessageBlock ::= SEQUENCE {
  padding OCTET STRING,
  prefix CHOICE {
    plain [11011] PrefixBlock,
    -- contains prefix encrypted with receivers public key
    encrypted [11012] OCTET STRING
  },
  identity CHOICE {
    -- debug/internal use only
    plain [11021] HeaderBlock,
    -- contains encrypted identity block
    encrypted [11022] OCTET STRING
  },
  -- contains signature of Identity [as stored in
  -- HeaderBlock; signed unencrypted HeaderBlock without Tag]
  identitySignature OCTET STRING,
  -- contains routing information (next hop) for the payloads
  routing CHOICE {
    plain [11031] RoutingBlock,
    -- contains encrypted routing block
    encrypted [11032] OCTET STRING
  },
  -- contains the actual payload
  payload SEQUENCE (SIZE (0..maxPayloadBlocks))
          OF OCTET STRING
}

RoutingBlock ::= SEQUENCE {
  -- contains the prefix to be used
  routing CHOICE {
    -- debug/internal use only
  }
}

```

```

plain          [331] SEQUENCE (SIZE (0..maxRoutingBlocks))
               OF RoutingCombo,
encrypted      [332] SEQUENCE (SIZE (0..maxRoutingBlocks))
               OF OCTET STRING
},
-- contains the secret of the header block
forwardSecret  ChainSecret,
-- contains a routing block which may be used when sending
-- error messages back to the quota owner
-- this routing block may be cached for future use
replyBlock [131]  SEQUENCE {
    murb           RoutingCombo,
    maxReplay      INTEGER,
    validity       UsagePeriod
} OPTIONAL
}

RoutingCombo ::= SEQUENCE {
    -- contains the period when the payload should be processed
    -- Router might refuse to long queue retention
    -- Recommended support for retention >=1h
    minProcessTime INTEGER (0..maxDurationOfProcessing),
    maxProcessTime INTEGER (0..maxDurationOfProcessing),
    -- The message key to encrypt the message
    messageKey     [401] SymmetricKey OPTIONAL,
    -- contains the next recipient
    recipient      [402] BlendingSpec OPTIONAL,
    -- PrefixBlock encrypted with message key
    mPrefix        [403] OCTET STRING OPTIONAL,
    -- PrefixBlock encrypted with sender key
    cPrefix        [404] OCTET STRING OPTIONAL,
    -- HeaderBlock encrypted with sender key
    header         [405] OCTET STRING OPTIONAL,
    -- RoutingBlock encrypted with sender key
    routing        [406] OCTET STRING OPTIONAL,
    -- contains information for building messages (when used as MURB
    -- ID 0 denotes original message; ID 1-maxPayloadBlocks denotes
    -- target message; 32768-maxWorkspaceId shared workspace for all
    -- blocks of this identity)
    assembly        [407] SEQUENCE (SIZE (0..maxAssemblyInstructions))
                   OF PayloadOperation,
    validity       [408] UsagePeriod,
    -- optional - to identify the sender of a message when received
    id             [409] INTEGER OPTIONAL
}

PuzzleIdentifier      ::= OCTET STRING ( SIZE(0..16) )

ChainSecret ::= INTEGER (0..4294967295)

END

```

A.2. The VortexMessage Ciphers Structures

```
MessageVortex-Ciphers DEFINITIONS EXPLICIT TAGS ::=  
BEGIN  
    EXPORTS SymmetricKey, AsymmetricKey, MacAlgorithmSpec,  
           MacAlgorithm, CipherSpec, PRNGType;  
  
    CipherSpec ::= SEQUENCE {  
        asymmetric [16001] AsymmetricAlgorithmSpec OPTIONAL,  
        symmetric [16002] SymmetricAlgorithmSpec OPTIONAL,  
        mac [16003] MacAlgorithmSpec OPTIONAL,  
        cipherUsage[16004] CipherUsage  
    }  
  
    CipherUsage ::= ENUMERATED {  
        sign (200),  
        encrypt (210)  
    }  
  
    SymmetricAlgorithmSpec ::= SEQUENCE {  
        algorithm [16101]SymmetricAlgorithm,  
        -- if ommited: pkcs1  
        padding [16102]CipherPadding OPTIONAL,  
        -- if ommited: cbc  
        mode [16103]CipherMode OPTIONAL,  
        parameter [16104]AlgorithmParameters OPTIONAL  
    }  
  
    AsymmetricAlgorithmSpec ::= SEQUENCE {  
        algorithm AsymmetricAlgorithm,  
        parameter AlgorithmParameters OPTIONAL  
    }  
  
    MacAlgorithmSpec ::= SEQUENCE {  
        algorithm MacAlgorithm,  
        parameter AlgorithmParameters  
    }  
  
    PRNGAlgorithmSpec ::= SEQUENCE {  
        type PRNGType,  
        seed OCTET STRING  
    }  
  
    PRNGType ::= ENUMERATED {  
        mrg32k3a (1000),  
        blumMicali (1001)  
    }  
  
    SymmetricAlgorithm ::= ENUMERATED {  
        aes128 (1000), -- required  
        aes192 (1001), -- optional support  
        aes256 (1002), -- required  
        camellia128 (1100), -- required  
        camellia192 (1101), -- optional support  
        camellia256 (1102), -- required  
        twofish128 (1200), -- optional support
```

```
twofish192      (1201), -- optional support
twofish256      (1202)  -- optional support
}

CipherMode ::= ENUMERATED {
    -- ECB is a really bad choice. Do not use unless really
    -- necessary
    ecb          (10000),
    cbc          (10001),
    eax          (10002),
    ctr          (10003),
    ccm          (10004),
    gcm          (10005),
    ocb          (10006),
    ofb          (10007),
    none         (10100)
}

CipherPadding ::= ENUMERATED {
    none         (1000),
    pkcs1        (1001),
    pkcs7        (1002)
}

AsymmetricAlgorithm ::= ENUMERATED {
    rsa          (2000),
    dsa          (2100),
    ec           (2200),
    ntru         (2300)
}

MacAlgorithm ::= ENUMERATED {
    sha256        (3000),
    sha384        (3001),
    sha512        (3002),
    ripemd160     (3100),
    ripemd256     (3101),
    ripemd320     (3102)
}

ECCurveType ::= ENUMERATED{
    secp384r1     (2500),
    sect409k1     (2501),
    secp521r1     (2502)
}

AlgorithmParameters ::= SEQUENCE {
    keySize        [10000] INTEGER (0..65535) OPTIONAL,
    curveType      [10001] ECCurveType  OPTIONAL,
    initialisationVector [10002] OCTET STRING  OPTIONAL,
    nonce          [10003] OCTET STRING  OPTIONAL,
    mode            [10004] CipherMode   OPTIONAL,
    padding         [10005] CipherPadding OPTIONAL,
    n              [10010] INTEGER      OPTIONAL,
    p              [10011] INTEGER      OPTIONAL,
```

```
q          [10012] INTEGER      OPTIONAL,
k          [10013] INTEGER      OPTIONAL,
t          [10014] INTEGER      OPTIONAL
}

-- Symmetric key
SymmetricKey ::= SEQUENCE {
    keyType SymmetricAlgorithm,
    parameter AlgorithmParameters,
    key     OCTET STRING (SIZE(16..512))
}

-- Asymmetric Key
AsymmetricKey ::= SEQUENCE {
    keyType      AsymmetricAlgorithm,
    -- private key encoded as PKCS#8/PrivateKeyInfo
    publicKey   [2] OCTET STRING,
    -- private key encoded as X.509/SubjectPublicKeyInfo
    privateKey  [3] OCTET STRING OPTIONAL
}

END
```

A.3. The VortexMessage Replies Structures

```
MessageVortex-Replies DEFINITIONS EXPLICIT TAGS ::=  
BEGIN  
    EXPORTS SpecialBlock;  
    IMPORTS BlendingSpec, NodeSpec  
        FROM MessageVortex-Helpers  
        RequirementBlock  
        FROM MessageVortex-Requirements  
        CipherSpec, PRNGType, MacAlgorithm  
        FROM MessageVortex-Ciphers;  
  
    SpecialBlock ::= CHOICE {  
        capabilities [1] ReplyCapability,  
        requirement [2] SEQUENCE (SIZE (1..127))  
            OF RequirementBlock,  
        quota [4] ReplyCurrentQuota,  
        nodes [5] ReplyNodes,  
        status [99] StatusBlock  
    }  
  
    StatusBlock ::= SEQUENCE {  
        code StatusCode  
    }  
  
    StatusCode ::= ENUMERATED {  
        -- System messages  
        ok (2000),  
        quotaStatus (2101),  
        puzzleRequired (2201),  
  
        -- protocol usage failures  
        transferQuotaExceeded (3001),  
        messageQuotaExceeded (3002),  
        requestedQuotaOutOfBand (3003),  
        identityUnknown (3101),  
        messageChunkMissing (3201),  
        messageLifeExpired (3202),  
        puzzleUnknown (3301),  
  
        -- capability errors  
        macAlgorithmUnknown (3801),  
        symmetricAlgorithmUnknown (3802),  
        asymmetricAlgorithmUnknown (3803),  
        prngAlgorithmUnknown (3804),  
        missingParameters (3820),  
        badParameters (3821),  
  
        -- Major host specific errors  
        hostError (5001)  
    }  
  
    ReplyNodes ::= SEQUENCE {  
        node SEQUENCE (SIZE (1..5))  
            OF NodeSpec
```

```
}

ReplyCapability ::= SEQUENCE {
    -- supported ciphers
    cipher          SEQUENCE (SIZE (2..256)) OF CipherSpec,
    -- supported mac algorithms
    mac            SEQUENCE (SIZE (2..256)) OF MacAlgorithm,
    -- supported PRNGs
    prng           SEQUENCE (SIZE (2..256)) OF PRNGType,
    -- maximum number of bytes to be transferred (outgoing bytes in
vortex message without blending)
    maxTransferQuota  INTEGER (0..4294967295),
    -- maximum number of messages to process for this identity
    maxMessageQuota   INTEGER (0..4294967295),
    -- maximum simultaneously tracked header serials
    maxHeaderSerials  INTEGER (0..4294967295),
    -- maximum simultaneously valid build operations in workspace
    maxBuildOps        INTEGER (0..4294967295),
    -- maximum header lifespan in seconds
    maxHeaderLive      INTEGER (0..4294967295),

    supportedBlendingIn SEQUENCE OF BlendingSpec
}

ReplyCurrentQuota ::= SEQUENCE {
    messages INTEGER (0..4294967295),
    size     INTEGER (0..4294967295)
}

END
```

A.4. The VortexMessage Requirements Structures

```
MessageVortex-Requirements DEFINITIONS EXPLICIT TAGS ::=  
BEGIN  
    EXPORTS RequirementBlock;  
    IMPORTS MacAlgorithmSpec  
            FROM MessageVortex-Ciphers  
            UsagePeriod, UsagePeriod  
            FROM MessageVortex-Helpers;  
  
    RequirementBlock ::= CHOICE {  
        puzzle [1] RequirementPuzzleRequired,  
        payment [2] RequirementPaymentRequired  
    }  
  
    RequirementPuzzleRequired ::= SEQUENCE {  
        -- bit sequence at beginning of hash from encrypted identity  
        -- block  
        challenge     BIT STRING,  
        mac           MacAlgorithmSpec,  
        valid          UsagePeriod,  
        identifier    INTEGER (0..4294967295)  
    }  
  
    RequirementPaymentRequired ::= SEQUENCE {  
        account        OCTET STRING,  
        amount         REAL,  
        currency       Currency  
    }  
  
    Currency ::= ENUMERATED {  
        btc            (8001),  
        eth            (8002),  
        zec            (8003)  
    }  
  
END
```

A.5. The VortexMessage Helpers Structures

```
MessageVortex-Helpers DEFINITIONS EXPLICIT TAGS ::=  
BEGIN  
    EXPORTS UsagePeriod, BlendingSpec, NodeSpec;  
    IMPORTS AsymmetricKey, SymmetricKey  
            FROM MessageVortex-Ciphers;  
  
    -- the maximum number of parameters that might be embedded  
    maxNumberOfParameter      INTEGER ::= 127  
  
    UsagePeriod ::= SEQUENCE {  
        notBefore      [0]  GeneralizedTime OPTIONAL,  
        notAfter       [1]  GeneralizedTime OPTIONAL  
    }  
  
    -- contains a node spec of a routing point  
    -- At the moment either smtp:<email> or xmpp:<jabber>  
    BlendingSpec ::= SEQUENCE {  
        target          [1] NodeSpec,  
        blendingType    [2] IA5String,  
        parameter       [3] SEQUENCE ( SIZE (0..maxNumberOfParameter) )  
                                OF BlendingParameter  
    }  
  
    BlendingParameter ::= CHOICE {  
        offset          [1] INTEGER,  
        symmetricKey   [2] SymmetricKey,  
        asymmetricKey  [3] AsymmetricKey,  
        passphrase     [4] OCTET STRING  
    }  
  
    NodeSpec ::= SEQUENCE {  
        transportProtocol [1] Protocol,  
        recipientAddress [2] IA5String,  
        recipientKey     [3] AsymmetricKey OPTIONAL  
    }  
  
    Protocol ::= ENUMERATED {  
        smtp  (100),  
        xmpp  (110)  
    }  
  
END
```

A.6. The VortexMessage Additional Structures

```

-- States: Tuple()=Value() [validity; allowed operations] {Store}
-- - Tuple(identity)=Value(messageQuota,transferQuota,sequence of
--   Routingblocks for Error Message Routing) [validity; Requested
--   at creation; may be extended upon request] {identityStore}
-- - Tuple(Identity,Serial)=maxReplays ['valid' from Identity
--   Block; from First Identity Block; may only be reduced]
--   {IdentityReplayStore}

MessageVortex-NonProtocolBlocks DEFINITIONS EXPLICIT TAGS ::=
BEGIN
    IMPORTS PrefixBlock, InnerMessageBlock, RoutingBlock, maxID
        FROM MessageVortex-Schema
        UsagePeriod, NodeSpec, BlendingSpec
        FROM MessageVortex-Helpers
        AsymmetricKey
        FROM MessageVortex-Ciphers
        RequirementBlock
        FROM MessageVortex-Requirements;

    -- maximum size of transfer quota in bytes of an identity
    maxTransferQuota      INTEGER ::= 4294967295
    -- maximum size of message quota in messages of an identity
    maxMessageQuota       INTEGER ::= 4294967295

    -- do not use these blocks for protocol encoding (internal only)
    VortexMessage ::= SEQUENCE {
        prefix      CHOICE {
            plain          [10011] PrefixBlock,
            -- contains prefix encrypted with receivers public key
            encrypted      [10012] OCTET STRING
        },
        innerMessage CHOICE {
            plain          [10021] InnerMessageBlock,
            -- contains inner message encrypted with Symmetric key from
            -- Prefix
            encrypted      [10022] OCTET STRING
        }
    }

    MemoryPayloadChunk ::= SEQUENCE {
        id                  INTEGER (0..maxID),
        payload             [100] OCTET STRING,
        validity            UsagePeriod
    }

    IdentityStore ::= SEQUENCE {
        identities SEQUENCE (SIZE (0..4294967295))
            OF IdentityStoreBlock
    }

    IdentityStoreBlock ::= SEQUENCE {
        valid                UsagePeriod,
        messageQuota         INTEGER (0..maxMessageQuota),
        transferQuota        INTEGER (0..maxTransferQuota),
    }

```

```
-- if omitted this is a node identity
identity          [1001] AsymmetricKey OPTIONAL,
-- if omitted own identity key
nodeAddress        [1002] NodeSpec      OPTIONAL,
-- Contains the identity of the owning node;
-- May be omitted if local node
nodeKey           [1003] SEQUENCE OF AsymmetricKey OPTIONAL,
routingBlocks     [1004] SEQUENCE OF RoutingBlock OPTIONAL,
replayStore       [1005] IdentityReplayStore,
requirement       [1006] RequirementBlock OPTIONAL
}

IdentityReplayStore ::= SEQUENCE {
    replays   SEQUENCE (SIZE (0..4294967295))
                  OF IdentityReplayBlock
}

IdentityReplayBlock ::= SEQUENCE {
    identity      AsymmetricKey,
    valid         UsagePeriod,
    replaysRemaining INTEGER (0..4294967295)
}
END
```

Author's Address

University of Applied Sciences of
Northwestern Switzerland
Martin Gwerder
Bahnhofstrasse 5
CH-5210 Windisch
Switzerland
Phone: [+41 56 202 76 81](tel:+41562027681)
Email: rfc@messagevortex.net

Appendix B.

Short analysis on common internet protocols

The following sections list common internet protocols.

B.1. HTTP

The HTTP protocol allows message transfer from and to a server and is specified in RFC2616 [68]. It is not suitable as a communication protocol for messages due to the lack of notifications. There are some extensions which would allow such communications (such as WebDAV) but in general even those are not suitable as they require a continuous connection to the server in order to get notifications. Having a “rollup” of notifications when connecting is not there by default but could be implemented on top of it.

HTTP servers listen on standard ports 80 or 443 for incoming connects. The port 443 is equivalent to the port 80 except for the fact that it has a wrapping encryption layer (usually TLS). The incoming connects (requests) must offer a header part and may contain a body part which would be suitable for transferring messages to the server. The reply onto this request is transferred over the same TCP connection containing the same two sections.

HTTP0.9-HTTP/1.1 are clear text protocols which are human readable (except for the data part which might contain binary data). The HTTP/2 (as specified in [7]) is using the same ports and default behaviour. Unlike HTTP/0.9-HTTP/1.1 it is not a clear text but a binary protocol. Headers and bodies of messages are sent as binaries.

To be a valid candidate as storage WebDAV support as specified in [25] MUST BE ASSUMED

The protocol does definitely satisfy the first two main criteria (Ct1: Widely Adopted and Ct2: Reliable).

The main disadvantage in terms as message transport protocol is that this protocol is not symmetrically. This means that a server is always just “serving requests” and not sending actively information to peers. This Request-Reply violates criteria (Ct1: Symmetrically built) and makes the protocol not a primary choice for message transport.

B.2. FTP

FTP is defined in RFC959[76]. This Protocol is intended for authenticated file transfer only. There is a account available for general access (“anonymous”). This account does for security reasons normally not offer upload rights.

It is possible to use FTP as message transfer endpoint. The configuration would work as follows: “anonymous” has upload rights only. It is unable to download or list a directory. A node may upload a message with a random name. If there is a collision the node retries with another random name.

The blending layer picks messages up using an authenticated user.

This has multiple downsides. At first, handling FTP that way is very uncommon and usually requires an own dedicated infrastructure. Secondly passwords are within FTP always in plain text. This is considered as a very bad practice nowadays. Encryption as a wrapping layer (FTPS) is not common and SFTP (actually a subsystem of SSH) has nothing in common with FTP except for the fact that it may transfer files as well.

Furthermore FTP may be problematic when used in active mode for firewalls. All these problems make FTP not very suitable as transport layer protocol.

Like HTTP a main disadvantage of FTP in terms as a message transport protocol is that this protocol is not symmetrically. This means that a server is always just “serving requests” and not sending actively information to peers. This Request-Reply violates criteria (Ct3: Symmetrically built) and makes the protocol not a primary choice for message transport. The Protocol however satisfies the first two criteria (Ct1: Widely Adopted and Ct2: Reliable).

B.3. TFTP

TFTP has despite its naming similarities to FTP very little in common with it. TFTP is a UDP based file transfer protocol without any authentication scheme. This makes it not suitable as transport layer as it would leave messages open to anyone. The protocol is due to the use of UDP in a meshed network with redundant routes. Since the internet has a lot of these redundant routes this neglects the use of this protocol.

TFTP is rarely ever used in the internet (it is quite commonly used in lans for booting over a network connection). This violates Criteria one (Ct1: Widely Adopted). TFTP is not symmetrically. This means that a server is always just “serving requests” and not sending actively information to peers. This Request-Reply violates criteria (Ct3: Symmetrically built) and makes the protocol not a primary choice for message transport. The Protocol furthermore violates Ct2 (Ct2: Reliable) as it is based on UDP without any additional error correction.

B.4. MQTT

MQTT is an ISO standard (ISO/IEC PRF 20922:2016) and was formerly called MQ Telemetry Transport. The current standard as the time of writing this document was 3.1.1 [4].

The protocol runs by default on the two ports 1883 and 8883 and may be encrypted with TLS. MQTT is a publish/subscribe based message passing protocol which is mainly targeted to m2m communication. This Protocol requires the receiving party to be subscribed in a central infrastructure in order to be able to receive messages. This makes it very hard to be used in a system without centralistic infrastructure and having no static routes between senders and recipients.

The protocol does definitely satisfy the second criteria (Ct2: Reliable). It is in the area of enduser (i.e. Internet) not widely adopted thus violating Criteria 1 (Ct1: Widely Adopted). In terms of decentralistic design the protocol fails as well (Ct3: Symmetrically built).

B.5. Advanced Message Queuing Protocol

The Advanced Message Queuing Protocol (AMQP) was originally initiated by numerous exponents based mainly in finance related industries. The AMQP-Protocol is either used for communication between two message brokers, or between a message broker and a client[3].

It is designed to be interoperable, stable, reliable and safe. It supports either SASL or TLS secured communication. The usage of such a tunnel is controlled by the immediate sender of a message. In its current version 1.0 it does however not support a dynamic routing between brokers[3].

Due to the lack of a generic routing capability this protocol is there-

fore not suitable for message transport in a global generic environment.

The protocol satisfies partially the first criteria (Ct1: Widely Adopted), and fully satisfies the second criteria (Ct2: Reliable). However the third criteria is violated due to the lack of routing capabilities between message brokers (Ct3: Symmetrically built).

B.6. Constrained Application Protocol (CoAP)

The Constrained Application Protocol (CoAP) is a communication Protocol which is primarily destined to m2m communication. It is defined in RFC7252[10]. It is Defined as lightweight replacement for HTTP in IoT devices and is based on UDP.

The protocol does partially satisfy the first criteria (Ct1: Widely Adopted). The second criteria (Ct2: Reliable) is only partially fulfilled as it is based on UDP and does only add limited session control on its own.

The main disadvantage in terms as message transport protocol is that this protocol is not (like HTTP) symmetrically. This means that a server is always just "serving requests" and not sending actively information to peers. This Request-Reply violates criteria (Ct3: Symmetrically built) and makes the protocol not a primary choice for message transport.

B.7. Web Application Messaging Protocol

WAMP is a websockets based protocol destined to enable M2M communication. Like MQTT it is publish/subscribe oriented. Unlike MQTT it allows remote procedure calls (RPC).

The WAMP protocol is not widely adopted (Ct1: Widely Adopted) but it is definitely reliable on a per node base (Ct2: Reliable). Due to its RPC based capability unlike MQTT a routing like capability could be implemented. Symmetrical protocol behaviour is therefore not available but could be built in relatively easy.

B.8. XMPP (jabber)

XMPP (originally named Jabber) is a synchronous message protocol used in the internet. It is specified in the documents RFC6120[89], RFC6121[89], RFC3922[88], and RFC3923[87]. The protocol is a very advanced chat protocol featuring numeros levels of security including end-to-end signing and object encryption[87]. There is also a stream initiation extension for transferring files between endpoints [104].

It has generic routing capabilities spanning between known and unknown servers. The protocol offers a message retrieval mechanism for offlin messages similarly to POP [74].

The protocol itself seems to be a strong candidate as a transport layer as it is being used actively in the internet.

B.9. SMTP

The SMTP protocol is currently specified in [49]. It specifies a method to deliver reliably asynchronous mail objects thru a specific transport medium (most of the time the internet). The document splits a mail object into a mail envelope and its content. The envelope contains the routing information which is the sender (one) and the recipient (one or more) in 7-Bit ASCII. The envelope may additionally contain optional protocol extension material.

The content should be in 7-Bit-ASCII (8-Bit ASCII may be requested but this feature is not widely adopted). It is split into two parts. These parts are the header (which does contain meta information

about the message such as subject, reply address or a comprehensive list of all recipients), and the body which contains the message itself. All lines of the content must be terminated with a CRLF and must not be longer than 998 characters excluding CRLF.

The header consists of a collection of header fields. Each of them is built by a header name, a colon and the data. Exact outline of the header is specified in [83] and is separated with a blank line from the body.

It [49] furthermore introduces a simplistic model for smtp message based communication. A more comprehensive model is introduced in the section Email. As the proposed model is not sufficient for a comprehensive end-to-end analysis.

Traditionally the message itself is mime encoded. The MIME messages are mainly specified in [35], and [36]. MIME allows to send messages in multiple representations (alternates), and attach additional information (such as possibly inlined images or attached documents).

SMTP is one of the most common messaging protocols in the internet (Ct1: Widely Adopted) and it would be devastating for business of a country if for censoring reasons this protocol would be cut off. The protocol is furthermore very reliable as it has built in support for redundancy and a throughout message design making it relatively easy to diagnose problems (Ct2: Reliable). All SMTP servers are normally capable of routing and receiving messages. Messages going over several servers are common (Ct3: Symmetrically built) so the third criteria may be considered as fulfilled as well

SMTP is considered a strong candidate as transport layer.

B.10. SMS

SMS capability was introduced in the SS7 protocol. This protocol allows the message transfer of messages not bigger than 144 character. Due to this restriction in size it is unlikely to be suitable for this type of communication as the keys being required are already sized similarly leaving no space for Messages or routing information.

Secondly the protocol is not widely adopted within the internet domain. There are gateways providing bridging functionalities to the SMS service. However – the protocol itself is insignificant in the internet itself.

B.11. MMS

The Multimedia Messaging Service (MMS) is maintained by 3GPP (3rd Generation Partnership Project). This protocol is manly a mobile protocol based on telephone networks. This protocol is just like the SMS protocol accessible through the internet by using gateways but not directly usable within the internet.

Appendix C.

Glossary

adversary In this work we are referring to an adversary to any entity opposing to the privacy of a message. For a more thorough definition refer to 4.1

anonymity We refer to the term anonymity as defined in [75]. "Anonymity of a subject means that the subject is not identifiable within a set of subjects, the anonymity set."¹

Sender Anonymity The anonymity set is the set of all possible subjects. With respect to actors, the anonymity set consists of the subjects who might cause an action. With respect to actees, the anonymity set consists of the subjects who might be acted upon. Therefore, a sender may be anonymous (sender anonymity) only within a set of potential senders, his/her sender anonymity set, which itself may be a subset of all subjects worldwide who may send a message from time to time.

Receiver Anonymity The same for the recipient means that a recipient may be anonymous (recipient anonymity) only within a set of potential recipients, his/her recipient anonymity set. Both anonymity sets may be disjoint, be the same, or they may overlap. The anonymity sets may vary over time.

Agent An agent is a single component of a service (Service) provided to a user or other services.

EWS Exchange Web Services (EWS) are a Microsoft proprietary protocol to access exchange services from a client. It may be regarded as alternative to IMAPv4. This is however incomplete as EWS offers additional features such as User Configuration, Delegate Management or Unified Messaging.

IMAP IMAP (currently IMAPv4) is a typical protocol to be used between a Client MRA and a Remote MDA. It has been specified in its current version in [20]. The protocol is capable of fully maintaining a server based message store. This includes the capability of adding, modifying and deleting messages and folders of a mail-store. It does not include however sending mails to other destinations outside the server based store.

Item of Interest (IoI) The Item of Interest (IoI) are defined in [75] and refer to any subject action or entity which is of interest to a potential adversary.

LMTP The Local Mail Transfer Protocol is defined in [70]. This RFC defines a protocol similar to SMTP for local mail senders. This protocol allows a sender to have no mail queue at all and thus simplifies the client implementation.

Local Mail Store A Local Mail Store offers a persistent store on a local non volatile memory in which messages are being stored. A store may be flat or structured (e.g. supports folders). A Local Mail Store may be an authoritative store for mails or a "Cache Only" copy. It is typically not a queue.

Server Admin We do regard a server admin as a person with high privileges and profound technical knowledge of a server and its associated technology. A Server Admin may have access to one or multiple servers of the same kind.

MDA An MDA provides an uniform access to a local message store.

Remote MDA A Remote MDA is typically supporting a specific access protocol to access the data stored within a local message store.

Local MDA A Local MDA is typically giving local applications access to a server store. This may be done thru an API, a named socket or similar mechanisms.

MRA A Mail receiving Agent. This agent receives mails from a

agent. Depending on the used protocol two subtypes of MRAs are available.

Client MRA A client MRA picks up mails in the server mail storage from a remote MDA. Client MRAs usually connect thru a standard protocol which was designed for client access. Examples for such protocols are POP or IMAP.

Server MRA Unlike a Client MRA a server MRA listens passively for incoming connections and forwards received Messages to a MTA for delivery and routing. A typical protocol supported by an Server MRA is SMTP

MS-OXCMAPIHTTP Microsoft's Messaging Application Programming Interface (MAPI) Extensions for HTTP specifies the Messaging Application Programming Interface (MAPI) Extensions for HTTP in [63], which enable a client to access personal messaging and directory data on a server by sending HTTP requests and receiving responses returned on the same HTTP connection. This protocol extends HTTP and HTTPS.

MSA A Mail Sending Agent. This agent sends mails to a Server MRA.

MTA A Mail Transfer Agent. This transfer agent routes mails between other components. Typically an MTA receives mails from an MRA and forwards them to a MDA or MSA. The main task of a MTA is to provide reliable queues and solid track of all mails as long as they are not forwarded to another MTA or local storage.

MTS A Mail Transfer Service. This is a set of agents which provide the functionality to send and receive Messages and forward them to a local or remote store.

MSS A Mail Storage Service. This is a set of agents providing a reliable store for local mail accounts. It also provides Interfacing which enables clients to access the users mail.

MUA A Mail User Agent. This user agent reads mails from a local storage and allows a user to read existing mails, create and modify mails.

Privacy From the Oxford English Dictionary:

1. The state or condition of being withdrawn from the society of others, or from the public interest; seclusion. The state or condition of being alone, undisturbed, or free from public attention, as a matter of choice or right; freedom from interference or intrusion.
2. Private or retired place; private apartments; places of retreat.
3. Absence or avoidance of publicity or display; a condition approaching to secrecy or concealment. Keeping of a secret.
4. A private matter, a secret; private or personal matters or relations; The private parts.
5. Intimacy, confidential relations.
6. The state of being privy to some act.

[98]

In this work privacy is related to definition two. Mails should be able to be handled as a virtual private place where no one knows who is talking to whom and about what or how frequent (except for directly involved people).

Pseudonymity As Pseudonymity we take the definition as specified in [75].

A pseudonym is an identifier of a subject other than one of the subject's real names. The subject which the pseudonym refers to is the holder of the pseudonym. A subject is pseudonymous if a pseudonym is used as iden-

¹footnotes omitted in quote

tifier instead of one of its real names.²

POP POP (currently in version 3) is a typical protocol to be used between a Client MRA and a Remote MDA. Unlike IMAP it is not able to maintain a mail store. Its sole purpose is to fetch and delete mails in a server based store. Modifying Mails or even handling a complex folder structure is not doable with POP

Service A service is a endpoint on a server providing a functionality to a client. This service may consist out of several Agents (Agent).

SMTP SMTP is the most commonly used protocol for sending mails across the internet. In its current version it has been specified in [49].

Storage A store to keep data. It is assumed to be temporary or persistent in its nature.

UBM We use the term Unsolicited Bulk Message as term for any mass message being received by a user without prior explicit consent. A less formal term for such a message in email terminology is spam or junk mail.

Undetectability As undetectability we take the definition as specified in [75].

Undetectability of an item of interest (IOI) from an attacker's perspective means that the attacker cannot sufficiently distinguish whether it exists or not.²

Unlikability We refer to the term unlinkability as defined in [75]. "Unlinkability of two or more items of interest (IOIs, e.g., subjects, messages, actions, ...)" from an attacker's perspective means that within the system (comprising these and possibly other items), the attacker cannot sufficiently distinguish whether these IOIs are related or not.

Unobservability As unobservability we take the definition as specified in [75].

Unobservability of an item of interest (IOI) means

- undetectability of the IOI against all subjects uninvolved in it and
- anonymity of the subject(s) involved in the IOI even against the other subject(s) involved in that IOI.

As mentioned in this paper unobservability raises the bar of required attributes again (⇒ reads "implies"):

$$\begin{aligned} \textit{censorship resistance} &\Rightarrow \textit{unobservability} \\ \textit{unobserability} &\Rightarrow \textit{undetectability} \\ \textit{unobserability} &\Rightarrow \textit{anonymity} \end{aligned}$$

user Any human or technical entity using a system not following strict message processing rules. A user does always interface a non-interface related entity and is triggered by this or triggers it related, but not limited, to the message.

Zero Trust Zero trust is not a truly researched model in systems engineering. It is however widely adopted. We refer in this work to the zero trust model when denying the trust in any infrastructure not directly controlled by the sending or receiving entity. This distrust extends especially but not exclusively to the network transporting the message, the nodes storing and forwarding messages, the backup taken from any system except the client machines of the sending and receiving parties, and software, hardware, and operators of all systems not explicitly trusted. As explicitly trusted in our model we do regard the user sending a message (and his immediate hardware used for sending the message), and the users receiving the messages. Trust in between the receiving parties (if more than one) of a message is not necessarily given.

²footnotes omitted in quote

Bibliography

- [1] 754-2008 - IEEE Standard for Floating-Point Arithmetic - Redline. 2008. DOI: 10.1109/IEEESTD.2008.5976968. URL: <http://ieeexplore.ieee.org/servlet/opac?punumber=5976966> (cit. on p. 42).
- [2] Luis von Ahn, Andrew Bortz, and Nicholas J. Hopper. "k-Anonymous Message Transmission". In: *Proceedings of the 10th ACM Conference on Computer and Communications Security (CCS 2003)*. Ed. by Vijay Atluri and Peng Liu. ACM Press, Oct. 2003, pp. 122–130. DOI: 10.1145/948109.948128. URL: <http://www.abortz.com/papers/k-anon.pdf> (cit. on p. 19).
- [3] AMQP v1.0. AMQP.org, Oct. 2011. URL: <http://www.amqp.org/confluence/display/AMQP/AMQP+Specification> (cit. on p. A55).
- [4] Banks Andrew and Gupta Rahul. MQTT. en. OASIS, Apr. 2014. URL: <http://docs.oasis-open.org/mqtt/mqtt/v3.1.1/mqtt-v3.1.1.pdf> (cit. on p. A55).
- [5] Marco Valerio Barbera, Vasileios P. Kemerlis, Vasilis Pappas, and Angelos Keromytis. "CellFlood: Attacking Tor Onion Routers on the Cheap". In: *Proceedings of ESORICS 2013*. Sept. 2013. URL: <http://www.cs.columbia.edu/~vpk/papers/cellflood.esorics13.pdf> (cit. on p. 25).
- [6] Kevin Bauer, Damon McCoy, Dirk Grunwald, Tadayoshi Kohno, and Douglas Sicker. "Low-Resource Routing Attacks Against Tor". In: *Proceedings of the Workshop on Privacy in the Electronic Society (WPES 2007)*. Washington, DC, USA, Oct. 2007. DOI: 10.1145/1314333.1314336. URL: <http://systems.cs.colorado.edu/~bauerk/papers/wpes25-bauer.pdf> (cit. on p. 25).
- [7] Mike Belshe, Roberto Peon, and Martin Thomson. *Hypertext Transfer Protocol Version 2 (HTTP/2)*. RFC 7540. May 2015. DOI: 10.17487/rfc7540. URL: <https://rfc-editor.org/rfc/rfc7540.txt> (cit. on p. A55).
- [8] Alex Biryukov, Ivan Pustogarov, and Ralf Philipp Weinmann. "TorScan: Tracing Long-lived Connections and Differential Scanning Attacks". In: *Proceedings of the European Symposium Research Computer Security - ESORICS'12*. Springer, Sept. 2012. URL: <http://freehaven.net/anonbib/papers/torscan-esorics2012.pdf> (cit. on p. 25).
- [9] Alex Biryukov, Ivan Pustogarov, and Ralf-Philipp Weinmann. "Trawling for Tor Hidden Services: Detection, Measurement, Deanonymization". In: *Proceedings of the 2013 IEEE Symposium on Security and Privacy*. May 2013. URL: <http://www.ieee-security.org/TC/SP2013/papers/4977a080.pdf> (cit. on p. 25).
- [10] Carsten Bormann, Klaus Hartke, and Zach Shelby. *RFC7252: The Constrained Application Protocol (CoAP)*. RFC 7252. June 2014. DOI: 10.17487/rfc7252. URL: <https://rfc-editor.org/rfc/rfc7252.txt> (cit. on p. A56).
- [11] S. Bradner. *RFC2119 Key words for use in RFCs to Indicate Requirement Levels*. IETF, 1997. URL: <http://tools.ietf.org/pdf/rfc2119.pdf> (cit. on p. 51).
- [12] Johann A. Briffa, Hans Georg Schaathun, and Ainuddin Wahid Abdul Wahab. "Has F5 Really Been Broken". In: (). URL: <https://pdfs.semanticscholar.org/4d6c/d9d7e3a419ea74a4a363a36fcc674e89ecc7.pdf> (cit. on p. 20).
- [13] Campaign Monitor. 2012. URL: <http://www.campaignmonitor.com/resources/will-it-work/email-clients/> (cit. on p. 28).
- [14] David Chaum. "Untraceable Electronic Mail, Return Addresses, and Digital Pseudonyms". In: *Communications of the ACM* (1981). URL: http://www.cs.utexas.edu/~shmat/courses/cs395t/_fall104/chaum81.pdf (cit. on pp. 19, 23, 24).
- [15] David Chaum. "The Dining Cryptographers Problem: Unconditional Sender and Recipient Untraceability". In: *Journal of Cryptology* 1 (1988), pp. 65–75. URL: <http://www.cs.ucsb.edu/~ravenben/classes/595n-s07/papers/dcnet-jcrypt88.pdf> (cit. on pp. 24, 26).
- [16] David Chaum, Claude Crépeau, and Ivan Damgård. "Multiparty unconditionally secure protocols". In: *Proceedings of the twentieth annual ACM symposium on Theory of computing*. ACM, 1988, pp. 11–19. URL: <http://crypto.cs.mcgill.ca/~crepeau/PDF/ASPUBLISHED/CCD88A.pdf> (cit. on p. 32).
- [17] Ian Clarke, Oskar Sandberg, Brandon Wiley, and Theodore W. Hong. "Freenet: A Distributed Anonymous Information Storage and Retrieval System". In: *Proceedings of Designing Privacy Enhancing Technologies: Workshop on Design Issues in Anonymity and Unobservability*. July 2000, pp. 46–66. URL: <https://freenetproject.org/> (cit. on pp. 23, 26).
- [18] Commercial National Security Algorithm Suite. URL: <https://apps.nsa.gov/iaarchive/programs/iad-initiatives/cnsa-suite.cfm> (cit. on p. 21).
- [19] Henry Corrigan-Gibbs and Bryan Ford. "Dissent: Accountable Anonymous Group Messaging". In: *Proceedings of the 17th ACM Conference on Computer and Communications Security*. CCS '10. Chicago, Illinois, USA: ACM, 2010, pp. 340–350. ISBN: 978-1-4503-0245-6. DOI: 10.1145/1866307.1866346. URL: <http://doi.acm.org/10.1145/1866307.1866346> (cit. on p. 26).
- [20] M. Crispin. *RFC3501 INTERNET MESSAGE ACCESS PROTOCOL - VERSION 4rev1*. IETF, 2003. URL: <http://tools.ietf.org/pdf/rfc3501.pdf> (cit. on p. A57).
- [21] Steve Crocker, Donald E. Eastlake 3rd, and Jeffrey I. Schiller. *Randomness Recommendations for Security*. RFC 1750. Dec. 1994. DOI: 10.17487/RFC1750. URL: <https://rfc-editor.org/rfc/rfc1750.txt> (cit. on p. 28).
- [22] George Danezis, Claudia Diaz, Emilia Käasper, and Carmela Troncoso. "The Wisdom of Crowds: Attacks and Optimal Constructions". In: *Proceedings of the 14th European Symposium on Research in Computer Security (ESORICS 2009)*, Saint-Malo, France. Ed. by Michael Backes and Peng Ning. Vol. 5789. Lecture Notes in Computer Science. Springer, 2009, pp. 406–423. ISBN: 978-3-642-04443-4. URL: <http://homes.esat.kuleuven.be/~ekasper/papers/crowds.pdf> (cit. on p. 23).
- [23] Norman Danner, Sam DeFabbia-Kane, Danny Krizanc, and Marc Liberator. "Effectiveness and detection of denial of service attacks in Tor". In: *Transactions on Information and System Security* 15.3 (2012), 11:1–11:25. DOI: 10.1145/2382448.2382449. URL: <http://arxiv.org/pdf/1110.5395v3.pdf> (cit. on p. 25).
- [24] Roger Dingledine and Nick Mathewson. *Tor Protocol Specification*. URL: <https://gitweb.torproject.org/torspec.git/tree/tor-spec.txt> (cit. on p. 25).
- [25] Lisa M. Dusseault. *HTTP Extensions for Web Distributed Authoring and Versioning (WebDAV)*. RFC 4918. June 2007. DOI: 10.17487/RFC4918. URL: <https://rfc-editor.org/rfc/rfc4918.txt> (cit. on p. A55).
- [26] Morris Dworkin. *Recommendation for block cipher modes of operation. methods and techniques*. Tech. rep. DTIC Document, 2001 (cit. on p. 22).
- [27] André Egners, Dominic Gatzen, Andriy Panchenko, and Ulrike Meyer. "Introducing SOR: SSH-based onion routing". In: *Advanced Information Networking and Applications Workshops (WAINA), 2012 26th International Conference on*. IEEE, 2012, pp. 280–286. DOI: 10.1109/waina.2012.89. URL: https://www.researchgate.net/profile/Andre_Egners/publication/237007773_Introducing_SOR_SSH-based_onion_routing/links/548805e90cf2ef34478ed724/Introducing-SOR-SSH-based-onion-routing.pdf (cit. on p. 25).
- [28] M. Elkins. *RFC2015 MIME Security with Pretty Good Privacy (PGP)*. IETF, 1996. URL: <http://tools.ietf.org/pdf/rfc2015.pdf> (cit. on p. 3).

- [29] *Email Client Market Share*. 2014. URL: <http://emailclientmarketshare.com/> (cit. on p. 28).
- [30] Nathan Evans, Roger Dingledine, and Christian Grothoff. "A Practical Congestion Attack on Tor Using Long Paths". In: *Proceedings of the 18th USENIX Security Symposium*. Aug. 2009. URL: <http://freehaven.net/anonbib/papers/congestion-longpaths.pdf> (cit. on p. 25).
- [31] *Fact Sheet Suite B Cryptography*. 2008. URL: http://www.nsa.gov/ia/industry/crypto_suite_b.cfm (cit. on p. 21).
- [32] Hannes Federrath. "Das AN.ON-System—Starke Anonymität und Unbeobachtbarkeit im Internet". In: *Anonymität im Internet*. Springer, 2003, pp. 172–178 (cit. on p. 25).
- [33] Paul Feldman. "A practical scheme for non-interactive verifiable secret sharing". In: *Foundations of Computer Science, 1987., 28th Annual Symposium on*. IEEE. 1987, pp. 427–438. URL: <https://www.cs.umd.edu/~gasarch/TOPICS/secretsharing/feldmanVSS.pdf> (cit. on p. 21).
- [34] Hal Finney, Lutz Donnerhacke, Jon Callas, Rodney L. Thayer, and David Shaw. *OpenPGP Message Format*. RFC 4880. Nov. 2007. DOI: 10.17487/RFC4880. URL: <https://rfc-editor.org/rfc/rfc4880.txt> (cit. on p. 28).
- [35] N. Freed and N. Borenstein. *RFC2045 Multipurpose Internet Mail Extensions; (MIME) Part One: Format of Internet Message Bodies*. IETF, 1996. URL: <http://tools.ietf.org/pdf/rfc2045.pdf> (cit. on pp. 3, A56).
- [36] N. Freed and N. Borenstein. *RFC2046 Multipurpose Internet Mail Extensions; (MIME) Part Two: Media Types*. IETF, 1996. URL: <http://tools.ietf.org/pdf/rfc2046.pdf> (cit. on p. A56).
- [37] Michael J. Freedman and Robert Morris. "Tarzan: A Peer-to-Peer Anonymizing Network Layer". In: *Proceedings of the 9th ACM Conference on Computer and Communications Security (CCS 2002)*. Washington, DC, Nov. 2002. URL: <http://pdos.lcs.mit.edu/tarzan/docs/tarzan-ccs02.pdf> (cit. on p. 25).
- [38] *FREEDOM ON THE NET 2018*. Oct. 2018 (cit. on p. 3).
- [39] R. Gellens and J. Klensin. *RFC4409 Message Submission for Mail*. IETF, 2006. URL: <http://tools.ietf.org/pdf/rfc4409.pdf> (cit. on p. 27).
- [40] Sharad Goel, Mark Robson, Milo Polte, and Emin Gun Sirer. *Herbivore: A Scalable and Efficient Protocol for Anonymous Communication*. Tech. rep. 2003-1890. Ithaca, NY: Cornell University, Feb. 2003. URL: <http://www.cs.cornell.edu/People/egs/papers/herbivore-tr.pdf> (cit. on p. 26).
- [41] Philippe Golle and Ari Juels. "Dining Cryptographers Revisited". In: *Proceedings of Eurocrypt 2004*. May 2004. URL: <http://crypto.stanford.edu/~pgolle/papers/nim.pdf> (cit. on p. 24).
- [42] Ceki Gülcü and Gene Tsudik. "Mixing E-mail With Babel". In: *Proceedings of the Network and Distributed Security Symposium - NDSS '96*. IEEE, Feb. 1996, pp. 2–16. URL: <http://citesear.nj.nec.com/2254.html> (cit. on p. 24).
- [43] Shai Halevi and Phillip Rogaway. "A Tweakable Enciphering Mode". In: *Advances in Cryptology - CRYPTO 2003*. Ed. by Dan Boneh. Berlin, Heidelberg: Springer Berlin Heidelberg, 2003, pp. 482–499. ISBN: 978-3-540-45146-4. DOI: 10.1007/978-3-540-45146-4_28 (cit. on p. 22).
- [44] Michael Herrmann and Christian Grothoff. "Privacy Implications of Performance-Based Peer Selection by Onion Routers: A Real-World Case Study using I2P". In: *Proceedings of the 11th Privacy Enhancing Technologies Symposium (PETS 2011)*. Waterloo, Canada, July 2011. URL: <http://freehaven.net/anonbib/papers/pets2011/p9-herrmann.pdf> (cit. on p. 26).
- [45] Jeffrey Hoffstein, Jill Pipher, and Joseph H. Silverman. "NTRU: A ring-based public key cryptosystem". In: *International Algorithmic Number Theory Symposium*. More information about recent research at <https://ntru.com>. Springer, 1998, pp. 267–288. URL: <https://assets.onboardsecurity.com/static/downloads/NTRU/resources/ANTS97.pdf> (cit. on p. 21).
- [46] Amir Houmansadr, Chad Brubaker, and Vitaly Shmatikov. "The Parrot is Dead: Observing Unobservable Network Communications". In: *Proceedings of the 2013 IEEE Symposium on Security and Privacy*. May 2013. URL: <http://www.cs.utexas.edu/~amir/papers/parrot.pdf> (cit. on pp. 20, 61).
- [47] Aaron Johnson, Chris Wacek, Rob Jansen, Micah Sherr, and Paul Syverson. "Users Get Routed: Traffic Correlation on Tor by Realistic Adversaries". In: *Proceedings of the 20th ACM conference on Computer and Communications Security (CCS 2013)*. Nov. 2013. URL: <http://www.ohmygodel.com/publications/usersrouted-ccs13.pdf> (cit. on p. 25).
- [48] S. Kaur, S. Bansal, and R. K. Bansal. "Steganography and classification of image steganography techniques". In: *2014 International Conference on Computing for Sustainable Global Development (INDIACoM)*. 2014, pp. 870–875. DOI: 10.1109/IndiaCom.2014.6828087. URL: <https://ieeexplore.ieee.org/abstract/document/6828087> (cit. on p. 20).
- [49] J. Klensin. *RFC5321 Simple Mail Transfer Protocol*. IETF, 2008. URL: <http://tools.ietf.org/pdf/rfc5321.pdf> (cit. on pp. 27, A56, A58).
- [50] Neal Koblitz, Alfred Menezes, and Scott Vanstone. *Guide to Elliptic Curve Cryptography*. 2004. URL: <http://www.ams.org/journals/mcom/1987-48-177/S0025-5718-1987-0866109-5/S0025-5718-1987-0866109-5.pdf> (cit. on p. 21).
- [51] Jan Kodovský, Tomáš Pevný, and Jessica Fridrich. "Modern steganalysis can detect YASS". In: *Media Forensics and Security II*. Vol. 7541. International Society for Optics and Photonics. 2010, p. 754102. URL: http://ia.binghamton.edu/publication/FridrichPDF/yass_attack.pdf (cit. on p. 20).
- [52] Butler W. Lampson. *A Note on the Confinement Problem*. 1973. URL: <http://faculty.kfupm.edu.sa/COE/mimam/Papers/73%20A%20Note%20on%20the%20Confinement%20Problem.pdf> (cit. on p. 20).
- [53] Daniel Lemire and Melissa E. O'Neill. "Xorshift1024*, xorshift1024+, xorshift128+ and xoroshiro128+ fail statistical tests for linearity". In: *Journal of Computational and Applied Mathematics* 350 (2019), pp. 139 – 142. ISSN: 0377-0427. DOI: <https://doi.org/10.1016/j.cam.2018.10.019>. URL: <http://www.sciencedirect.com/science/article/pii/S0377042718306265> (cit. on p. 28).
- [54] Arjen K. Lenstra. *Key Length. Contribution to The Handbook of Information Security*. 2004. URL: <https://infoscience.epfl.ch/record/164539/files/NPDF-32.pdf> (cit. on p. 21).
- [55] Brian Neil Levine and Clay Shields. "Hordes — A Multicast Based Protocol for Anonymity". In: *Journal of Computer Security* 10.3 (2002), pp. 213–240. URL: <http://prisms.cs.umass.edu/brian/pubs/brian.hordes.jcs01.pdf> (cit. on p. 26).
- [56] Bin Li, Jiwu Huang, and Yun Qing Shi. "Steganalysis of YASS". In: *IEEE Transactions on Information Forensics and Security* 4.3 (2009), pp. 369–382. URL: <https://ieeexplore.ieee.org/stamp/stamp.jsp?arnumber=5153278> (cit. on p. 20).
- [57] Helger Lipmaa, Phillip Rogaway, and David Wagner. "CTR-mode encryption". In: *First NIST Workshop on Modes of Operation*. 2000 (cit. on p. 22).
- [58] Ashwin Machanavajjhala, Daniel Kifer, Johannes Gehrke, and Muthuramakrishnan Venkitasubramaniam. "l-diversity: Privacy beyond k-anonymity". In: *ACM Transactions on Knowledge Discovery from Data (TKDD)* 1.1 (2007), p. 3. URL: <http://www.cs.cornell.edu/~vmuthu/research/ldiversity.pdf> (cit. on p. 19).
- [59] Luther Martin. "XTS: A Mode of AES for Encrypting Hard Disks". In: *IEEE Security & Privacy Magazine* 8.3 (2010), pp. 68–69. DOI: 10.1109/msp.2010.111. URL: <https://ieeexplore.ieee.org/iel5/8013/5470945/05470958.pdf> (cit. on p. 22).
- [60] Mitsuru Matsui, S Morai, and J Nakajima. "RFC3713: A Description of the Camellia Encryption Algorithm". In: (2004) (cit. on p. 20).
- [61] David McGrew and John Viega. "The Galois/counter mode of operation (GCM)". In: *Submission to NIST*. <http://csrc.nist.gov/CryptoToolkit/modes/proposedmodes/gcm/gcm-spec.pdf> (2004) (cit. on p. 22).

- [62] David A McGrew and John Viega. "The security and performance of the Galois/Counter Mode (GCM) of operation". In: *International Conference on Cryptology in India*. Springer. 2004, pp. 343–355 (cit. on p. 22).
- [63] *Messaging Application Programming Interface (MAPI) Extensions for HTTP*. Microsoft Corporation, 2018. URL: [https://interoperability.blob.core.windows.net/files/MS-OXCMAPIHTTP/\[MS-OXCMAPIHTTP\].pdf](https://interoperability.blob.core.windows.net/files/MS-OXCMAPIHTTP/[MS-OXCMAPIHTTP].pdf) (cit. on p. A57).
- [64] Victor S. Miller. "Use of Elliptic Curves in Cryptography". In: *Advances in Cryptology — CRYPTO '85 Proceedings*. Ed. by Hugh C. Williams. Berlin, Heidelberg: Springer Berlin Heidelberg, 1986, pp. 417–426. ISBN: 978-3-540-39799-1. DOI: 10.1007/3-540-39799-X_31. URL: http://dx.doi.org/10.1007/3-540-39799-X_31 (cit. on p. 21).
- [65] Kazuhiko Minematsu, Stefan Lucks, Hiraku Morita, and Tetsu Iwata. "Attacks and security proofs of EAX-prime". In: *International Workshop on Fast Software Encryption*. Springer. 2013, pp. 327–347. URL: <http://eprint.iacr.org/2012/018.pdf> (cit. on p. 22).
- [66] Alan Mislove, Gaurav Oberoi, Ansley Post, Charles Reis, Peter Druschel, and Dan S Wallach. "AP3: Cooperative, decentralized anonymous communication". In: *Proceedings of the 11th workshop on ACM SIGOPS European workshop*. ACM. 2004, p. 30. URL: <http://www-dev.ccs.neu.edu/home/amislove/publications/AP3-SIGOPSEW.pdf> (cit. on p. 26).
- [67] Prateek Mittal and Nikita Borisov. "Information Leaks in Structured Peer-to-peer Anonymous Communication Systems". In: *Proceedings of the 15th ACM Conference on Computer and Communications Security (CCS 2008)*. Ed. by Paul Syverson, Somesh Jha, and Xiaolan Zhang. Alexandria, Virginia, USA: ACM Press, Oct. 2008, pp. 267–278. URL: <http://www.hatswitch.org/~nikita/papers/information-leak.pdf> (cit. on p. 26).
- [68] Jerey Mogul, Larry M Masinter, Roy T. Fielding, Jim Gettys, Paul J. Leach, and Tim Berners-Lee. *Hypertext Transfer Protocol – HTTP/1.1*. RFC 2616. June 1999. DOI: 10.17487/rfc2616. URL: <https://rfc-editor.org/rfc/rfc2616.txt> (cit. on p. A55).
- [69] J. P. Muñoz-Gea, J. Malgosa-Sanahuja, P. Manzanares-Lopez, J. C. Sanchez-Aarnoutse, and J. Garcia-Haro. "A Low-Variance Random-Walk Procedure to Provide Anonymity in Overlay Networks". In: *Computer Security - ESORICS 2008*. Springer Berlin Heidelberg, 2008, pp. 238–250. ISBN: 978-3-540-88313-5. DOI: 10.1007/978-3-540-88313-5_16 (cit. on p. 23).
- [70] John G. Myers. *Local Mail Transfer Protocol*. RFC 2033. Oct. 1996. DOI: 10.17487/RFC2033. URL: <https://rfc-editor.org/rfc/rfc2033.txt> (cit. on p. A57).
- [71] Arjun Nambiar and Matthew Wright. "Salsa: A Structured Approach to Large-Scale Anonymity". In: *Proceedings of CCS 2006*. Nov. 2006. URL: <http://ranger.uta.edu/~mwright/papers/salsa-ccs06.pdf> (cit. on p. 26).
- [72] Suresh Venkatasubramanian Ninghui Li Tiancheng Li. "t-Closeness: Privacy Beyond k-Anonymity and l-Diversity". In: (). URL: http://www.cs.purdue.edu/homes/li83/papers/icde_closeness.pdf (cit. on p. 19).
- [73] Lasse Øverlier and Paul Syverson. "Locating Hidden Servers". In: *Proceedings of the 2006 IEEE Symposium on Security and Privacy*. IEEE CS, May 2006. URL: <http://tor-svn.freehaven.net/anonbib/cache/hs-attack06.pdf> (cit. on p. 25).
- [74] Saint-Andre Peter and Kaes Craig. *XEP-0013: Flexible Offline Message Retrieval*. XMPP Standards Foundation, 2005. URL: <http://xmpp.org/extensions/xep-0013.html> (cit. on p. A56).
- [75] Andreas Pfitzmann and Marit Hansen. *A terminology for talking about privacy by data minimization: Anonymity, Unlinkability, Undetectability, Unobservability, Pseudonymity, and Identity Management*. http://dud.inf.tu-dresden.de/literatur/Anon_Terminology_v0.34.pdf. v0.34. Aug. 2010. URL: <http://dud.inf.tu-dresden.de/literatur/Anon\Terminology\0.34.pdf> (cit. on pp. 19, A57, A58).
- [76] Jon Postel and Joyce Reynolds. *RFC 959: File transfer protocol*. 1985. URL: <https://tools.ietf.org/pdf/rfc959.pdf> (cit. on p. A55).
- [77] Tom Postmes, Russell Spears, Khaled Sakhel, and Daphne De Groot. "Social influence in computer-mediated communication: The effects of anonymity on group behavior". In: *Personality and Social Psychology Bulletin* 27.10 (2001), pp. 1243–1254. DOI: 10.1177/01461672012710001. URL: <http://psp.sagepub.com/content/27/10/1243.short> (cit. on p. 67).
- [78] B. Ramsdell. *RFC3851 Secure/Multipurpose Internet Mail Extensions (S/MIME) Version 3.1 Message Specification*. IETF, 2004. URL: <http://tools.ietf.org/pdf/rfc3851.pdf> (cit. on p. 28).
- [79] Irving S Reed and Gustave Solomon. "Polynomial codes over certain finite fields". In: *Journal of the society for industrial and applied mathematics* 8.2 (1960), pp. 300–304 (cit. on p. 32).
- [80] Michael Reiter and Aviel Rubin. "Crowds: Anonymity for Web Transactions". In: *ACM Transactions on Information and System Security* 1.1 (June 1998). URL: <http://avirubin.com/crowds.pdf> (cit. on p. 23).
- [81] Marc Rennhard and Bernhard Plattner. "Introducing MorphMix: Peer-to-Peer based Anonymous Internet Usage with Collusion Detection". In: *Proceedings of the Workshop on Privacy in the Electronic Society (WPES 2002)*. Washington, DC, USA, Nov. 2002. URL: <http://cecid.sourceforge.net/morphmix.pdf> (cit. on p. 25).
- [82] Marc Rennhard and Bernhard Plattner. "Practical Anonymity for the Masses with Mix-Networks". In: *Proceedings of the IEEE 8th Intl. Workshop on Enterprise Security (WET ICE 2003)*. Linz, Austria, June 2003. URL: <https://gnunet.org/sites/default/files/RP03-1.pdf> (cit. on p. 23).
- [83] P. Resnick. *RFC5322 Internet Message Format*. IETF, 2008. URL: <http://tools.ietf.org/pdf/rfc5322.pdf> (cit. on p. A56).
- [84] R. L. Rivest, A. Shamir, and L. Adleman. "A Method for Obtaining Digital Signatures and Public-key Cryptosystems". In: *Commun. ACM* 21.2 (Feb. 1978), pp. 120–126. ISSN: 0001-0782. DOI: 10.1145/359340.359342. URL: <http://doi.acm.org/10.1145/359340.359342> (cit. on p. 21).
- [85] Phillip Rogaway, Mihir Bellare, and John Black. "OCB: A block-cipher mode of operation for efficient authenticated encryption". In: *ACM Transactions on Information and System Security (TISSEC)* 6.3 (2003), pp. 365–403 (cit. on p. 22).
- [86] Phillip Rogaway and Ted Krovetz. *The OCB Authenticated-Encryption Algorithm*. Internet-Draft draft-krovetz-ocb-04. Work in Progress. Internet Engineering Task Force, July 2012. 17 pp. URL: <https://tools.ietf.org/html/draft-krovetz-ocb-04> (cit. on p. 22).
- [87] J. P. Sain-Andre. *RFC3923: End-to-End Signing and Object Encryption for the Extensible Messaging and Presence Protocol (XMPP)*. IETF, 2004. URL: <http://tools.ietf.org/pdf/rfc3923.pdf> (cit. on p. A56).
- [88] P. Saint-Andre. *RFC3922: Mapping the Extensible Messaging and Presence Protocol (XMPP) to Common Presence and Instant Messaging (CPIM)*. IETF, 2004. URL: <http://tools.ietf.org/pdf/rfc3922.pdf> (cit. on p. A56).
- [89] P. Saint-Andre. *RFC6120: Extensible Messaging and Presence Protocol (XMPP): Core*. IETF, 2011. URL: <http://tools.ietf.org/pdf/rfc6120.pdf> (cit. on pp. 28, A56).
- [90] P. Saint-Andre. *RFC6121: Extensible Messaging and Presence Protocol (XMPP): Instant Messaging and Presence*. IETF, 2011. URL: <http://tools.ietf.org/pdf/rfc6121.pdf> (cit. on p. 28).
- [91] Peter Saint-Andre and Lance Stout. "XEP-0234: Jingle File Transfer". In: *Saatavilla osoiteesta-< URL: http://xmpp.org/extensions/xep-0234.html* 29 (2011). URL: <https://xmpp.org/extensions/xep-0234.pdf> (cit. on p. 28).
- [92] Saad Saleh, Junaid Qadir, and Muhammad U Ilyas. "Shedding Light on the Dark Corners of the Internet: A Survey of Tor Research". In: *Journal of Network and Computer Applications* 114 (2018), pp. 1–28. DOI: 10.1016/j.jnca.2018.04.002. URL: <https://www.sciencedirect.com/science/article/pii/S1084804518301280> (cit. on p. 25).
- [93] Rob Sherwood, Bobby Bhattacharjee, and Aravind Srinivasan. "P5: A Protocol for Scalable Anonymous Communication". In: *Proceedings of the 2002 IEEE Symposium on Security and Privacy*. May 2002. URL: <http://www.cs.umd.edu/projects/p5/p5.pdf> (cit. on p. 26).
- [94] Fatemeh Shirazi, Milivoj Simeonovski, Muhammad Rizwan Asghar, Michael Backes, and Claudia Diaz. "A Survey on Routing in Anonymous Communication Protocols". In: *ACM Computing Surveys* 51.3 (2018), pp. 1–39. DOI: 10.1145/3182658. URL: <https://dl.acm.org/citation.cfm?id=3182658> (cit. on p. 41).

- [95] Peter W. Shor. "Polynomial-Time Algorithms For Prime Factorization And Discrete Logarithms On A Quantum Computer". In: *SIAM Journal on Computing* 26 (1997), pp. 1484–1509. URL: <https://arxiv.org/pdf/quant-ph/9508027v2> (cit. on p. 21).
- [96] Kaushal Solanki, Anindya Sarkar, and BS Manjunath. "YASS: Yet another steganographic scheme that resists blind steganalysis". In: *International Workshop on Information Hiding*. Springer. 2007, pp. 16–31. URL: http://vision.ece.ucsb.edu/sites/vision.ece.ucsb.edu/files/publications/kaushal_2007_IWIH.pdf (cit. on p. 20).
- [97] NIST-FIPS Standard. "Announcing the advanced encryption standard (AES)". In: *Federal Information Processing Standards Publication 197* (2001), pp. 1–51 (cit. on p. 20).
- [98] A. Stevenson. *Oxford Dictionary of English*. Oxford reference online premium. OUP Oxford, 2010. ISBN: 9780199571123. URL: <http://www.oed.com> (cit. on p. A57).
- [99] Almon Brown Strowger. "Automatic Telephone-Exchange". en. Pat. 447918. Mar. 1891 (cit. on p. 3).
- [100] Mansi S Subhedar and Vijay H Mankar. "Current status and key issues in image steganography: A survey". In: *Computer science review* 13 (2014), pp. 95–113 (cit. on p. 20).
- [101] Paul Syverson, Gene Tsudik, Michael Reed, and Carl Landwehr. "Towards an Analysis of Onion Routing Security". In: *Proceedings of Designing Privacy Enhancing Technologies: Workshop on Design Issues in Anonymity and Unobservability*. Ed. by H. Federrath. Springer-Verlag, LNCS 2009, July 2000, pp. 96–114. URL: <https://dtic.mil/dtic/tr/fulltext/u2/a465255.pdf> (cit. on p. 25).
- [102] Parisa Tabriz and Nikita Borisov. "Breaking the Collusion Detection Mechanism of MorphMix". In: *Proceedings of the Sixth Workshop on Privacy Enhancing Technologies (PET 2006)*. Ed. by George Danezis and Philippe Golle. Cambridge, UK: Springer, June 2006, pp. 368–384. URL: <https://hatswitch.org/nikita/papers/pet2006-morphmix.pdf> (cit. on p. 25).
- [103] BiaoShuai Tao and Hongjun Wu. "Improving the biclique cryptanalysis of AES". In: *Australasian Conference on Information Security and Privacy*. Springer. 2015, pp. 39–56 (cit. on p. 20).
- [104] Muldowney Thomas, Miller Mathew, Eatmon Ryan, and Saint-Andre Peter. *XEP-0096: SI File Transfer*. XMPP Standards Foundation, 2004. URL: <http://xmpp.org/extensions/xep-0096.html> (cit. on p. A56).
- [105] Florian Tschorsch and Björn Scheurmann. "How (not) to build a transport layer for anonymity overlays". In: *Proceedings of the ACM SIGmetrics/Performance Workshop on Privacy and Anonymity for the Digital Economy*. June 2012. URL: <http://pade12.mytestbed.net/pade12-final6.pdf> (cit. on p. 22).
- [106] Alan M. Turing. "Computing machinery and intelligence". In: *Parsing the Turing Test*. Springer, 1950, pp. 23–65 (cit. on p. 67).
- [107] UNHR. *International Covenant on Civil and Political Rights*. 1966. URL: <http://www.ohchr.org/en/professionalinterest/pages/ccpr.aspx> (cit. on p. 13).
- [108] Michael Waidner and Birgit Pfitzmann. "The dining cryptographers in the disco: Unconditional Sender and Recipient Untraceability". In: *Proceedings of EUROCRYPT 1989*. Springer-Verlag, LNCS 434, 1990. URL: http://www.semper.org/sirene/publ/WaPf1_89DiscoEngl.ps.gz (cit. on p. 24).
- [109] Andreas Westfeld. "F5 - A Steganographic Algorithm". In: *none none* (2002). URL: <http://www.ws.binghamton.edu/fridrich/research/f5.pdf> (cit. on p. 20).
- [110] Doug Whiting, Niels Ferguson, and Russell Housley. "RFC3610: Counter with cbc-mac (ccm)". In: (2003) (cit. on p. 22).
- [111] Li Zhuang, Feng Zhou, Ben Y Zhao, and Antony Rowstron. "Cashmere: Resilient anonymous routing". In: *Proceedings of the 2nd conference on Symposium on Networked Systems Design & Implementation-Volume 2*. USENIX Association. 2005, pp. 301–314. URL: https://www.usenix.org/legacy/publications/library/proceedings/nsdi05/tech/full_papers/zhuang/zhuang.pdf (cit. on p. 26).

Short Biography

Martin Gwerder was born 20. July 1972 in Glarus, Switzerland. He is currently a doctoral Student at the University of Basel. After having concluded his studies at the polytechnic at Brugg in 1997, he did a postgraduate study as a master of business and engineering. Following that, he changed to the university track doing an MSc in Informatics at FernUniversität in Hagen. While doing this he constantly broadened his horizon by working for industry, banking and government as engineer and architect in security



related positions. He currently holds a lecturer position for cloud and security at the University of Applied Sciences Northwestern Switzerland. His main expertise lays in the field of networking related problems dealing with data protection, distribution, confidentiality and anonymity.