

SMU Lyle School of Engineering

# Reinforcement Learning

## Introduction

Textbook Chapter 1

Michael Hahsler, SMU

Some slides are based on material by Oliver Wallscheid (Paderborn University) and by David Silver (University College London)



Online Material

CC BY NC SA

# How Do We Build Intelligent Systems?

Options:

- Explicitly program behavior: **Rule-based agent, planning**
- Learn behavior from labeled data offline: **Supervised learning**
- Learn behavior using feedback from interacting with the environment (online): **Reinforcement Learning**





# Topics of this Course

- **Introduction to reinforcement learning**
- Markov decision processes
- Part I: Tabular Methods
  - Dynamic programming
  - Monte Carlo methods
  - Temporal-difference learning
  - Multi-step bootstrapping
  - Planning and learning with tabular methods
- Part II: Approximate Solution Methods
  - Prediction and Control using Approximation
  - Eligibility Traces
  - Policy Gradient Methods
- Part III: Modern RL Methods
  - Deep Reinforcement Learning
  - Current Applications

# Recommended Readings

- Richard S. Sutton, Andrew G. Barto,
  *Reinforcement Learning: An Introduction*,
  2nd edition, MIT Press, Cambridge, MA, 2018.

- Vincent François-Lavet, Peter Henderson, Riashat Islam, Marc G. Bellemare and Joelle Pineau,
  An Introduction to Deep Reinforcement Learning,
  *Foundations and Trends in Machine Learning*, 11:3-4, pp 219-354, 2018.


# Table of Contents


- What is RL?
- Elements of RL
- A Small Example
- Important Issues in RL
- RL and Planning



# What is RL?

# The Basic Reinforcement Learning Structure

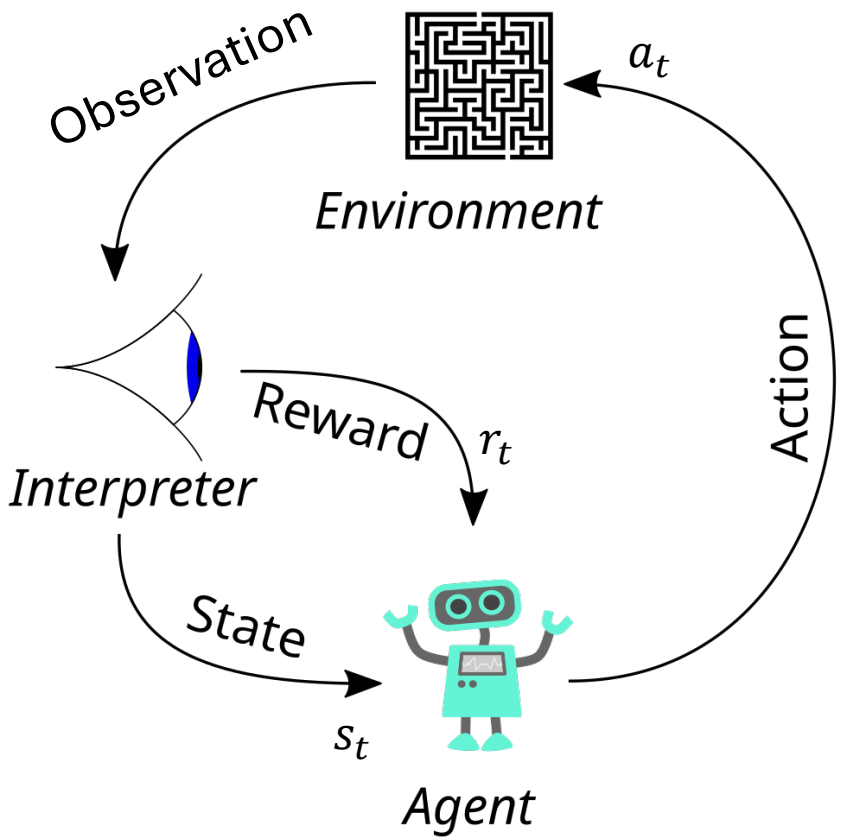



The basic RL operation principle
(derivative of www.wikipedia.org, CC0 1.0)

**Goal**: Map a situation to an action to maximize the reward

**Key characteristics**:

- **Uncertainty about the environment** leads to a need for sensing.
- **No supervisor**: no training data, discover actions by trying them.
- **Sequential decision making**: Agent actions affect subsequent data. Agent maximizes over future (delayed) rewards which need to be estimated!
- Action discovery and maximization lead to a tradeoff: **exploit vs. explore**

# Agent and Environment

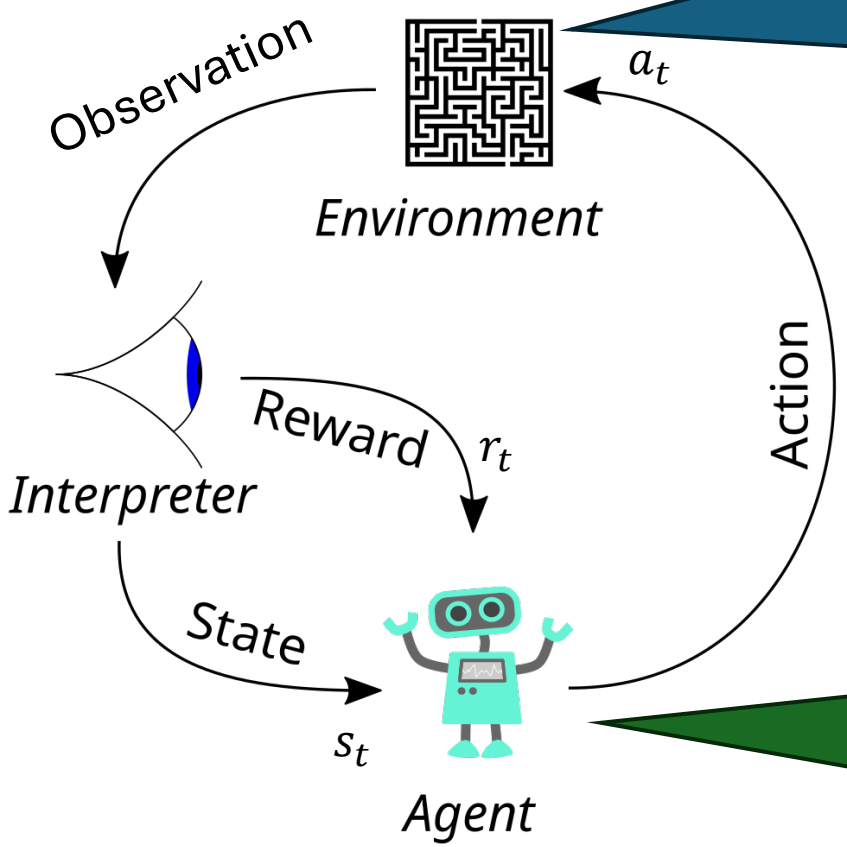


We often model the interpreter as part of the environment.

At each step $t$ the environment:

- Receives an action $a_t$.
- Emits an observation $s_{t+1}$.
- Emits a reward $r_{t+1}$.

The time increments $t \leftarrow t + 1$.

At each step $t$ the agent:

- Receives the state $s_t$.
- Receives a reward $r_t$.
- Picks an action $a_t$.


**Goal**: Lean what the best action for state $s_t$ is. This is called a **policy**.

**Remark on time:** In AI, we often assume a time delay of one unit between executing the action and receiving the next state as well as the reward. This is called a discrete-time process (vs. a continuous-time process).

# RL and Machine Learning

Machine learning is a field of AI that learns from examples.

RL is a 3rd type of machine learning

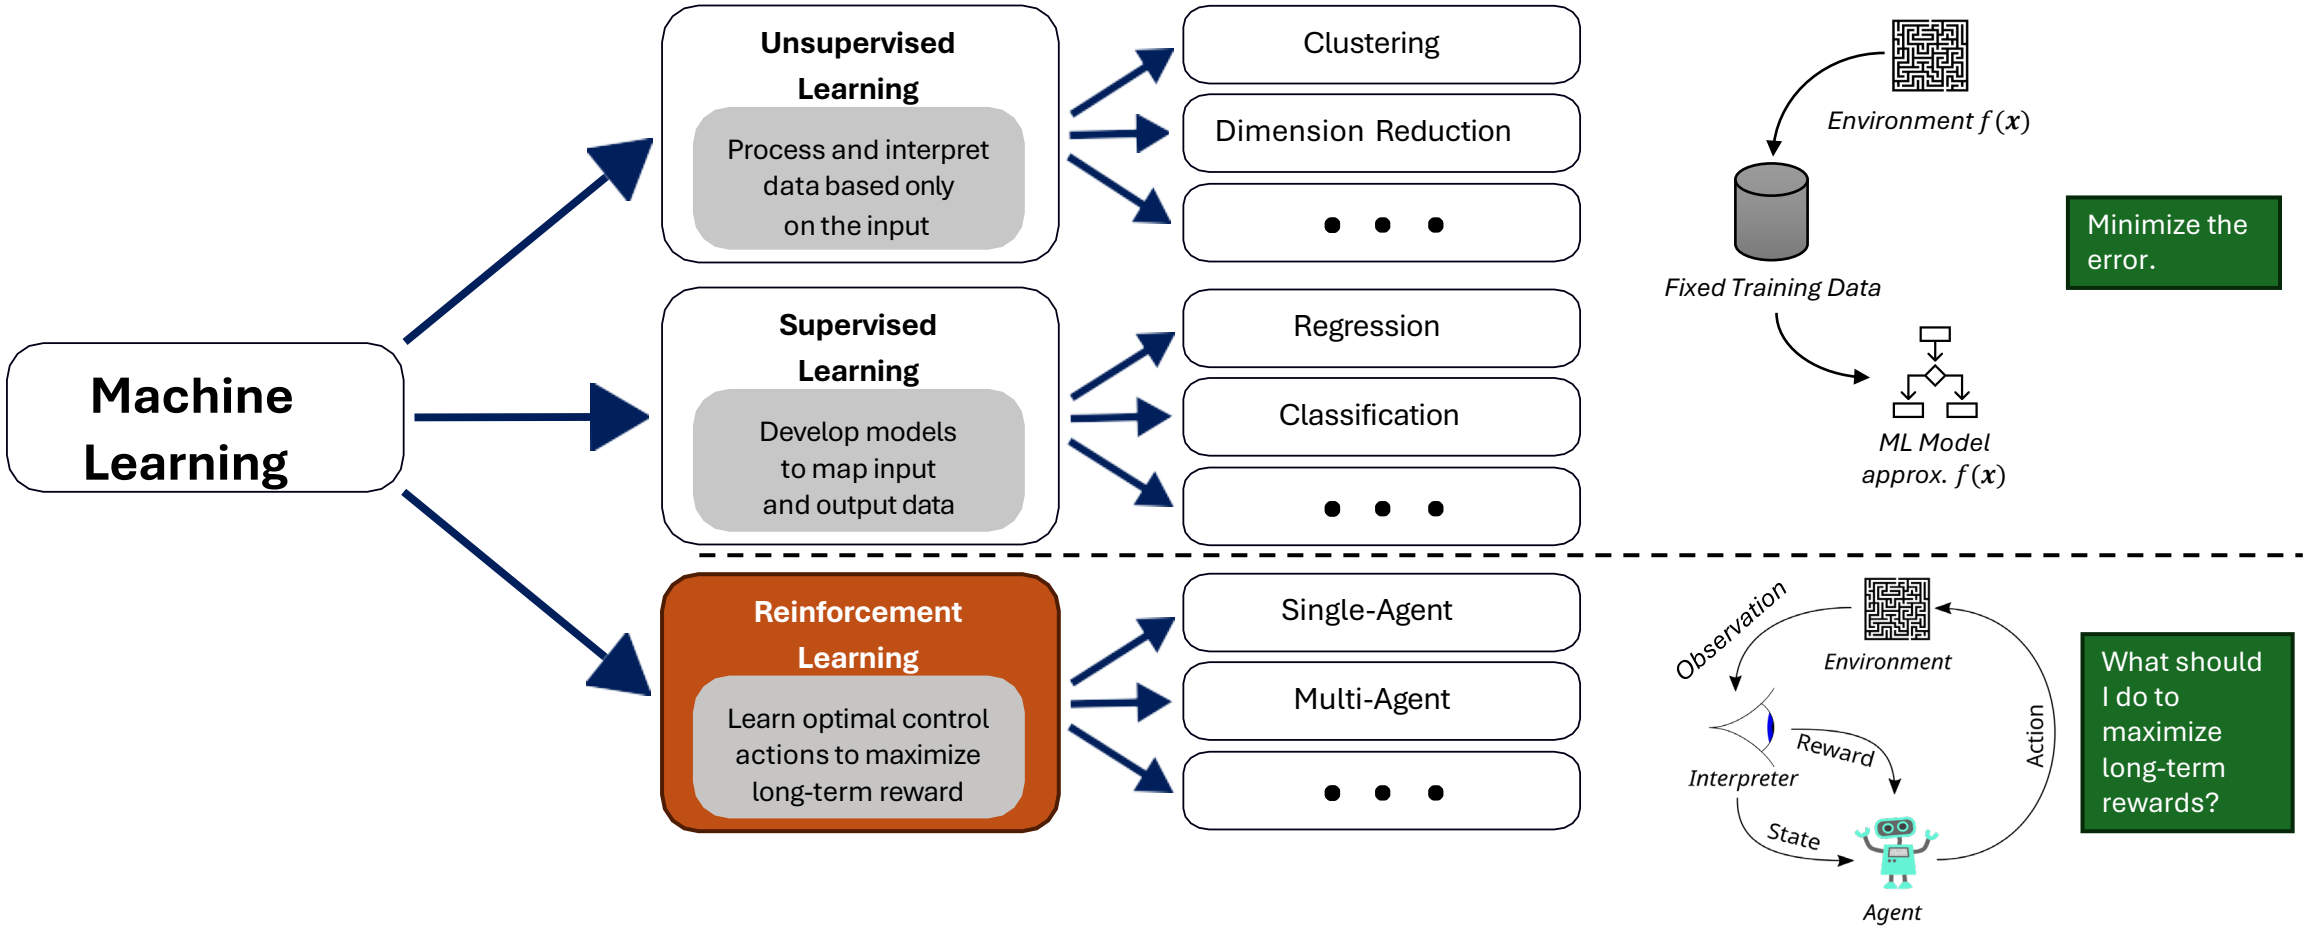


# When to Use RL vs Supervised Learning

- Sequential problems
  - Actions now affect future outcomes
  - Delayed feedback (e.g., a good chess move leads to a win later)
  - Instead of minimizing prediction error, RL optimizes a long-term objective (cumulative reward over time).

- Learning through interaction with an environment
  - No labeled training data
  - Rewards are produced from interacting with the environment

- Dynamic, uncertain, and potentially changing environment. RL explicitly models
  - exploration (trying new actions) vs exploitation (using known good actions).

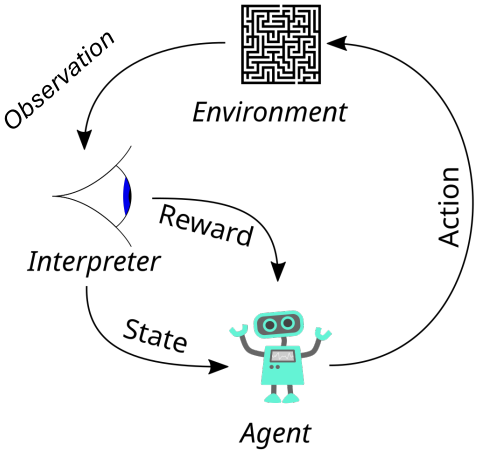


**Do not use RL if**

- You already have high-quality labeled training data.
- The task is static (e.g., image classification, spam detection).
- Decisions do not influence future states.

# Many Faces of Reinforcement Learning

**Optimal sequential decision making**




Richard E. Bellman (1920-1984)
American applied mathematician, who introduced **dynamic programming** and the Bellman equation. Foundation of **optimal control theory**.

**Stochastic process formalism**




Andrei Markov (1856-1922)
Russian mathematician developed the groundwork for **Markov chains** to model **dynamical systems**.

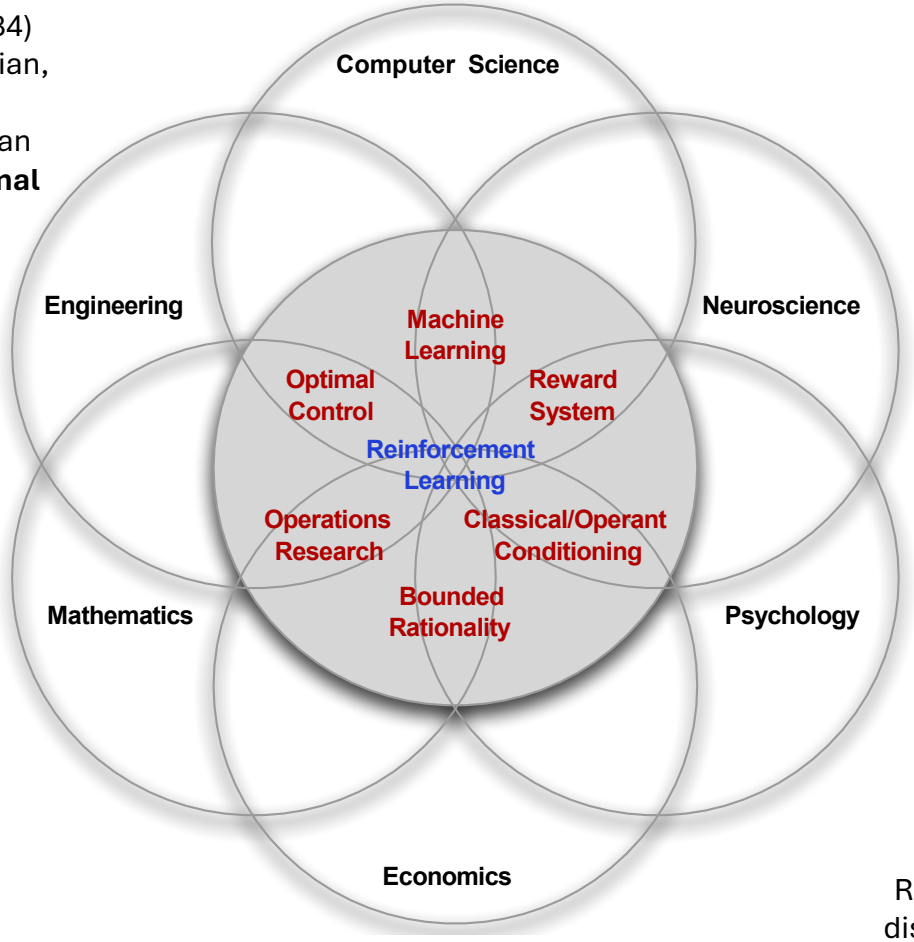


RL and its neighboring domains

(source: D. Silver, "Reinforcement learning", 2015. CC BY-NC 4.0)

**Classical conditioning**

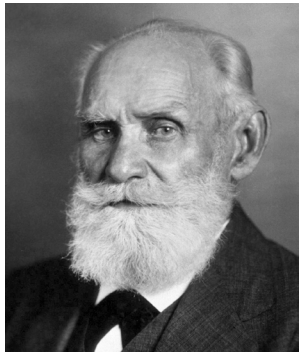

Ivan Pavlov (1849-1936)
Russian physiologist and Nobel laureate who discovered **classical conditioning** through his experiments with dogs.

# Contemporary application examples

RL has led to superhuman performance for many games and simple toy examples

- Playing Atari Breakout
- Play strategy board game Go at super-human performance
- Simulated classic control problems
- Swinging-up and balance a cart-pole / an inverted pendulum

Using RL for real applications is promising, but much more difficult. Here are some examples:

- Controlling electric drive systems
- Flipping pancakes with a roboter arm
- Drifting with a RC-car
- Driving an autonomous car
- Nuclear fusion reactor plasma control
- Training chat bots (like chatGPT)
- …


**Reasons for difficulty:**

- Real environments are complicated.
- Sensors (observations) are noisy.
- We often have partial observability.
- The number of different actions can be large.
- Measuring reward can be difficult.
- No access to a fast, perfect simulation environment.



# Elements of RL (1 of 2)

# Elements of RL (2 of 2)

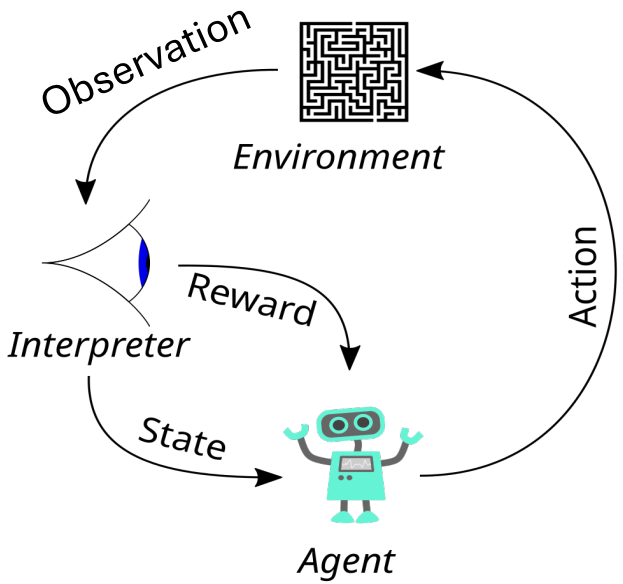


We will discuss:


- State, Interpreter, Observations and Reward
- Actions and Policy

# State

- The environment has an **environment state** $s_t^e$ that **contains all information** needed to determine how it will react to actions:
  - Physical states, e.g., location in a maze, current car velocity and direction
  - Game states, e.g., current chess board
  - Financial states, e.g., stock market prices, sentiment
- We call such a state **Markovian** or an **information state**.

- **Agent state** $s_t^a$ or $s_t$ is the agent's internal representation of the situation.
  - What does it know about the environmental state?
  - It is the basis of choosing the next action.
  - Can be incomplete and noisy based on observations $o_t$
  - Can include the agent's internal memory. E.g., agent's current strategy, belief states, learned features, etc.
  - Can be compressed (often using an artificial neural network).

- **Important**: With state, we will mean the agent state, and we will use the random variable $S_t$.
- The state typically has a factored representation with discrete and continuous variables.

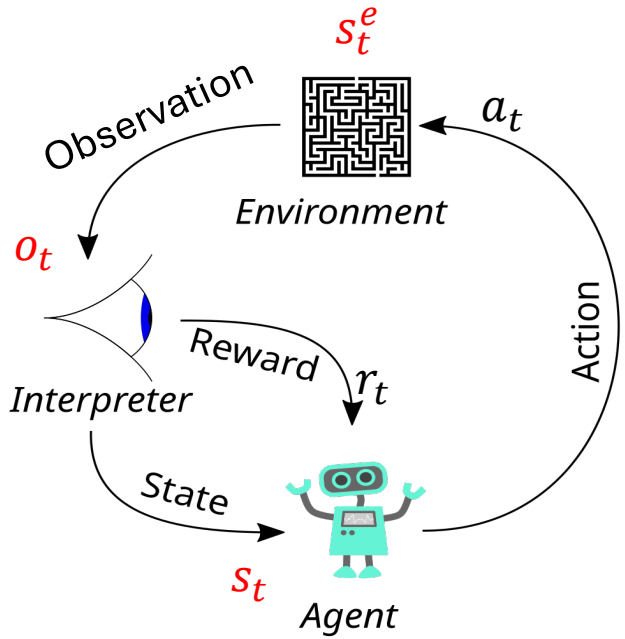

# Degree of Observability

**Full observability**

- Agent directly observes the full environment state (e.g., $s_t = \boldsymbol{o}_t = s_t^e$).
- $s_t$ is an information state (Markovian): Markov Decision Process (MDP)

**Partial observability**


- Agent does not have full access to the environment state but observes state features $\boldsymbol{o}_t = f(s_t^e)$. $\boldsymbol{o}_t$ is typically not Markovian and not sufficient to predict the environment's behavior.
- Agent may try to reconstruct the complete state information (state estimation):

$$s_t = \widehat{s_t^e} = \text{update}\left(\text{predict}\left(\widehat{s_{t-1}^e}, a_t\right), \boldsymbol{o}_t\right)$$

- A formal model for this situation is a Partially Observable Markov Decision Processes (POMDP).

**POMDP examples**

- Self-driving cars: only cheap cameras to reduce cost
- Poker game: opponents' cards and what cards will be dealt next are unknown
- Human health status: Sensing is intrusive and expensive; the detailed system dynamics are unknown

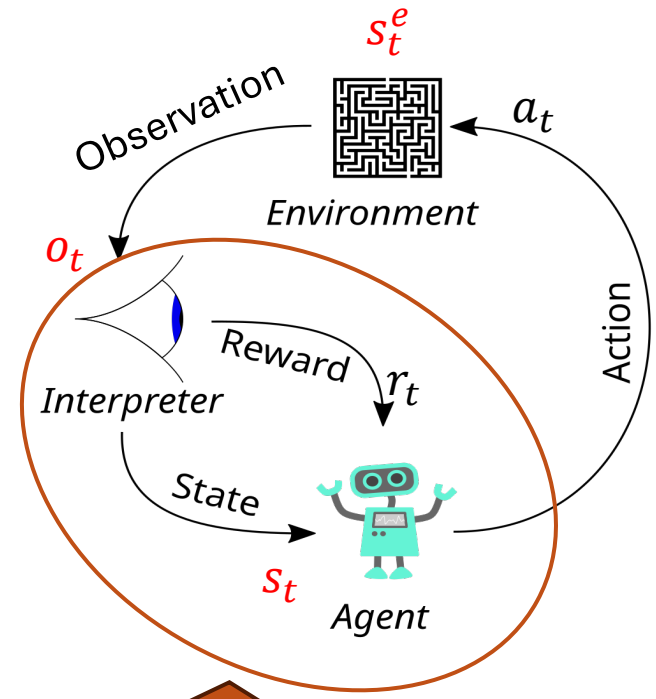


The agent design often includes designing the interpreter's **state estimation.**


# Reward

- An **immediate reward** is a scalar random variable $R_t$ with realizations $r_t \in \mathbb{R}$ that the agent "receives" at time $t$.
- **Reward function**: The reward is often defined as a function of the current state and action $r(s_t, a_t)$ (assuming full observability). Examples:
  - 1 point for winning a game = last action leads to a winning board.
- The **agent's task** is to choose actions to maximize the long-term reward called the **return**.

**Reward hypothesis**: All goals and purposes can be modeled as maximizing the expected cumulative sum of a received scalar reward signal.

$$\max \mathbb{E}\left[\sum_{t=0}^{\infty} w_t R_t\right]$$

- The reward hypothesis is a **foundational assumption** of RL!
  This means that the reward structure fully determines the goal.
- The **designer's task** is to design the reward signal so the agent can learn how to achieve the goal. This is called **reward engineering or reward shaping**.
  E.g., add a reward for intermediate goals, such as achieving 3 in a row in Connect-4.

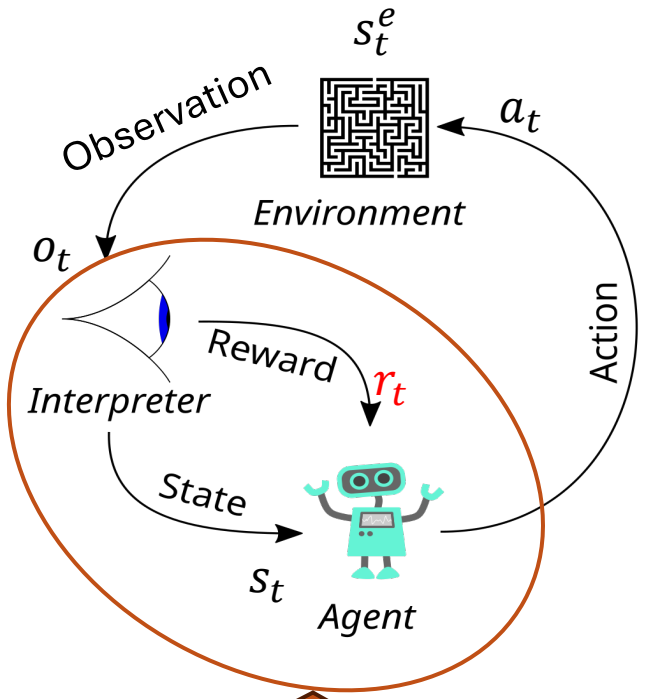


The agent design often includes designing the **reward structure**

Note: $w_t$ is just a weight that depends only on $t$.

# Reward Characteristics

Rewards are highly dependent on the given problem:

- Actions may have **short and long-term consequences**.
  - The reward for a certain action may be delayed, leading to the **credit assignment problem**.
  - Examples: Stock trading, strategic board games,…
- Rewards can be **positive and negative values**.
  - Certain situations (e.g., car hits a wall) might lead to a negative reward (= a cost).
- Exogenous impacts might introduce **stochastic reward components**.
  - Example: A wind gust pushes an autonomous helicopter into a tree.

# Reward Examples

**Flipping a pancake:**

- Pos. reward: catching the flipped pancake
- Neg. reward: dropping the pancake on the floor

**Stock trading:**

- Trading portfolio monetary value

**Playing Atari games:**

- Highscore value at the end of a game episode

**Driving an autonomous car:**

- Pos. reward: getting safely from A to B without crashing
- Neg. reward: hitting another car, pedestrian, bicycle,…

**Classical control task** (e.g., electric drive, inverted pendulum,…):

- Pos. reward: following a given reference trajectory precisely
- Neg. reward: violating a system constraint or producing a large control error

# Issues With the Reward Function

"Be careful what you wish for - you might get it" (proverb)

"...it grants what you ask for, not what you should have asked for or what you intend."
(Norbert Wiener, American mathematician)



Midas and daughter (good as gold)
(source: www.flickr.com, by Robin Hutton CC BY-NC-ND 2.0)

**Reward engineering**: Designing an effective reward function is crucial for successful RL applications!

**Issues**:

- **Learning**: The RL agent's learning process heavily depends on the reward distribution over time.
- **Alignment**: The reward structure needs to represent the designer's goals.
- **Reward hacking**: The agent exploits mistakes in the reward structure or model to maximize reward without solving the problem.

# Episodic and Continuing Tasks

**Definition**: The expected cumulative reward that the agent wants to maximize is called the **return**.

## Episodic tasks

- A problem which naturally breaks into subsequences (episodes) with a **finite horizon**.
- Examples: most games like chess, solving a maze,…
- The return for one episode becomes a finite sum with horizon $T$:

$$G_t = R_{t+1} + R_{t+2} + \cdots + R_T = \sum_{k=1}^{T} R_{t+k}$$

## Continuing tasks

- A problem without a natural end (**infinite horizon**; $T = \infty$).
- Example: A smart thermostat controlling the room temperature.
- We use **discounting** and have a **recursive relationship**:

$$\begin{aligned} G_t &= \sum_{k=0}^{\infty} \gamma^k R_{t+k+1} \\ &= R_{t+1} + \gamma R_{t+2} + \gamma^2 R_{t+3} + \cdots \\ &= R_{t+1} + \gamma (R_{t+2} + \gamma R_{t+3} + \cdots) \\ &= R_{t+1} + \gamma G_{t+1} \end{aligned}$$


Strategic viewpoint of discounting:

- If $\gamma \approx 1$ : agent is farsighted.
- If $\gamma \approx 0$ : agent is shortsighted (only interested in immediate reward).

- The discount rate $0 \leq \gamma < 1$ is an exponentially decaying weight that prevents infinite sums.

# Actions

- Choosing actions is the agent's means to affect the environment so it can maximize its long-term reward.
- **Notation**: Random variable $A_t$ or a known action $a_t \in \mathcal{A}$
- **Finite action set (FAS):** $\mathcal{A}$ is a finite set.
  Available actions often depend on the current state $a_t \in \mathcal{A}(s_t)$.
- **Continuous action set (CAS):** $\mathcal{A} = \mathbb{R}^m$
  $\mathrm{a_t}$ is an $m$-dimensional vector. Can be discretized into a FAS.
- Examples:
  - Take another card during a Blackjack game? Yes/No (FAS)
  - Steering while driving an autonomous car. Angle? (CAS)
  - Buy stock options for your trading portfolio (FAS/CAS)

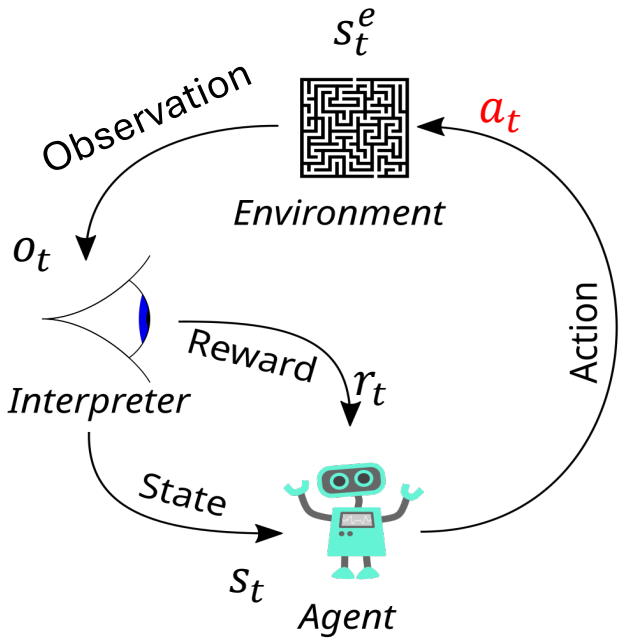


# Deterministic Policy

- A policy is the rule of how an agent chooses actions. **This is what RL wants to lean!**
- Choice depends on what the agent currently knows about the environment. This is the current state $s$.
- A deterministic policy prescribes an action for each state:



$$\pi: \mathcal{S} \to \mathcal{A} \quad \text{or} \quad a = \pi(s)$$

**Example**:

State: $s =$

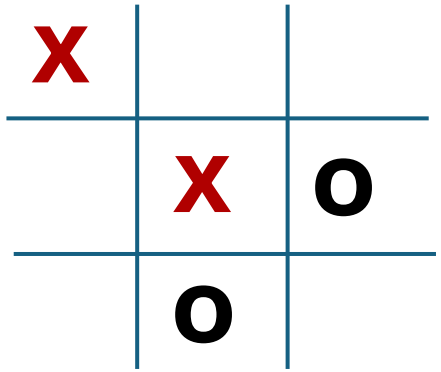


Policy shown as a table: x plays bottom right corner for the board.

| State $s$ | Action $a = \pi(s)$ |
|---|---|
|  | Bottom right |
|  | Top right |
| ... | ... |

**Connection to agents AI:**

- In AI, we called the policy $\pi: \mathcal{S} \to \mathcal{A}$ the agent function f: $P^* \to \mathcal{A}$
- This implies that the state $s$ needs to contain al relevant information from the percept sequence $P^* = p_0, p_1, \dots, p_t$

# Stochastic Policy






$\Delta(\mathcal{A})$ … Probability distribution over the action space

- A mapping from states to the probability distribution of selecting each action:

$$\pi\colon\ \mathcal{S} \to \Delta(\mathcal{A})$$

often written as $\pi(a|s)$ giving the probability of choosing $a$ given the agent is in state $s$.

**Example**: Probability distribution indicating to play bottom right 60% of the time.

| State $s$ | Action $a$ | Probability $\pi(a\|s)$ |
|---|---|---|
|  | Top center | .1 |
|  | Top right | .1 |
|  | Middle left | .1 |
|  | Bottom left | .1 |
|  | Bottom right | .6 |


**Note**: The deterministic policy is just a special case with 1 for the chosen action and 0 for all others.



# A Small Example


Simple Maze

# Maze Example

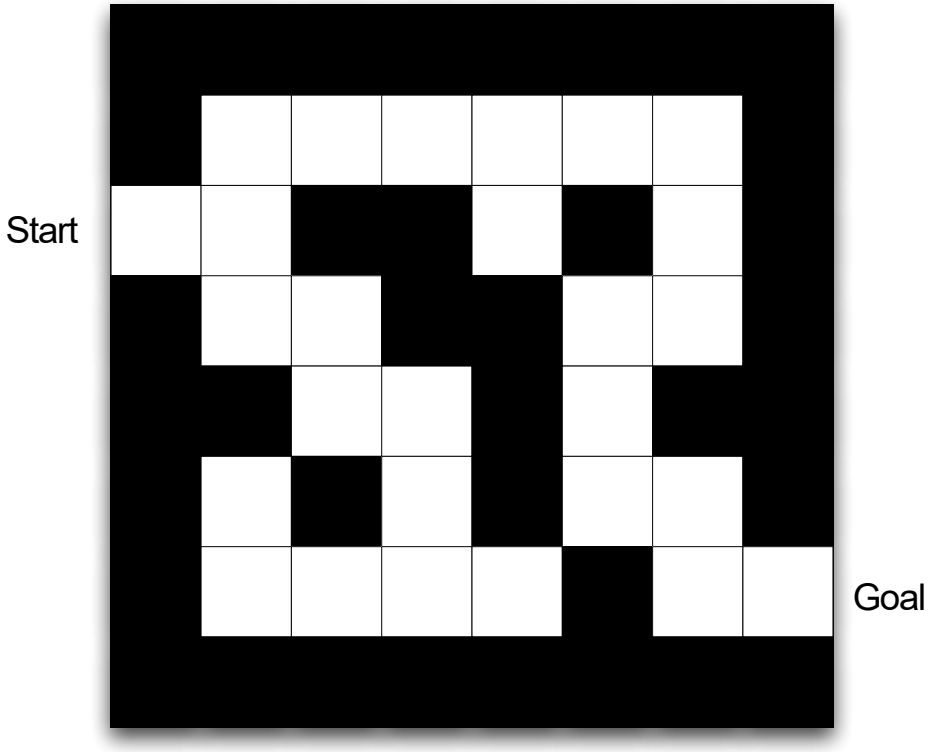


Maze setup

(source: D. Silver, “Reinforcement learning”, 2015. CC BY-NC 4.0)

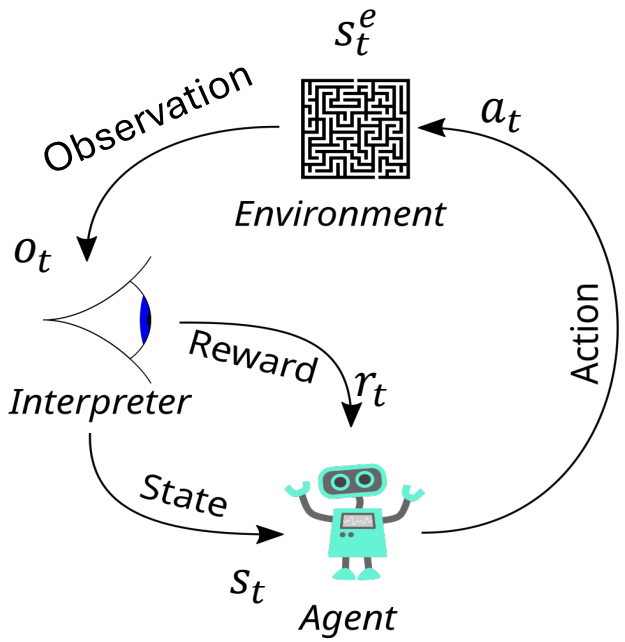



**Problem statement**

- State: agent’s location is observable
- Start and goal are given
- Actions: $a_t \in \{N, E, S, W\}$
- Transition model: deterministic
- Immediate Reward: $r_t = -1$
- Episode terminates at goal state

Episodic problem! To maximize the return, it needs to minimize the number of steps to get to the goal!

# Maze Example: RL-Solution as a Policy

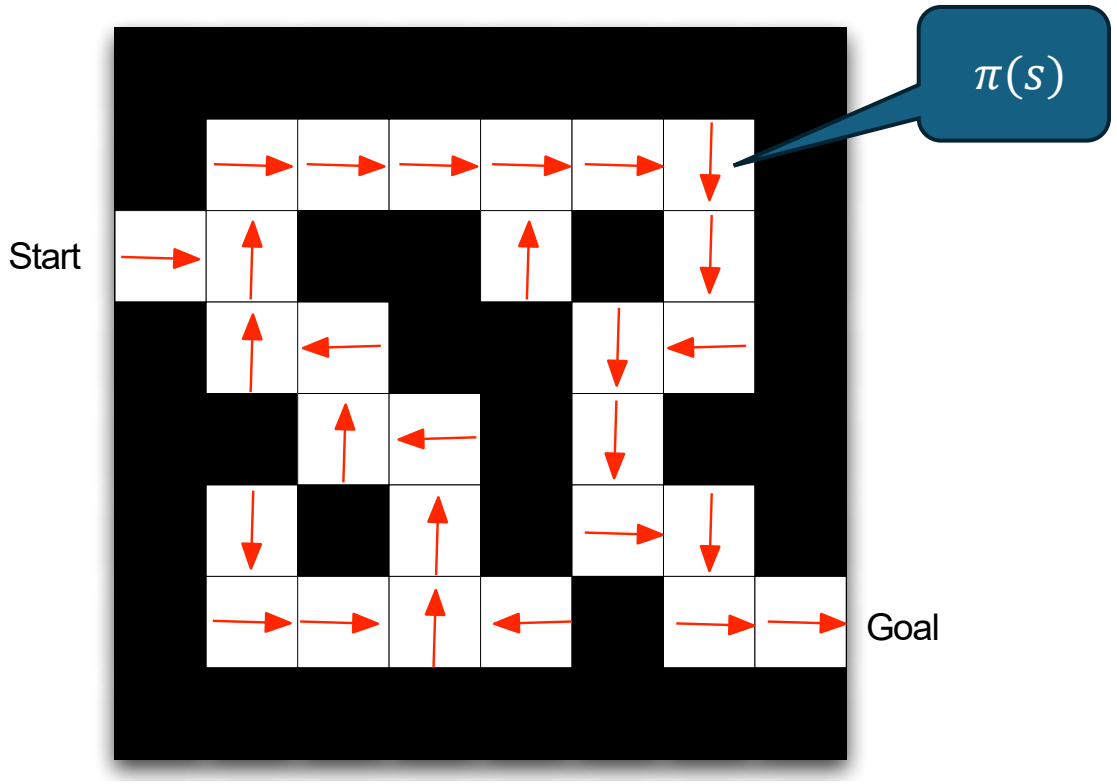



Maze setup: Arrows represent policy $\pi(s)$

(source: D. Silver, “Reinforcement learning”, 2015. CC BY-NC 4.0)

**Key characteristics of the policy:**

- Specify an action (direction) for each state (position in the maze).
- Policy can be explicitly stored as a table.

# Maze Example: RL-Solution as a Value Function

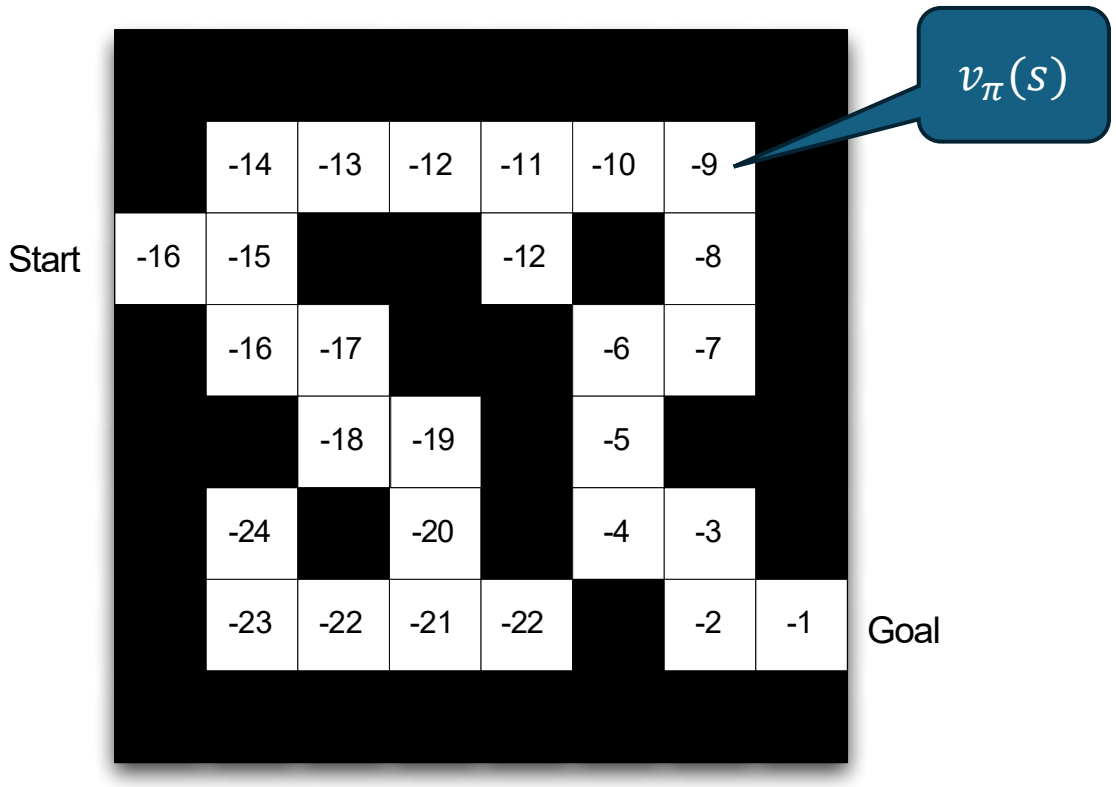


Numbers represent value $v_\pi(s)$: Each step costs 1, i.e. $r = -1$

(source: D. Silver, "Reinforcement learning", 2015. CC BY-NC 4.0)

The (state) value function gives the expected return when following a given policy.

$$v_\pi(s) = \mathbb{E}_\pi\left[\sum_{t=0}^{\infty} w_t R_t | s_0 = s\right]$$

**Key characteristics**

- The policy is implicitly defined by the state values:
  The agent always chooses actions to move to states with better state values.
  This is called a "greedy" policy.


# **Code example**: Lunar Lander Environment

See Code on https://michael.hahsler.net/Introduction_to_Reinforcement_Learning/



# Important Issues in RL

# Important Issues

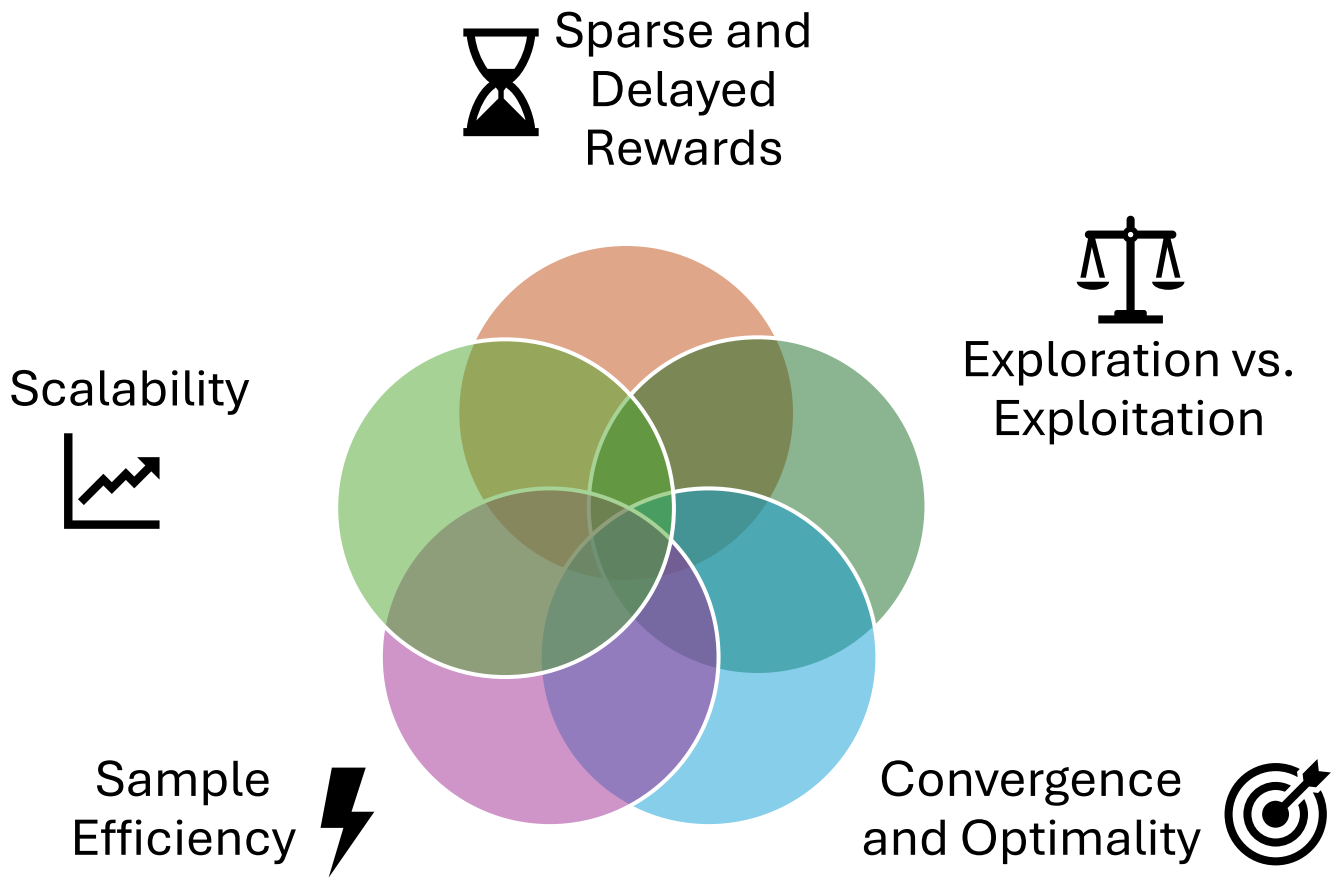

# Credit Assignment Problem: Sparse and Delayed Rewards

- **Credit assignment problem**: Delayed rewards make it hard to figure out which actions caused the reward.

- **Example**:
  - What were the moves in a chess game that led to winning the game?
  - How much did getting the Bishop in the right position contribute?



- To address this issue, we will learn methods like:
  - Temporal differencing
  - Eligibility traces
  - Reward shaping

# Exploration vs. Exploitation

- **Issue**: The agent must learn a good policy using the reward signal **while it is being evaluated** at the same time. E.g., learn to play chess while playing games.
- At any point in time, the agent can choose actions to:
  - **Exploit** the currently known best policy to maximize the return.
  - **Explore** new actions to find out more about the environment. This could improve the policy and future returns.
- **Trade-off problem**: When should we explore?
- **Typical solution**: Follow a policy that exploits but sometimes performs exploratory actions (e.g., $\epsilon$-greedy policy)


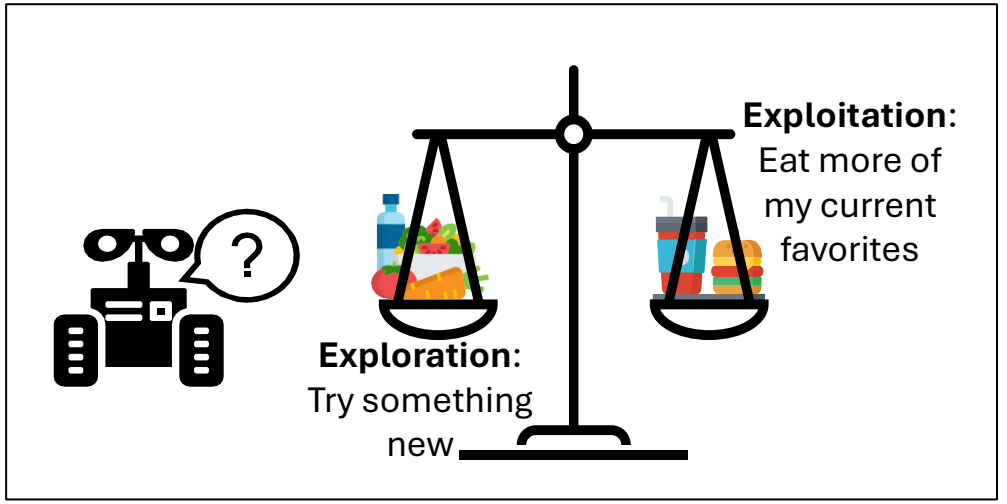



Figure: The exploration-exploitation dilemma

# Convergence and Optimality

**Convergence**: Will learning eventually stabilize at a **fixed solution**?

**Optimality**: Does the algorithm converge to the true optimal policy/value function?

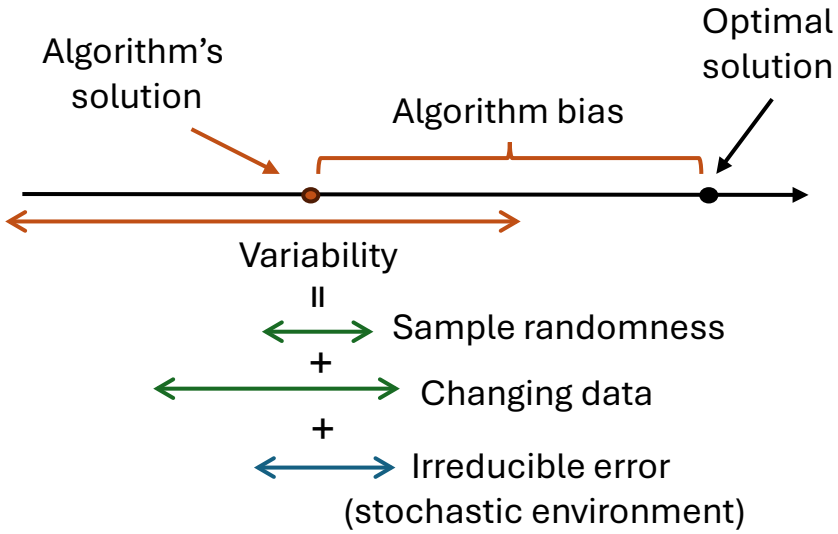


**Affected by:**

- **Bias:** systematic error
  Do we move towards the **optimal solution**? Estimation and approximation may introduce bias.
- **Variance:** difference in found solutions
  ML: The result of randomness (sampling the training data and in the algorithm)
  RL: Sampling + training data is not fixed. Observations and rewards depend on the agent's current actions (i.e., behavior policy).

General error components:


$$Total\ squared\ error\ =\ bias^2\ +\ variance\ +\ irreducible\ error^2$$

RL algorithm keeps learning, so variance and bias may change over time. Questions:

- Does it **converge** or exhibit **instability**? Does it converge to the optimum?
- How fast does it converge? Depends mostly on variance and how fast bias can be reduced.

We will discuss the **variance vs. bias tradeoff** whenever we introduce a new algorithm.

## After Convergence

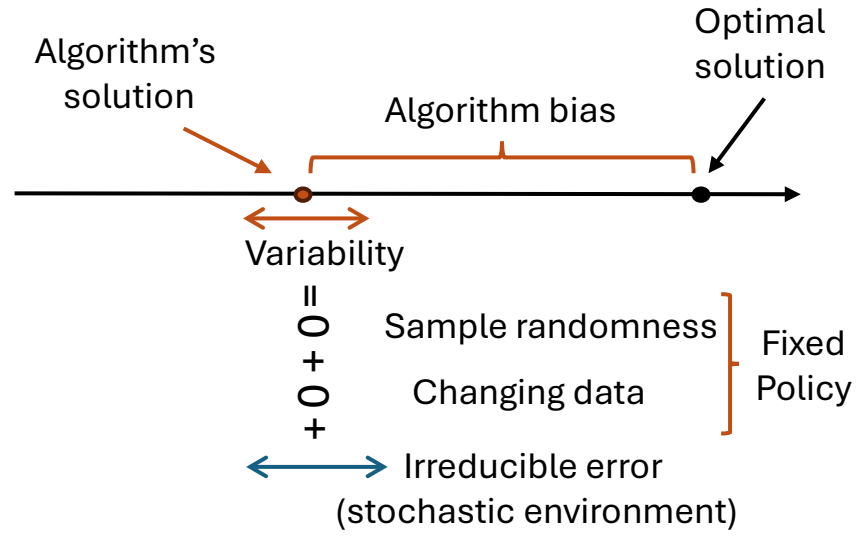

# Sample Efficiency

**Issue**: Real-world environments are expensive and slow (robots, healthcare, etc.)

**Sample efficiency**: How many interactions does an algorithm need to learn a good policy?

- **High sample efficiency**: Learns quickly with **few interactions.**
- **Low sample efficiency**: Requires a lot **of data** to perform well.

RL often has low **sample efficiency** (needs millions of interactions).

We will cover key approaches to improve sample efficiency:

- Model-based RL (planning with dynamic programming)
- Learning and planning (e.g., Dyna)
- Experience replay
- Offline RL on a prerecorded data set

# Scalability

- **Issue**: Interesting problems are very large with many or continuous states and actions.

- **Solution**: Linear function approximation
  - enables **generalization** (we can predict a value for a state we have not seen before),
  - but it can affect **stability**.

- Non-linear function approximation (neural networks in DRL) together with bootstrapping lead to:
  - Divergence
  - Oscillations
  - Overestimation bias

- We will cover these issues and potential fixes when we talk about approximation and DRL.



# RL and Planning

Model-based vs. Model-free Methods

# Model-based vs. Model-free RL

## Model-based RL

- **Known Environment**: The agent has a complete model of the environment.
  - Transition model
  - Reward model
- The agent does not need to interact with the environment: The agent can use the model to **plan** offline and find the optimal policy.
- Important issues:
  - Computational complexity (time and space)
  - Model errors compound

## Model-free RL

- **Unknown environment**: Model is unknown.
- **Data-driven approach**: The agent interacts with the environment via **trial & error** by trying actions and updating its policy based on the received reward.
- Important issues:
  - Sample efficiency (how fast can we learn)
  - Exploitation vs. exploration

# RL vs Optimal Control Theory

**Goal**: Specify a controller for a dynamic process.

Methods for optimal control of dynamical systems. They are typically

- **model-based** (planning),
- **continuous**,
- solved **offline** (often with a closed-form solution), and
- results in **stable and robust** solutions.

- Example: **Linear Quadratic Regulator (LQR)**
  - Minimize the infinite-horizon quadratic continuous-time cost function:

$$J = \frac{1}{2}\int_0^\infty [\boldsymbol{x}^\mathsf{T}(t)\boldsymbol{Q}\boldsymbol{x}(t) + \boldsymbol{u}^\mathsf{T}(t)\boldsymbol{R}\boldsymbol{u}(t)]\,\mathrm{d}t$$

  - With linear time-invariant first-order dynamic constraints


$$\boldsymbol{x}(t+1) = \boldsymbol{A}\boldsymbol{x}(t) + \boldsymbol{B}\boldsymbol{u}(t)$$

  - This optimization problem can be solved to create a feedback control law

$$\boldsymbol{u}(t) = \boldsymbol{K}\boldsymbol{x}(t)$$

- $\boldsymbol{x}$ is the state (feature vector)
- $\boldsymbol{u}$ is the action.
- $\boldsymbol{Q}$ and $\boldsymbol{R}$ are the reward (cost) model

- $\boldsymbol{A}$ and $\boldsymbol{B}$ are the transition model.

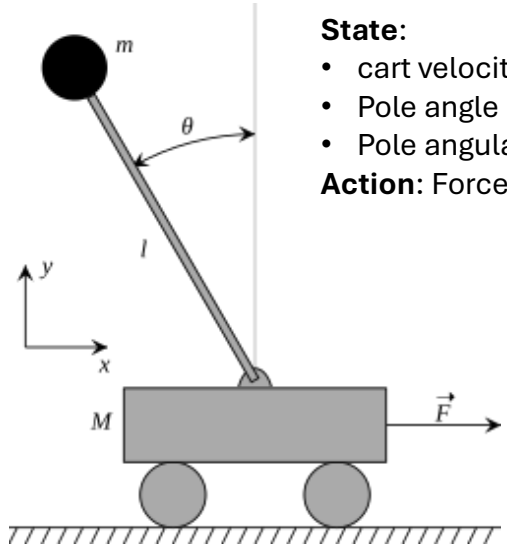


**State**:
- cart velocity
- Pole angle
- Pole angular velocity

**Action**: Force

Example: Cart Pole Balancing
Balance the weight by moving forth and back.

- **Model Predictive Control (MPC):** Similar to optimal control, but
  - reoptimizes online in each step given the feedback
  - uses numerical optimization instead of closed form solutions
  - can deal with non-linear problems.

This course will focus on RL and not Optimal Control Theory or MPC.



# What You Should Know



- Understand the basic **RL interaction loop**: agent, environment, and the role of the interpreter.
- **Basic RL vocabulary**: state, action, immediate reward, return, policy, value function.
- Appreciate the significance of proper **reward formulation**.
- The important RL issues of:
  - Credit assignment problem
  - Exploitation vs exploration
  - Sample efficiency
  - Variance vs bias
  - Approximation and generalization
- Differentiate between **model-based** (planning) and **model-free** reinforcement learning methods.