


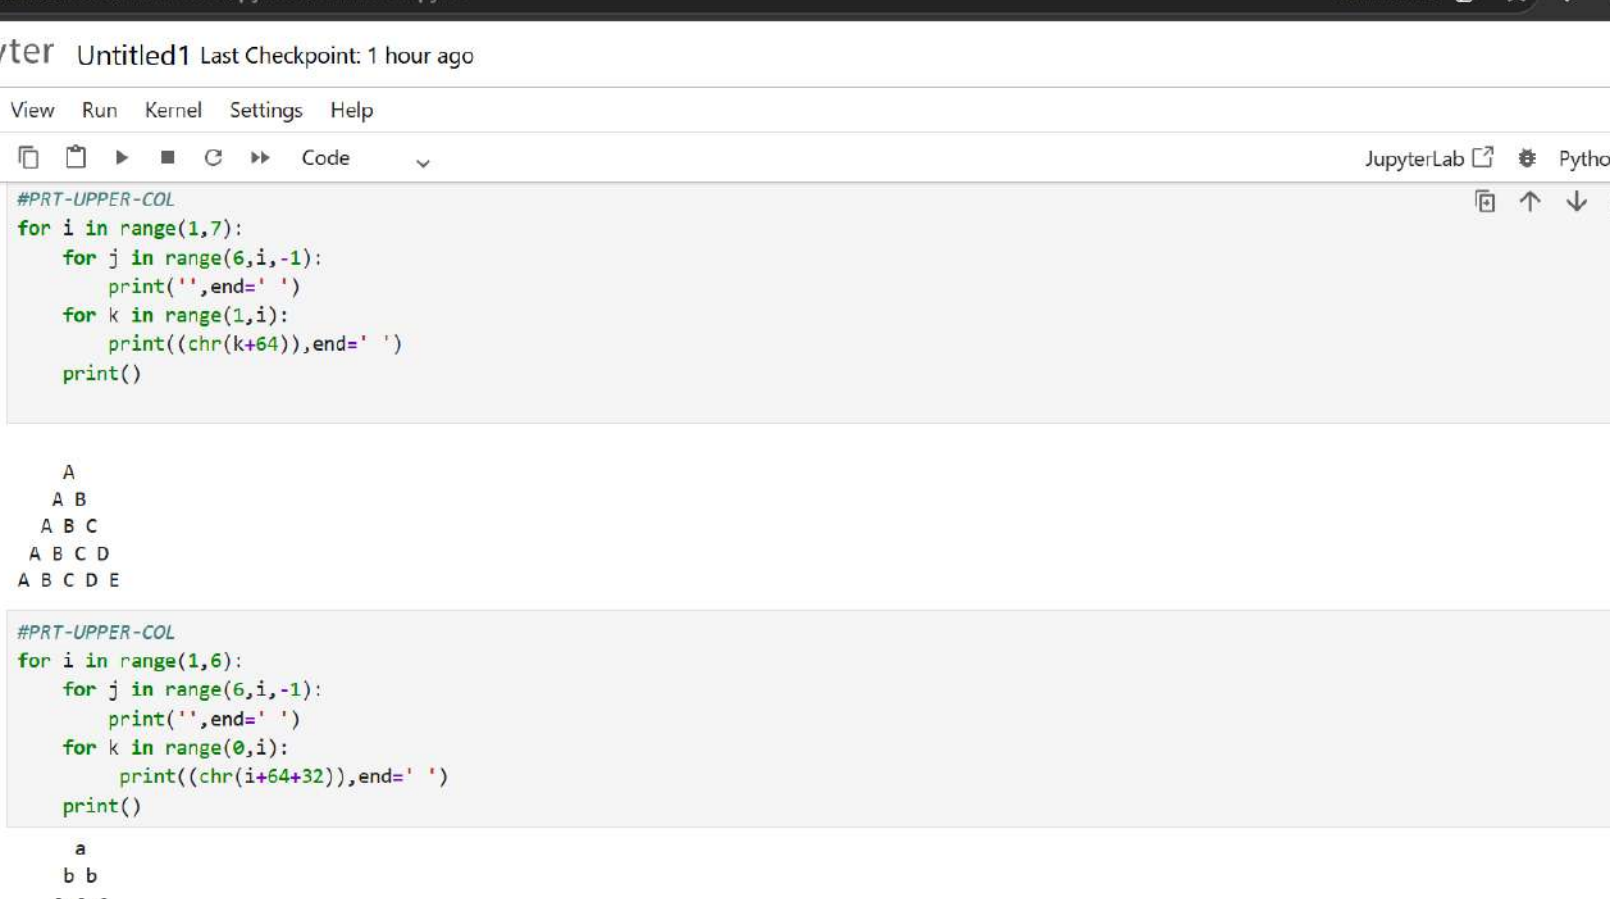


The screenshot shows a JupyterLab web interface. The top bar includes a browser address bar with 'localhost:8888/notebooks/python/Untitled1.ipynb' and a JupyterLab header with 'Untitled1 Last Checkpoint: 1 hour ago'. The interface has a menu bar (File, Edit, View, Run, Kernel, Settings, Help) and a toolbar with various icons. The main area contains two code cells. The first cell, labeled [30], contains a Python loop that prints a pattern of uppercase letters. The second cell, labeled [32], contains a similar loop but with a different range and character offset. The outputs of these cells are visible below the code.

```
[30]: #PRT-UPPER-COL
      for i in range(1,7):
          for j in range(6,i,-1):
              print('',end=' ')
          for k in range(1,i):
              print((chr(k+64)),end=' ')
          print()

      A
      A B
      A B C
      A B C D
      A B C D E
```

```
[32]: #PRT-UPPER-COL
      for i in range(1,6):
          for j in range(6,i,-1):
              print('',end=' ')
          for k in range(0,i):
              print((chr(i+64+32)),end=' ')
          print()

      a
      b b
      c c c
      d d d d
```

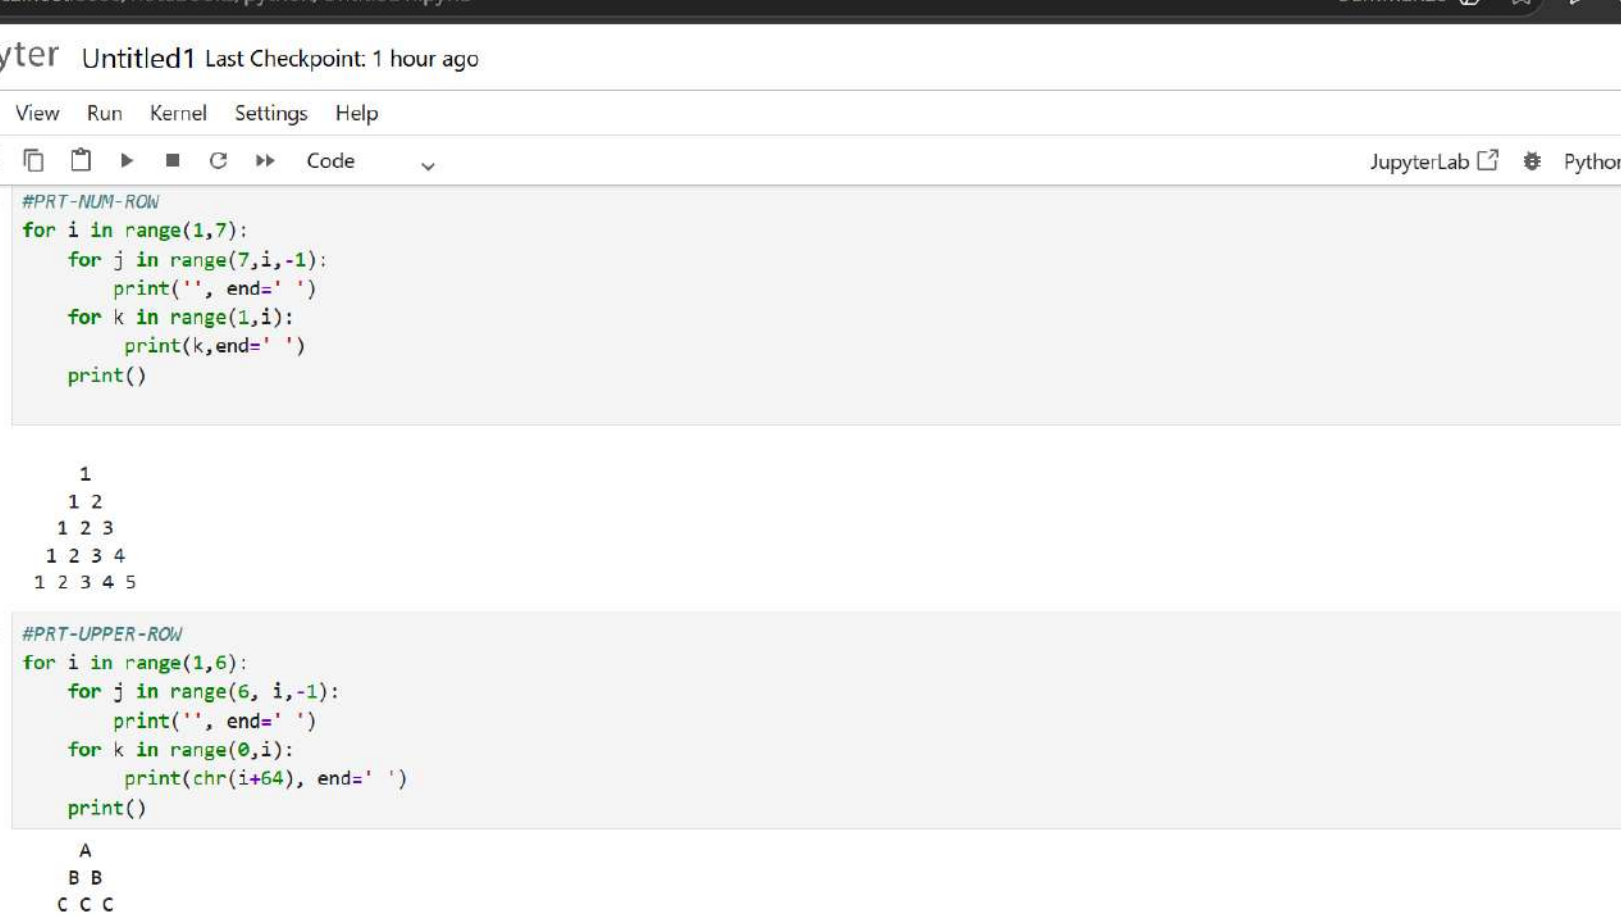

```
[27]: #PRT-NUM-ROW
for i in range(1,7):
    for j in range(7,i,-1):
        print(' ', end=' ')
    for k in range(1,i):
        print(k,end=' ')
    print()


1
1 2
1 2 3
1 2 3 4
1 2 3 4 5

[29]: #PRT-UPPER-ROW
for i in range(1,6):
    for j in range(6, i,-1):
        print(' ', end=' ')
    for k in range(0,i):
        print(chr(i+64), end=' ')
    print()

A
B B
C C C
D D D D
E E E E E
```

```
[25]: #PRT-NUM-ROW
for i in range(1,6):
    for j in range(6,i,-1):
        print(' ', end=' ')
    for k in range(0,i):
        print(i,end=' ')
    print()
```

1
2 2
3 3 3
4 4 4 4
5 5 5 5 5

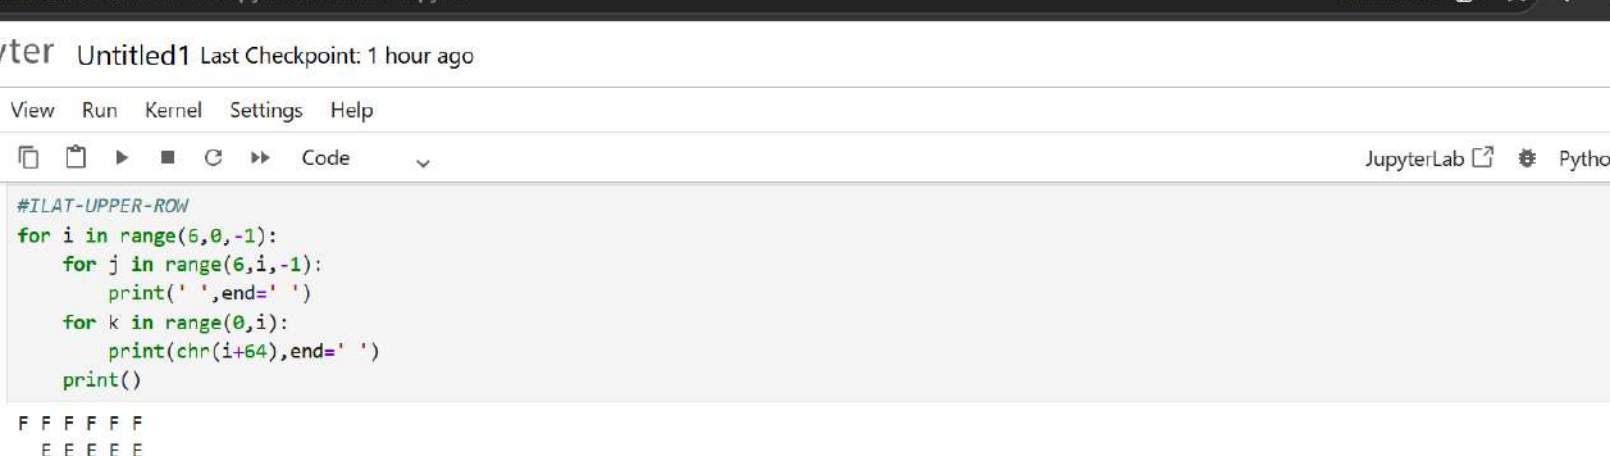

```
[20]: #ILAT-UPPER-ROW
for i in range(6,0,-1):
    for j in range(6,i,-1):
        print(' ',end=' ')
    for k in range(0,i):
        print(chr(i+64),end=' ')
    print()

F F F F F
E E E E
D D D D
C C C
B B
A

[21]: #ILAT-UPPER-COL
for i in range(6,0,-1):
    for j in range(6,i,-1):
        print(' ',end=' ')
    for k in range(1,i):
        print((chr(k+64)), end=' ')
    print()

A B C D E
A B C D
A B C
A B
A
```