
Node.js What's Next?

Michael Dawson
IBM Community Lead for Node.js

Agenda Key:

About Michael Dawson

IBM Community Lead for Node.js

- Active Node.js community member
 - Collaborator
 - Node.js Technical Steering Committee TSC Chair
 - Community Committee member
 - Working group(s) member/leadership



- Twitter: @mhdawson1
- GitHub: @mhdawson
- LinkedIn: <https://www.linkedin.com/in/michael-dawson-6051282>

Overview

- Learn how to fish (why do I need to fish?)
- Survey of what new/next
 - Features
 - Working Groups/Teams
 - Strategic Initiatives
- Wrap-up and Questions

Why do I need to fish?

- Node.js project has no formal roadmap!
 - No single corporate sponsor
 - Decentralized
 - Things make it into release when ready
- But !
 - Still longer term efforts and planning



2019 – Node.js Core in Numbers

- 2,541 contributors
- 3000+ Pull requests
- 1400+ issues opened
- 40+ releases

Go Fishing, How to track What's Next


- Releases



<https://nodejs.org>

- Twitter

- GitHub Fire Hose

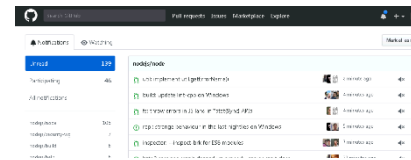

- Working Groups/Teams

<https://github.com/nodejs>
<https://nodejs.org/calendar>

- Strategic Initiatives

<https://github.com/nodejs/TSC/blob/master/Strategic-Initiatives.md>
<https://github.com/nodejs/community-committee/blob/master/STRATEGIC-INITIATIVES.md>

- OpenJS Foundation

<https://openjsf.org/>
<https://github.com/openjs-foundation/standards>

Releases - Process

Release Types

- Canary
- Nightlies
- Current
 - Every 6 months
 - Even releases promoted to LTS
- LTS
 - Every 12 months
 - 30 Months support (12 active, 18 maintenance *** NEW**)

‘Notable Changes’ in release notes is good way to see what’s coming


<https://github.com/nodejs/node/blob/master/CHANGELOG.md>

2019-01-29, Version 10.15.1 'Dubnium' (LTS), @codebytere

Notable Changes

- doc:
 - add oyyd to collaborators (Ouyang Yadong) [#24300](#)
- tls:
 - throw if protocol too long (Andre Jodat-Danbrani) [#23606](#)

Releases - Schedule for 2020

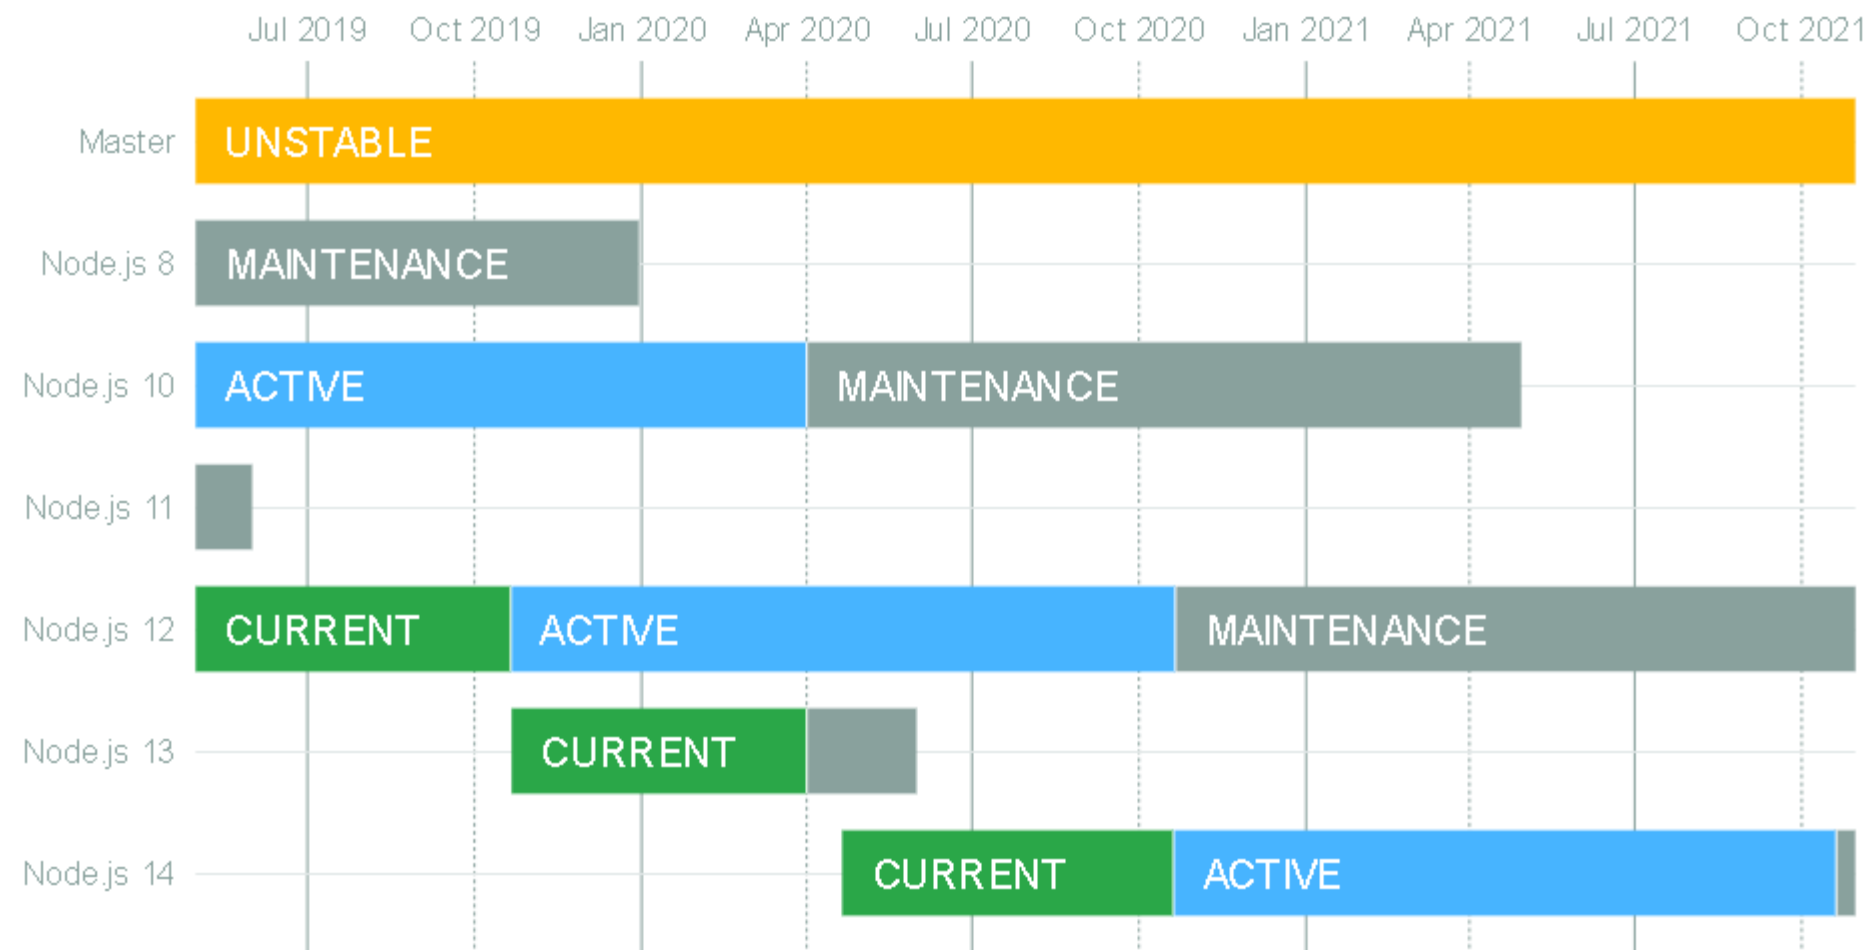


source: <https://github.com/nodejs/release>

Survey of what's New/Next

- Features
- Teams/Working Groups
- Strategic Initiatives

Features – Workers – Now Stable in 12.x

- Very **similar to Web Workers**
- Each thread is **separate JavaScript environment**
- **Message-based** data exchange:
 - Object cloning via structure clone algorithm
 - Handoff via ArrayBuffer or MessagePort
 - Memory sharing via SharedArrayBuffer and Atomics
- **Limitations**
 - Cannot transfer file handles
 - Initial overhead; re-use or pooling recommended

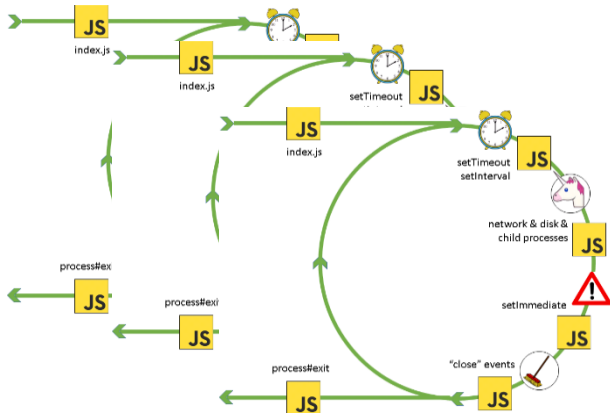

```
// app.js
const workers = require('worker_threads');

if (workers.isMainThread) {
  const worker1 = new workers.Worker(__filename, {foo: 'bar'});
  const worker2 = new workers.Worker(__filename, {baz: 'quux'});

  worker1.on('message', message => {
    console.log(`parent:${message}`);
  });

  worker2.on('message', message => {
    console.log(`parent:${message}`);
  });

  worker2.postMessage('wakeup');
} else {
  workers.parentPort.postMessage('running');
  workers.parentPort.on('message', message => {
    console.log(`worker:${message}:${workers.threadId}`);
    workers.parentPort.postMessage(message);
  });
}

// $ node app.js
// parent:running
// parent:running
// worker:wakeup:2
// parent:wakeup
```

Http2 – stable since 10.x (ok not really new)

- HTTP/2
 - Is a **binary** protocol
 - Is **fully multiplexed**, instead of ordered & blocking
 - Achieves **parallelism** using a single connection
 - Uses **header compression** to reduce overhead
 - Allows servers to “**push**” responses proactively into client caches
- Node.js provides a **core** API and a **compatibility** API
- What’s next -> QUIC

```
const http2 = require('http2');
const fs = require('fs');
const {
  HTTP2_HEADER_STATUS,
  HTTP2_HEADER_CONTENT_TYPE
} = http2.constants;

// core API
http2
  .createSecureServer({
    key: fs.readFileSync('/path/to/key.pem'),
    cert: fs.readFileSync('/path/to/cert.pem')
  })
  .on('stream', stream => {
    stream.respond({
      [HTTP2_HEADER_CONTENT_TYPE]: 'text/html',
      [HTTP2_HEADER_STATUS]: 200
    });
    stream.end('<h1>Hello World</h1>');
  })
  .listen(8443);

// compatibility API
http2
  .createSecureServer(
    {
      key: fs.readFileSync('/path/to/key.pem'),
      cert: fs.readFileSync('/path/to/cert.pem')
    },
    (req, res) => {
      res.writeHead(200, { 'Content-Type': 'text/html' });
      res.end('<h1>Hello World</h1>');
    }
  )
  .listen(9443);
```

Features - Diagnostic Reports - Experimental

- Released in **Node.js v11.8.0**
- Usable **via flag only** `--experimental-report`
 - `--diagnostic-report-directory=directory`
 - `--diagnostic-report-filename=filename`
 - `--diagnostic-report-on-fatalerror`
 - `--diagnostic-report-on-signal`
 - `--diagnostic-report-signal=signal`
 - `--diagnostic-report-uncaught-exception`
 - `--diagnostic-report-verbose`
- **JSON** output; see example at <https://nodejs.org/docs/latest/api/report.html>

```
// automatic trigger
process.report.setDiagnosticReportOptions({
  events: ['exception', 'fatalerror', 'signal'],
  signal: 'SIGUSR2',
  filename: 'myreport.json',
  path: '/home/nodeuser',
  verbose: true
});

// manual trigger
try {
  process.chdir('/non-existent-path');
} catch (err) {
  process.report.triggerReport(err);
}

// custom handling
const report = process.report.getReport(
  new Error('custom error')
);
console.log(report); // JSON string
```

Introducing report-toolkit

<https://github.com/ibm/report-toolkit>

A tool for processing & analyzing Diagnostic Reports

- CLI tool
- Programmable API
- See <https://ibm.github.io/report-toolkit> for documentation (WIP)
- *Alpha!*

Redact – sensitive info
Inspect – ESLint-like rules
Diff
Transform

Internationalization

- Node has had Intl for a long time, but lacked language data
 - Need to add data - <https://www.npmjs.com/package/full-icu>
- Node 13.x brings full-icu data bundled in
 - Collation
 - Date/Time and Number formatting
 - Upper/Lower Casing

```
console.log(new Intl.DateTimeFormat('es',{month:'long'}).format(new Date(9E8)));  
console.log(new Date(0).toLocaleString('el',{month:"long"}));  
console.log(new Date(157177E7).toLocaleString("zh",{year:"numeric",day:"numeric",month:"long"}));
```

Node.js 13.x and later

```
bash-4.2$ node test2.js  
Enero  
Δεκεμβρίου  
2019年10月22日
```

Node.js 12 and before

```
bash-4.2$ node test2.js  
January  
December  
October 22, 2019
```

Locales: es = Spanish, el = Greek, zh = chinese

OpenSSL 1.1.1

- TLS 1.3
 - Enabled by default in 12.x and above
 - Enabled in 10.x with `--tls-max-v1.3`
 - <https://developer.ibm.com/technologies/node-js/blogs/migrating-to-tls13-in-nodejs/>
 - <https://developer.ibm.com/blogs/openssl-111-has-landed-in-nodejs-master-and-why-its-important-for-nodejs-lts-releases/>
- No Community FIPs
 - Node.js went out of service Dec 31 2019
 - OpenSSL plans for FIPs on OpenSSL 3


Source Maps

- 2019 State of JavaScript Survey, ~60% using alternate flavor of JavaScript
 - Up from ~21% in 2016
- Source Maps V3 - <https://sourcemaps.info/spec.html>
 - Generate source includes special comment: `//# sourceMappingURL=mytest.js.map`
- Node.js v12.11.0 – NODE_V8_COVERAGE
 - Load/cache source maps when available
- Node.js v12.12.0 - `--enable-source-maps` (Experimental)
 - Better stack trace on exception
- Still more place in Node.js to update

Context Local Storage - Experimental

- Analog to ThreadLocal in other languages
- Previously user-land implementations -> ex <https://www.npmjs.com/package/continuation-local-storage>
- Uses
 - Async Hooks (experimental, concerns about API surface)
 - Hope is to get API we can make non-experimental sooner

- AsyncLocalStorage
 - run(callback)
 - runSyncAndReturn()
 - getStore()
 - get/set on store
 - exit(callback)
 - exitSyncAndReturn()
 - disable

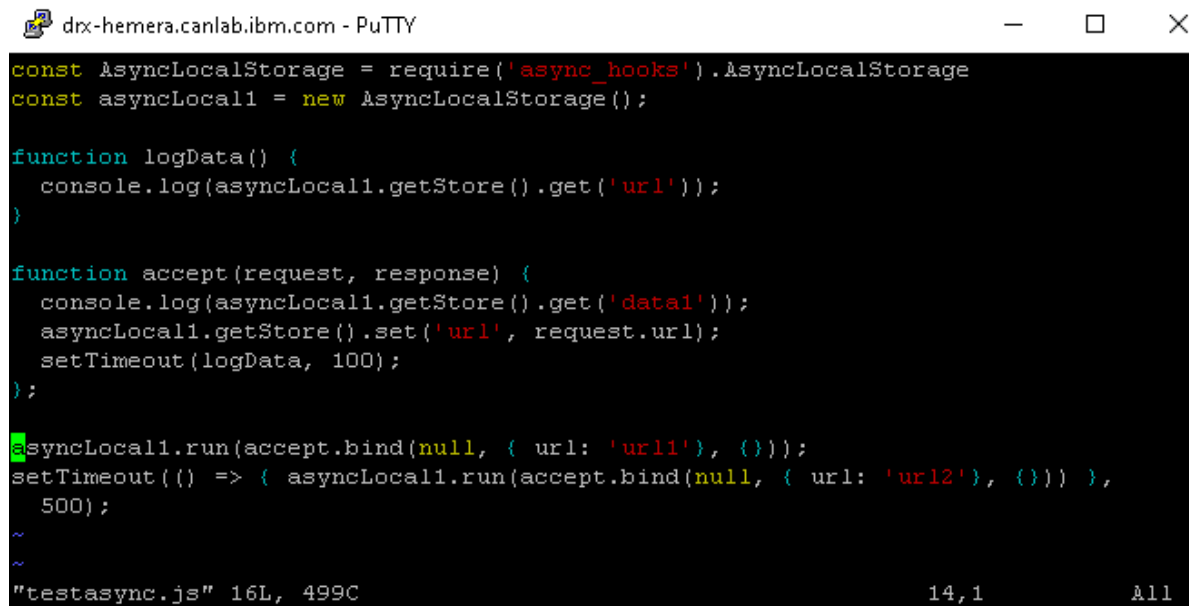


```
drx-hemera.canlab.ibm.com - PuTTY
const AsyncLocalStorage = require('async_hooks').AsyncLocalStorage
const asyncLocal1 = new AsyncLocalStorage()

function logData() {
  console.log(asyncLocal1.getStore().get('url1'));
}

function accept(request, response) {
  console.log(asyncLocal1.getStore().get('data1'));
  asyncLocal1.getStore().set('url1', request.url);
  setTimeout(logData, 100);
};

asyncLocal1.run(accept.bind(null, { url: 'url1' }, {}));
setTimeout(() => { asyncLocal1.run(accept.bind(null, { url: 'url2' }, {})) },
  500);

"testasync.js" 16L, 499C                               14,1          All
```

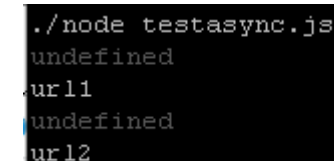

```
./node testasync.js
undefined
url1
undefined
url2
```

Pointer Compression

- Pointers use a lot of memory in the heap
 - Potentially save 50-60%
- Master -> <https://github.com/nodejs/node/pull/30463>
- Product still needs to figure out how we might deliver
 - Current limit is 4G
 - Build only flag
 - More complex build
 - Increased download size

WASI – Experimental

- Web Assembly – WASM - <https://webassembly.org/>
 - Compile other languages (C/C++/Rust etc.) to portable target
 - WASM support in Node.js through V8
- Web Assembly System Interface WASI (<https://github.com/WebAssembly/WASI>)
 - adds interaction with conceptual OS
 - Initial PR for Node.js support <https://github.com/nodejs/node/pull/30258>
- WASI provides methods like
 - `__wasi_fd_read()`
 - `__wasi_clock_time_get()`
 - `__wasi_environ_get()`
 - etc.
- Language implementation maps standard functions (for example libc functions to WASI functions)

Node.js 12 - V8 Updated to V8 7.7

- Faster `await`
- Faster `JSON.parse()`
- Better Async Stack Traces



<https://v8.dev/blog>

Teams and Working Groups

Teams/Working Groups - Package-maintenance

Key Goals

- Identify key packages
- Build and document guidance for business -> module usage
- Document backlog of help needed by modules
- Build, document and evangelize guidance, tools and processes to help maintainers

What's Next?

- Understanding the state of the ecosystem
- Support info
- Best Practices
- Develop Patterns of Engagement
- Tooling <https://github.com/pkgjs>

```
{ "support": {  
  "target" : "LTS",  
  "response": "REGULAR-7",  
  "response-paid": "REGULAR-1",  
  "backing": "COMPANY",  
  "url": "http://mygreatmodule.org/supportinfo.html"  
}
```

<https://github.com/nodejs/package-maintenance/blob/master/docs/drafts/PACKAGE-SUPPORT.md>

Support Info

- + Reducing mismatched expectations
- + Closer Communication and Collaboration
- Making it easier to maintain packages
- + Responsible + sustainable consumption

target: the platform versions that the package maintainer aims to support.

response: how quickly the maintainer chooses to, or is able to, respond to issues and contacts for that level of support

backing: how the project is supported

Key Attributes

JSON

Tooling Friendly
Still human readable
Consistent with Package.json

General

Tailored to JavaScript Ecosystem
but applicable more broadly

Draft

Want **your** input

Support Info

- + Reducing mismatched expectations
- + Closer Communication and Collaboration
Making it easier to maintain packages
- + Responsible + sustainable consumption

```
"support": {
  "versions": [
    {
      "version": "*",
      "target": {
        "node": "none"
      },
      "response": {
        "type": "time-permitting",
        "paid": false,
        "contact": {
          "name": "Volunteers",
          "url": "https://github.com/myproject"
        }
      },
      "backing": {
        "hobby": "https://github.com/myproject"
      }
    }
  ]
}
```

<https://github.com/nodejs/package-maintenance/blob/master/docs/drafts/PACKAGE-SUPPORT.md> (screenshots on pages which follow as well)

Support Info

- + Reducing mismatched expectations
- + Closer Communication and Collaboration
- Making it easier to maintain packages
- + Responsible + sustainable consumption

```
"support": {
  "versions": [
    {
      "version": "*",
      "target": {
        "node": "none"
      },
      "response": {
        "type": "time-permitting",
        "paid": false,
        "contact": {
          "name": "Volunteers",
          "url": "https://github.com/myproject"
        }
      },
      "backing": {
        "hobby": "https://github.com/myproject"
      }
    }
  ]
}
```




Value	Description
none	There is nobody backing this package
hobby	The single maintainer maintains the package for fun, does not get any support to continue maintenance.
sponsored	The single maintainer actively maintains the package but depends on sponsorship to be able to continue to maintain the package. Consider supporting this sponsorship through the funding platforms listed.
bounty	The package is maintained through the use of a bounty service
project	The package is maintained under the auspices of a larger project (ex Node.js project).
foundation	The package is maintained and supported under the auspices of a Foundation.
company	The package is maintained and supported by a corporate entity but may not be related to their product or service offerings.
commercial	The package is maintained and supported by a corporate entity as part of supporting their products.
paid-support	The package is maintained and supported through paid support contracts.
freemium	Basic version of the package it provided for free, premium version is available at a cost.
donations	The project can be funded by any donations.

Support Info

- + Reducing mismatched expectations
- + Closer Communication and Collaboration
- Making it easier to maintain packages
- + Responsible + sustainable consumption

```
"support": {
  "versions": [
    {
      "version": "*",
      "target": {
        "node": "none"
      },
      "response": {
        "type": "time-permitting",
        "paid": false,
        "contact": {
          "name": "Volunteers",
          "url": "https://github.com/myproject"
        }
      },
      "backing": {
        "hobby": "https://github.com/myproject"
      }
    }
  ]
}
```





Value	Description
none	There is nobody backing this package
hobby	The single maintainer maintains the package for fun, does not get any support to continue maintenance.
sponsored	The single maintainer actively maintains the package but depends on sponsorship to be able to continue to maintain the package. Consider supporting this sponsorship through the funding platforms listed.
bounty	The package is maintained through the use of a bounty service
project	The package is maintained under the auspices of a larger project (ex Node.js project).
foundation	The package is maintained and supported under the auspices of a Foundation.
company	The package is maintained and supported by a company.
commercial	The package is maintained and supported by a commercial entity.
paid-support	The package is maintained and supported by a paid support service.
freemium	The package is maintained and supported by a freemium model.
donations	The package is maintained and supported by donations.

```
{
  "sponsored": [
    "https://opencollective.com/my-account",
    "https://www.patreon.com/my-account",
    "https://tidelift.com/subscription/pkg/my-package"
  ]
}
```

Support Info

```
"support": {
  "versions": [
    {
      "version": "*",
      "target": {
        "node": "none"
      },
      "response": {
        "type": "time-permitting",
        "paid": false,
        "contact": {
          "name": "Volunteers",
          "url": "https://github.com/myproject"
        }
      },
      "backing": {
        "hobby": "https://github.com/myproject"
      }
    }
  ]
}
```

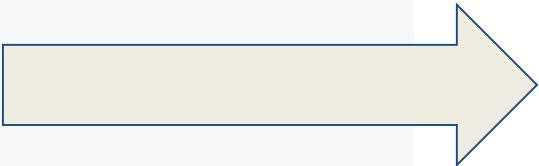



Reducing mismatched expectations

collaboration
packages
assumption

Value	Current	Active LTS	Maintenance LTS	EOL	Example	Description
xxxxxx						xxxxxx is a semver range of Node.js versions supported
abandoned						Not recommended for use. The package is deprecated or no longer maintained
none						Use at your own risk, no active support. May or may not work for a given Node.js version
all	✓	✓	✓	✓	...,8,9,10,11,12	The package is maintained for versions of Node.js including both LTS and non-LTS releases regardless of whether they are EOL or not. It may be necessary to accept semver-major level (ie. breaking) changes into that application in order to receive essential fixes. Documentation for the package will include the non-LTS releases for which the package is still maintained (some maintainers support as far back as 0.6)
lts		✓	✓		8,10	The package is maintained for the Node.js LTS releases (both in Active and Maintenance status). Anyone creating an application using an LTS version of Node.js and using the latest major version of LTS adopting packages will not have to accept semver-major level (ie. breaking) changes into that application in order to receive essential fixes. Full details are available here
active	✓	✓			10,12	All releases that are in active LTS
lts_active		✓			10	All releases both LTS and active. There may be more than one LTS release in active maintenance at a given point in time
lts_latest		✓			10	The package is maintained only for the Latest LTS Node.js version. You will be required to update to the latest LTS Node.js version in order to ensure you can use new versions/get security fixes
supported	✓	✓	✓		12,10,8	Node.js versions which are not EOL
current	✓				12	The latest release from "all"

Support Info

- + Reducing mismatched expectations
- + Closer Communication and Collaboration
- Making it easier to maintain packages
- + Responsible + sustainable consumption

```
"support": {
  "versions": [
    {
      "version": "*",
      "target": {
        "node": "none"
      },
      "response": {
        "type": "time-permitting",
        "paid": false,
        "contact": {
          "name": "Volunteers",
          "url": "https://github.com/myproject"
        }
      },
      "backing": {
        "hobby": "https://github.com/myproject"
      }
    }
  ]
}
```




Value	Description
none	Don't expect a response, the package is not being actively maintained
time-permitting	The maintainer is interested in fixing/discussing issues, however, there should be no expectation on response times. If and when the maintainer has time they may respond.
regular-X	There are dedicated resources who regularly maintain the package, expected response time is X days or less for a "we read your issue" response. Further work will depend on prioritization of the issue by the maintainer team.
24-7	There are dedicated resources who regularly maintain the package and they are available 24/7. You can expect to be able to contact the maintainers and get an initial response with 6 hours.

Best Practices

Reducing mismatched expectations
Closer Communication and Collaboration
+ Making it easier to maintain packages
Responsible + sustainable consumption

- CI/CD
 - Testing
- Publishing
 - Support info
 - Versioning
 - Licensing
- Deprecation

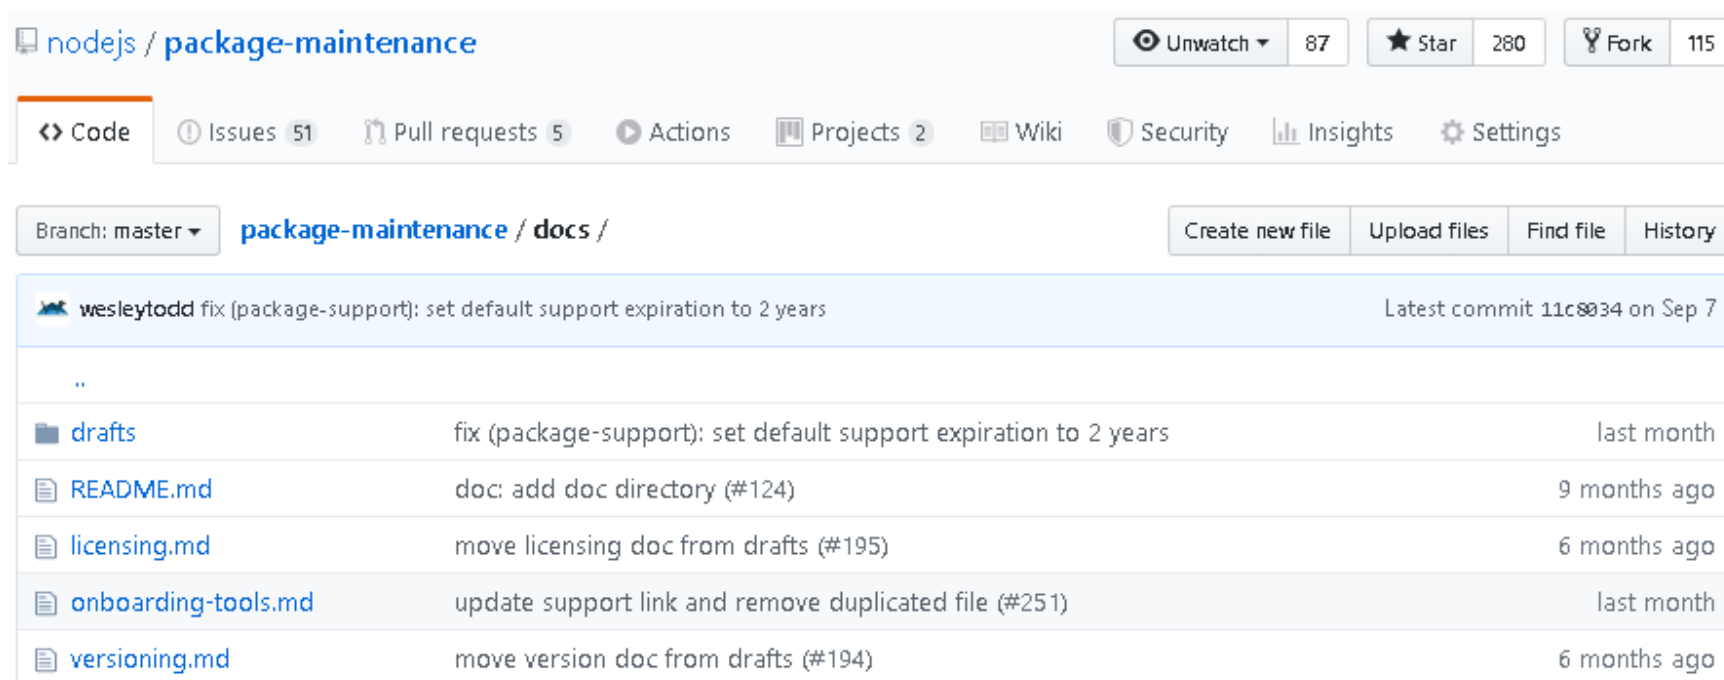

nodejs / package-maintenance

Unwatch 87 Star 280 Fork 115

Code Issues 51 Pull requests 5 Actions Projects 2 Wiki Security Insights Settings

Branch: master package-maintenance / docs /

Create new file Upload files Find file History

wesleystodd fix (package-support): set default support expiration to 2 years Latest commit 11c8034 on Sep 7

..		
drafts	fix (package-support): set default support expiration to 2 years	last month
README.md	doc: add doc directory (#124)	9 months ago
licensing.md	move licensing doc from drafts (#195)	6 months ago
onboarding-tools.md	update support link and remove duplicated file (#251)	last month
versioning.md	move version doc from drafts (#194)	6 months ago

Developing Patterns of Engagement

- + Reducing mismatched expectations
- + Closer Communication and Collaboration
- + Making it easier to maintain packages
- + Responsible + sustainable consumption

- Approach

- Choose 1-2 pilot packages
- Experiment
- Document what “Works”

- Currently Working with Express

- Help to triage/answering questions
- Top ten list as identified
- Help in moving forward key objectives.

<https://github.com/nodejs/package-maintenance/issues/233>

<https://github.com/nodejs/package-maintenance/pull/230>


Working Groups - Build/Automation

Key Goals

Support infrastructure to deliver Node.js

What's Next

Working to add IBMi to CI

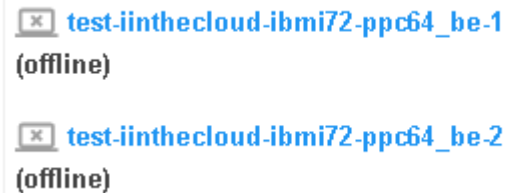

The screenshot shows two terminal windows. The top window has a title bar with a close button and the text 'test-iinthecloud-ibmi72-ppc64_be-1'. Below the title bar, the text '(offline)' is displayed. The bottom window has a title bar with a close button and the text 'test-iinthecloud-ibmi72-ppc64_be-2'. Below the title bar, the text '(offline)' is displayed.

<https://github.com/nodejs/node/blob/master/BUILDING.md>

Working Groups - Diagnostics


Key Goals

First class

- Tracing
- Profiling
- Heap and memory analysis
- Step debugging
- Post mortem analysis

What's Next

Best practices guides

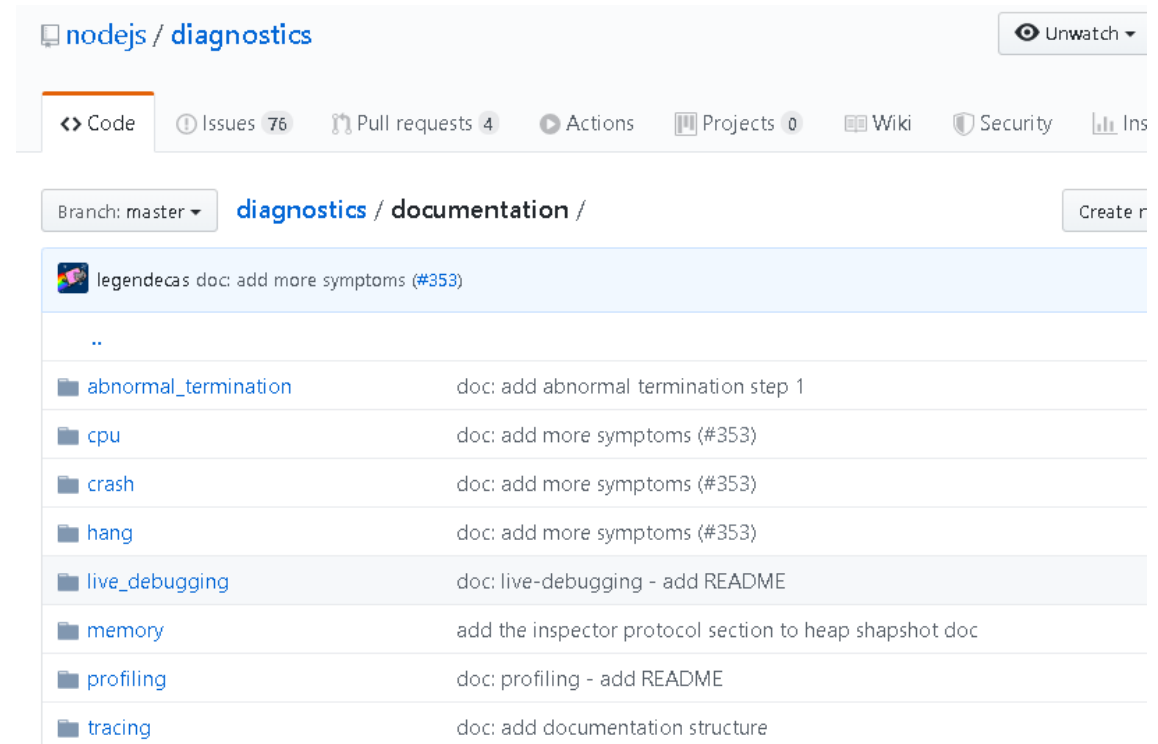

<https://github.com/nodejs/diagnostics/tree/master/documentation>

Working Groups - Website

Key Goals

Great landing page and information about Node.js

What's Next?

Next generation website. Experimentation at [Nodejs.dev](https://nodejs.dev)

Strategic Initiatives

Strategic Initiatives – Modules – Experimental

- Context
 - Node.js has pre-existing module system
 - ES6 Standardized new module system
- Goals
 - Browser compatible ES6 implementation (as possible)
 - Co-existence with existing module system
- Still Experimental
- No Flag needed in 13.x

<https://nodejs.org/api/esm.html>

```
module.exports = function() {  
  console.log('Hello');  
}
```

```
const test =  
require('./helloTest.js');  
test();
```

```
export function test() {  
  console.log('Hello');  
}
```

```
import { test } from  
'./helloTest.mjs';  
test();
```

package.json can set as esm with"
"type": "module"

Strategic Initiatives - N-API

- N-API is a **stable API layer for native modules**, which provides ABI **compatibility guarantees** across different Node.js versions & flavors.

<https://nodejs.org/dist/latest/docs/api/n-api.html>

- N-API enables native modules to **just work** across Node.js versions without recompilations!
- A handy-dandy C++ API maintained by the Node.js organization is also available:

<https://github.com/nodejs/node-addon-api>

```
#include <node_api.h>

napi_value RunCallback(napi_env env,
                      const napi_callback_info info) {
    napi_status status;
    size_t argc = 1;

    napi_value args[1];
    status = napi_get_cb_info(env, info, &argc, args,
                              nullptr, nullptr);

    napi_value cb = args[0];

    napi_value argv[1];
    status = napi_create_string_utf8(env, "hello world",
                                     NAPI_AUTO_LENGTH, argv);

    napi_value global;
    status = napi_get_global(env, &global);

    napi_value result;
    status = napi_call_function(env, global, cb, 1,
                                argv, &result);

    return nullptr;
}
```

Strategic Initiatives - N-API – What's new

- N-API 4
 - Added thread-safe function
- N-API 5
 - Added API to manage date object
 - Finalizer callback (marked as stable)
 - Optional callback in thread-safe function.
- node-addon-api (~400k downloads/week)
 - Improved documentation
 - Napi::AsyncContext
 - Napi::ThreadsafeFunction
 - Napi::AsyncProgressWorker
 - Napi::Date
- Support for
 - prebuild - <https://www.npmjs.com/package/prebuild#n-api-considerations>
 - cmake-js - <https://www.npmjs.com/package/cmake-js#n-api-and-node-addon-api>

QUIC – WIP - <https://github.com/nodejs/quic>

- Sequencing/backlog issues in HTTP/2
- HTTP/3 will use QUIC as transport
- UDP based transport protocol
 - UDP
 - Unreliable
 - Flow control issues
- Adds in
 - Error Handling
 - Acknowledgements
 - Flow Control
 - Sequencing
 - Encryption (TLS 1.3 mandatory)
 - Bidirectional/Unidirectional streams
- Connections are not tied to routing (can switch Wifi without dropping connections)

<https://en.wikipedia.org/wiki/QUIC>

<https://github.com/nodejs/quic>

So What's Next?



It's what YOU make it!

Meet us in GitHub

Summary and Questions

Don't Forget Your Session Survey!


Sign in to the Online Session Guide

(www.common.org/sessions)

Go to your personal schedule

Click on the session that you attended

Click on the *Feedback Survey* button located above the abstract.



Come to this session to learn about the DB2 for IBM i enhancements delivered in 2016. This session will include reasons why you should upgrade to the latest IBM i release.
This is session 610533

Completing session surveys helps us plan future programming and provides feedback used in speaker awards. Thank you for your participation.

Special notices

This document was developed for IBM offerings in the United States as of the date of publication. IBM may not make these offerings available in other countries, and the information is subject to change without notice. Consult your local IBM business contact for information on the IBM offerings available in your area.

Information in this document concerning non-IBM products was obtained from the suppliers of these products or other public sources. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

IBM may have patents or pending patent applications covering subject matter in this document. The furnishing of this document does not give you any license to these patents. Send license inquiries, in writing, to IBM Director of Licensing, IBM Corporation, New Castle Drive, Armonk, NY 10504-1785 USA.

All statements regarding IBM future direction and intent are subject to change or withdrawal without notice, and represent goals and objectives only.

The information contained in this document has not been submitted to any formal IBM test and is provided "AS IS" with no warranties or guarantees either expressed or implied.

All examples cited or described in this document are presented as illustrations of the manner in which some IBM products can be used and the results that may be achieved. Actual environmental costs and performance characteristics will vary depending on individual client configurations and conditions.

IBM Global Financing offerings are provided through IBM Credit Corporation in the United States and other IBM subsidiaries and divisions worldwide to qualified commercial and government clients. Rates are based on a client's credit rating, financing terms, offering type, equipment type and options, and may vary by country. Other restrictions may apply. Rates and offerings are subject to change, extension or withdrawal without notice.

IBM is not responsible for printing errors in this document that result in pricing or information inaccuracies.

All prices shown are IBM's United States suggested list prices and are subject to change without notice; reseller prices may vary.

IBM hardware products are manufactured from new parts, or new and serviceable used parts. Regardless, our warranty terms apply.

Any performance data contained in this document was determined in a controlled environment. Actual results may vary significantly and are dependent on many factors including system hardware configuration and software design and configuration. Some measurements quoted in this document may have been made on development-level systems. There is no guarantee these measurements will be the same on generally-available systems. Some measurements quoted in this document may have been estimated through extrapolation. Users of this document should verify the applicable data for their specific environment.

Revised September 26, 2006

Special notices (cont.)

IBM, the IBM logo, ibm.com AIX, AIX (logo), AIX 5L, AIX 6 (logo), AS/400, BladeCenter, Blue Gene, ClusterProven, Db2, ESCON, i5/OS, i5/OS (logo), IBM Business Partner (logo), IntelliStation, LoadLeveler, Lotus, Lotus Notes, Notes, Operating System/400, OS/400, PartnerLink, PartnerWorld, PowerPC, pSeries, Rational, RISC System/6000, RS/6000, THINK, Tivoli, Tivoli (logo), Tivoli Management Environment, WebSphere, xSeries, z/OS, zSeries, Active Memory, Balanced Warehouse, CacheFlow, Cool Blue, IBM Systems Director VMControl, pureScale, TurboCore, Chiphopper, Cloudscape, Db2 Universal Database, DS4000, DS6000, DS8000, EnergyScale, Enterprise Workload Manager, General Parallel File System, , GPFS, HACMP, HACMP/6000, HASM, IBM Systems Director Active Energy Manager, iSeries, Micro-Partitioning, POWER, PowerExecutive, PowerVM, PowerVM (logo), PowerHA, Power Architecture, Power Everywhere, Power Family, POWER Hypervisor, Power Systems, Power Systems (logo), Power Systems Software, Power Systems Software (logo), POWER2, POWER3, POWER4, POWER4+, POWER5, POWER5+, POWER6, POWER6+, POWER7, System i, System p, System p5, System Storage, System z, TME 10, Workload Partitions Manager and X-Architecture are trademarks or registered trademarks of International Business Machines Corporation in the United States, other countries, or both. If these and other IBM trademarked terms are marked on their first occurrence in this information with a trademark symbol (® or ™), these symbols indicate U.S. registered or common law trademarks owned by IBM at the time this information was published. Such trademarks may also be registered or common law trademarks in other countries.

A full list of U.S. trademarks owned by IBM may be found at: <http://www.ibm.com/legal/copytrade.shtml>.

Adobe, the Adobe logo, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.

AltiVec is a trademark of Freescale Semiconductor, Inc.

AMD Opteron is a trademark of Advanced Micro Devices, Inc.

InfiniBand, InfiniBand Trade Association and the InfiniBand design marks are trademarks and/or service marks of the InfiniBand Trade Association.

Intel, Intel logo, Intel Inside, Intel Inside logo, Intel Centrino, Intel Centrino logo, Celeron, Intel Xeon, Intel SpeedStep, Itanium, and Pentium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

IT Infrastructure Library is a registered trademark of the Central Computer and Telecommunications Agency which is now part of the Office of Government Commerce.

Java, JavaScript and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

Linear Tape-Open, LTO, the LTO Logo, Ultrium, and the Ultrium logo are trademarks of HP, IBM Corp. and Quantum in the U.S. and other countries.

Linux is a registered trademark of Linus Torvalds in the United States, other countries or both.

Microsoft, Windows and the Windows logo are registered trademarks of Microsoft Corporation in the United States, other countries or both.

NetBench is a registered trademark of Ziff Davis Media in the United States, other countries or both.

SPECint, SPECfp, SPECjbb, SPECweb, SPECjAppServer, SPEC OMP, SPECviewperf, SPECapc, SPECchpc, SPECjvm, SPECmail, SPECimap and SPECsfs are trademarks of the Standard Performance Evaluation Corp (SPEC).

The Power Architecture and Power.org wordmarks and the Power and Power.org logos and related marks are trademarks and service marks licensed by Power.org.

TPC-C and TPC-H are trademarks of the Transaction Performance Processing Council (TPPC).

UNIX is a registered trademark of The Open Group in the United States, other countries or both.

•Node.js is an official trademark of Joyent. IBM SDK for Node.js is not formally related to or endorsed by the official Joyent Node.js open source or commercial project..

•"TWITTER, TWEET, RETWEET and the Twitter logo are trademarks of Twitter, Inc. or its affiliates."

Other company, product and service names may be trademarks or service marks of others.