

# Raftian: Pygame Meets Raft

MARCO BELLÒ and TULLIO VARDANEGA, University of Padua, Italy

The problem of shared consensus in a distributed system is both older than a millennium and more relevant than ever: while in the Aegean island of Paxos the challenge was to keep track of the many laws passed in a parliament where legislators had better to do than attend sessions full-time, nowadays the ubiquity of web-based architectures and applications (from a simple cloud storage to the whole banking system) gives daily headaches to developers and system administrators alike. To reduce ibuprofen consumption in the IT sector, Ongaro and Ousterhout devised an easily understandable and implementable alternative to the Paxos algorithm, namely the Raft consensus algorithm, which we employ in this work to implement communication via XML-RPC between multiple Pygame applications, each running a game instance that aims to simulate a simplified version of a real-time strategy game.

CCS Concepts: • **Computer systems organization** → **Fault-tolerant network topologies**; • **Computing methodologies** → **Concurrent algorithms**; **Self-organization**; *Graphics input devices*.

Additional Key Words and Phrases: Python, Raft, Distribution, Consensus, Gaming, Multiplayer, Multithreading, RPC, Pygame

## ACM Reference Format:

Marco Bellò and Tullio Vardanega. 2018. Raftian: Pygame Meets Raft. 1, 1 (August 2018), 14 pages. <https://doi.org/XXXXXXX.XXXXXXX>

## 1 INTRODUCTION

From sharing spreadsheets between a handful of laptops in a small basement office, through large-scale rendering on a supercomputer, to the entire global finance system, distributed computing has become an essential component of the modern world that we almost take for granted: nowadays, what most people need a computer for can be done in the browser thanks to services like email clients, cloud calendars, media streaming platforms and web-based office suites (like Google Docs) that expose word editors, spreadsheets managers, presentations programs and more, all while being constantly synchronized to the cloud, which not only ensures data persistence and availability, but also enables sharing and collaboration between users.

It does not end here: other examples of distributed applications include cloud storage services like Dropbox, Google Drive or OneDrive, streaming services like Netflix, YouTube or Spotify, distributed computing like blockchain technologies or AWS, online banking services (the banking system itself is distributed since way before), social networks, and even maritime and aircraft traffic control systems. Moreover, the rise of the gaming industry played a significant role in pushing forward distribution: in 2024 the gaming market revenue was estimated to be 187.7 billion U.S. dollars [2], making it a hefty slice of the pie that is the entertainment industry [13], with 111 billions generated by free-to-play games [3] (70 billions from social and casual games alone [8]), which interests us since their business model often relies on cosmetics, game passes and advertisements, forcing them to be constantly on-line.

---

Authors' address: Marco Bellò, marco.bello.3@studenti.unipd.it; Tullio Vardanega, tullio.vardanega@unipd.it, University of Padua, Padua, Italy.

---

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).

© 2018 Copyright held by the owner/author(s). Publication rights licensed to ACM.

Manuscript submitted to ACM

Manuscript submitted to ACM

Let's now define what distribution *is*: a distributed system is a computer system whose inter-communicating components are located on different networked computers [1, 17], which coordinate their actions via message-passing to achieve a common goal. There are three significant challenges to overcome: maintaining components' concurrency<sup>1</sup>, eliminating global-lock reliance and managing the independent failure of components, all while ensuring scalability (often the purpose is scaling itself) and transparency to the user, meaning interactions with any exposed interface must be done while being unaware of the complexity behind them.

Most importantly, shared consensus must be guaranteed: it does not require much thought to see that all servers in a cluster should agree on one or more shared values, lest becoming a collection of un-related components that have little to do with collaboration (thus distribution). In the most traditional single-value consensus protocols, such as Paxos [10], cooperating nodes agree on a single value (e.g., an integer), while multi-value alternatives like Raft [11] aim to agree on a series of values (i.e., a log) growing over time forming a sort-of cluster's history. It is worth noting that both goals are hindered by the intrinsically asynchronous nature of real-world communication, which make it impossible to achieve consensus via deterministic algorithms, as stated by Fischer, Lynch and Paterson in their FLP impossibility theorem [5]. Thankfully this can be circumvented by injecting some degree of randomness.

## 1.1 Project's Contributions

The concepts and examples we mentioned so far allow us to finally present the goal of this project: we will create a simplified clone of Travian<sup>2</sup>, an old real-time<sup>3</sup> player-versus-player<sup>4</sup> strategy game<sup>5</sup>, where players build their own city and wage war on one another (less wrinkly readers may be more familiar with the modern counterpart Clash of Clans<sup>6</sup>), built with Pygame<sup>7</sup>, a Python library that creates and manages all necessary components to run a game such as game-engine, graphical user interface, sounds, player inputs and the like, where each player resides in a separate server (or node) that communicate with the others via an algorithm modelled after Raft's specifications.

This choice follows the authors' interest in exploring Raft capabilities and ease of implementation in a fun and novel way, using a language that while extremely popular is seldom used in such a fashion and, as far as we can tell, never with this mixture of libraries.

Both game and algorithm implementations have been reduced to a reasonably complex proof of concept to keep the project scope manageable: it is possible to instantiate games up to five players, each of which is restricted to the only action of attacking the others, while Raft's functionalities are limited to log replication and overwriting.

Experiments were conducted to evaluate both game responsiveness and the communication algorithm correctness.

All source code is visible at the following link: <https://github.com/mhetacc/RuntimesConcurrencyDistribution/blob/main/raftian/raftian.py>.

<sup>1</sup>Concurrency refers to the ability of a system to execute multiple tasks through simultaneous execution or time-sharing (context switching), sharing resources and managing interactions. It improves responsiveness, throughput, and scalability [6, 12, 14, 16, 18].

<sup>2</sup>Travian: Legends is a persistent, browser-based, massively multiplayer, online real-time strategy game developed by the German software company Travian Games. It was originally written and released in June 2004 as "Travian" by Gerhard Müller. Set in classical antiquity, Travian: Legends is a predominantly militaristic real-time strategy game. Source: <https://www.travian.com/international>

<sup>3</sup>Real-time games progresses in a continuous time frame, allowing all players (human or computer-controlled) to play at the same time. By contrast, in turn-based games players wait for their turn to play.

<sup>4</sup>Player-versus-player (PvP) is a type of game where real human players compete against each other, opposed to player-versus-environment (PvE) games, where players face computer-controlled opponents.

<sup>5</sup>Strategy video game is a major video game genre that focuses on analyzing and strategizing over direct quick reaction in order to secure success. Although many types of video games can contain strategic elements, the strategy genre is most commonly defined by a primary focus on high-level strategy, logistics and resource management. [15]

<sup>6</sup>Clash of Clans: <https://supercell.com/en/games/clashofclans/>

<sup>7</sup>Pygame: <https://www.pygame.org/docs/>

## 2 PYTHON

We will now discuss the technologies employed in the development of the project (section 2) as well as presenting our implementation of the algorithm Raft.

Python is a high-level, dynamically typed and interpreted programming language that is often used for scripting, data analysis and developing small applications, making it a non-obvious choice for this project, which does not fall into any of these categories.

As a language, it has two main advantages compared to others: first of all it is undoubtedly the most popular and widely used in the world (figure 1) [4, 7] which translates to abundant documentation and resources, and secondly it has a huge ecosystem of libraries that implement all the functionalities we need for this project, namely: *xmlrpc* for the remote procedure calls (RPCs), *threading* to handle local concurrency and *Pygame* to manage everything game-related.

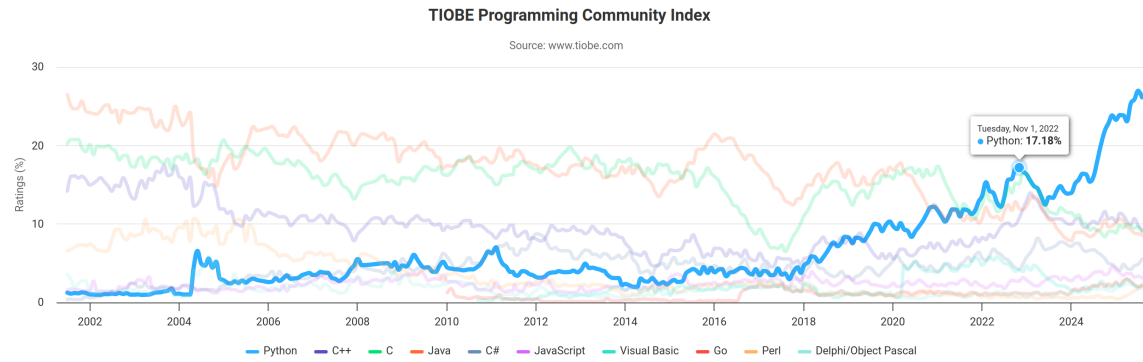


Fig. 1. TIOBE Programming Community Index, focus on Python statistics, 2025. (<https://www.tiobe.com/tiobe-index/>).

### 2.1 Remote Procedure Calls

In Raft's specifications it is stated that nodes communicate with each other via remote procedure calls [11], which in distributed computing is when a program causes a procedure (or subroutine) to execute in another address space (commonly on another computer on a shared network) calling it as if it were local (that is, the programmer writes the same code whether the subroutine is local or remote).

There are many libraries that implement this functionality, like gRPC (<https://grpc.io/>) which is a high performance open source RPC framework used by many big players, such as Netflix<sup>8</sup> and Cockroach Labs<sup>9</sup>, available for many languages (Python included), but we opted for the standard library *xmlrpc*<sup>10</sup> thanks to its promised simplicity and ease of use.

The library provides both server and client implementations, encapsulating the former in its own loop, while the latter can be fired as needed allowing a bit more flexibility in its usage.

In code 1, `client` is an instance of `ServerProxy`, which acts as the client-side interface for XML-RPC, allowing you to call the remote procedure `test_foo` as if it were a local function, even though it executes on a server in a different networked location.

<sup>8</sup>Netflix Ribbon is an Inter Process Communication library built in software load balancers: <https://github.com/Netflix/ribbon>

<sup>9</sup>Cockroach Labs is the company behind CockroachDB, a highly resilient distributed database: <https://www.cockroachlabs.com/>

<sup>10</sup>XML-RPC is a Remote Procedure Call method that uses XML passed via HTTP as a transport: <https://docs.python.org/3/library/xmlrpc.html>

**Listing 1.** Client as server proxy

---

```

with xmlrpc.client.ServerProxy('http://localhost:8000', allow_none=True) as client:
    print(client.test_foo(42)) # print returned value

```

---

The server must be instantiated and kept running by calling its event loop (e.g., using `serve_forever`), and all remote procedure calls must be registered using the `register_function` method of `SimpleXMLRPCServer` (code 2).

**Listing 2.** Server

---

```

with SimpleXMLRPCServer(('localhost', 8000)) as server:
    def test_foo(number):
        return f'The number is {number}'

    server.register_function(test_foo)
    server.serve_forever() # keep server alive

```

---

For this project, we extended *SimpleXMLRPCServer* to create a class that implements the Raft protocol (more details in section 3)

**2.2 Concurrency**

In this project the need for concurrent programming arises from two challenges: every server have an internal timer that fires at certain intervals, and every node has to run a game engine and the server itself at the same time, both of which can be simplified as two *"while true"* loops.

Most Raft implementations achieve concurrency with asynchronous programming, using libraries such as *asyncio*<sup>11</sup>, which while powerful and efficient, makes writing code a bit awkward and cumbersome. We thus opted for a more traditional approach using multithreaded programming: in computer science, a thread of execution is the smallest sequence of programmed instruction that can be managed independently by the scheduler [9], and multiple threads may be executed concurrently sharing resources such as memory, which is directly counterpointed to multiprocessing where each process has its own storage space (moreover, processes are typically made of threads).

In Python there are modules in the standard library for both of them, respectively *threading*<sup>12</sup> and *multiprocessing*<sup>13</sup>. It is fundamental to note that the former does not provide real multi-threading since, due to the Global Interpreter Lock of CPython (the, for want of a better word, "official" Python implementation), only one thread can execute bytecode at once. To cite directly from the documentation: "[GIL is] The mechanism used by the CPython interpreter to assure that only one thread executes Python bytecode at a time. This simplifies the CPython implementation by making the object model (including critical built-in types such as dict) implicitly safe against concurrent access. Locking the entire interpreter makes it easier for the interpreter to be multi-threaded, at the expense of much of the parallelism afforded by multi-processor machines."<sup>14</sup>

<sup>11</sup>asyncio is a library to write concurrent code using the `async/await` syntax: <https://docs.python.org/3/library/asyncio.html>

<sup>12</sup>The threading module provides a way to run multiple threads (smaller units of a process) concurrently within a single process: <https://docs.python.org/3/library/threading.html>

<sup>13</sup>The multiprocessing module is a package that supports spawning processes using an API similar to the threading module: <https://docs.python.org/3/library/multiprocessing.html>

<sup>14</sup>Global Interpreter Lock: <https://docs.python.org/3/glossary.html#term-global-interpreter-lock>

Thankfully, this does not apply with the *multiprocessing* module, which creates separate processes instead, offering both local and remote concurrency effectively side-stepping the Global Interpreter Lock, allowing programmers to fully leverage multiple cores. As previously stated, processes are much heavier than threads and thus more expensive to create, but do not incur the risks of shared memory.

**2.2.1 Comparison.** To evaluate which of the two modules is more suited for our purposes, we devised a simple experiment: we created two game instances with one hundred and one thousands coloured dots respectively (figure 2), that move around the screen offsetting their position each frame by a random amount between minus five and plus five pixels (pseudocode 3).

Then we ran both of them in various scenarios: with the game instance alone (baselines), with a server alive in a thread and with a server alive in a process, and we measured the *frames per second* (FPS)<sup>15</sup> in each case, since it is the most common metric to evaluate game performance. Higher FPS-count translates to a smoother and more responsive, i.e., better, gaming experience.

### Listing 3. Pygame graphical dot

```
# create random offsets for both x and y coordinates
xmov = random.randint(-5,5)
ymov = random.randint(-5,5)

# move the dot by a certain offset
dot.move_by(xmov, ymov)
```

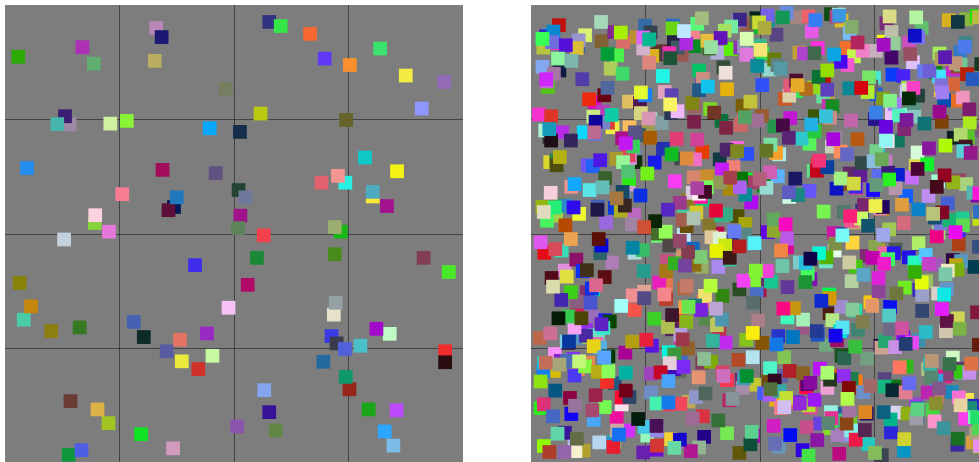


Fig. 2. Two game instances made with Pygame, with respectively 100 and 1000 dots that randomly move around.

Results, shown in the graph at figure 3 shows us that:

- Increasing the number of dots from 100 to 1000 halves the FPS count;

<sup>15</sup>Frame rate, most commonly expressed in frames per second or FPS, is typically the frequency (rate) at which consecutive images (frames) are captured or displayed. This definition applies to film and video cameras, computer animation, and motion capture systems, while in the context of computer graphics is the rate at which a system, particularly the graphic card, is able to generate frames. Source: [https://en.wikipedia.org/wiki/Frame\\_rate](https://en.wikipedia.org/wiki/Frame_rate)

- Adding a server in a separate thread halves performances;
- Using *multiprocessing* yields worse performances than *threading* in the 100-dots scenario (about -30%) while performs similarly in the 1000-dots one.

This leads us to conclude that, for our specific purposes, the *threading* module is the best choice, especially since the final game will be way less computationally expensive from a graphical standpoint, hence using a lighter weight alternative should be even more beneficial than tested.

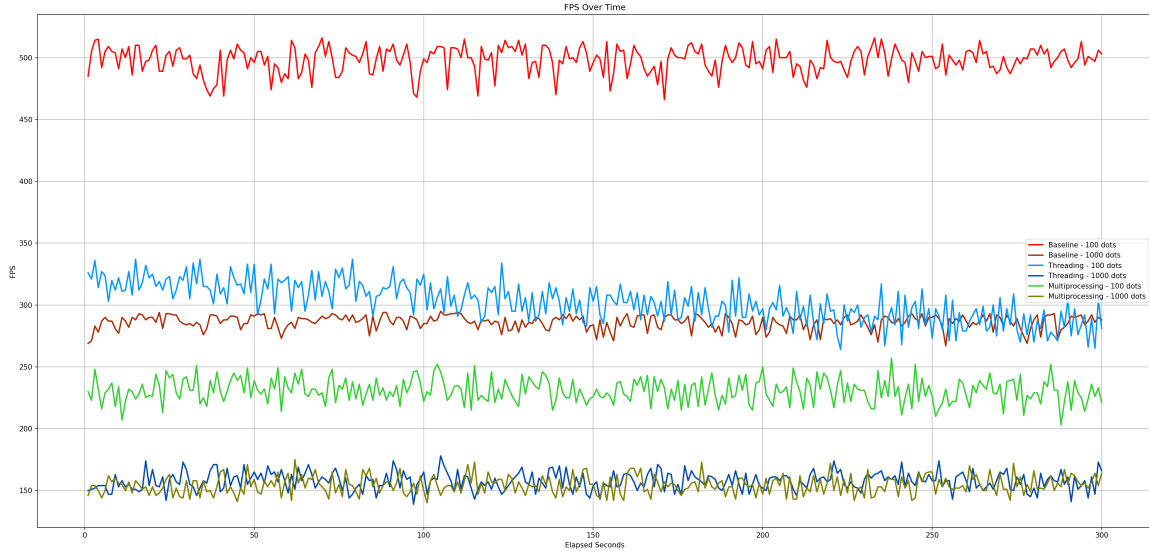


Fig. 3. Performance evaluation graph: red hues for baselines, blue hues for threading and green hues for multiprocessing. Darker shades for 1000 dots and lighter shades for 100 dots game instances.

All tests have been performed with the following machine:

- OS: Ubuntu 24.04.1 LTS x86\_64;
- Kernel: 6.8.0-52-generic;
- Shell: bash 5.2.21;
- CPU: 13th Gen Intel i7-13620H;
- GPU: NVIDIA GeForce RTX 4050 Laptop GPU;
- Memory: 15610MiB;
- Python version: 3.12.3;
- Power Mode: Balanced;
- Power Supply: 100W via type C.

## 2.3 Game Engines

There are many ways to implement a graphical user interface: from clever shell tricks like `htop`<sup>16</sup>, to full fledged game engines like Unity<sup>17</sup> or Godot<sup>18</sup> that often come with their own editor and a *top-down* approach, meaning build the UI first and then go down to code as needed for scripting and refining.

Unfortunately our needs are quite opposite: what we want is a code-only, mono-language framework that while slowing down game development should simplify merging Raft with it. The choice thus boiled down to two alternatives: `tkinter` and `Pygame`.

2.3.1 *Comparison.* Let's list strengths and weaknesses of the two.

- **`tkinter`:**

- 👍 Module of the standard library;
- 👍 Few lines of code to make simple UIs;
- 🙅 Low flexibility;
- 🙅 No game loop;
- 🙅 Not a game engine;

- **`Pygame`:**

- 👍 Extreme flexibility;
- 👍 Direct access to game loop;
- 👍 APIs to access many kinds of user inputs;
- 🙅 Verbose to obtain simple UIs;
- 🙅 Non-standard community-made framework.

We ultimately decided to opt for `Pygame` for four reasons: it is extremely flexible, exposes many useful functions (for example to catch different user inputs), gives direct access to the game loop and it is a novel and fun framework that has never, to the best of our knowledge, been used in such a fashion.

## 3 RAFT

It is not our intention to plagiarize Ongaro and Ousterhout's excellent work "In Search of an Understandable Consensus Algorithm" [11] by presenting the Raft algorithm's specifications. Instead, we will discuss how we interpreted and implemented it to mold it into our own use case

The algorithm uses three types of nodes, namely *leader*, *follower* and *candidate*, and revolves around three core functionalities: leader election, log replication and cluster membership change. Log compaction is also mentioned, while a byzantine fault tolerant variant is never explored by the original authors.

One last component, instrumental to the functioning of the algorithm, is the *term*: everything happens in a certain term, which divides time logically and increments every election.

Our Raft class directly extends `simpleXMLRPCServer` from XML-RPC module, as shown at code 4.

Lastly, to fire off non-blocking concurrent RPCs on the cluster, we leverage the `concurrent.futures` module using `ThreadPoolExecutor`. To avoid having to keep creating and destroying pools every time a server needs to communicate with the cluster, we embedded a finite amount of workers as class attributes (code 5).

<sup>16</sup>`htop` is a cross-platform text-mode interactive process viewer: <https://htop.dev/>

<sup>17</sup>Unity is a cross-platform game engine developed by Unity Technologies: <https://unity.com/>

<sup>18</sup>Godot is a cross-platform open-source game engine: <https://godotengine.org/>

**Listing 4.** Class Raft definition

---

```

class Raft(SimpleXMLRPCServer):
    def __init__(self,
                  addr: tuple[str, int],
                  allow_none: bool = True,
                  # ...
                  last_index_on_server: list[tuple[int, int]] | None = None
                  ):
        SimpleXMLRPCServer.__init__(self, addr=addr, allow_none=allow_none)

```

---

**Listing 5.** ThreadPoolExecutor workers

---

```

class Raft(SimpleXMLRPCServer):
    def __init__(self,
                  # ...
                  )
        # start executors pool
        self.executor = concurrent.futures.ThreadPoolExecutor(max_workers=len(self.cluster))

```

---

### 3.1 Node Types

There are three types of node, namely leader, follower and candidate (code 6). In this section we are going to show their characteristics and similarities. Note that all nodes have a timer: it is randomized for each of them and has been implemented by extending *threading.Timer*, thus making it thread-safe (code 7)

**Listing 6.** Node modes

---

```

class Raft(SimpleXMLRPCServer):
    class Mode(Enum):
        LEADER = 1
        CANDIDATE = 2
        FOLLOWER = 3

    def __init__(self,
                  # ...
                  mode: Mode = Mode.FOLLOWER,
                  )

```

---

**Listing 7.** Threadsafe looping timer

---

```

class LoopTimer(Timer):
    def __init__(self, interval, function, args=None, kwargs=None):
        Timer.__init__(self, interval, function, args, kwargs)

```

---



```

417         self.was_reset : bool = False
418     # ...
419
420 class Raft(SimpleXMLRPCServer):
421     def __init__(self,
422                 # ...
423                 )
424         # start timer
425         self.timer = LoopTimer(timeout, self.on_timeout)
426         self.timer.start()
427
428
429

```

3.1.1 *Leader Node*. The algorithm revolves around one leader node, whose job is to synchronize all servers' logs to ensure data consistency. It does so by replicating its own log on all followers (the non-leader nodes) by sending new or, if needed, old entries via remote procedure calls.

To make sure all nodes believe the leader's alive, it sends periodically (every 150-300ms) an empty remote procedure call called *heartbeat*

3.1.2 *Follower Node*. All nodes, except for the leader, are classified as followers. They are not allowed to replicate their own log, and when they receive any request they have to forward it to the leader.

To make sure the cluster never remains without a leader, every follower have an election timeout (between 150ms and 300ms) which resets every time an RPC from the leader gets received. When times out, the follower change its state to *candidate*, increment its current term and starts a leader election.

Followers become candidates in another scenario: whenever they receive an entry from the leader, they compare it with their own last log entry. If either leader's term is smaller, or leader's index is smaller while having the same term, the *append entry* is rejected and a new election is started.

3.1.3 *Candidate Node*. When a follower's election timeout times out, it becomes a candidate, increment its own term and starts an election. It votes for itself and then wait for either of two outcomes: wins, thus becoming a new leader, or loses (either another leader gets elected or the old one manifest itself) thus reverting back to being a follower.

## 3.2 Log

As stated, the leader's job is to accept requests (in our specific case they are player inputs) and then forward them to the followers. Let's talk about the structure of the log.

The log is basically a *list* (or an *array*) of entries, where *entry* is an element that encapsulates data (like an integer or a string), has an index (unique for each entry) and the term of its creation (figure 4). We defined entries as *Data Classes*<sup>19</sup> (decorators that simulate C's structures) as can be seen in code 8.

### Listing 8. Dataclass Entry definition

```

463 @dataclass
464 class Entry:
465

```

<sup>19</sup>Data Classes module provides a decorator and functions for automatically adding generated special methods to user-defined classes: <https://docs.python.org/3/library/dataclasses.html>

```

469     term: int
470     index: int
471     command: str
472

```

indices						
i = 8	i = 9	i = 10	i = 11	i = 12	i = 13	i = 14
'x = 1'	'x = 4'	'y = 6'	'x = 2'	'x = -3'	'x = 9'	'x = 0'
T = 3	T = 3	T = 3	T = 3	T = 3	T = 3	T = 3
Terms			Commands			

Fig. 4. Raf's log is fundamentally an array made of entries.

### 3.3 Log Replication and Overwriting

**3.3.1 Leader Propagates.** The leader (each server as a matter of fact) periodically checks whether there are new commands to propagate (always stored in queue *pygame\_commands*), by overriding *SimpleXMLRPCServer*'s method *service\_actions* (listing 9, more details in section ??).

Then, translates them into entries by giving each of them the current term and a log index that starts from *lastLogEntry(index) + 1* and increases by one for each entry. To give an example: if *lastLogEntry(index) = 7* and we have three new commands, their indexes will respectively be eight (8), nine (9) and ten (10). The translation can be seen at listing 10

At this point it propagates *new\_entries* to the whole cluster, updating the commit index (necessary for applying log to state) as soon as at least half the propagations are successful, like so: *commitIndex = lastNewEntry(index)*.

What happens if the *append\_entries* gets rejected? The leader adds to *new\_entries* its own last log entry: *new\_entries = lastLogEntry + new\_entries* (figure 5). Then repeats the propagation procedure, for each reject a new *last log entry* gets added, progressively traversing the log backwards. If, at a certain point, *new\_entries == allLog + new\_entries* (i.e., all leader's log gets propagated) the flag *all\_log* is set to *True*.

Since every server may reject or accept different sets of entries, depending on their own local log, every propagation must be "local" for each follower.

The flow of execution for the log propagation is: *Raft: service\_actions* → *Raft: propagate\_entries* → *propagate\_entries :encapsulates\_proxy: append\_entries\_rpc*. The last one gets called as many times as needed on every single follower.

Of course, all propagation happens concurrently using a *ThreadPoolExecutor*, and the code for entries propagation (leader's side) can be seen at listing 11.

Listing 9. Periodically checks whether there are new commands

```

514 def service_actions(self):                                # RUN method of the server, override
515     if time.time() - self.countdown >= .005:             # do actions every .005 seconds
516         global pygame_commands
517
518
519     if not pygame_commands.empty():                        # propagate entries to cluster
520

```

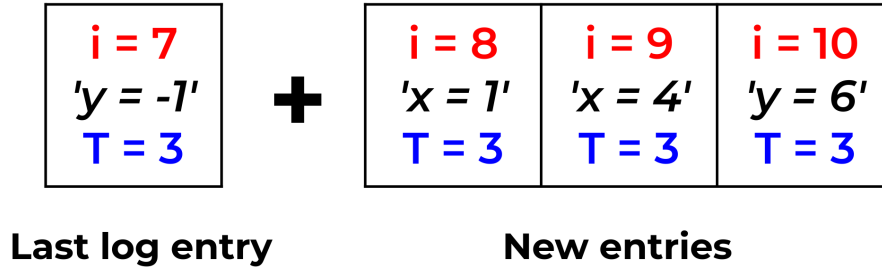


Fig. 5. New entries with the last log's entry added to the begging of the list.

```
self.propagate_entries()
```

**Listing 10.** Translates commands into new entries

```
def propagate_entries():
    # ...
    while not pygame_commands.empty():
        command = pygame_commands.get()
        log_index += 1                # lastLogEntry(index) + 1
        self.new_entries.append(Raft.Entry(    # append to support list 'new_entries'
            term=self.term,
            index=log_index,
            command=command
        ))
```

**Listing 11.** Leader propagation procedure, for complete code refer to project's repository

```
def propagate_entries(self):
    # ...
    if self.log:                        # travel backwards through self.log for each reject
        entries: list[Raft.Entry] = []
        entries.append(self.log[-1])
        entries.extend(self.new_entries)
        log_iterator: int = -2          # log_iterator soft resets for each follower
    else:
        entries: list[Raft.Entry] = self.new_entries
        log_iterator: int = -1

    # ...
    # inner function necessary for concurrent execution
    def encapsulate_proxy(self, follower, entries, log_iterator):
```

```

573     # ...
574     with xmlrpc.client.ServerProxy(complete_url, allow_none=True) as proxy:
575         while not propagation_successful:
576             # send new entries (local for each follower)
577             # ...
578             result = proxy.append_entries_rpc(entries, self.term, self.commit_index, all_log)
579             if result[0] == False:
580                 # add another entry from self.log to new entries
581                 entries = [self.log[log_iterator]] + entries
582                 log_iterator -= 1
583             elif result[0] == True:
584                 propagation_successful = True
585
586     return propagation_successful # to propagate_entries, make propagation counter increase
587     # encapsulate_proxy ends
588
589 results = []
590
591 # fires RPCs concurrently using ThreadPoolExecutor
592 future_result = { # clever python syntax trick
593     self.executor.submit(
594         encapsulate_proxy, # function
595         self, # function's parameter
596         follower, # function's parameter
597         entries, # function's parameter
598         log_iterator # function's parameter
599     ): follower for follower in self.cluster}
600
601 for future in concurrent.futures.as_completed(future_result):
602     # results of RPCs
603     data = future.result()
604     results.append(data)
605
606 # finally counts if propagation was successful enough
607 if results.count(True) >= len(self.cluster) / 2:
608     self.log.extend(self.new_entries) # add new entries to log
609     self.new_entries.clear() # clear new entries list
610     self.commit_index = self.log[-1].index # ensure log gets eventually applied
611 else:
612     # new entries are not cleared, so they will be propagated again

```

---

### 3.3.2 Follower Recieves.

### 3.3.3 Apply Log to State.

### 3.3.4 Log Compaction.

## 3.4 Leader Election

## 3.5 Cluster Membership Change

## 3.6 Byzantine Raft

## ACKNOWLEDGMENTS

To Robert, for the bagels and explaining CMYK and color spaces.

## REFERENCES

- [1] 2009. *Distributed Programs*. Springer London, London, 373–406. [https://doi.org/10.1007/978-1-84882-745-5\\_11](https://doi.org/10.1007/978-1-84882-745-5_11)
- [2] Michiel Buijsman, Devan Brennan, Tianyi Gu, Lester Isaac Simon, Tomofumi Kuzuhara, Spyros Georgiou, Michael Wagner, Ngoc Linh Nguyen, Brett Hunt, Alejandro Marin Vidal, and Tiago Reis. 2024. Newzoo’s Global Games Market Report 2024. <https://newzoo.com/resources/trend-reports/newzoos-global-games-market-report-2024-free-version>
- [3] Jessica Clement. 2025. Free-to-play (F2P) games market revenue worldwide from 2018 to 2024. <https://www.statista.com/statistics/324129/arpuf2p-mmo/>
- [4] Stephen Crass. 2024. The Top Programming Languages 2024. <https://spectrum.ieee.org/deep-brain-stimulation-depression>
- [5] Michael J. Fischer, Nancy A. Lynch, and Michael S. Paterson. 1985. Impossibility of distributed consensus with one faulty process. *J. ACM* 32, 2 (April 1985), 374–382. <https://doi.org/10.1145/3149.214121>
- [6] George Coulouris, Jean Dollimore, Tim Kindberg, and Gordon Blair. 2012. *Distributed Systems: Concepts and Design* (5 ed.). Addison-Wesley.
- [7] Paul Jansen. 2025. TIOBE Index for August 2025. <https://www.tiobe.com/tiobe-index/>
- [8] Rida Khan and Zack Aboulazm. 2023. \$300 Billion of Video Gaming Revenue, by Segment (2017-2026). <https://www.visualcapitalist.com/sp/video-games-industry-revenue-growth-visual-capitalist/>
- [9] Lamport. 1979. How to Make a Multiprocessor Computer That Correctly Executes Multiprocess Programs. *IEEE Trans. Comput.* C-28, 9 (1979), 690–691. <https://doi.org/10.1109/TC.1979.1675439>
- [10] Leslie Lamport. 1998. The part-time parliament. *ACM Trans. Comput. Syst.* 16, 2 (May 1998), 133–169. <https://doi.org/10.1145/279227.279229>
- [11] Diego Ongaro and John Ousterhout. 2014. In search of an understandable consensus algorithm. In *Proceedings of the 2014 USENIX Conference on USENIX Annual Technical Conference* (Philadelphia, PA) (*USENIX ATC’14*). USENIX Association, USA, 305–320.
- [12] David A. Patterson and John L. Hennessy. 2008. *Computer Organization and Design, Fourth Edition, Fourth Edition: The Hardware/Software Interface* (*The Morgan Kaufmann Series in Computer Architecture and Design*) (4th ed.). Morgan Kaufmann Publishers Inc., San Francisco, CA, USA.
- [13] PWC. 2025. Global entertainment and media industry revenues to hit US\$3.5 trillion by 2029, driven by advertising, live events, and video games: PwC Global Entertainment & Media Outlook. <https://www.pwc.com/gx/en/news-room/press-releases/2025/pwc-global-entertainment-media-outlook.html>
- [14] Michael J. Quinn. 1994. *Parallel computing (2nd ed.): theory and practice*. McGraw-Hill, Inc., USA.
- [15] A. Rollings and E. Adams. 2003. *Andrew Rollings and Ernest Adams on Game Design*. New Riders. <https://books.google.it/books?id=Qc19ChiOUI4C>
- [16] Abraham Silberschatz, Peter Baer Galvin, and Greg Gagne. 2008. *Operating System Concepts* (8th ed.). Wiley Publishing.
- [17] A.S. Tanenbaum and M. van Steen. 2017. *Distributed Systems*. CreateSpace Independent Publishing Platform. <https://books.google.it/books?id=c77GAQAACAAJ>
- [18] Albert Y. H. Zomaya. 1996. *Parallel and distributed computing handbook*. McGraw-Hill, Inc., USA.

## A APPENDIX SECTION

Etiam commodo feugiat nisl pulvinar pellentesque. Etiam auctor sodales ligula, non varius nibh pulvinar semper. Suspendisse nec lectus non ipsum convallis congue hendrerit vitae sapien. Donec at laoreet eros. Vivamus non purus placerat, scelerisque diam eu, cursus ante. Etiam aliquam tortor auctor efficitur mattis.

## A.1 Appendix Subsection

Etiam commodo feugiat nisl pulvinar pellentesque. Etiam auctor sodales ligula, non varius nibh pulvinar semper. Suspendisse nec lectus non ipsum convallis congue hendrerit vitae sapien. Donec at laoreet eros. Vivamus non purus placerat, scelerisque diam eu, cursus ante. Etiam aliquam tortor auctor efficitur mattis.

Received TODO; revised TOOD; accepted TODO