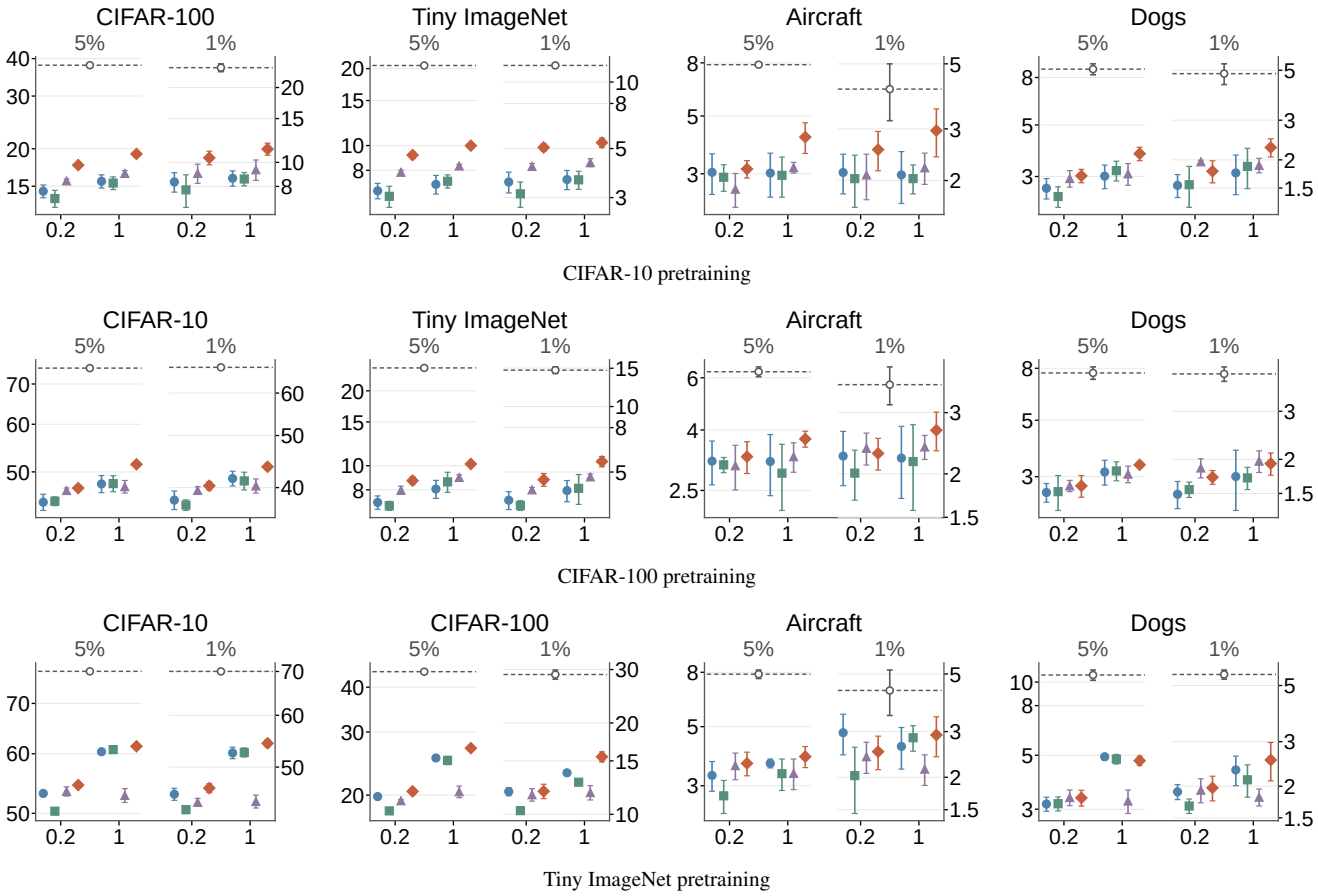


Figure 1. **Cross-dataset transfer.** Titles show downstream tasks; rows identify pretraining data. Ticks 0.2 and 1 denote pretraining percentages. The 5% and 1% downstream label budgets use independent left and right logarithmic accuracy (%) axes. ● Random; ■ K-means; ▲ MKDT; ♦ MIPA. Dashed gray lines with open circles show full-data pretraining; whiskers show sample SD.

2. Figure at printed size

The full-width figure above is arranged in three rows of four plots. CIFAR-10 pretraining occupies the top row, CIFAR-100 the middle row, and Tiny ImageNet the bottom row. All twelve panels have identical physical dimensions. Downstream task names appear within the plots; pretraining names appear below each group. Method symbols are defined only in the figure caption.

This text provides a 10 pt body-font comparison with the plots' 8 pt numerical ticks and 9 pt downstream titles. The source PDF widths and inclusion widths are both 1.65 inches, so the document does not shrink the plots' typography. Each panel retains visible ticks at 0.2 and 1 for both downstream label budgets.

3. Plot conventions

Each task uses two independently scaled logarithmic accuracy axes. The 5% label-budget groups use the left axis and the 1% groups use the right axis. The bounds include every error bar, with a small margin beyond the lowest benchmark and full-data reference. The x-axis values denote percentages of the pretraining data; the label-budget annotations denote percentages of labeled downstream data.