1. Downstream evaluation

This document checks the downstream figure at its final printed size in the CVPR two-column format. The figure spans both columns and places one pretraining group in each row. Each group contains four downstream tasks arranged across the full text width. The plot files are included at their native width of 1.65 inches, so their typography is preserved without rescaling.

Each plot uses a Helvetica-compatible sans-serif font: numeric ticks and label-budget annotations are 8 pt, and downstream titles are 9 pt. This paragraph uses the template's 10 pt Times body font; figure captions use the template's 9 pt Roman font. The group captions use the template's 8 pt subcaption size.

The left and right axes correspond to the 5% and 1% label budgets, respectively. Their logarithmic limits are chosen independently and include the displayed error bars. Vertical positions across the two budgets therefore use different scales. The underlying two-decimal means and standard deviations come from the previously verified saved probe results.

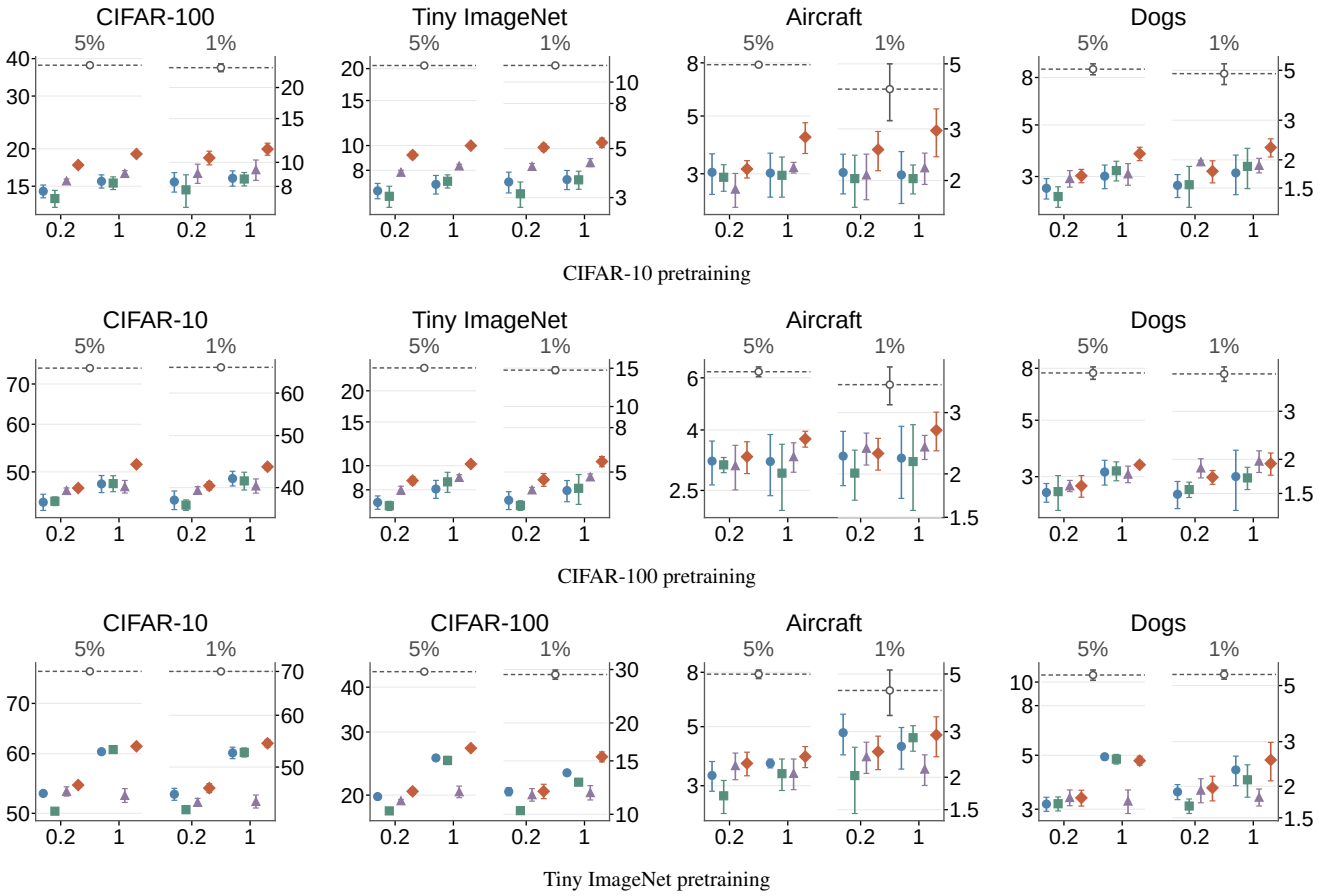


Figure 1. **Cross-dataset transfer.** Titles show downstream tasks; rows identify pretraining data. Ticks 0.2 and 1 denote pretraining percentages. The 5% and 1% downstream label budgets use independent left and right logarithmic accuracy (%) axes. ● Random; ■ K-means; ▲ MKDT; ♦ MIPA. Dashed gray lines with open circles show full-data pretraining; whiskers show sample SD.

2. Figure at printed size

The full-width figure above is arranged in three rows of four plots. CIFAR-10 pretraining occupies the top row, CIFAR-100 the middle row, and Tiny ImageNet the bottom row. All twelve panels have identical physical dimensions. Downstream task names appear within the plots; pretraining names appear below each group. Method symbols are defined only in the figure caption.

This text provides a 10 pt body-font comparison with the plots' 8 pt numerical ticks and 9 pt downstream titles. The source PDF widths and inclusion widths are both 1.65 inches, so the document does not shrink the plots' typography. Each panel retains visible ticks at 0.2 and 1 for both downstream label budgets.

3. Plot conventions

Each task uses two independently scaled logarithmic accuracy axes. The 5% label-budget groups use the left axis and the 1% groups use the right axis. The bounds include every error bar, with a small margin beyond the lowest benchmark and full-data reference. The x-axis values denote percentages of the pretraining data; the label-budget annotations denote percentages of labeled downstream data.