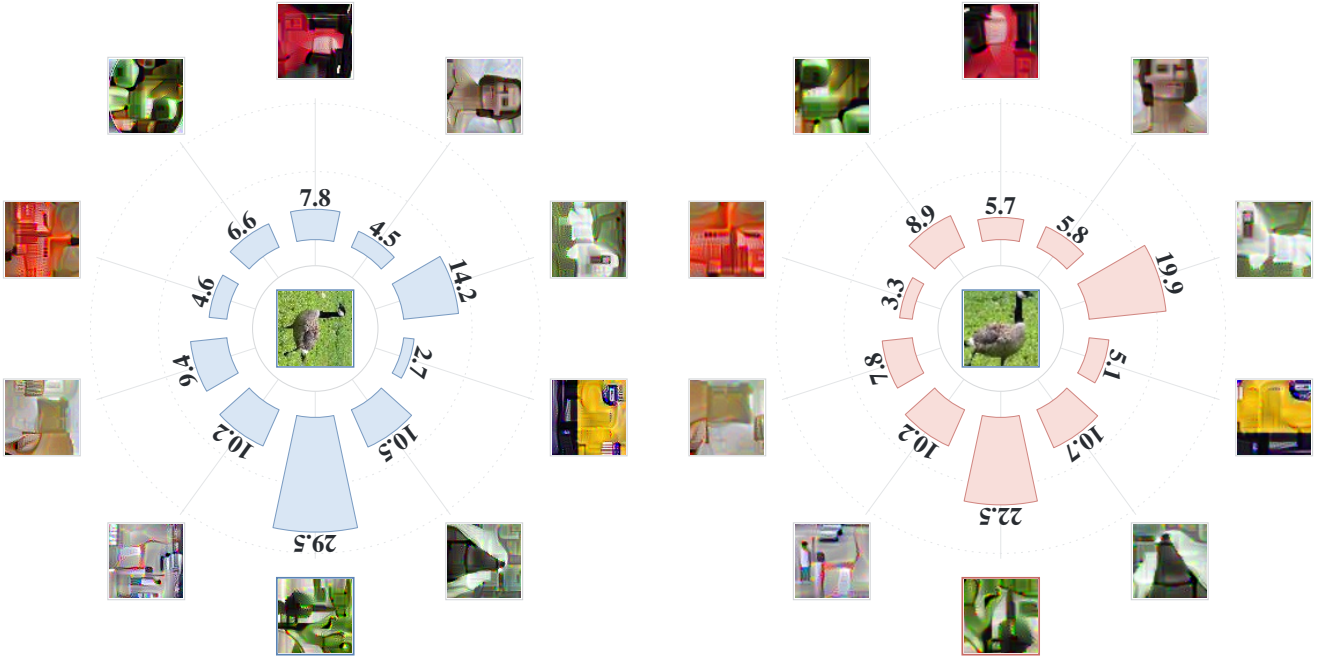


Figure 1: **Soft assignments across augmentations.** A frozen TinyImageNet ResNet-18 encoder assigns the real image to the ten shown synthetic prototypes using softmax over ℓ_2-normalized feature similarities ($\tau = 0.025$). Each view applies the same transform to all images. Percentages are normalized over these ten prototypes; both panels use the same 0–35% radial scale. Four left-panel values are manually adjusted for illustration.