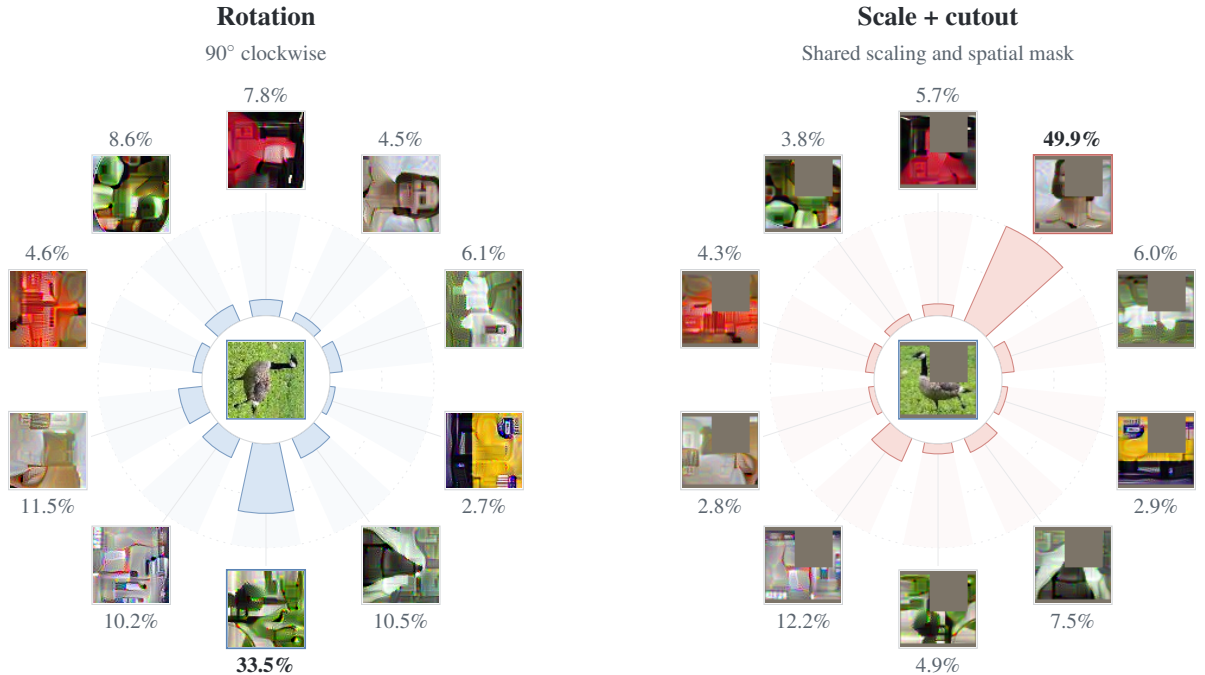


Figure 1: **Soft assignments across augmentations.** A frozen TinyImageNet ResNet-18 encoder assigns the real image to the ten shown synthetic prototypes using softmax over ℓ_2-normalized feature similarities ($\tau = 0.025$). Each panel applies the same transform to all images. Probabilities are normalized over these ten prototypes; both panels use a 0–50% radial scale.