


- GRAFT (as implemented, $\beta=0$) GRAFT+ with $R_i = \langle h_i, h_t \rangle$ (Alg. 1 as printed)
- GRAFT+ (as implemented, $\beta=1$) ranking by exact $\langle g_i, g_t \rangle$

Does the score select the bases the objective wants?

mean alignment percentile of the
selected bases ($m = 250$)

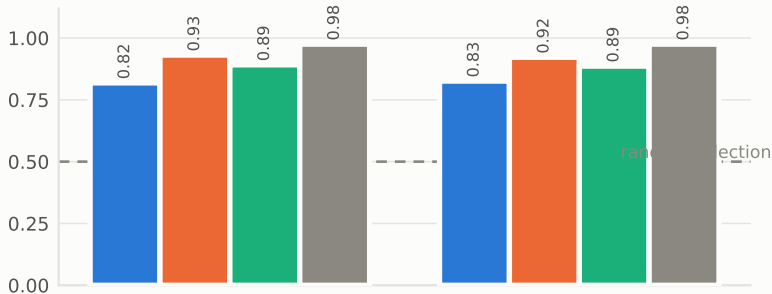

ConvNetBN/dog-bird

ConvNetBN/frog-airplane