

Report from Aug 19, 2026, 5:55:45 PM

https://staging.caicaramarketing.com.br/sobre

Analyze



Mobile



Desktop



Discover what your real users are experiencing



No Data



Diagnose performance issues



Performance



Accessibility



Best Practices



SEO

2/3

Agentic Browsing



Performance

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)



0-49



50-89



90-100



METRICS

Expand view

First Contentful Paint
1.5 s

Largest Contentful Paint
2.0 s

Total Blocking Time
0 ms


Cumulative Layout Shift
0.003

Speed Index
7.2 s

Captured at Aug 19, 2026, 5:55
PM GMT-3
Initial page load

Emulated Desktop with
Lighthouse 13.4.1
Custom throttling

Single page session
Using HeadlessChromium
151.0.7922.71 with Ir

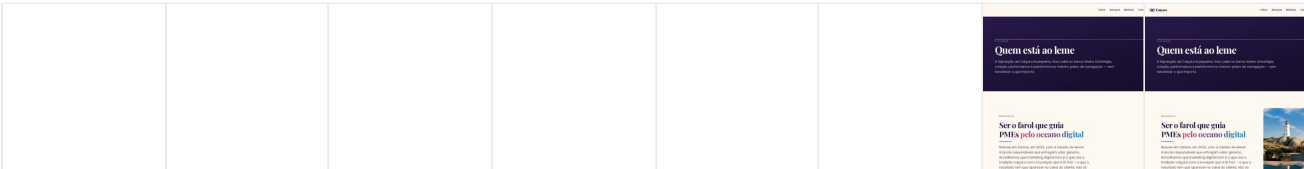

Show audits relevant to: All FCP LCP TBT CLS

INSIGHTS

Improve image delivery — Est savings of 4,896 KiB

Reducing the download time of images can improve the perceived load time of the page and LCP.
[Learn more about optimizing image size](#) LCP FCP Unscored



Ca
mi
la
Pr
ol

```

```


...imagery/camila-caicara.png (cdn.jsdelivr.net) 2,952.2 KiB 2,942.8 KiB

Using a modern image format (WebP, AVIF) or increasing the image compression could improve this image's download size.

2,707.7 KiB

This image file is larger than it needs to be (1173x1280) for its displayed dimensions (240x240). Use responsive images to reduce the image download size.

2,838.9 KiB



div#caic
ara-page
> div >
section.o
n-deep

```
> img

```

...photography/embarcacoes-
marina.webp (cdn.jsdelivr.net)

1,583.1 KiB 1,244.7 KiB

Increasing the image compression factor could improve this image's download size.

1,175.7 KiB


This image file is larger than it needs to be (3000x834) for its displayed dimensions (1287x1616). Use responsive images to reduce the image download size.

267.9 KiB



Fa ...photography/farol-na-
rol costa.webp (cdn.jsdelivr.net)

505.5 KiB 471.2 KiB


co
st


a

```

```

This image file is larger than it needs to be (2302x1696) for its displayed dimensions (630x420). Use responsive images to reduce the image download size.

471.2 KiB


Ca
iça
ra
M
ar

keting Digital Estratégico

```

```

...logo/caicara-horizontal-preto.png (cdn.jsdelivr.net)

114.7 KiB


114.2 KiB

Using a modern image format (WebP, AVIF) or increasing the image compression could improve this image's download size.

36.6 KiB

This image file is larger than it needs to be (1200x400) for its displayed dimensions (102x34). Use responsive images to reduce the image download size.

113.9 KiB


M
at
he
us
Pr

...imagery/matheus-caicara.webp (cdn.jsdelivr.net)

120.7 KiB

113.1 KiB

ol

```
src="https://cdn.jsdelivr.net/gh/mhprol/caicara-site@v1.0.5/assets/imagery/math..." alt="Matheus Prol" loading="lazy" decoding="async" style="width: 100%; height: 100%; object-fit: cover; object-position: center top;">
```


This image file is larger than it needs to be (917x1000) for its displayed dimensions (240x240). Use responsive images to reduce the image download size.

113.1 KiB

leadconnectorhq.com

10.3 KiB

10.0 KiB



Av
at
ar
<i
mg

alt="Avatar"

```
src="https://images.leadconnectorhq.com/image/f_webp/q_100/r_180/u_https://asse..." class="lc_text-widget_prompt--avatar circular-image" width="48" height="48" decoding="async">
```

media/67d87ed...png (images.leadconnectorhq.com)

10.3 KiB

10.0 KiB

Increasing the image compression factor could improve this image's download size.

5.0 KiB

This image file is larger than it needs to be (180x180) for its displayed dimensions (40x40). Use responsive images to reduce the image download size.

9.7 KiB


▲ LCP breakdown

Each [subpart has specific improvement strategies](#). Ideally, most of the LCP time should be spent on loading the resources, not within delays. LCP Unscored

Subpart	Duration
Time to first byte	0 ms
Resource load delay	11,030 ms

Element render delay

90 ms



Farol na costa

```


```

▲ LCP request discovery



Optimize LCP by making the LCP image discoverable from the HTML immediately, and avoiding lazy-loading **LCP** **Unscored**

- LCP resources should not use loading=lazy
- fetchpriority=high should be applied
- Request is discoverable in initial document



Farol na costa

```

```

▲ Network dependency tree





Warnings: More than 4 `preconnect` connections were found. These should be used sparingly and only to the most important origins.

Avoid chaining critical requests by reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. **LCP** **Unscored**

Maximum critical path latency: **11,068 ms**

Initial Navigation

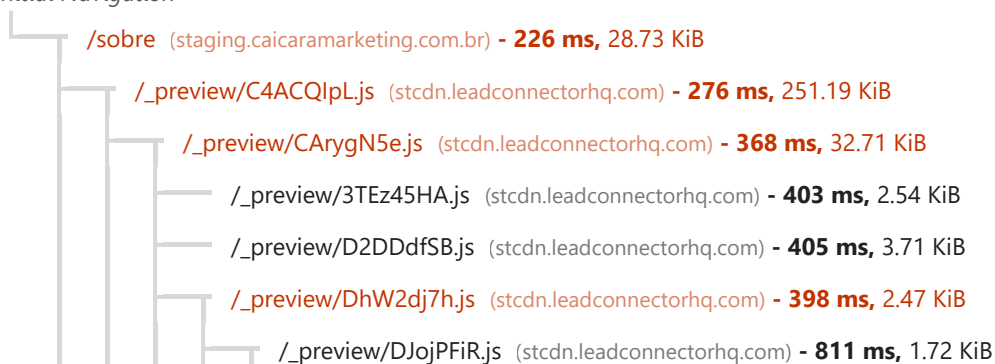

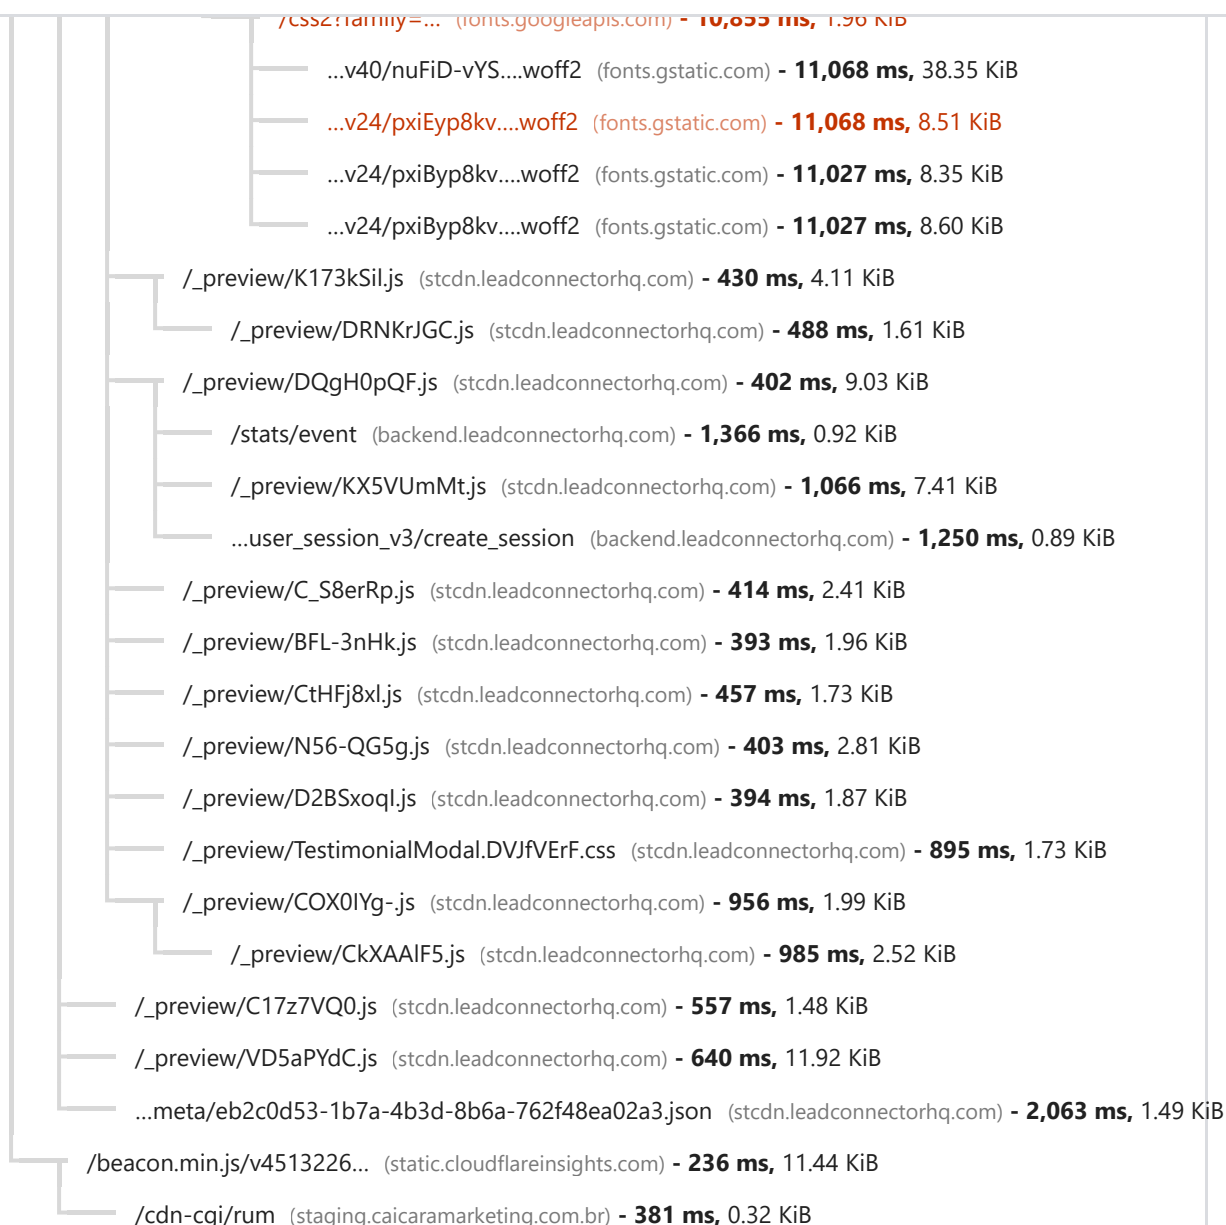

Preconnected origins

[preconnect](#) hints help the browser establish a connection earlier in the page load, saving time when the first request for that origin is made. The following are the origins that the page preconnected to.

Origin	Source
https://fonts.gstatic.com/	head > link <link rel="preconnect" href="https://fonts.gstatic.com/" crossorigin="anonymous">
https://backend.leadconnectorhq.com/	head > link <link rel="preconnect" href="https://backend.leadconnectorhq.com" crossorigin="anonymous">
https://images.leadconnectorhq.com/	head > link

https://cdn.filesafe.space/

Unused preconnect. Only use `preconnect` for origins that the page is likely to request.

https://fonts.googleapis.com/

https://fonts.gstatic.com/

https://cdn.jsdelivr.net/

https://unpkg.com/

```
crossorigin="anonymous">
```

```
head > link
```

```
<link rel="preconnect"
```

```
href="https://cdn.filesafe.space"
```

```
crossorigin="anonymous">
```

```
head > link
```

```
<link rel="preconnect"
```

```
href="https://fonts.googleapis.com">
```

Unused preconnect. Only use `preconnect` for origins that the page is likely to request.

```
head > link
```

```
<link rel="preconnect"
```

```
href="https://fonts.gstatic.com"
```

```
crossorigin="">
```

Unused preconnect. Only use `preconnect` for origins that the page is likely to request.

```
head > link
```

```
<link rel="preconnect"
```

```
href="https://cdn.jsdelivr.net"
```

```
crossorigin="">
```

Unused preconnect. Only use `preconnect` for origins that the page is likely to request.

```
head > link
```

```
<link rel="preconnect"
```

```
href="https://unpkg.com" crossorigin="">
```

Unused preconnect. Only use `preconnect` for origins that the page is likely to request.

Preconnect candidates

Add [preconnect](#) hints to your most important origins, but try to use no more than 4.

Origin

Est LCP savings

https://widgets.leadconnectorhq.com

80 ms

Among other, it can speed up repeat visits to your page. [Learn more about caching.](#) [FCP](#)

Unscored

Request	Cache TTL	Transfer Size
leadconnectorhq.com		109 KiB
/chat-widget/p-5ff9a208.entry.js (widgets.leadconnectorhq.com)	4h	51 KiB
/chat-widget/p-BmGdPIUL.js (widgets.leadconnectorhq.com)	4h	26 KiB
/chat-widget/p-Do7bswAW.js (widgets.leadconnectorhq.com)	4h	16 KiB
/chat-widget/p-Bck6bG0u.js (widgets.leadconnectorhq.com)	4h	8 KiB
/chat-widget/p-CbVA63cT.js (widgets.leadconnectorhq.com)	4h	4 KiB
...js/user-session.js (services.leadconnectorhq.com)	4h	3 KiB
Cloudflare Utility		11 KiB
/beacon.min.js/v4513226... (static.cloudflareinsights.com)	1d	11 KiB

Font display — Est savings of 20 ms

Consider setting [font-display](#) to swap or optional to ensure text is consistently visible. swap can be further optimized to mitigate layout shifts with [font metric overrides](#). [FCP](#) [Unscored](#)

URL	Est Savings
bunny.net	
...files/montserrat-latin-400-normal.woff2 (fonts.bunny.net)	20 ms

Layout shift culprits

Layout shifts occur when elements move absent any user interaction. [Investigate the causes of layout shifts](#), such as elements being added, removed, or their fonts changing as the page loads.

[CLS](#) [Unscored](#)

Element	Layout shift score
Total	0.003
 PROPÓSITO Ser o farol que guia PMEs pelo oceano digital Nasceu em Santos, em 2... <div>	0.003
...v40/nuFiD-vYS....woff2 (fonts.gstatic.com)	Web font



3rd parties

3rd party code can significantly impact load performance. [Reduce and defer loading of 3rd party code](#) to prioritize your page's content. Unscored

3rd party	Transfer size	Main thread time
Unpkg Cdn	159 KiB	87 ms
...umd/lucide.js (unpkg.com)	0 KiB	51 ms
...umd/react.production.min.js (unpkg.com)	5 KiB	22 ms
...umd/react-dom.production.min.js (unpkg.com)	43 KiB	14 ms
...umd/lucide.js (unpkg.com)	111 KiB	0 ms
leadconnectorhq.com	556 KiB	67 ms
/chat-widget/p-Do7bswAW.js (widgets.leadconnectorhq.com)	16 KiB	22 ms
...1.12.41/libphonenumber-js.min.js (stcdn.leadconnectorhq.com)	44 KiB	20 ms
/_preview/DhW2dj7h.js (stcdn.leadconnectorhq.com)	2 KiB	10 ms
/_preview/K173kSil.js (stcdn.leadconnectorhq.com)	4 KiB	6 ms
/_preview/C4ACQlPl.js (stcdn.leadconnectorhq.com)	251 KiB	3 ms
/loader.js (widgets.leadconnectorhq.com)	5 KiB	3 ms
/chat-widget/p-5ff9a208.entry.js (widgets.leadconnectorhq.com)	51 KiB	2 ms
/_preview/CArgN5e.js (stcdn.leadconnectorhq.com)	33 KiB	1 ms
/_preview/KX5VUmMt.js (stcdn.leadconnectorhq.com)	7 KiB	1 ms
/chat-widget/p-BmGdPIUL.js (widgets.leadconnectorhq.com)	26 KiB	0 ms
/intl-tel-input/intlTelInput.min.js (stcdn.leadconnectorhq.com)	12 KiB	0 ms
/_preview/VD5aPYdC.js (stcdn.leadconnectorhq.com)	12 KiB	0 ms
...media/67d87ed....png (images.leadconnectorhq.com)	11 KiB	0 ms
/chat-widget/chat-widget.esm.js?v=178... (widgets.leadconnectorhq.com)	10 KiB	0 ms
/_preview/DQgH0pQF.js (stcdn.leadconnectorhq.com)	9 KiB	0 ms
/chat-widget/p-Bck6bG0u.js (widgets.leadconnectorhq.com)	8 KiB	0 ms
...css/intlTelInput.min.css (stcdn.leadconnectorhq.com)	4 KiB	0 ms
/chat-widget/p-CbVA63cT.js (widgets.leadconnectorhq.com)	4 KiB	0 ms
...i18n/pt-br.json (widgets.leadconnectorhq.com)	4 KiB	0 ms
/_preview/D2DDdfSB.js (stcdn.leadconnectorhq.com)	4 KiB	0 ms
...js/user-session.js (services.leadconnectorhq.com)	3 KiB	0 ms

...com/g/0930000... (services.leadconnectorhq.com)	3 KiB	0 ms
/_preview/N56-QG5g.js (stcdn.leadconnectorhq.com)	3 KiB	0 ms
/_preview/3TEz45HA.js (stcdn.leadconnectorhq.com)	3 KiB	0 ms
/_preview/CkXAAIF5.js (stcdn.leadconnectorhq.com)	3 KiB	0 ms
/_preview/C_S8erRp.js (stcdn.leadconnectorhq.com)	2 KiB	0 ms
/_preview/COX0IYg-.js (stcdn.leadconnectorhq.com)	2 KiB	0 ms
/_preview/BFL-3nHk.js (stcdn.leadconnectorhq.com)	2 KiB	0 ms
/_preview/BsjK_CC5.js (stcdn.leadconnectorhq.com)	2 KiB	0 ms
/_preview/D2BSxoql.js (stcdn.leadconnectorhq.com)	2 KiB	0 ms
/_preview/CtHFj8xl.js (stcdn.leadconnectorhq.com)	2 KiB	0 ms
/_preview/TestimonialModal.DVJfVErF.css (stcdn.leadconnectorhq.com)	2 KiB	0 ms
/_preview/DJojPFiR.js (stcdn.leadconnectorhq.com)	2 KiB	0 ms
/_preview/DRNKRJGC.js (stcdn.leadconnectorhq.com)	2 KiB	0 ms
...meta/eb2c0d53-1b7a-4b3d-8b6a-762f48ea02a3.json (stcdn.leadconnectorhq.com)	1 KiB	0 ms
/_preview/C17z7VQ0.js (stcdn.leadconnectorhq.com)	1 KiB	0 ms
/stats/event (backend.leadconnectorhq.com)	1 KiB	0 ms
...user_session_v3/create_session (backend.leadconnectorhq.com)	1 KiB	0 ms
...update_session/d971b6c9-2a18-4a8e-8977-33369d990dc0 (backend.leadconnectorhq.com)	1 KiB	0 ms
...funnel/geo-location (services.leadconnectorhq.com)	1 KiB	0 ms
JSDelivr CDN Cdn	5,339 KiB	15 ms
...dist/ds-bundle.js (cdn.jsdelivr.net)	30 KiB	10 ms
...dist/site.js (cdn.jsdelivr.net)	21 KiB	5 ms
...imagery/camila-caicara.png (cdn.jsdelivr.net)	2,953 KiB	0 ms
...photography/embarcacoes-marina.webp (cdn.jsdelivr.net)	1,584 KiB	0 ms
...photography/farol-na-costa.webp (cdn.jsdelivr.net)	507 KiB	0 ms
...imagery/matheus-caicara.webp (cdn.jsdelivr.net)	121 KiB	0 ms
...logo/caicara-horizontal-preto.png (cdn.jsdelivr.net)	116 KiB	0 ms
...dist/site.css (cdn.jsdelivr.net)	7 KiB	0 ms
Cloudflare Utility	11 KiB	10 ms
/beacon.min.js/v4513226... (static.cloudflareinsights.com)	11 KiB	10 ms
Google Fonts Cdn	66 KiB	0 ms
...v40/nuFiD-vYS....woff2 (fonts.gstatic.com)	38 KiB	0 ms
...v24/pxiByp8kv....woff2 (fonts.gstatic.com)	9 KiB	0 ms



...v24/pxiByp8kv....woff2 (fonts.gstatic.com)	8 KiB	0 ms
/css2?family=... (fonts.googleapis.com)	2 KiB	0 ms
bunny.net	22 KiB	0 ms
...files/montserrat-latin-400-normal.woff2 (fonts.bunny.net)	19 KiB	0 ms
/css?family=Montserrat (fonts.bunny.net)	1 KiB	0 ms
/css?family=Montserrat:bold (fonts.bunny.net)	1 KiB	0 ms

These insights are also available in the Chrome DevTools Performance Panel - [record a trace](#) to view more detailed information.

DIAGNOSTICS

▲ Reduce unused JavaScript — Est savings of 202 KiB

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. [Learn how to reduce unused JavaScript.](#) LCP FCP Unscored




If you are not server-side rendering, [split your JavaScript bundles](#) with `React.lazy()`. Otherwise, code-split using a third-party library such as [loadable-components](#).

URL	Transfer Size	Est Savings
leadconnectorhq.com	299.4 KiB	179.5 KiB
/_preview/C4ACQlpL.js (stdn.leadconnectorhq.com)	249.4 KiB	157.2 KiB
/chat-widget/p-5ff9a208.entry.js (widgets.leadconnectorhq.com)	50.0 KiB	22.3 KiB
JSDelivr CDN Cdn	29.1 KiB	22.9 KiB
...dist/ds-bundle.js (cdn.jsdelivr.net)	29.1 KiB	22.9 KiB

■ Image elements do not have explicit [width](#) and [height](#)

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. [Learn how to set image dimensions](#) CLS Unscored

URL
JSDelivr CDN Cdn



Estratégico

```

```

■ Minify JavaScript — Est savings of 39 KiB

Minifying JavaScript files can reduce payload sizes and script parse time. [Learn how to minify JavaScript.](#) LCP FCP Unscored



If your build system minifies JS files automatically, ensure that you are deploying the production build of your application. You can check this with the React Developer Tools extension. [Learn more.](#)

URL	Transfer Size	Est Savings
Unpkg Cdn	110.4 KiB	23.8 KiB
...umd/lucide.js (unpkg.com)	110.4 KiB	23.8 KiB
JSDelivr CDN Cdn	48.9 KiB	15.3 KiB
...dist/ds-bundle.js (cdn.jsdelivrivr.net)	29.2 KiB	9.3 KiB
...dist/site.js (cdn.jsdelivrivr.net)	19.7 KiB	6.0 KiB

■ Reduce unused CSS — Est savings of 17 KiB

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. [Learn how to reduce unused CSS.](#) LCP FCP Unscored

URL	Transfer Size	Est Savings
html.ios { --ion-default-font: -apple-system, BlinkMacSystemFont, "Helvetica Neue", "Roboto", sans-s... } ...	17.5 KiB	16.8 KiB

■ Avoid enormous network payloads — Total size was 6,187 KiB

URL	Transfer Size
JSDelivr CDN Cdn	5,281.1 KiB
...imagery/camila-caicara.png (cdn.jsdelivr.net)	2,953.2 KiB
...photography/embarcacoes-marina.webp (cdn.jsdelivr.net)	1,584.2 KiB
...photography/farol-na-costa.webp (cdn.jsdelivr.net)	506.5 KiB
...imagery/matheus-caicara.webp (cdn.jsdelivr.net)	121.4 KiB
...logo/caicara-horizontal-preto.png (cdn.jsdelivr.net)	115.8 KiB
leadconnectorhq.com	346.5 KiB
/_preview/C4ACQlpL.js (stcdn.leadconnectorhq.com)	251.2 KiB
/chat-widget/p-5ff9a208.entry.js (widgets.leadconnectorhq.com)	51.4 KiB
...1.12.41/libphonenumber-js.min.js (stcdn.leadconnectorhq.com)	43.9 KiB
Unpkg Cdn	153.9 KiB
...umd/lucide.js (unpkg.com)	111.3 KiB
...umd/react-dom.production.min.js (unpkg.com)	42.6 KiB

○ Avoid long main-thread tasks — 2 long tasks found ^

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay.

[Learn how to avoid long main-thread tasks](#) TBT Unscored

☒ Show 3rd-party resources (1)

URL	Start Time	Duration
Unattributable		68 ms
Unattributable	1,127 ms	68 ms
Unpkg Cdn		51 ms
...umd/lucide.js (unpkg.com)	1,494 ms	51 ms



More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

Your first network request is the most important. [Reduce its latency](#) by avoiding redirects, ensuring a fast server response, and enabling text compression. LCP FCP Unscored

-  Avoids redirects
-  Server responds quickly (observed 3 ms)
-  Applies text compression

● Optimize DOM size

A large DOM can increase the duration of style calculations and layout reflows, impacting page responsiveness. A large DOM will also increase memory usage. [Learn how to avoid an excessive DOM size.](#) Unscored

Statistic	Element	Value
Total elements		193
DOM depth	 span > span.caicara-icon > svg > circle <circle cx="12" cy="12" r="10">	25
Most children	 Início Serviços Método Cases A Caiçara Contato <nav class="caicara-nav-links" aria-label="Navegação principal" style="display: flex; align-items: center; gap: var(--space-6); margin-left: auto;">	6

● Duplicated JavaScript

Remove large, [duplicate JavaScript modules](#) from bundles to reduce unnecessary bytes consumed by network activity. LCP FCP Unscored

● Forced reflow

A forced reflow occurs when JavaScript queries geometric properties (such as `offsetWidth`) after styles have been invalidated by a change to the DOM state. This can result in poor performance. Learn more about [forced reflows](#) and possible mitigations. Unscored

○ INP breakdown

● Legacy JavaScript ^

Polyfills and transforms enable older browsers to use new JavaScript features. However, many aren't necessary for modern browsers. Consider modifying your JavaScript build process to not transpile [Baseline](#) features, unless you know you must support older browsers. [Learn why most sites can deploy ES6+ code without transpiling](#) LCP FCP Unscored

● Render-blocking requests ^

Requests are blocking the page's initial render, which may delay LCP. [Deferring or inlining](#) can move these network requests out of the critical path. LCP FCP Unscored

● Optimize viewport for mobile ^

Tap interactions may be [delayed by up to 300 ms](#) if the viewport is not optimized for mobile. Unscored

head > meta

```
<meta name="viewport" content="width=device-width, initial-scale=1">
```

● Minify CSS ^

Minifying CSS files can reduce network payload sizes. [Learn how to minify CSS](#). LCP FCP Unscored



If your build system minifies CSS files automatically, ensure that you are deploying the production build of your application. You can check this with the React Developer Tools extension. [Learn more](#).

○ User Timing marks and measures ^

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more about User Timing marks](#). Unscored



Use the React DevTools Profiler, which makes use of the Profiler API, to measure the rendering performance of your components. [Learn more](#).

● JavaScript execution time — 0.2 s ^

☒ Show 3rd-party resources (2)

URL	Total CPU Time	Script Evaluation	Script Parse
Unattributable	260 ms	138 ms	0 ms
Unattributable	260 ms	138 ms	0 ms
caicaramarketing.com.br 1st Party	146 ms	3 ms	1 ms
/sobre (staging.caicaramarketing.com.br)	146 ms	3 ms	1 ms
leadconnectorhq.com	70 ms	54 ms	2 ms
/chat-widget/p-Do7bswAW.js (widgets.leadconnectorhq.com)	70 ms	54 ms	2 ms
Unpkg Cdn	51 ms	7 ms	43 ms
...umd/lucide.js (unpkg.com)	51 ms	7 ms	43 ms

● Minimizes main-thread work — 0.8 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to minimize main-thread work](#) TBT Unscored

Category	Time Spent
Script Evaluation	321 ms
Other	177 ms
Script Parsing & Compilation	131 ms
Style & Layout	114 ms
Parse HTML & CSS	11 ms
Rendering	11 ms
Garbage Collection	2 ms

○ Avoid non-composited animations

Animations which are not composited can be janky and increase CLS. [Learn how to avoid non-composited animations](#) CLS Unscored



Accessibility

These checks highlight opportunities to [improve the accessibility of your web app](#). Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so [manual testing](#) is also encouraged.

CONTRAST

- ▲ Background and foreground colors do not have a sufficient contrast ratio. ^


Low-contrast text is difficult or impossible for many users to read. [Learn how to provide sufficient color contrast](#).

Failing Elements



Falar com a gente

```
<a href="/contato" class="caicara-cta caicara-nav-cta" style="display: inline-flex; align-items: center; justify-content: center;">
```



Agendar diagnóstico

```
<button style="font-family: var(--font-sans); font-weight: var(--fw-semibold);">
```

These are opportunities to improve the legibility of your content.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

- Interactive controls are keyboard focusable ^

Custom interactive controls are keyboard focusable and display a focus indicator. [Learn how to make custom controls focusable](#). Unscored

interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. [Learn how to decorate interactive elements with affordance hints.](#)

Unscored

- ☐ The page has a logical tab order



Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. [Learn more about logical tab ordering.](#)

Unscored

- ☐ Visual order on the page follows DOM order



DOM order matches the visual order, improving navigation for assistive technology. [Learn more about DOM and visual ordering.](#)

Unscored

- ☐ User focus is not accidentally trapped in a region



A user can tab into and out of any control or region without accidentally trapping their focus. [Learn how to avoid focus traps.](#)

Unscored

- ☐ The user's focus is directed to new content added to the page



If new content, such as a dialog, is added to the page, the user's focus is directed to it. [Learn how to direct focus to new content.](#)

Unscored

- ☐ HTML5 landmark elements are used to improve navigation



Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. [Learn more about landmark elements.](#)

Unscored

- ☐ Offscreen content is hidden from assistive technology



Offscreen content is hidden with display: none or aria-hidden=true. [Learn how to properly hide offscreen content.](#)

Unscored

- ☐ Custom controls have associated labels



Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. [Learn more about custom controls and labels.](#)

Unscored

- ☐ Custom controls have ARIA roles



Custom interactive controls have appropriate ARIA roles. [Learn how to add roles to custom](#)

accessibility review.

PASSED AUDITS (22)

[Hide](#)

● [aria-*] attributes match their roles ^

Each ARIA role supports a specific subset of aria-* attributes. Mismatching these invalidates the aria-* attributes. [Learn how to match ARIA attributes to their roles.](#)

● [aria-hidden="true"] is not present on the document <body> ^

Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. [Learn how aria-hidden affects the document body.](#)

● [role]s have all required [aria-*] attributes ^

Some ARIA roles have required attributes that describe the state of the element to screen readers. [Learn more about roles and required attributes.](#)

● [role] values are valid ^

ARIA roles must have valid values in order to perform their intended accessibility functions. [Learn more about valid ARIA roles.](#)

● [aria-*] attributes have valid values ^

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. [Learn more about valid values for ARIA attributes.](#)

● [aria-*] attributes are valid and not misspelled ^

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. [Learn more about valid ARIA attributes.](#)

When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. [Learn how to make buttons more accessible.](#)

● Image elements have `[alt]` attributes ^

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#)

● `[user-scalable="no"]` is not used in the `<meta name="viewport">` element and the `[maximum-scale]` attribute is not less than 5. ^

Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. [Learn more about the viewport meta tag.](#)

● ARIA attributes are used as specified for the element's role ^

Some ARIA attributes are only allowed on an element under certain conditions. [Learn more about conditional ARIA attributes.](#)

● `[aria-hidden="true"]` elements do not contain focusable descendents ^

Focusable descendents within an `[aria-hidden="true"]` element prevent those interactive elements from being available to users of assistive technologies like screen readers. [Learn how aria-hidden affects focusable elements.](#)

● Elements use only permitted ARIA attributes ^

Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. [Learn more about prohibited ARIA roles.](#)

● Document has a `<title>` element ^

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles.](#)

If a page doesn't specify a `lang` attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. [Learn more about the `lang` attribute.](#)

● `<html>` element has a valid value for its `[lang]` attribute ^

Specifying a valid [BCP 47 language](#) helps screen readers announce text properly. [Learn how to use the `lang` attribute.](#)

● Links have a discernible name ^

Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. [Learn how to make links accessible.](#)

● No element has a `[tabindex]` value greater than 0 ^

A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. [Learn more about the `tabindex` attribute.](#)

● Touch targets have sufficient size and spacing. ^

Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. [Learn more about touch targets.](#)

● Heading elements appear in a sequentially-descending order ^

Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. [Learn more about heading order.](#)

● Document has a main landmark. ^

One main landmark helps screen reader users navigate a web page. [Learn more about landmarks.](#)

Deprecated ARIA roles may not be processed correctly by assistive technology. [Learn more about deprecated ARIA roles.](#)

● Elements with `role="none"` or `role="presentation"` do not have conflicts ^

There are certain cases where the semantic role of an element with `role="none"` or `role="presentation"` does not resolve to none or presentation. To ensure the element remains removed from the accessibility tree, you should not add any global ARIA attributes to the element or make it focusable. [Learn more about presentation role conflict.](#)

NOT APPLICABLE (40)

Hide

○ `[accesskey]` values are unique ^

Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. [Learn more about access keys.](#) Unscored

○ `button`, `link`, and `menuitem` elements have accessible names ^

When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to make command elements more accessible.](#) Unscored

○ Elements with `role="dialog"` or `role="alertdialog"` have accessible names. ^

ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. [Learn how to make ARIA dialog elements more accessible.](#)

Unscored

○ ARIA input fields have accessible names ^

When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about input field labels.](#) Unscored

○ ARIA `meter` elements have accessible names ^

elements. Unscored

☐ ARIA `progressbar` elements have accessible names ^

When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to label progressbar elements.](#) Unscored

☐ Elements with an ARIA `[role]` that require children to contain a specific `[role]` have all required children. ^

Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. [Learn more about roles and required children elements.](#) Unscored

☐ `[role]`s are contained by their required parent element ^

Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. [Learn more about ARIA roles and required parent element.](#) Unscored

☐ Elements with the `role=text` attribute do not have focusable descendents. ^

Adding `role=text` around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. [Learn more about the `role=text` attribute.](#) Unscored

☐ ARIA toggle fields have accessible names ^

When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about toggle fields.](#) Unscored

☐ ARIA `tooltip` elements have accessible names ^

When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name tooltip elements.](#) Unscored

☐ ARIA `treeitem` elements have accessible names ^

When a `treeitem` element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about labeling](#)



☐ The page contains a heading, skip link, or landmark region.

Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently.

[Learn more about bypass blocks.](#) Unscored

☐ `<d1>`'s contain only properly-ordered `<dt>` and `<dd>` groups, `<script>`, `<template>` or `<div>` elements.

When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. [Learn how to structure definition lists correctly.](#) Unscored

☐ Definition list items are wrapped in `<d1>` elements

Definition list items (`<dt>` and `<dd>`) must be wrapped in a parent `<d1>` element to ensure that screen readers can properly announce them. [Learn how to structure definition lists correctly.](#)

Unscored

☐ ARIA IDs are unique

The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. [Learn how to fix duplicate ARIA IDs.](#) Unscored

☐ No form fields have multiple labels

Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. [Learn how to use form labels.](#)

Unscored

☐ `<frame>` or `<iframe>` elements have a title

Screen reader users rely on frame titles to describe the contents of frames. [Learn more about frame titles.](#) Unscored

☐ `<html>` element has an `[xml:lang]` attribute with the same base language as the `[lang]` attribute.

If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. [Learn more about the lang attribute.](#) Unscored

☐ Input buttons have discernible text.

Adding discernable and accessible text to input buttons may help screen reader users understand

When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. [Learn about input image alt text.](#) Unscored

☐ Form elements have associated labels ^

Labels ensure that form controls are announced properly by assistive technologies, like screen readers. [Learn more about form element labels.](#) Unscored

☐ Links are distinguishable without relying on color. ^

Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. [Learn how to make links distinguishable.](#)

Unscored

☐ Lists contain only `<li>` elements and script supporting elements (`<script>` and `<template>`). ^

Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. [Learn more about proper list structure.](#) Unscored

☐ List items (`<li>`) are contained within `<ul>`, `<ol>` or `<menu>` parent elements ^

Screen readers require list items (`<li>`) to be contained within a parent `<ul>`, `<ol>` or `<menu>` to be announced properly. [Learn more about proper list structure.](#) Unscored

☐ The document does not use `<meta http-equiv="refresh">` ^

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. [Learn more about the refresh meta tag.](#) Unscored

☐ `<object>` elements have alternate text ^

Screen readers cannot translate non-text content. Adding alternate text to `<object>` elements helps screen readers convey meaning to users. [Learn more about alt text for object elements.](#)

Unscored

☐ Select elements have associated label elements. ^

Form elements without effective labels can create frustrating experiences for screen reader users. [Learn more about the select element.](#) Unscored

including a skip link can help users skip to the main content to save time. [Learn more about skip links.](#) Unscored

- ☐ Cells in a `<table>` element that use the `[headers]` attribute refer to table cells within the same table. ^

Screen readers have features to make navigating tables easier. Ensuring `<td>` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. [Learn more about the headers attribute.](#) Unscored

- ☐ `<th>` elements and elements with `[role="columnheader"/"rowheader"]` have data cells they describe. ^

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. [Learn more about table headers.](#) Unscored

- ☐ `[lang]` attributes have a valid value ^

Specifying a valid [BCP 47 language](#) on elements helps ensure that text is pronounced correctly by a screen reader. [Learn how to use the lang attribute.](#) Unscored

- ☐ `<video>` elements contain a `<track>` element with `[kind="captions"]` ^

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. [Learn more about video captions.](#) Unscored

- ☐ `autocomplete` attributes are used correctly ^

The `autocomplete` attribute values must be valid and correctly applied for screen readers to function correctly. [Learn more about valid autocomplete values.](#) Unscored

- ☐ SVG elements with an `img` role have an accessible text alternative ^

Ensures SVG elements with an `img`, `graphics-document` or `graphics-symbol` role have an accessible text alternative. [Learn more about SVG alt text.](#) Unscored

- ☐ Tables have different content in the summary attribute and `<caption>`. ^

The summary attribute should describe the table structure, while `<caption>` should have the onscreen title. Accurate table mark-up helps users of screen readers. [Learn more about summary and caption.](#) Unscored

...meaning with no content or inaccessible text prevent screen reader users from accessing information on the page's structure. [Learn more about headings.](#) Unscored

- ☐ Uses ARIA roles only on compatible elements ^

Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. [Learn more about ARIA roles.](#)


Unscored

- ☐ Image elements do not have `[alt]` attributes that are redundant text. ^

Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. [Learn more about the alt attribute.](#) Unscored

- ☐ Identical links have the same purpose. ^

Links with the same destination should have the same description, to help users understand the link's purpose and decide whether to follow it. [Learn more about identical links.](#) Unscored



Best Practices

TRUST AND SAFETY

- ☐ Ensure CSP is effective against XSS attacks ^

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. [Learn how to use a CSP to prevent XSS](#) Unscored

○ Use a strong HSTS policy ^

Deployment of the HSTS header significantly reduces the risk of downgrading HTTP connections and eavesdropping attacks. A rollout in stages, starting with a low max-age is recommended. [Learn more about using a strong HSTS policy.](#) Unscored

Description	Directive	Severity
No HSTS header found		High

○ Ensure proper origin isolation with COOP ^

The Cross-Origin-Opener-Policy (COOP) can be used to isolate the top-level window from other documents such as pop-ups. [Learn more about deploying the COOP header.](#) Unscored

Description	Directive	Severity
No COOP header found		High

○ Mitigate clickjacking with XFO or CSP ^

The X-Frame-Options (XFO) header or the frame-ancestors directive in the Content-Security-Policy (CSP) header control where a page can be embedded. These can mitigate clickjacking attacks by blocking some or all sites from embedding the page. [Learn more about mitigating clickjacking.](#) Unscored

Description	Severity
No frame control policy found	High

○ Mitigate DOM-based XSS with Trusted Types ^

The require-trusted-types-for directive in the Content-Security-Policy (CSP) header instructs user agents to control the data passed to DOM XSS sink functions. [Learn more about mitigating DOM-based XSS with Trusted Types.](#) Unscored

Description	Severity
No `Content-Security-Policy` header with Trusted Types directive found	High



Lists web features used on the page and their Baseline status as of 2026-07-15. [Learn more about Baseline.](#) Unscored

☒ Show 3rd-party resources (13)

Web-features	Baseline Status	Source
caicaramarketing.com.br 1st Party		
background-clip-text	Limited Availability	/sobre:-1:-2 (staging.caicaramarketing.com.br)
text-wrap-pretty	Limited Availability	/sobre:-1:-2 (staging.caicaramarketing.com.br)
backdrop-filter	Newly Available (2024-09-16)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
registered-custom-properties	Newly Available (2024-07-09)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
text-wrap-balance	Newly Available (2024-05-13)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
has	Widely Available (2023-12-19)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
color-mix	Widely Available (2023-05-09)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
outline	Widely Available (2023-03-27)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
forced-colors	Widely Available (2022-09-12)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
individual-transforms	Widely Available (2022-08-05)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
cascade-layers	Widely Available (2022-03-14)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
appearance	Widely Available (2022-03-14)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
focus-visible	Widely Available (2022-03-14)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
logical-properties	Widely Available (2021-09-20)	/sobre:-1:-2 (staging.caicaramarketing.com.br)

aspect-ratio	✓ (2021-09-20)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
file-selector-button	✓ Widely Available (2021-04-26)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
where	✓ Widely Available (2021-01-21)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
is	✓ Widely Available (2021-01-21)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
not	✓ Widely Available (2021-01-21)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
clip-path	✓ Widely Available (2021-01-21)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
text-underline-offset	✓ Widely Available (2020-11-19)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
nullish-coalescing	✓ Widely Available (2020-09-16)	/sobre:1:0 (staging.caicaramarketing.com.br)
logical-assignments	✓ Widely Available (2020-09-16)	/sobre:1:0 (staging.caicaramarketing.com.br)
webp	✓ Widely Available (2020-09-16)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
js-modules	✓ Widely Available (2018-05-09)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
grid	✓ Widely Available (2017-10-17)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
flexbox	✓ Widely Available (2015-09-30)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
text-indent	✓ Widely Available (2015-07-29)	/sobre:-1:-2 (staging.caicaramarketing.com.br)
Cloudflare Utility		
long-animation-frames	✗ Limited Availability	/beacon.min.js/v4513226....:1:2023 (static.cloudflareinsights.com)
layout-instability	✗ Limited Availability	/beacon.min.js/v4513226....:1:2023 (static.cloudflareinsights.com)
Unattributable		
requestidlecallback	✗ Limited Availability	_lighthouse-eval.js:9:109



beforeunload	Limited Availability	/_preview/C4ACQlpL.js:83:17045 (stcdn.leadconnectorhq.com)
cookie-store	Limited Availability	/_preview/C4ACQlpL.js:6:14153 (stcdn.leadconnectorhq.com)
display-mode	Limited Availability	/chat-widget/p-Do7bswAW.js:4:1616 (widgets.leadconnectorhq.com)
abortsignal-any	Newly Available (2024-03-19)	/_preview/C4ACQlpL.js:6:7328 (stcdn.leadconnectorhq.com)
dir-pseudo	Widely Available (2023-12-07)	/chat-widget/p-Do7bswAW.js:8:3348 (widgets.leadconnectorhq.com)
constructed-stylesheets	Widely Available (2023-03-27)	/chat-widget/p-Do7bswAW.js:8:2160 (widgets.leadconnectorhq.com)
intersection-observer	Widely Available (2019-03-25)	/_preview/C4ACQlpL.js:66:21011 (stcdn.leadconnectorhq.com)
aborting	Widely Available (2019-03-25)	/_preview/C4ACQlpL.js:6:5626 (stcdn.leadconnectorhq.com)
template	Widely Available (2015-11-12)	/_preview/C4ACQlpL.js:3:44617 (stcdn.leadconnectorhq.com)
request-animation-frame	Widely Available (2015-07-29)	/chat-widget/p-5ff9a208.entry.js:1:76945 (widgets.leadconnectorhq.com)
Unpkg Cdn		
text-wrap	Newly Available (2024-10-17)	...umd/react-dom.production.min.js:30:468 (unpkg.com)

GENERAL

☐ Detected JavaScript libraries

All front-end JavaScript libraries detected on the page. [Learn more about this JavaScript library detection diagnostic audit.](#)

PASSED AUDITS (13)

[Hide](#)

● Uses HTTPS [^](#)

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding [mixed content](#), where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more about HTTPS.](#)

● Avoids deprecated APIs [^](#)

Deprecated APIs will eventually be removed from the browser. [Learn more about deprecated APIs.](#)

● Avoids third-party cookies [^](#)

Third-party cookies may be blocked in some contexts. [Learn more about preparing for third-party cookie restrictions.](#)

● Allows users to paste into input fields [^](#)

Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. [Learn more about user-friendly input fields.](#)

● Avoids requesting the geolocation permission on page load [^](#)

Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. [Learn more about the geolocation permission.](#) Also consider using the `<geolocation>` element.

● Avoids requesting the notification permission on page load [^](#)

Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. [Learn more about responsibly getting](#)

● Displays images with correct aspect ratio ^

Image display dimensions should match natural aspect ratio. [Learn more about image aspect ratio.](#)

● Serves images with appropriate resolution ^

Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. [Learn how to provide responsive images.](#)

● Page has the HTML doctype ^

Specifying a doctype prevents the browser from switching to quirks-mode. [Learn more about the doctype declaration.](#)

● Properly defines charset ^

A character encoding declaration is required. It can be done with a `<meta>` tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. [Learn more about declaring the character encoding.](#)

● No browser errors logged to the console ^

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. [Learn more about this errors in console diagnostic audit](#)

● No issues in the [Issues](#) panel in Chrome Devtools ^

Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

● Page has valid source maps ^

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. [Learn more about source maps.](#) Unscored

...1.12.41/libphonenumber-
js.min.js (stcdn.leadconnectorhq.com)

...1.12.41/libphonenumber-
js.min.js.map (stcdn.leadconnectorhq.com)

SyntaxError: Unexpected token '<', "<?xml
vers"... is not valid JSON

Unpkg [Cdn](#)

...umd/lucide.js (unpkg.com)

...umd/lucide.js.map (unpkg.com)

NOT APPLICABLE (1)

[Hide](#)

☐ Redirects HTTP traffic to HTTPS

^

Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. [Learn more.](#) [Unscored](#)



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#). [Learn more about Google Search Essentials.](#)

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

[Hide](#)

☐ Structured data is valid

^

Run the [Structured Data Testing Tool](#) to validate structured data. [Learn more about Structured Data.](#) [Unscored](#)

PASSED AUDITS (10)

[Hide](#)
● Page isn't blocked from indexing ^

Search engines are unable to include your pages in search results if they don't have permission to crawl them. [Learn more about crawler directives.](#)

● Document has a `<title>` element ^

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles.](#)

● Document has a meta description ^

Meta descriptions may be included in search results to concisely summarize page content. [Learn more about the meta description.](#)

● Page has successful HTTP status code ^

Pages with unsuccessful HTTP status codes may not be indexed properly. [Learn more about HTTP status codes.](#)

● Links have descriptive text ^

Descriptive link text helps search engines understand your content. [Learn how to make links more accessible.](#)

● Links are crawlable ^

Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. [Learn how to make links crawlable](#)

● robots.txt is valid ^

If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. [Learn more about robots.txt.](#)

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#)

● Document has a valid [hreflang](#) ^

hreflang links tell search engines what version of a page they should list in search results for a given language or region. [Learn more about hreflang.](#)

● Document has a valid [rel=canonical](#) ^

Canonical links suggest which URL to show in search results. [Learn more about canonical links.](#)

■ 2/3

Agentic Browsing

These checks ensure high-quality, [browsable websites for AI agents](#) and validate the correctness of WebMCP integrations. This category is still under development and subject to change.

AGENT ACCESSIBILITY

▲ llms.txt does not follow recommendations ^

If your llms.txt file does not follow recommendations, large language models may not be able to understand how you want your website to be crawled or used for training. The [llms.txt](#) file should be a Markdown file containing at least one H1 header. [Learn more about the llms.txt audit.](#)

These audits highlight best practices for improving the accessibility of the website for AI agents.

PASSED AUDITS (2)

[Hide](#)

- Accessibility tree is well-formed — All audits passed ^

A well-formed [accessibility tree](#) helps AI agents to navigate and interact with the page.

- Cumulative Layout Shift — 0.003 ^

Cumulative Layout Shift measures the movement of visible elements within the viewport. [Learn more about the Cumulative Layout Shift metric.](#)

NOT APPLICABLE (3)

[Hide](#)

- WebMCP form coverage ^

Consider adding [WebMCP](#) annotations to the forms listed below. This helps AI agents identify and interact with these forms more reliably. Unscored

- WebMCP tools registered ^

Lists the [WebMCP tools](#) registered at the time of analysis. Unscored

- WebMCP schemas are valid ^

Valid [WebMCP schemas](#) are required for AI agents to understand and interact with tools correctly. Please fix any errors or warnings reported by the browser. Unscored

More on PageSpeed Insights

[What's new](#)
[Documentation](#)

Related Content

[Updates](#)
[Web Fundamentals](#)

Connect

[Twitter](#)
[Youtube](#)

Mailing list

 for Developers

[Chrome](#)

[Firebase](#)

[All products](#)

Terms and Privacy Policy

For details, see the [Google Developers Site Policies](#).