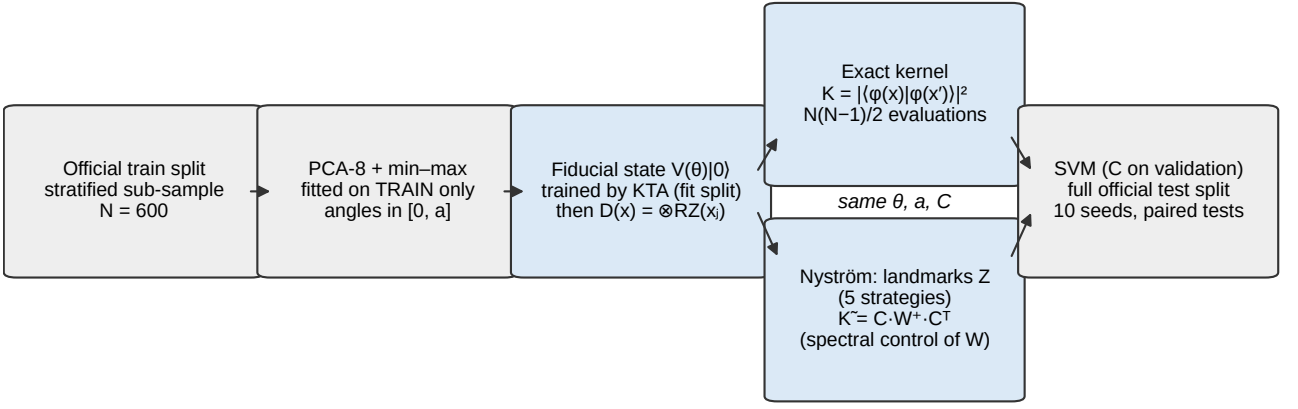

Baselines on the same features and splits: linear SVM · RBF SVM · logistic regression · RBF Nyström (same landmarks) · random Fourier features (D = m).
Noise model: each estimated fidelity → Binomial(S, K)/S; depolarising K → (1 − λ)K + λ/2ⁿ.