
(a) This work: V(θ) on $|0\rangle^n$ before the data $D(x) = \otimes RZ(x_j)$



(b) Previous construction: RY(θ), CNOTs after the encoding (cancel)

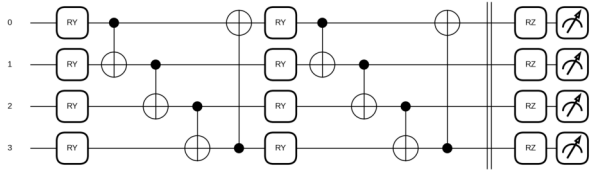