


The interface, end to end

What each part hands to the next, and which side of the air gap it sits on

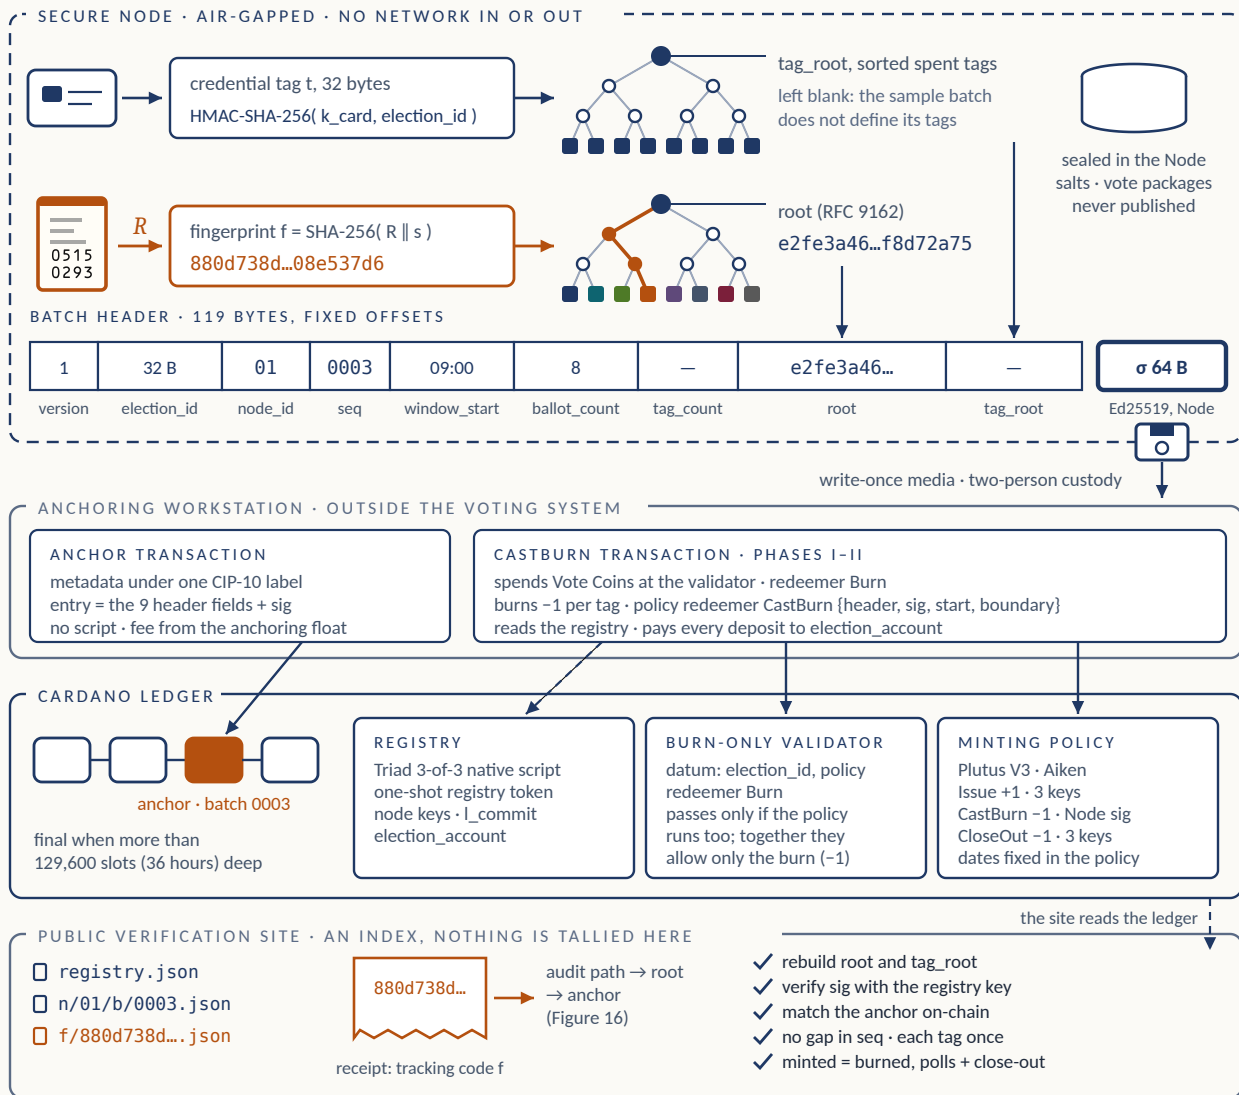

$$\sigma = \text{Ed25519}(k_{\text{Node}}, \text{header})$$

header — 119 bytes, nine fixed fields

σ — sig, the 64-byte signature

k_{Node} — the Node's private key, kept in the Node;
 its public key is in the registry

Every batch record on the chain was signed inside the Node, and nothing on it says how anyone voted.

The sample batch (Sample Node 01 · batch 0003 · 09:00–10:00 · 8 ballots; a real batch normally holds at least 100). Byte layouts, datums and redeemers are in the Interface Specification, where proposals are marked P.

Check it: the root $e2fe3a46\dots f8d72a75$ rebuilds from the eight published fingerprints (Reader Kit). The sample batch does not define its tags or signature, so those fields show no value.