


- Preemption = CPU given to another process (interrupt)
 non-cooperative (no interruption) / OS = preemptive (interrupts other processes)
1. ? 6/10 → regex (A odd, B even, nothing after)
 2. ✓ 4.25/10 → Two grep commands, only wrote one, should have been 5/10.
 3. ~ 5/10 → sed: A, B
 4. ~ 10/10
 - ✓ 5. - 10/10

6. ✓ ~ 8/10 → ?
7. ? 1/10
8. ✓ ~ 8/10

first file ← second
 second ← third (⇒) 3 all three. → needs command (cat, for example)

- ~ 9. ? 5/10
- ✓ 10. ? 4/10 → I wrote (7) but it was a close before the loop and then it could not read from it after (should have been nothing if).
- ✓ 11. ✓ 9/10 → file also how what happens (file/device/terminal) → should have been 10/10

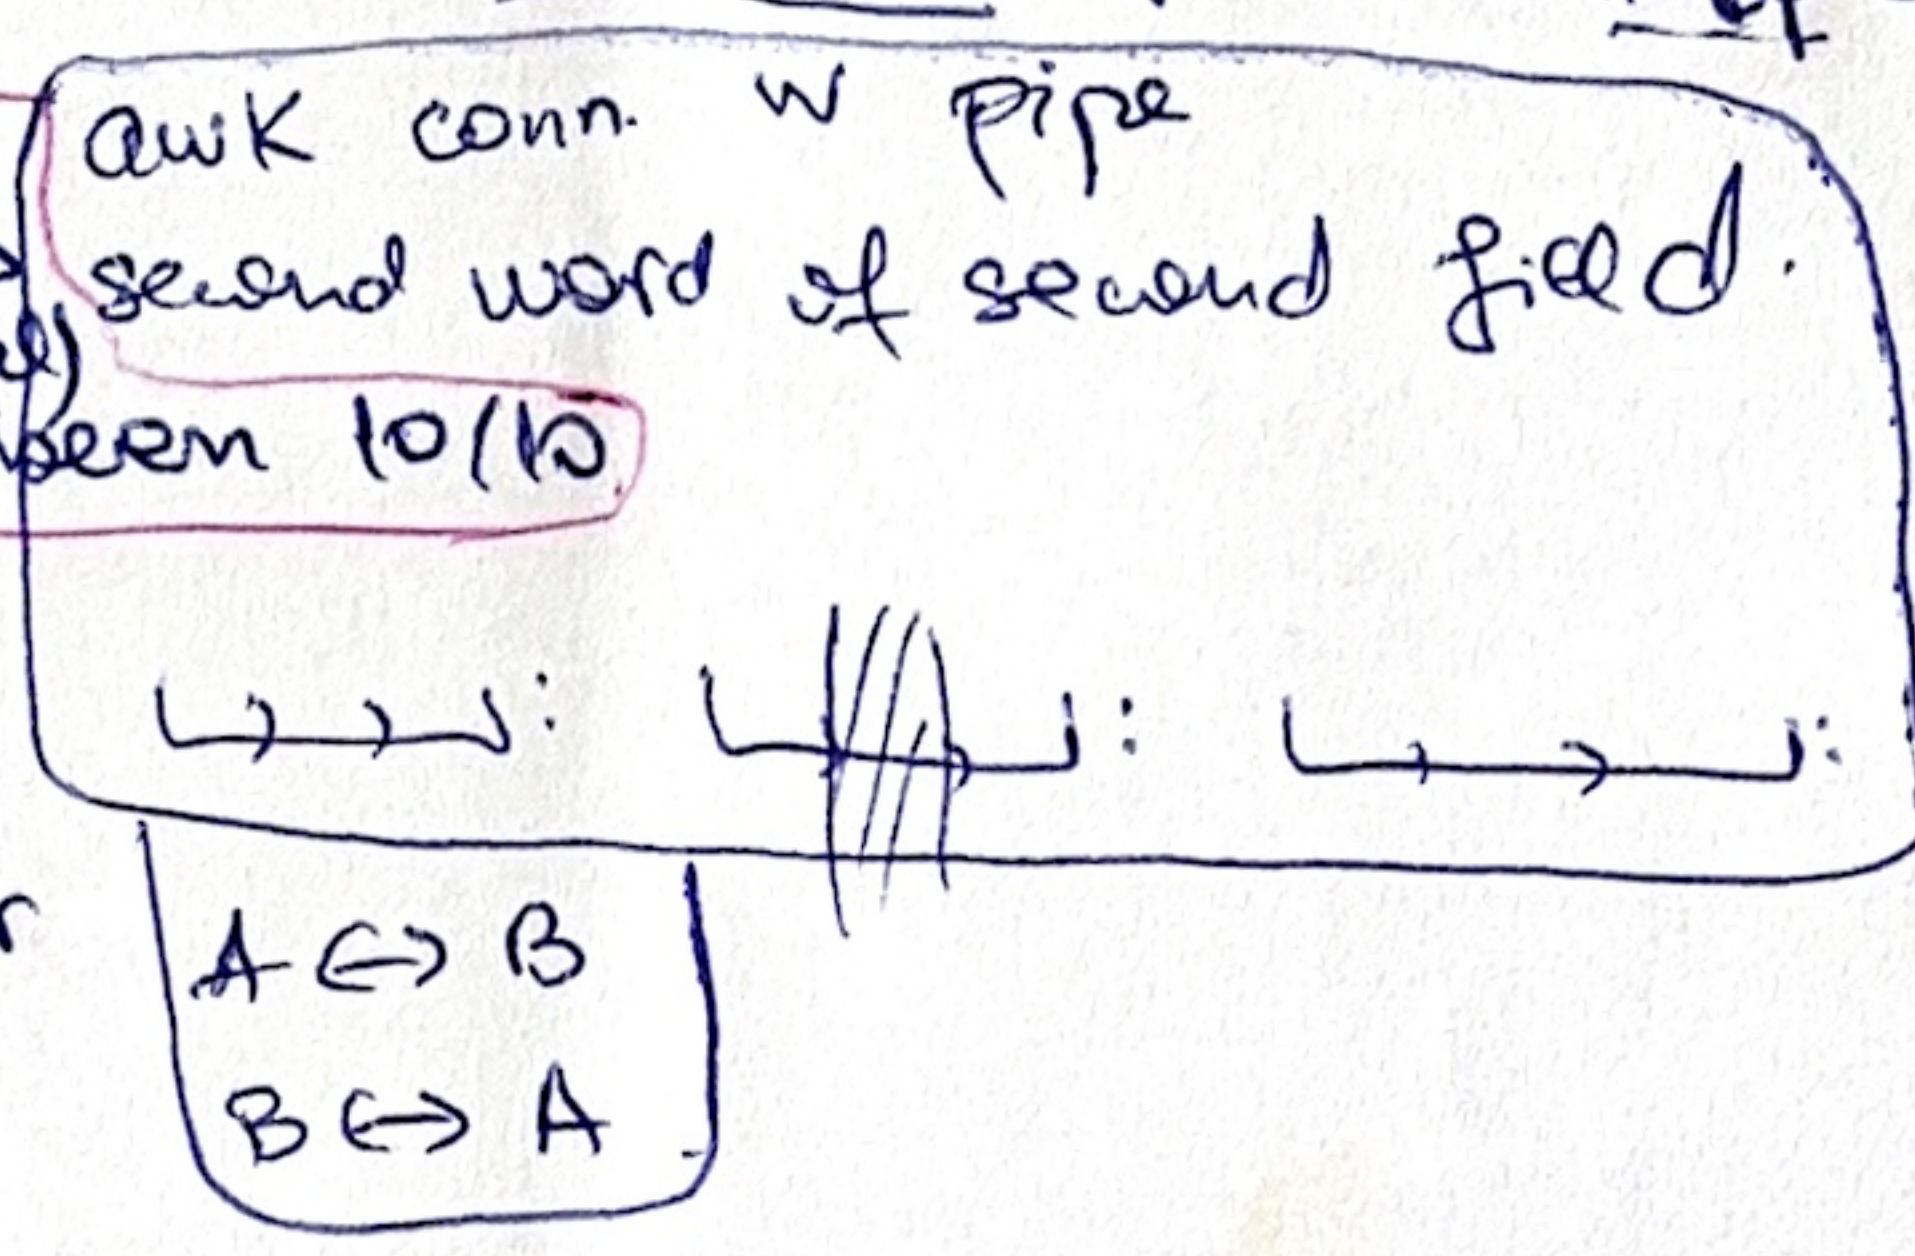


- ~ 12. ? 8/10
- ~ 13. ? 0/10
- ~ 14. ? 6/10
- ✓ 15. ✓ + more d. 4/10 → fair
- ✗ - 0/10

17. ✓ + more d. 10/10
18. ✓ + more detail 10/10

19. ✓ 10/10
20. ✓ 8/10 → fair (symbolic links / hard links → be more specific (decrease counter))

10 62-
 61- 37
 32 25
 24

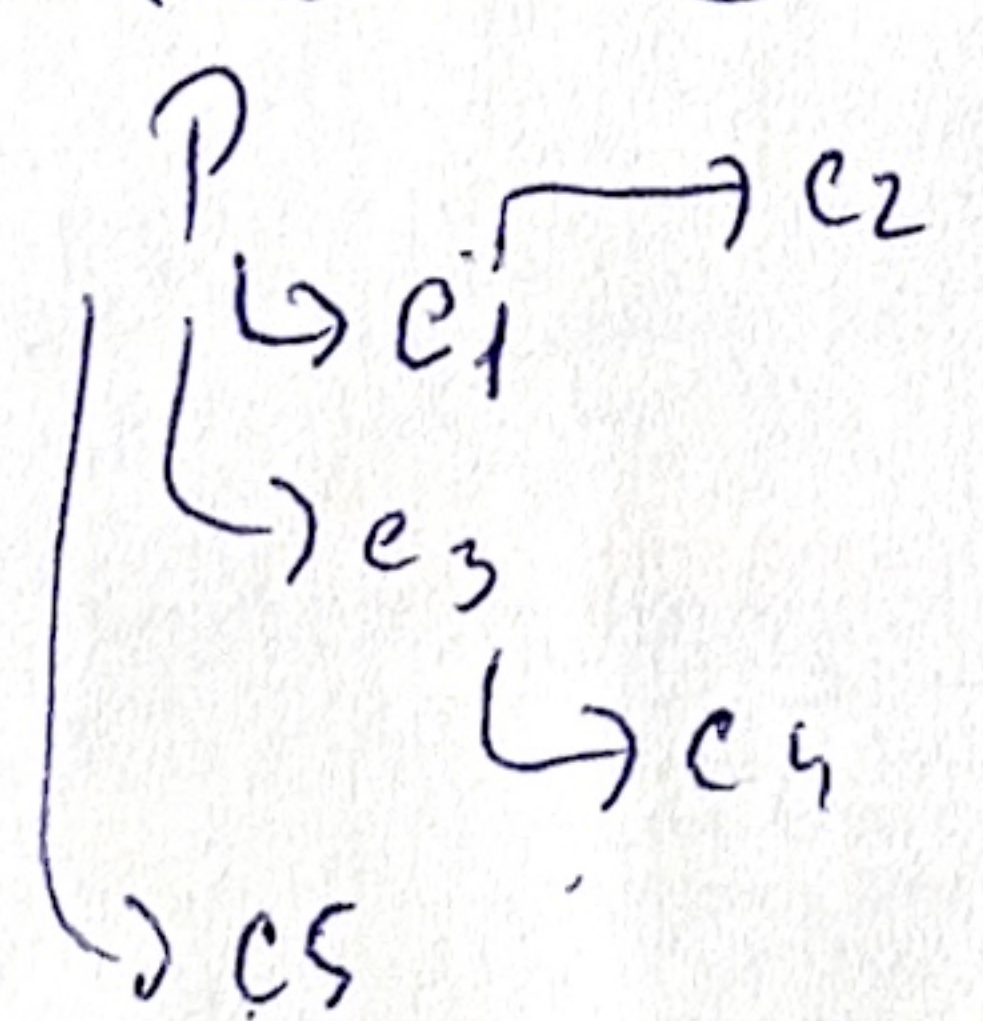

Questions:

- popen, counter
- exec
- redirect into file
- hard/symbolic link
- field separators (awk)

Two grep commands, not one
 [A]*([B]{2,3})*\$ no other stuff after
 put A without [A] (wrote 2 commands, one does half, the other the other half)
 append to file (>) needs command
 "\$f1" > "\$f2"

sed 's/A/B/g' | 's/B/A/g'
 wrong this transforms everything in A; it should do ABBA → BAAB
 use -y But WHAT THEY DO?

rwlocks = extension of mutex, concurrency was the answer (I answered if they can be/cannot be replaced, but should have explained the effect (I said) it cannot because sem. port allows one only, rwlocks more but that rlock is actually a mutex (bin. semaphore?) so it can be replaced with sem. port
 regex with (?!.*) was not needed,