


main.cpp, dynamicArray.h, dynamicArray.cpp

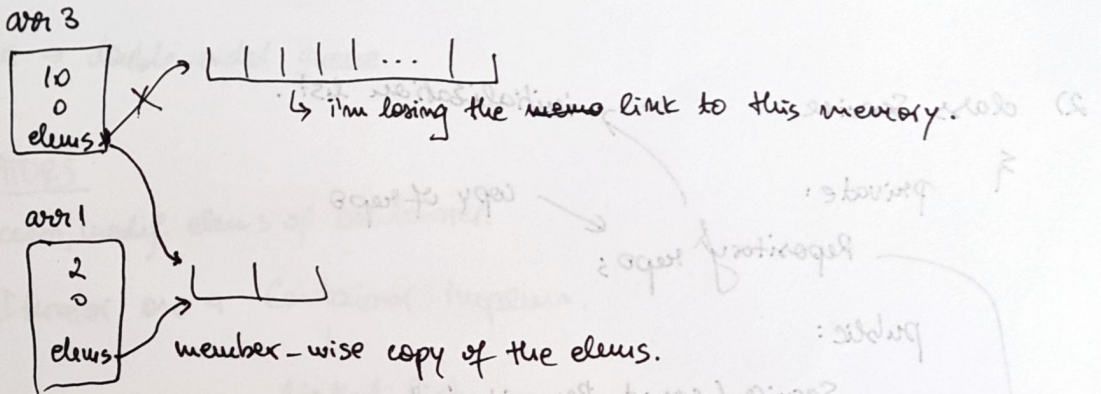

dynamicArray arr3{10}; → CONSTRUCT.

arr3 = arr1; → assign

! Try to debug


arr1	address
arr3	address
elems	

! Don't rely on the assignment operator given by compiler.

↓
define it yourself!

arr3 = arr1

arr3.operator=(arr1);

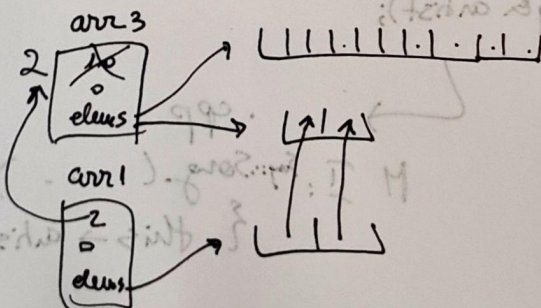

multiple assignment

arr3 = arr2 = arr1;

arr3.operator = (arr2.operator = (arr1));

2) class Service

{

private:

Repository repo;

public:

Service(const Repository &

STORE A REFERENCE? Repository is a reference.

⇓

initialise immediately through an init. list

Service::Service (Repository & repo) { ...

class Song {

private:

std::string artist;

public:

Song(const std::string & artist);

};

instead of array of characters

→ you have everything:

- assign

- destroy

- ...

M II: Song (...)

{ this → artist = artist;

M II: ... : artist {artist}

}

TEMPLATES

- Sequence containers → ordered in linear sequence.
- Associative containers →
- Container adapters →

deque → double-ended queue.

ITERATORS

↳ access, modif. elems of container.

C++ Iterator on a Container implem.

↓

linked-list

/dynamic array

std::vector

vector<int> integers {1, 2, 3, 4, 5};

vector<string> strings {"Hello", "hey"};