


Topological sorting for DAG using DFS algorithm: (8,12)

① manual execution calls

② graph

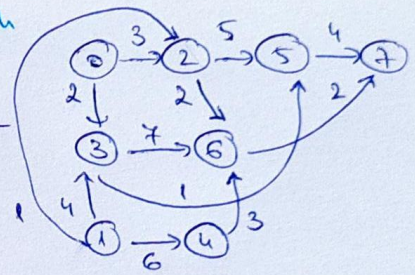

③ input file

```

8 12
0 2 3
0 3 2
2 5 5
2 6 2
3 6 4
1 3 4
1 2 1
3 5 1
5 7 4
6 4 2
1 4 6
4 6 3
  
```

	x, y	inProcess	fullyProcessed	sorted	ok
initialization	-	{ }	{ }	[]	-
TopSortDFS(G, 0, [], { }, { })	x=0	{ } {0} { }	{ } {0}	[] [0]	true
...(G, 1, [0], {0}, { })	x=1	{ } {1} { }	{0} {0} {0,1}	{0} [0] [0,1]	true
...(G, 3, [0,1], {0,1}, { })	x=3 y=0 y=1	{ } {3} {3}	{0,1} {0,1} {0,1}	{0} [0,1] [0,1]	true
...(G, 4, [0,1,3], {0,1,3}, { })	x=4 y=1	{ } {4}	{0,1,3} {0,1,3,4}	[0,1,3] [0,1,3,4]	true
...(G, 2, [0,1,3,4], {0,1,3,4}, { })	x=2 y=0 y=1	{ } {2} { }	{0,1,3,4} {0,1,3,4,2}	[0,1,3,4] [0,1,3,4,2]	true
...(G, 5, [0,1,3,4,2], {0,1,3,4,2}, { })	x=5 y=2 y=3	{ } {5}	{0,1,3,4,2} {0,1,3,4,2,5}	[0,1,3,4,2] [0,1,3,4,2,5]	true
...(G, 6, [0,1,3,4,2,5], {0,1,3,4,2,5}, { })	x=6 y=2 y=3 y=4	{ } {6}	{0,1,3,4,2,5} {0,1,3,4,2,5,6}	[0,1,3,4,2,5] [0,1,3,4,2,5,6]	true
...(G, 7, [0,1,3,4,2,5,6], {0,1,3,4,2,5,6}, { })	x=7 y=5, y=6	{ } { }	{0,1,3,4,2,5,6} {0,1,3,4,2,5,6,7}	[0,1,3,4,2,5,6] [0,1,3,4,2,5,6,7]	true