Canvas P15 — Production Part 2: API Actions, Layers Multi-Select, Templates

Branch feat/canvas-p3 · Flutter 3.47.2 · Release bundle, 1440×900 · API demo: card + =userName binding + Load-users apiCall flow · Audit 0/0/1 live · Zero page errors

Track	What landed	Tests
S1 — apiCall	apiCall{url,GET|POST,headers,body,saveTo}; 10s timeout, skip+note policy; MockClient preview; async codegen	core 257 / app 768
S2 — layers	Multi-aware signature (compat primary kept); Ctrl-toggle, Shift-range, count header + Group/Ungroup/Delete; selec	+10
S3 — templates	Onboarding/Settings/Profile starters (≤2 screens, ≤8 nodes); dialog polish (headers, empty states, 70% scroll); brie	+12
Follow-up	Audit shell wiring (done by coordinator, verified)	—

Repo health: analyze clean both packages; app 768 pass, core 257 pass. Research basis: FlutterFlow API integration + templates + collaboration patterns; Android Studio interactive-preview + audit precedent.

1 · Dark — apiCall flow, bound label, live Audit + Export

Load-users button runs apiCall → saveTo userName → snackbar; prompt documents the var + multi-step flow; no network fires in the editor (preview-only execution).

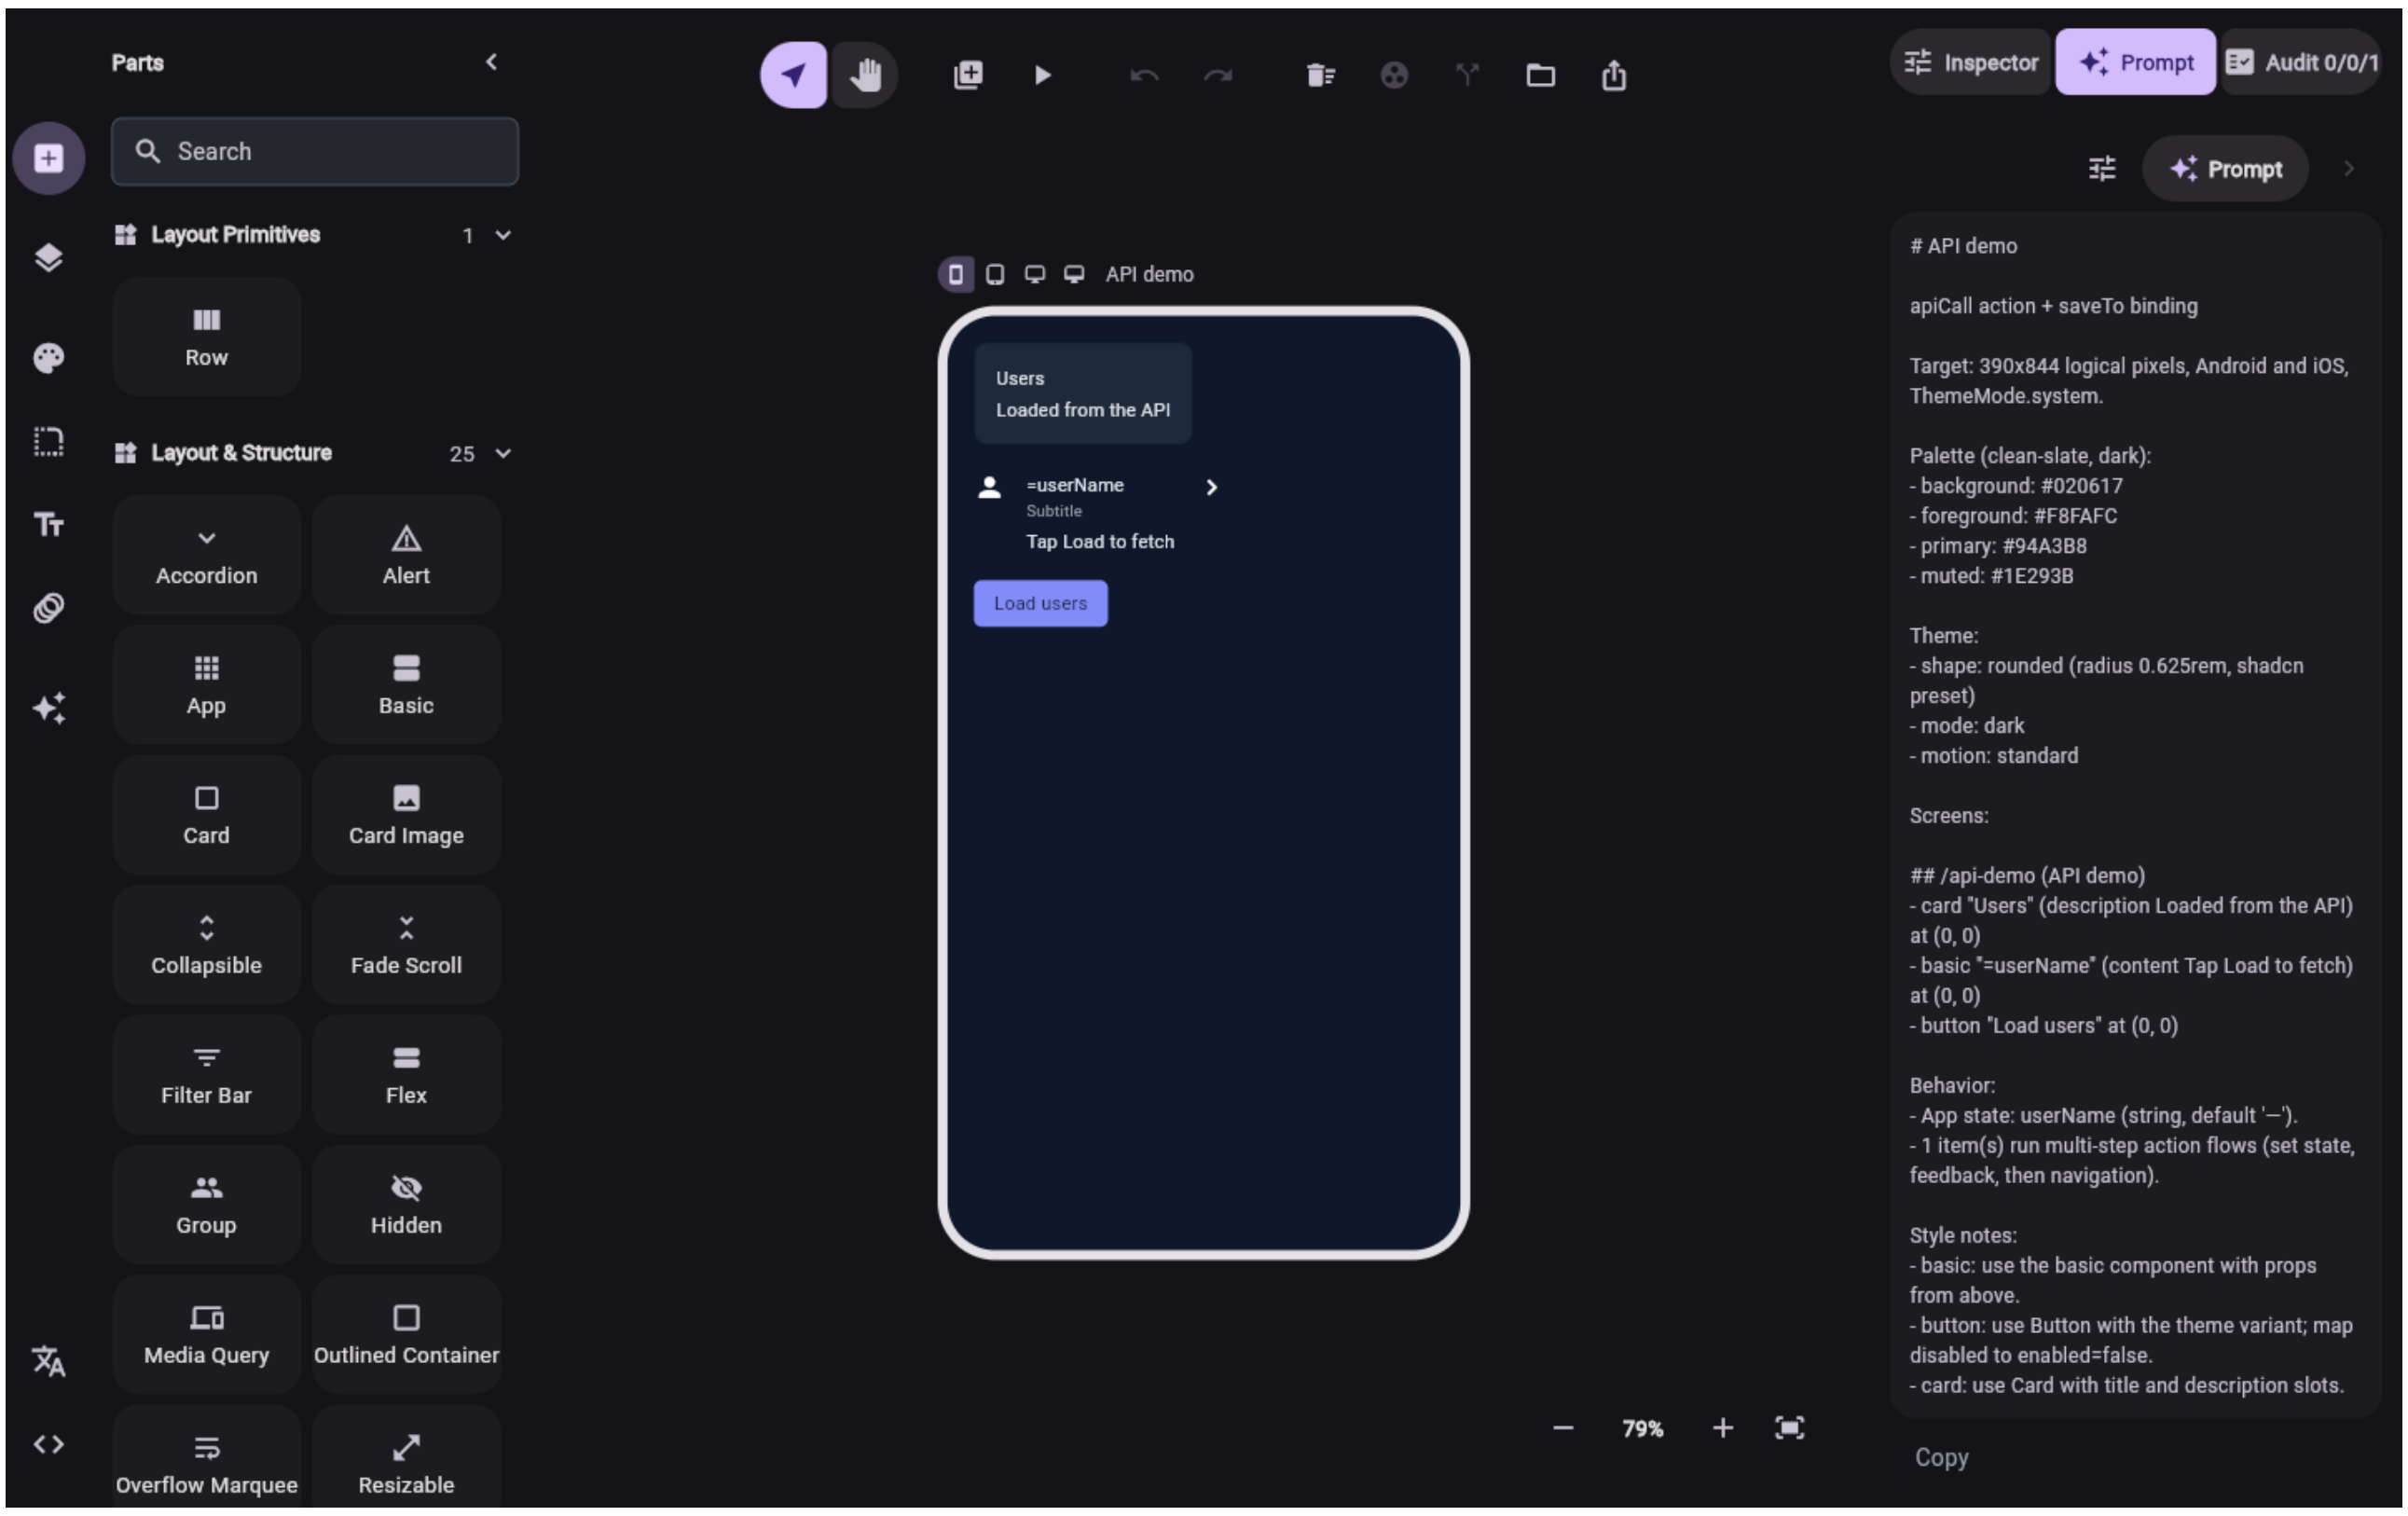

```
# API demo

apiCall action + saveTo binding

Target: 390x844 logical pixels, Android and iOS,
ThemeMode.system.

Palette (clean-slate, dark):
- background: #020617
- foreground: #F8FAFC
- primary: #94A3B8
- muted: #1E293B

Theme:
- shape: rounded (radius 0.625rem, shadcn
preset)
- mode: dark
- motion: standard

Screens:

## /api-demo (API demo)
- card "Users" (description Loaded from the API)
at (0, 0)
- basic "=userName" (content Tap Load to fetch)
at (0, 0)
- button "Load users" at (0, 0)

Behavior:
- App state: userName (string, default '—').
- 1 item(s) run multi-step action flows (set state,
feedback, then navigation).

Style notes:
- basic: use the basic component with props
from above.
- button: use Button with the theme variant; map
disabled to enabled=false.
- card: use Card with title and description slots.
```

2 · Light / supabase — same doc, consistent

Preset-following Load-users button; bindings raw in editor by design; no stray colors, no page errors.

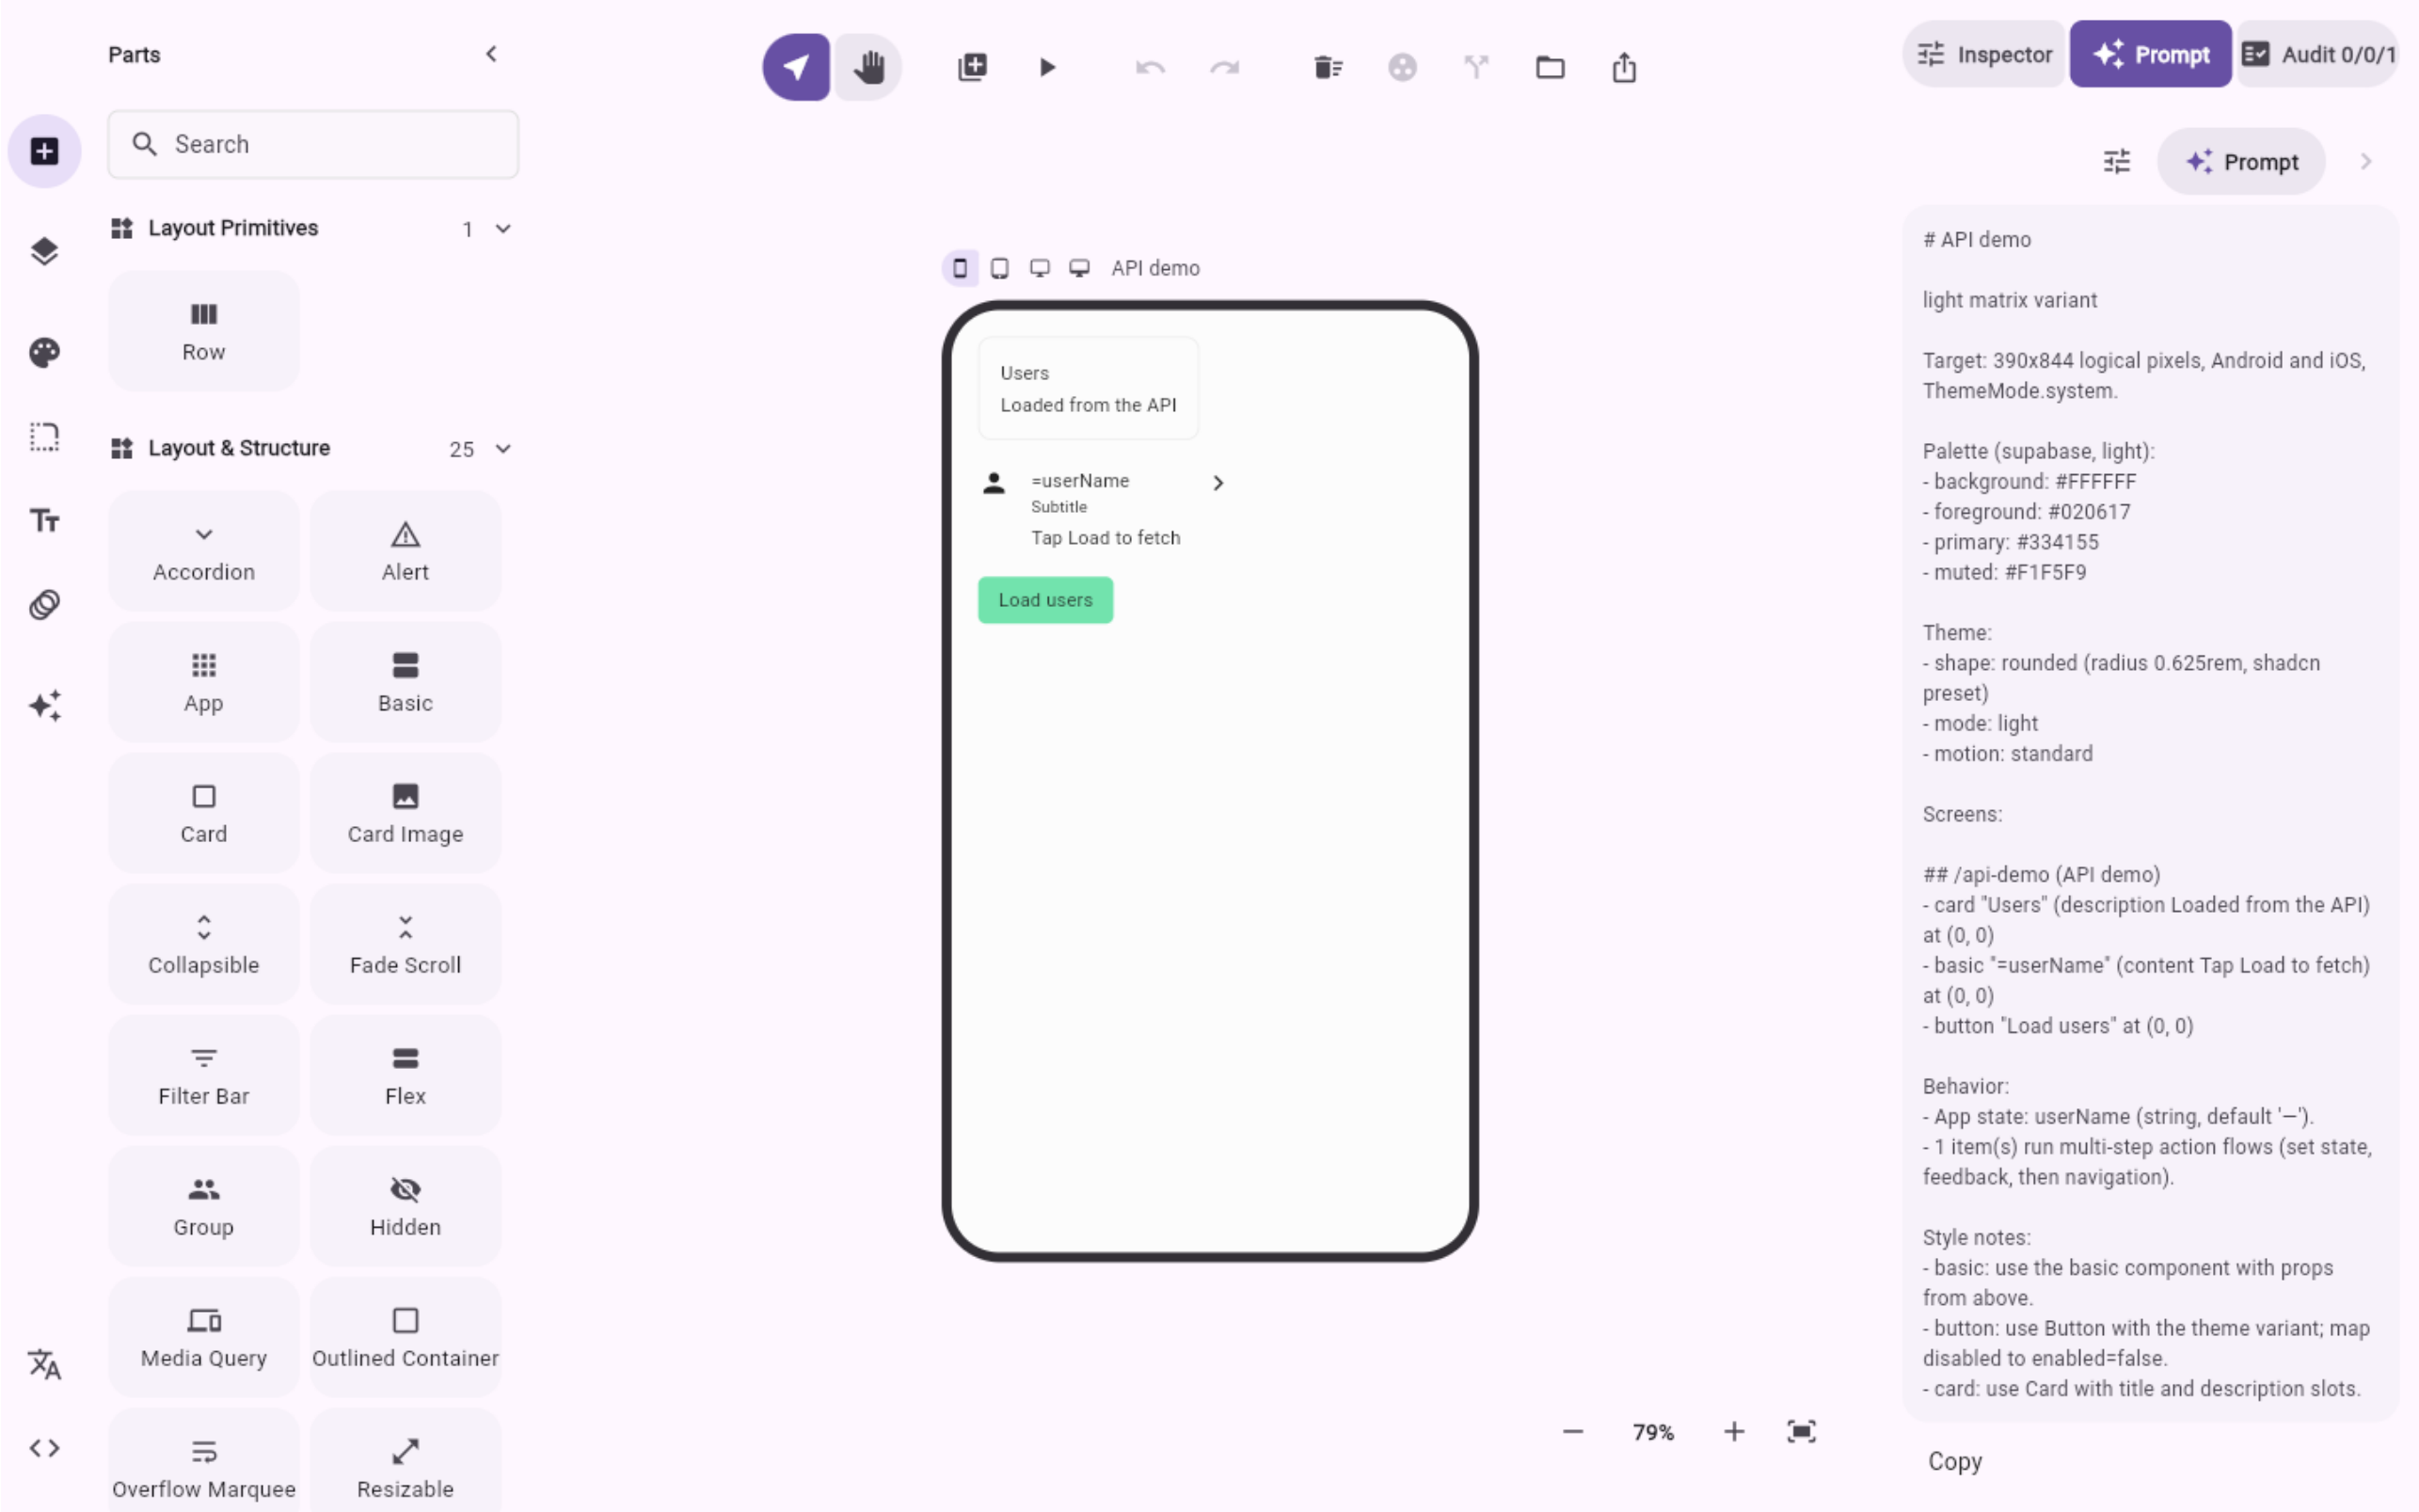

```
# API demo

light matrix variant

Target: 390x844 logical pixels, Android and iOS, ThemeMode.system.

Palette (supabase, light):
- background: #FFFFFF
- foreground: #020617
- primary: #334155
- muted: #F1F5F9

Theme:
- shape: rounded (radius 0.625rem, shadcn preset)
- mode: light
- motion: standard

Screens:

## /api-demo (API demo)
- card "Users" (description Loaded from the API) at (0, 0)
- basic "=userName" (content Tap Load to fetch) at (0, 0)
- button "Load users" at (0, 0)

Behavior:
- App state: userName (string, default '—').
- 1 item(s) run multi-step action flows (set state, feedback, then navigation).

Style notes:
- basic: use the basic component with props from above.
- button: use Button with the theme variant; map disabled to enabled=false.
- card: use Card with title and description slots.
```

Remaining production backlog

Animations engine (motion theme is still a label), code-peek panel (select → generated snippet), publish/deploy pipeline, collaboration/branching, auth vaults for API headers, backend collections (Firebase/Supabase) beyond REST. The platform now covers: builder, state, flows, API, preview, devices, themes, export, templates, audit, undo, zero-error codegen.