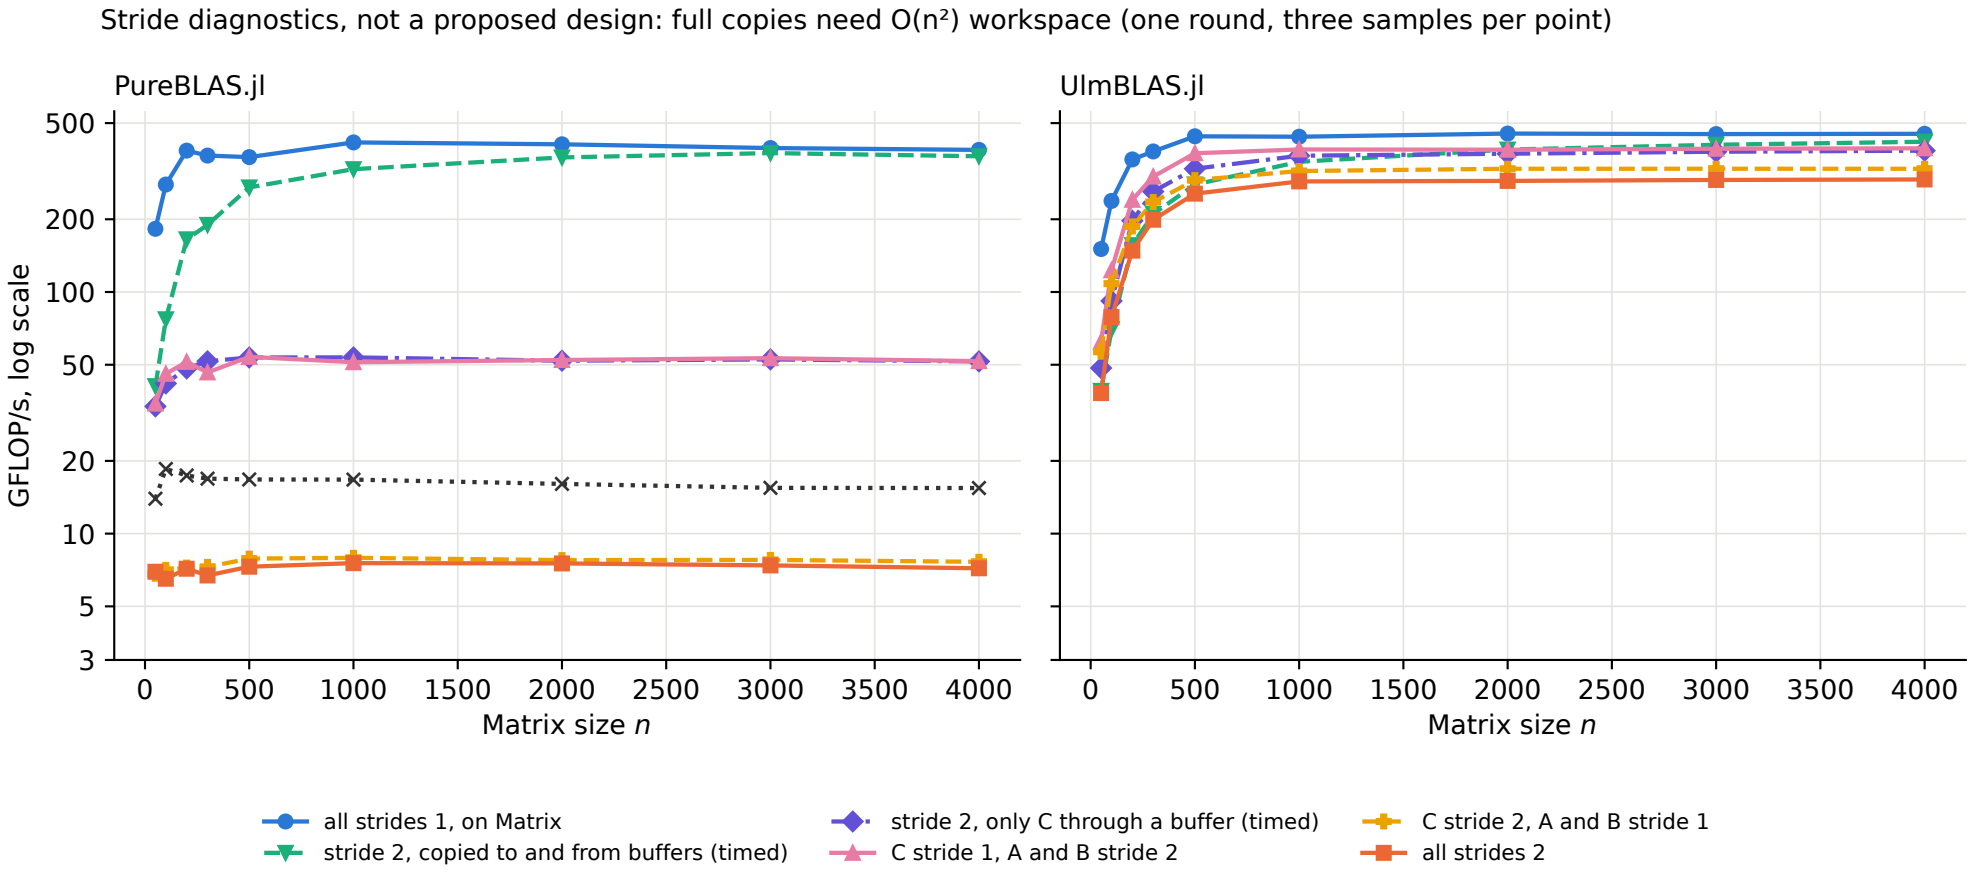
Stride diagnostics, not a proposed design: full copies need O(n²) workspace (one round, three samples per point)
PureBLAS.jl
UlmBLAS.jl
GFLOP/s, log scale
500
200
100
50
20
10
5
3
0
500
1000
1500
2000
2500
3000
3500
4000
Matrix size n
all strides 1, on Matrix
stride 2, copied to and from buffers (timed)
stride 2, only C through a buffer (timed)
C stride 1, A and B stride 2
C stride 2, A and B stride 1
all strides 2