

+ ACCOUNT  
+ LOGIN BASIC  
+ DO STUFF VIA TOKEN

PROTECT ROUTES  
+ DATA + SYSTEM

↓  
app.delete('API/uid:k/:id', AUTH, ...)

app.delete('/\_', AUTH('DELETE'), (k, k, n) => (

C  
P  
P  
P  
D

ACL

→

PUBLIC → READ

EDITOR → C, R, U

ADMIN - C, R, U, D

ADMIN: [...EDITOR, DEC]

RBAC

→ HW →

AUTH('DEC')

$$\left( \begin{array}{l} \text{USER MODE} \\ \text{-- "ROLE"} \\ \text{ROLES MODE} : \text{ROLE (ADMIN)} \\ \text{CAPABILITIES: [-, X, -]} \end{array} \right)$$

JOHN + PW + "user"  $\leftrightarrow$   $\begin{matrix} \text{C} \\ \text{K} \\ \text{S} \\ \text{H} \end{matrix} ?$


MIODSEWALE  
SEE CAPABILITY  $\leftarrow$

SWITCH  
PW \_AUTH\_TOKEN()  
 $\downarrow$   
USER.AUTH\_TOKEN()  
 $\downarrow$   
PW \_AUTHENTICATE()  
Y/N  
Y 'IF' or NO

ROUTER - ROUTER.POST('/PATH', AUTH(' '), (K, R, N)  $\rightarrow$ )  
AUTH, CAP('P')

Cursor selected



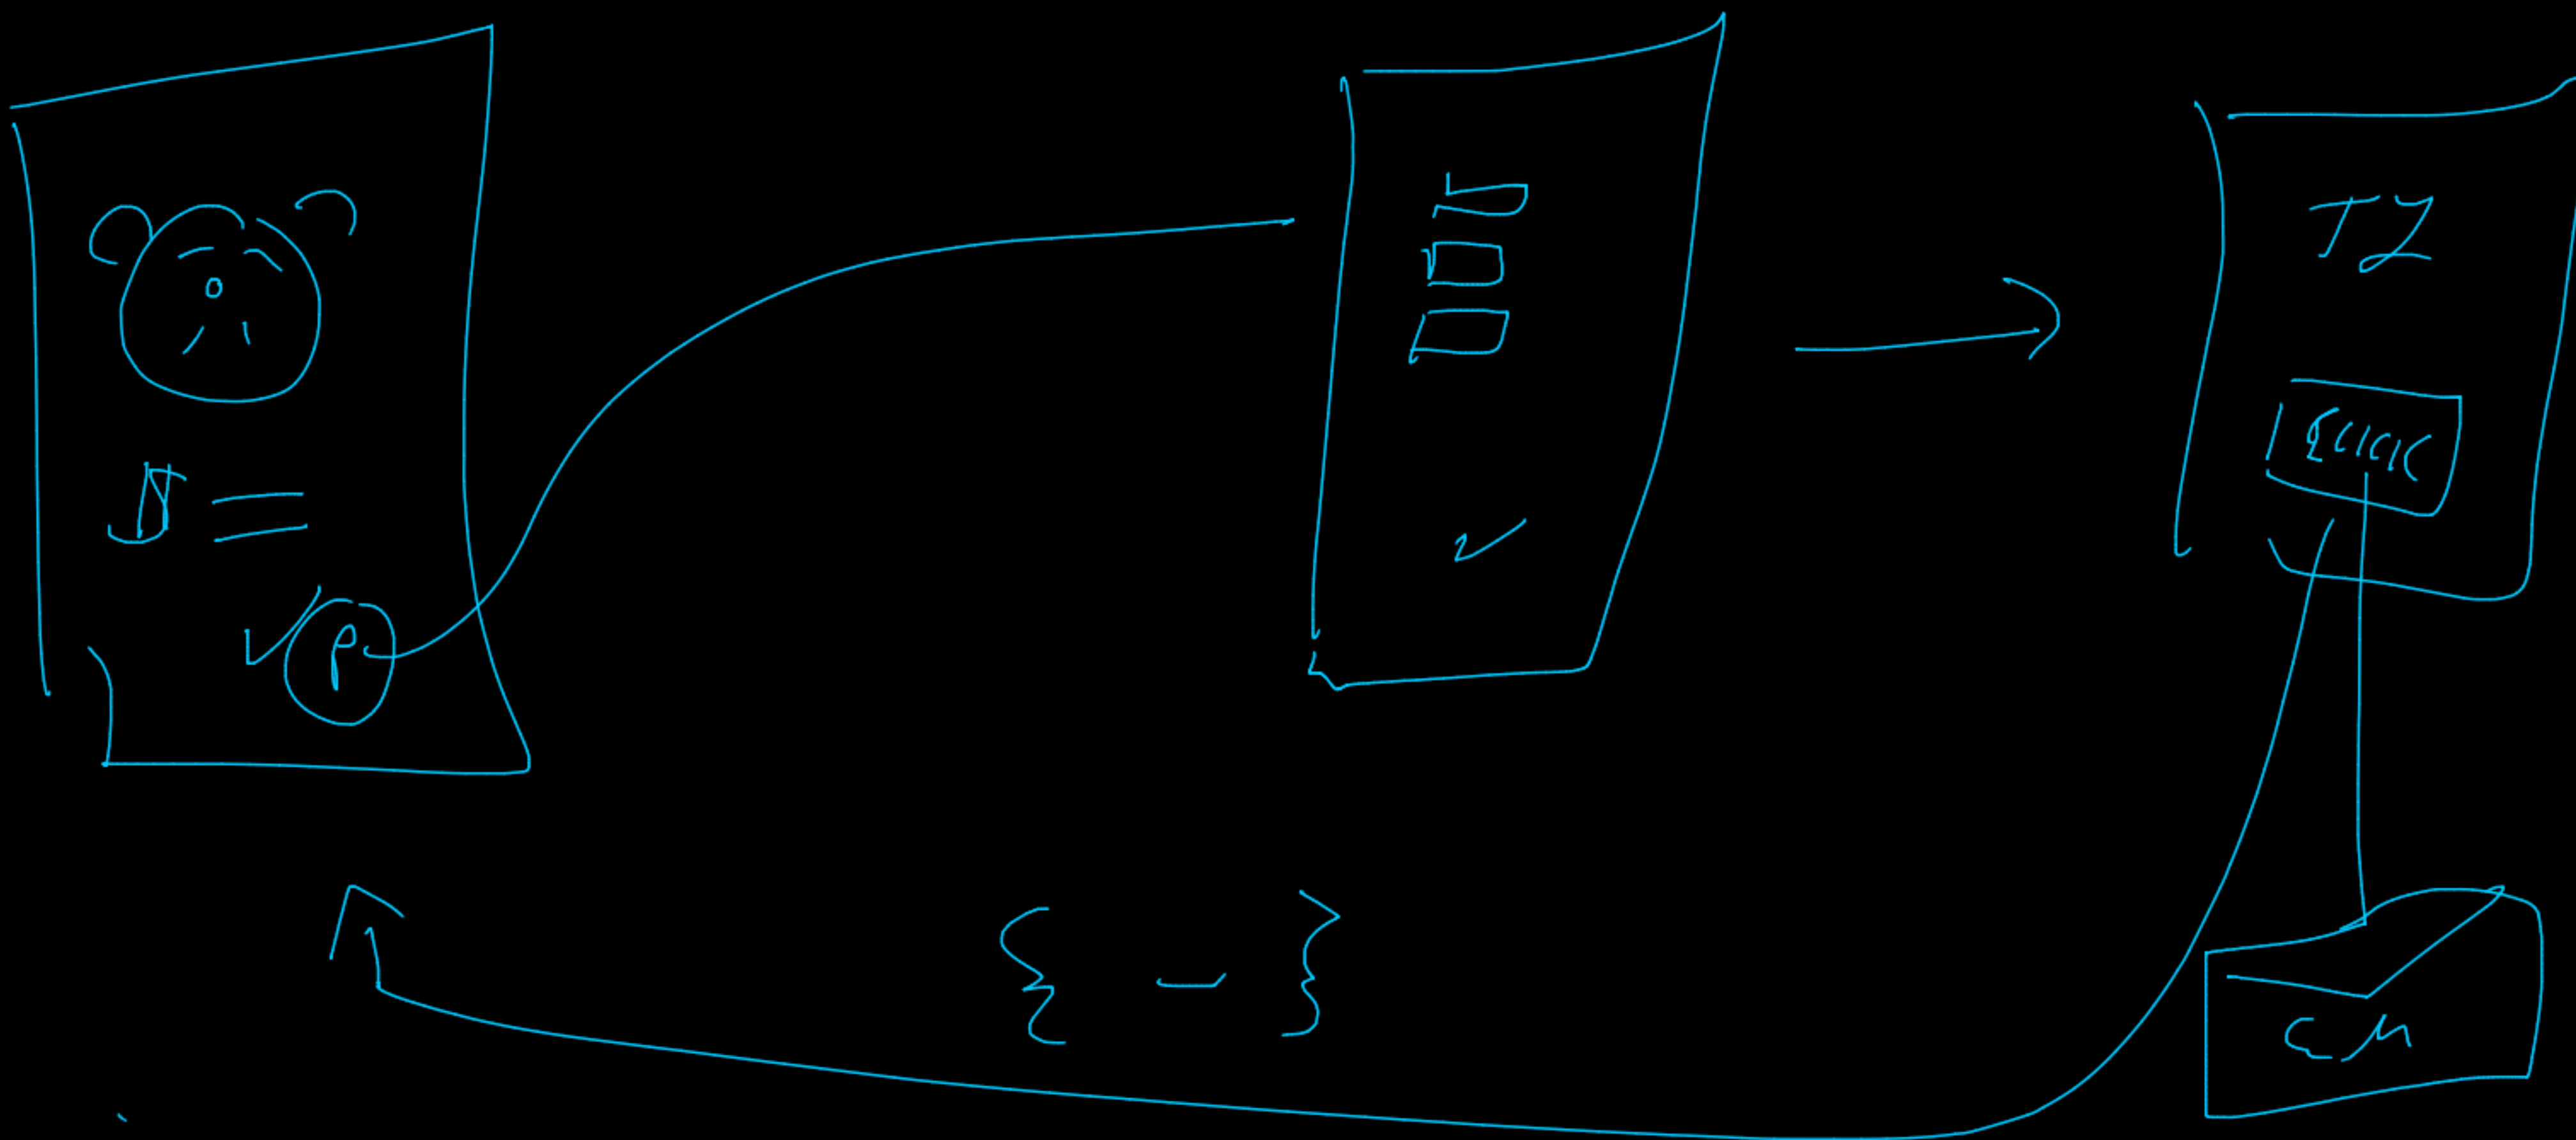

FULL