

✔ APP SCORES



Security Score **33/100**
Trackers Detection **0/432**

📁 FILE INFORMATION

File Name	vulnerable_android_app.apk
Size	5.29MB
MD5	1feed5b0310e0071bee9cfad81cc1d30
SHA1	dd6722b0b68267939e58de01d87af3a252dfa60f
SHA256	2804ec52e422c494bfb1c8b59ddda72d73e309aee093e565842ac0c8269c031c

ℹ APP INFORMATION

App Name	Vulnerable Android App				
Package Name	com.example.vulnapp				
Main Activity	com.example.vulnapp.MainActivity				
Target SDK	34	Min SDK	21	Max SDK	
Android Version Name	1.0	Android Version Code	1		

0 / 1

EXPORTED ACTIVITIES

View All ⌵

0 / 0

EXPORTED RECEIVERS

View All ⌵

0 / 0

EXPORTED SERVICES

View All ⌵

0 / 1

EXPORTED PROVIDERS

View All ⌵

⚙ SCAN OPTIONS

📄 DECOMPILED CODE

🔑 SIGNER CERTIFICATE

```
Binary is signed
v1 signature: True
v2 signature: True
v3 signature: False
v4 signature: False
X.509 Subject: CN=Android Debug, O=Android, C=US
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2026-05-07 17:22:42+00:00
Valid To: 2056-04-29 17:22:42+00:00
Issuer: CN=Android Debug, O=Android, C=US
Serial Number: 0x1
Hash Algorithm: sha256
md5: 39faf1092f3fdbd962228f2c1daeb6ad
sha1: 5414841e57de279cda8ae199e0d9aace49b5d451
sha256: 922dd77a76399dca728aa2e2ec3f74edb125682b21df0bde7ee34ee6ff3e559e
sha512: 6d1b7915f65fac21b89fb052ead129b1593ad45a4c5f12fee8e745e08cdc0816c5fdfd098196d1c09199ef6918cf41ee820e0c697b165a20bd6a797d72e3f0de
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: 1ca36f04fffa8e1e4498ed400f466556f73072dc7ce9131781351e7e2ac57102
Found 1 unique certificates
```

≡ APPLICATION PERMISSIONS

Search:

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
android.permission.ACCESS_NETWORK_STATE	normal	view network status	Allows an application to view the status of all networks.	
android.permission.INTERNET	normal	full Internet access	Allows an application to create network sockets.	
com.example.vulnapp.DYNAMIC_RECEIVER_NOT_EXPORTED_PERMISSION	unknown	Unknown permission	Unknown permission from android reference	

Showing 1 to 3 of 3 entries

 ANDROID API

Search:

API	FILES
Crypto	
HTTPS Connection	
JavaScript Interface Methods	
Local File I/O Operations	
Message Digest	
WebView JavaScript Interface	

Showing 1 to 6 of 6 entries

 BROWSABLE ACTIVITIES

Search:

ACTIVITY	INTENT
No data available in table	

Showing 0 to 0 of 0 entries

 NETWORK SECURITY

Search:

NO	SCOPE	SEVERITY	DESCRIPTION
No data available in table			

Showing 0 to 0 of 0 entries

 CERTIFICATE ANALYSIS

HIGH1

WARNING1

INFO1

Search:

TITLE	SEVERITY	DESCRIPTION
Application signed with debug certificate	high	Application signed with a debug certificate. Production application must not be shipped with a debug certificate.
Application vulnerable to Janus Vulnerability	warning	Application is signed with v1 signature scheme, making it vulnerable to Janus vulnerability on Android 5.0-8.0, if signed only with v1 signature scheme. Applications running on Android 5.0-7.0 signed with v1, and v2/v3 scheme is also vulnerable.
Signed Application	info	Application is signed with a code signing certificate

Showing 1 to 3 of 3 entries

MANIFEST ANALYSIS

HIGH
3**WARNING**
1**INFO**
0**SUPPRESSED**
0Search:

NO	ISSUE	SEVERITY	DESCRIPTION	OPTIONS
1	App can be installed on a vulnerable unpatched Android version 5.0-5.0.2, [minSdk=21]	high	This application can be installed on an older version of android that has multiple unfixed vulnerabilities. These devices won't receive reasonable security updates from Google. Support an Android version => 10, API 29 to receive reasonable security updates.	
2	Clear text traffic is Enabled For App[android:usesCleartextTraffic=true]	high	The app intends to use cleartext network traffic, such as cleartext HTTP, FTP stacks, DownloadManager, and MediaPlayer. The default value for apps that target API level 27 or lower is "true". Apps that target API level 28 or higher default to "false". The key reason for avoiding cleartext traffic is the lack of confidentiality, authenticity, and protections against tampering; a network attacker can eavesdrop on transmitted data and also modify it without being detected.	
3	Debug Enabled For App [android:debuggable=true]	high	Debugging was enabled on the app which makes it easier for reverse engineers to hook a debugger to it. This allows dumping a stack trace and accessing debugging helper classes.	
4	Application Data can be Backed up [android:allowBackup=true]	warning	This flag allows anyone to backup your application data via adb. It allows users who have enabled USB debugging to copy application data off of the device.	

Showing 1 to 4 of 4 entries

</> CODE ANALYSIS

HIGH
2WARNING
5INFO
2SECURE
0SUPPRESSED
0Search:

NO 	ISSUE 	SEVERITY 	STANDARDS 	FILES 	OPTIONS 
1	The App logs information. Sensitive information should never be logged.	info	CWE: CWE-532: Insertion of Sensitive Information into Log File OWASP MASVS: MSTG-STORAGE-3	com/example/vulnapp/MainActivity.java	
2	Hardcoded security mode string in initialization detected.	info	CWE: CWE-1052: Excessive Use of Hard-Coded Literals in Initialization OWASP MASVS: MSTG-CODE-2	com/example/vulnapp/MainActivity.java	
3	Insecure WebView Implementation. Execution of user controlled code in WebView is a critical Security Hole.	warning	CWE: CWE-749: Exposed Dangerous Method or Function OWASP Top 10: M1: Improper Platform Usage OWASP MASVS: MSTG-PLATFORM-7	com/example/vulnapp/MainActivity.java	
4	Ensure that user controlled URLs never reaches the Webview. Enabling file access from URLs in WebView can leak sensitive information from the file system.	warning	CWE: CWE-200: Information Exposure OWASP Top 10: M1: Improper Platform Usage OWASP MASVS: MSTG-PLATFORM-7	com/example/vulnapp/MainActivity.java	

NO 	ISSUE 	SEVERITY 	STANDARDS 	FILES 	OPTIONS 
5	The App uses ECB mode in Cryptographic encryption algorithm. ECB mode is known to be weak as it results in the same ciphertext for identical blocks of plaintext.	high	CWE: CWE-327: Use of a Broken or Risky Cryptographic Algorithm OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-2	com/example/vulnapp/MainActivity.java	
6	The file is World Readable and Writable. Any App can read/write to the file	high	CWE: CWE-276: Incorrect Default Permissions OWASP Top 10: M2: Insecure Data Storage OWASP MASVS: MSTG-STORAGE-2	com/example/vulnapp/MainActivity.java	
7	MD5 is a weak hash known to have hash collisions.	warning	CWE: CWE-327: Use of a Broken or Risky Cryptographic Algorithm OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-4	com/example/vulnapp/MainActivity.java	
8	SHA-1 is a weak hash known to have hash collisions.	warning	CWE: CWE-327: Use of a Broken or Risky Cryptographic Algorithm OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-4	com/example/vulnapp/MainActivity.java	

NO	ISSUE	SEVERITY	STANDARDS	FILES	OPTIONS
9	Hardcoded URL or API endpoint detected.	warning	CWE: CWE-200: Information Exposure OWASP Top 10: M9: Reverse Engineering OWASP MASVS: MSTG-STORAGE-14	com/example/vulnapp/MainActivity.java	

Showing 1 to 9 of 9 entries

SHARED LIBRARY BINARY ANALYSIS

No Shared Objects found.

Search:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
No data available in table									

Showing 0 to 0 of 0 entries

NIAP ANALYSIS v1.3

Search:

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
No data available in table				

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

FILE ANALYSIS

Search:

NO	ISSUE	FILES
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

FIREBASE DATABASE ANALYSIS

Search:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

MALWARE LOOKUP

 APKiD ANALYSISSearch:

DEX	DETECTIONS						
classes.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti-VM Code</td><td>Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check</td></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 2 of 2 entries Previous1Next	FINDINGS	DETAILS	Anti-VM Code	Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check	Compiler	r8
FINDINGS	DETAILS						
Anti-VM Code	Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check						
Compiler	r8						
classes2.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>unknown (please file detection issue!)</td></tr></table> Showing 1 to 1 of 1 entries Previous1Next	FINDINGS	DETAILS	Compiler	unknown (please file detection issue!)		
FINDINGS	DETAILS						
Compiler	unknown (please file detection issue!)						

DEX	DETECTIONS				
classes3.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td> Compiler </td><td>r8 without marker (suspicious)</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Compiler	r8 without marker (suspicious)
FINDINGS	DETAILS				
Compiler	r8 without marker (suspicious)				

Showing 1 to 3 of 3 entries

 BEHAVIOUR ANALYSIS

Search:			
RULE ID	BEHAVIOUR	LABEL	FILES
No data available in table			

Showing 0 to 0 of 0 entries

 ABUSED PERMISSIONS

Top Malware Permissions

android.permission.INTERNET,
android.permission.ACCESS_NETWORK_STATE

2/25 Other Common Permissions

0/44

Malware Permissions are the top permissions that are widely abused by known malware.
Other Common Permissions are permissions that are commonly abused by known malware.

 SERVER LOCATIONS



This app may communicate with the following OFAC sanctioned list of countries.

Search:

DOMAIN	COUNTRY/REGION
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

DOMAIN MALWARE CHECK

Search:

DOMAIN	STATUS	GEOLOCATION
example.com	ok	IP: 172.66.147.243 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map

Showing 1 to 1 of 1 entries

[Previous](#)[1](#)[Next](#)

URLS

Search:

URL	FILE
https://example.com	com/example/vulnapp/MainActivity.java

Showing 1 to 1 of 1 entries

[Previous](#)[1](#)[Next](#)

EMAILS

 TRACKERSSearch:

TRACKER NAME	CATEGORIES	URL
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#) **POSSIBLE HARDCODED SECRETS****A STRINGS****From APK Resource**► Show all **5815** strings**From Code**► Show all **9575** strings**From Shared Objects** **ACTIVITIES**▼ Showing all **1** activities[com.example.vulnapp.MainActivity](#)

 SERVICES RECEIVERS PROVIDERS

▼ Showing all 1 providers

[androidx.startup.InitializationProvider](#)

 LIBRARIES SBOM

▼ Showing all 41 Versioned Packages

androidx.activity:activity@1.6.0

androidx.annotation:annotation-experimental@1.3.0

androidx.appcompat:appcompat-resources@1.6.1

androidx.appcompat:appcompat@1.6.1

androidx.arch.core:core-runtime@2.1.0

androidx.cardview:cardview@1.0.0

androidx.coordinatorlayout:coordinatorlayout@1.1.0

androidx.core:core-ktx@1.9.0

androidx.core:core@1.9.0

androidx.cursoradapter:cursoradapter@1.0.0

androidx.customview:customview@1.1.0

androidx.documentfile:documentfile@1.0.0

androidx.drawerlayout:drawerlayout@1.1.1

androidx.dynamicanimation:dynamicanimation@1.0.0

androidx.emoji2:emoji2-views-helper@1.2.0
androidx.emoji2:emoji2@1.2.0
androidx.fragment:fragment@1.3.6
androidx.interpolator:interpolator@1.0.0
androidx.legacy:legacy-support-core-utils@1.0.0
androidx.lifecycle:lifecycle-livedata-core@2.5.1
androidx.lifecycle:lifecycle-livedata@2.0.0
androidx.lifecycle:lifecycle-process@2.4.1
androidx.lifecycle:lifecycle-runtime@2.5.1
androidx.lifecycle:lifecycle-viewmodel-savedstate@2.5.1
androidx.lifecycle:lifecycle-viewmodel@2.5.1
androidx.loader:loader@1.0.0
androidx.localbroadcastmanager:localbroadcastmanager@1.0.0
androidx.print:print@1.0.0
androidx.recyclerview:recyclerview@1.1.0
androidx.savedstate:savedstate@1.2.0
androidx.startup:startup-runtime@1.1.1
androidx.tracing:tracing@1.0.0
androidx.transition:transition@1.2.0
androidx.vectordrawable:vectordrawable-animated@1.1.0
androidx.vectordrawable:vectordrawable@1.1.0
androidx.versionedparcelable:versionedparcelable@1.1.1
androidx.viewpager2:viewpager2@1.0.0
androidx.viewpager:viewpager@1.0.0
com.google.android.material:material@1.9.0
org.jetbrains.kotlin:kotlinx-coroutines-android@1.6.1
org.jetbrains.kotlin:kotlinx-coroutines-core@1.6.1

▼ Showing all **3** Packages

com.example.vulnapp
org.intellij.lang.annotations
org.jetbrains.annotations

FILES

► Show all **843** files

✔ APP SCORES



Security Score **49/100**
Trackers Detection **0/432**

📁 FILE INFORMATION

File Name org.forkgram.messenger_666608.apk
Size 43.51MB
MD5 4a5e80ab8a278c1e84540f801179cae2
SHA1 8c49ac3b12040b6ca021dc33d16bda8d6f314a63
SHA256 1d2b99a673ca9b5ed823e89715dfe686d8bdc0284263b14ef745c0831853bdb3

i APP INFORMATION

App Name Fork Client
Package Name org.forkgram.messenger
Main Activity org.telegram.ui.LaunchActivity
Target SDK 35 Min SDK 21 Max SDK
Android Version Name 12.6.5.0 Android Version Code 666608

14 / 12

EXPORTED ACTIVITIES

View All ⌵

3 / 22

EXPORTED RECEIVERS

View All ⌵

13 / 20

EXPORTED SERVICES

View All ⌵

1 / 4

EXPORTED PROVIDERS

View All ⌵

⚙️ SCAN OPTIONS

📄 DECOMPILED CODE

🔑 SIGNER CERTIFICATE

```
Binary is signed
v1 signature: True
v2 signature: True
v3 signature: True
v4 signature: False
X.509 Subject: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2022-01-18 17:29:47+00:00
Valid To: 2049-06-05 17:29:47+00:00
Issuer: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid
Serial Number: 0x511a4f05
Hash Algorithm: sha256
md5: b920232aa63355fab7edc6f61d4de89
sha1: 93000b23e72fc39997d4a6ce1ebd5215b4b321fe
sha256: 00aa6a469b9439426d491b27f1fc46077694c41d973551b05b0c0594d33f77d7
sha512: f1aaf93edab78ad2a1ff4ea80d76a03564862ed9f68bf5b2e1f31ab5fa5c2d0357d5642081420ede1261b0f5e3e98aa5cb8058709d6b2b16b4d0869cd8077b7d
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: 2f4db863e99d5a50fce3d8d7468516596622540f94fd8a2b28f331fa5dec9a48
Found 1 unique certificates
```

≡ APPLICATION PERMISSIONS

Search:

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
android.permission.ACCESS_BACKGROUND_LOCATION	dangerous	access location in background	Allows an app to access location in the background.	
android.permission.ACCESS_COARSE_LOCATION	dangerous	coarse (network-based) location	Access coarse location sources, such as the mobile network database, to determine an approximate phone location, where available. Malicious applications can use this to determine approximately where you are.	

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
android.permission.ACCESS_FINE_LOCATION	dangerous	fine (GPS) location	Access fine location sources, such as the Global Positioning System on the phone, where available. Malicious applications can use this to determine where you are and may consume additional battery power.	
android.permission.ACCESS_MEDIA_LOCATION	dangerous	access any geographic locations	Allows an application to access any geographic locations persisted in the user's shared collection.	
android.permission.ACCESS_NETWORK_STATE	normal	view network status	Allows an application to view the status of all networks.	
android.permission.ACCESS_WIFI_STATE	normal	view Wi-Fi status	Allows an application to view the information about the status of Wi-Fi.	
android.permission.AUTHENTICATE_ACCOUNTS	dangerous	act as an account authenticator	Allows an application to use the account authenticator capabilities of the Account Manager, including creating accounts as well as obtaining and setting their passwords.	
android.permission.BLUETOOTH	normal	create Bluetooth connections	Allows applications to connect to paired bluetooth devices.	
android.permission.BLUETOOTH_CONNECT	dangerous	necessary for connecting to paired Bluetooth devices.	Required to be able to connect to paired Bluetooth devices.	

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
android.permission.CALL_PHONE	dangerous	directly call phone numbers	Allows the application to call phone numbers without your intervention. Malicious applications may cause unexpected calls on your phone bill. Note that this does not allow the application to call emergency numbers.	

Showing 1 to 10 of 67 entries

🤖 ANDROID API

Search:

API	FILES
No data available in table	

Showing 0 to 0 of 0 entries

📄 BROWSABLE ACTIVITIES

Search:

ACTIVITY	INTENT
org.telegram.ui.LaunchActivity	Schemes: http://, https://, tonsite://, tg://, Hosts: telegram.me, telegram.dog, t.me, Mime Types: image/*, video/*, text/plain, */*, vnd.android.cursor.item/vnd.org.telegram.messenger.android.profile,
org.telegram.ui.ShareActivity	Schemes: tgb://,

Showing 1 to 2 of 2 entries

[Previous](#) [1](#) [Next](#)

🔒 NETWORK SECURITY

Search:

NO	SCOPE	SEVERITY	DESCRIPTION
No data available in table			

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

📜 CERTIFICATE ANALYSIS

HIGH
0**WARNING**
1**INFO**
1Search:

TITLE 	SEVERITY 	DESCRIPTION 
Application vulnerable to Janus Vulnerability	warning	Application is signed with v1 signature scheme, making it vulnerable to Janus vulnerability on Android 5.0-8.0, if signed only with v1 signature scheme. Applications running on Android 5.0-7.0 signed with v1, and v2/v3 scheme is also vulnerable.
Signed Application	info	Application is signed with a code signing certificate

Showing 1 to 2 of 2 entries

Q MANIFEST ANALYSIS

HIGH 2	WARNING 34	INFO 0	SUPPRESSED 0
Search:			

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
1	App can be installed on a vulnerable unpatched Android version 5.0-5.0.2, [minSdk=21]	high	This application can be installed on an older version of android that has multiple unfixed vulnerabilities. These devices won't receive reasonable security updates from Google. Support an Android version => 10, API 29 to receive reasonable security updates.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
2	Clear text traffic is Enabled For App[android:usesCleartextTraffic=true]	high	The app intends to use cleartext network traffic, such as cleartext HTTP, FTP stacks, DownloadManager, and MediaPlayer. The default value for apps that target API level 27 or lower is "true". Apps that target API level 28 or higher default to "false". The key reason for avoiding cleartext traffic is the lack of confidentiality, authenticity, and protections against tampering; a network attacker can eavesdrop on transmitted data and also modify it without being detected.	
3	Application Data can be Backed up [android:allowBackup=true]	warning	This flag allows anyone to backup your application data via adb. It allows users who have enabled USB debugging to copy application data off of the device.	
4	Activity-Alias (org.telegram.messenger.DefaultIcon) is not Protected. [android:exported=true]	warning	An Activity-Alias is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
5	Activity-Alias (org.telegram.messenger.OriginalIcon) is not Protected. [android:exported=true]	warning	An Activity-Alias is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
6	Activity-Alias (org.telegram.messenger.Vintagelcon) is not Protected. [android:exported=true]	warning	An Activity-Alias is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
7	Activity-Alias (org.telegram.messenger.Aqualcon) is not Protected. [android:exported=true]	warning	An Activity-Alias is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
8	Activity-Alias (org.telegram.messenger.PremiumIcon) is not Protected. [android:exported=true]	warning	An Activity-Alias is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
9	Activity-Alias (org.telegram.messenger.Turbolcon) is not Protected. [android:exported=true]	warning	An Activity-Alias is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
10	Activity-Alias (org.telegram.messenger.Noxlcon) is not Protected. [android:exported=true]	warning	An Activity-Alias is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	

Showing 1 to 10 of 36 entries

 CODE ANALYSIS

Search:

NO 	ISSUE 	SEVERITY 	STANDARDS 	FILES 	OPTIONS 
No data available in table					

Showing 0 to 0 of 0 entries

 SHARED LIBRARY BINARY ANALYSIS

Search:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
1	arm64-v8a/libtmessages.49.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__strlen_chk', '__FD_SET_chk', '__memcpy_chk', '__memset_chk', '__FD_CLR_chk', '__FD_ISSET_chk', '__vsnprintf_chk', '__memmove_chk', '__read_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
2	arm64-v8a/libtmessages.49.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__strlen_chk', '__FD_SET_chk', '__memcpy_chk', '__memset_chk', '__FD_CLR_chk', '__FD_ISSET_chk', '__vsnprintf_chk', '__memmove_chk', '__read_chk']	True info Symbols are stripped.

Showing 1 to 2 of 2 entries

[Previous](#)[1](#)[Next](#)

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
No data available in table				

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

FILE ANALYSIS

Search:

NO	ISSUE	FILES
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

FIREBASE DATABASE ANALYSIS

Search:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

MALWARE LOOKUP

[VirusTotal Report](#)[Triage Report](#)[MetaDefender Report](#)[Hybrid Analysis Report](#) **APKiD ANALYSIS**Search:

DEX	DETECTIONS				
4a5e80ab8a278c1e84540f801179cae2.apk	Search: <table><tr><th data-bbox="1018 576 1455 654">FINDINGS</th><th data-bbox="1455 576 1946 654">DETAILS</th></tr><tr><td data-bbox="1018 654 1455 738">Manipulator Found</td><td data-bbox="1455 654 1946 738">Resources Confusion</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Manipulator Found	Resources Confusion
FINDINGS	DETAILS				
Manipulator Found	Resources Confusion				

DEX	DETECTIONS						
classes.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti-VM Code</td><td>Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.PRODUCT check Build.HARDWARE check Build.BOARD check possible Build.SERIAL check device ID check subscriber ID check network interface name check ro.hardware check ro.product.device check ro.kernel.qemu check emulator file check</td></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 2 of 2 entries Previous 1 Next	FINDINGS	DETAILS	Anti-VM Code	Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.PRODUCT check Build.HARDWARE check Build.BOARD check possible Build.SERIAL check device ID check subscriber ID check network interface name check ro.hardware check ro.product.device check ro.kernel.qemu check emulator file check	Compiler	r8
FINDINGS	DETAILS						
Anti-VM Code	Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.PRODUCT check Build.HARDWARE check Build.BOARD check possible Build.SERIAL check device ID check subscriber ID check network interface name check ro.hardware check ro.product.device check ro.kernel.qemu check emulator file check						
Compiler	r8						
classes2.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Compiler	r8		
FINDINGS	DETAILS						
Compiler	r8						

DEX	DETECTIONS						
classes3.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti-VM Code</td><td>Build.MANUFACTURER check</td></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 2 of 2 entries Previous1Next	FINDINGS	DETAILS	Anti-VM Code	Build.MANUFACTURER check	Compiler	r8
FINDINGS	DETAILS						
Anti-VM Code	Build.MANUFACTURER check						
Compiler	r8						
classes4.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti-VM Code</td><td>Build.MANUFACTURER check possible VM check</td></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 2 of 2 entries Previous1Next	FINDINGS	DETAILS	Anti-VM Code	Build.MANUFACTURER check possible VM check	Compiler	r8
FINDINGS	DETAILS						
Anti-VM Code	Build.MANUFACTURER check possible VM check						
Compiler	r8						

DEX	DETECTIONS						
classes5.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti-VM Code</td><td>Build.HARDWARE check</td></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 2 of 2 entries Previous1Next	FINDINGS	DETAILS	Anti-VM Code	Build.HARDWARE check	Compiler	r8
FINDINGS	DETAILS						
Anti-VM Code	Build.HARDWARE check						
Compiler	r8						
lib/arm64-v8a/libtmessages.49.so	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>anti_hook</td><td>syscalls</td></tr></table> Showing 1 to 1 of 1 entries Previous1Next	FINDINGS	DETAILS	anti_hook	syscalls		
FINDINGS	DETAILS						
anti_hook	syscalls						

Showing 1 to 7 of 7 entries

 BEHAVIOUR ANALYSIS

Search:

RULE ID	BEHAVIOUR	LABEL	FILES
No data available in table			

Showing 0 to 0 of 0 entries

Previous

Next

ABUSED PERMISSIONS

Top Malware Permissions

android.permission.ACCESS_COARSE_LOCATION,
android.permission.ACCESS_FINE_LOCATION,
android.permission.READ_CALL_LOG, android.permission.INTERNET,
android.permission.RECORD_AUDIO,
android.permission.ACCESS_NETWORK_STATE,
android.permission.ACCESS_WIFI_STATE,
android.permission.WAKE_LOCK,
android.permission.READ_EXTERNAL_STORAGE,
android.permission.GET_ACCOUNTS,
android.permission.READ_CONTACTS, android.permission.VIBRATE,
android.permission.SYSTEM_ALERT_WINDOW,
android.permission.READ_PHONE_STATE,
android.permission.RECEIVE_BOOT_COMPLETED,
android.permission.CAMERA,
android.permission.REQUEST_INSTALL_PACKAGES,
android.permission.WRITE_EXTERNAL_STORAGE


18/25 Other Common Permissions

android.permission.CALL_PHONE,
android.permission.FOREGROUND_SERVICE,
android.permission.MODIFY_AUDIO_SETTINGS,
android.permission.WRITE_CONTACTS,
android.permission.AUTHENTICATE_ACCOUNTS,
com.android.launcher.permission.INSTALL_SHORTCUT,
android.permission.BLUETOOTH,
android.permission.ACCESS_BACKGROUND_LOCATION

8/44

Malware Permissions are the top permissions that are widely abused by known malware.
Other Common Permissions are permissions that are commonly abused by known malware.

SERVER LOCATIONS

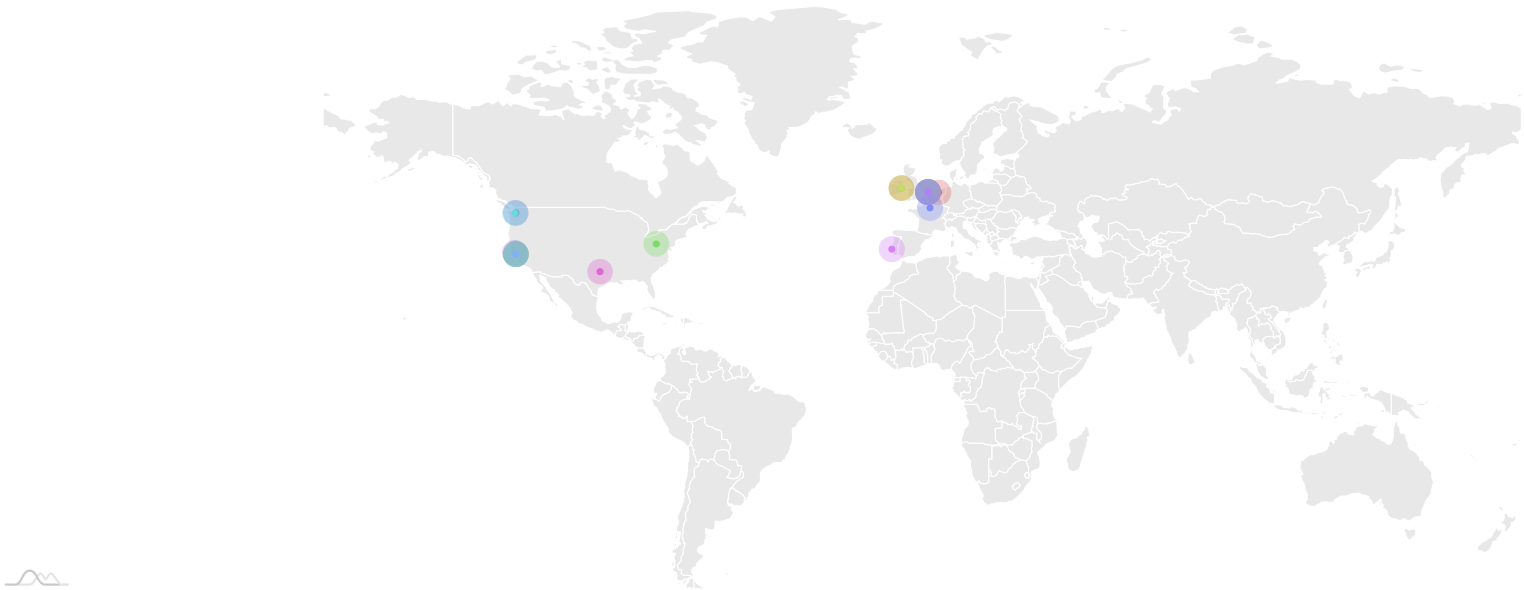

This app may communicate with the following OFAC sanctioned list of countries.

Search:

DOMAIN	COUNTRY/REGION
No data available in table	

Showing 0 to 0 of 0 entries

 DOMAIN MALWARE CHECK

Search:

DOMAIN	STATUS	GEOLOCATION
ads.telegram.org	ok	IP: 149.154.167.99 Country: United Kingdom of Great Britain and Northern Ireland Region: England City: Lowestoft Latitude: 52.475201 Longitude: 1.751590 View: Google Map
aomediadecodec.github.io	ok	IP: 185.199.111.153 Country: United States of America Region: Pennsylvania City: California Latitude: 40.065632 Longitude: -79.891708 View: Google Map
api.bing.com	ok	IP: 150.171.73.13 Country: United States of America Region: Washington City: Redmond Latitude: 47.682899 Longitude: -122.120903 View: Google Map
cocoon.org	ok	IP: 149.154.167.99 Country: United Kingdom of Great Britain and Northern Ireland Region: England City: Lowestoft Latitude: 52.475201 Longitude: 1.751590 View: Google Map

DOMAIN	STATUS	GEOLOCATION
core.telegram.org	ok	IP: 149.154.167.99 Country: United Kingdom of Great Britain and Northern Ireland Region: England City: Lowestoft Latitude: 52.475201 Longitude: 1.751590 View: Google Map
crbug.com	ok	IP: 216.239.32.29 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
desktop.telegram.org	ok	IP: 149.154.167.99 Country: United Kingdom of Great Britain and Northern Ireland Region: England City: Lowestoft Latitude: 52.475201 Longitude: 1.751590 View: Google Map
duckduckgo.com	ok	IP: 40.114.177.156 Country: Netherlands Region: Noord-Holland City: Amsterdam Latitude: 52.374031 Longitude: 4.889690 View: Google Map

DOMAIN	STATUS	GEOLOCATION
fragment.com	ok	IP: 172.66.170.24 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
getdesktop.telegram.org	ok	IP: 149.154.167.99 Country: United Kingdom of Great Britain and Northern Ireland Region: England City: Lowestoft Latitude: 52.475201 Longitude: 1.751590 View: Google Map

Showing 1 to 10 of 26 entries

 URLSSearch:

URL	FILE
http://www.webrtc.org/experiments/rtp-hdrex/generic-frame-descriptor-00 http://localhost/file http://www.webrtc.org/experiments/rtp-hdrex/abs-capture-time http://www.ietf.org/id/draft-holmer-rmcat-transport-wide-cc-extensions-01 http://www.webrtc.org/experiments/rtp-hdrex/video-timing http://www.webrtc.org/experiments/rtp-hdrex/transport-wide-cc-02 https://aomediacodec.github.io/av1-rtp-spec/#dependency-descriptor-rtp-header-extension http://www.webrtc.org/experiments/rtp-hdrex/video-content-type http://www.webrtc.org/experiments/rtp-hdrex/color-space https://webrtc.googlesource.com/src+/refs/heads/main/docs/native-code/rtp-hdrex/playout-delay/ , http://www.webrtc.org/experiments/rtp-hdrex/abs-send-time https://crbug.com/1053756 http://www.webrtc.org/experiments/rtp-hdrex/inband-cn http://www.webrtc.org/experiments/rtp-hdrex/video-layers-allocation00 http://www.webrtc.org/experiments/rtp-hdrex/video-frame-tracking-id http://www.webrtc.org/experiments/rtp-hdrex/playout-delay	lib/arm64-v8a/libtmessages.49.so
http://www.webrtc.org/experiments/rtp-hdrex/generic-frame-descriptor-00 http://localhost/file http://www.webrtc.org/experiments/rtp-hdrex/abs-capture-time http://www.ietf.org/id/draft-holmer-rmcat-transport-wide-cc-extensions-01 http://www.webrtc.org/experiments/rtp-hdrex/video-timing http://www.webrtc.org/experiments/rtp-hdrex/transport-wide-cc-02 https://aomediacodec.github.io/av1-rtp-spec/#dependency-descriptor-rtp-header-extension http://www.webrtc.org/experiments/rtp-hdrex/video-content-type http://www.webrtc.org/experiments/rtp-hdrex/color-space https://webrtc.googlesource.com/src+/refs/heads/main/docs/native-code/rtp-hdrex/playout-delay/ , http://www.webrtc.org/experiments/rtp-hdrex/abs-send-time https://crbug.com/1053756 http://www.webrtc.org/experiments/rtp-hdrex/inband-cn http://www.webrtc.org/experiments/rtp-hdrex/video-layers-allocation00 http://www.webrtc.org/experiments/rtp-hdrex/video-frame-tracking-id http://www.webrtc.org/experiments/rtp-hdrex/playout-delay	apktool_out/lib/arm64-v8a/libtmessages.49.so

URL	FILE
https://telegram.org/faq/it	Android String Resource
https://search.brave.com/api/suggest?q=	
https://telegram.org/tos/stars/	
https://telegram.org/faq/pt-br#questoes-gerais	
https://duckduckgo.com/ac/?q=	
https://core.telegram.org/bots/api	
https://telegram.org/faq#passport	
https://cocoon.org/	
https://telegram.org/faq#troubleshooting	
https://sugg.search.yahoo.net/sg/?output=json&nresults=10&command=	
https://duckduckgo.com/?q=	
https://privacy.microsoft.com/en-us/privacystatement	
https://telegram.org/faq	
https://legal.yahoo.com/us/en/yahoo/privacy/index.html	
https://telegram.org/faq/it#d-ho-un-nuovo-numero-di-telefono-cosa-faccio	
https://search.brave.com/search?q=	
https://telegram.org/faq#secret-chats	
https://telegram.org/faq/ar#j	
https://t.me/cocoon	
https://search.yahoo.com/search?p=	
https://web.telegram.org/	
https://telegram.org/faq/es#preguntas-generales	
https://ads.telegram.org/guidelines)	
https://telegram.org/faq/es	
https://telegram.org/faq/ar#a10	
https://www.bing.com/search?q=	
https://t.me/TelegramTips	
https://fragment.com/ads/topup	
https://t.me/TelegramTipsKo	
https://telegram.org/privacy-tpa	
https://telegram.org/faq/de#problembehandlung	
https://telegram.org/faq/ar	
https://t.me/TelegramTipsES	
https://telegram.org/faq/it#domande-general	
https://telegram.org/faq/pt-br#solucao-de-problemas	

URL	FILE
https://telegram.org/faq/de#allgemeine-fragen	
https://ads.telegram.org	
https://duckduckgo.com/privacy	
https://telegram.org/faq#q-i-have-a-new-phone-number-what-do-i-do	
https://telegram.org/faq/es#solucion-de-problemas	
https://telegram.org/faq#general-questions	
https://fragment.com/stars	
https://telegram.org/faq/ko	
https://t.me/TelegramTipsDE	
https://telegram.org/tos/content-creator-rewards	
https://telegram.org/privacy#5-6-no-ads-based-on-user-data)	
https://telegram.org/faq/pt-br	
https://telegram.org/faq/de#f-ich-habe-eine-neue-nummer-was-soll-ich-tun	
https://www.google.com/search?q=	
https://telegram.org/faq/ar#g2	
https://telegram.org/tos/stars	
https://telegram.org/faq/it#risoluzione-dei-problemi	
https://telegram.org/tos/mini-apps	
https://desktop.telegram.org/	
https://api.bing.com/osjson.aspx?query=	
https://telegram.org	
https://t.me/TelegramTipsAR/128	
https://telegram.org/privacy	
https://desktop.telegram.org	
https://telegram.org/faq/es#p-tengo-un-nuevo-numero-que-hago	
https://search.brave.com/help/privacy-policy	
https://telegram.org/tos	
https://telegram.org/faq/ko#325188137	
https://telegram.org/faq/ar#a	
https://telegram.org/faq/de	
https://t.me/cocoon?direct	
https://telegram.org/faq/pt-br#p-tenho-um-numero-novo-o-que-devo-fazer	
https://translations.telegram.org/%1\$s/emoji	
https://core.telegram.org/bots/webapps#launching-the-main-mini-app)),	
https://getdesktop.telegram.org/	
https://policies.google.com/privacy	

URL	FILE
https://suggestqueries.google.com/complete/search?client=chrome&q= https://t.me/TelegramTipsIT https://t.me/TelegramTipsBR https://telegram.org/faq/ko#1478791328	

Showing 1 to 3 of 3 entries

[Previous](#) [1](#) [Next](#)

✉ EMAILS

Search:

EMAIL	FILE
appro@openssl.org	lib/arm64-v8a/libtmessages.49.so
appro@openssl.org	apktool_out/lib/arm64-v8a/libtmessages.49.so
sms@telegram.org reports@stel.com reports@stel.com으로	Android String Resource

Showing 1 to 3 of 3 entries

[Previous](#) [1](#) [Next](#)

🕵 TRACKERS

Search:

TRACKER NAME	CATEGORIES	URL
No data available in table		

Showing 0 to 0 of 0 entries

 POSSIBLE HARDCODED SECRETS

► Show all 146 secrets

A STRINGS

From APK Resource

► Show all 25919 strings

From Code

From Shared Objects

lib/arm64-v8a/libtmessages.49.so

► Show all 20070 strings

apktool_out/lib/arm64-v8a/libtmessages.49.so

► Show all 20070 strings

 ACTIVITIES

▼ Showing all 12 activities

[org.telegram.ui.LaunchActivity](#)
[org.telegram.ui.BubbleActivity](#)
[org.telegram.ui.ShareActivity](#)
[org.telegram.ui.ExternalActionActivity](#)
[org.telegram.ui.ChatsWidgetConfigActivity](#)
[org.telegram.ui.ContactsWidgetConfigActivity](#)
[org.telegram.messenger.OpenChatReceiver](#)
[org.telegram.messenger.OpenAttachedMenuBotReceiver](#)
[org.telegram.ui.PopupNotificationActivity](#)
[org.telegram.ui.VoIPPermissionActivity](#)
[org.telegram.ui.VoIPFeedbackActivity](#)
[org.unifiedpush.android.connector.internal.LinkActivity](#)

SERVICES

▼ Showing all **20** services

[org.telegram.messenger.AuthenticatorService](#)
[org.telegram.messenger.ContactsSyncAdapterService](#)
[org.telegram.messenger.KeepAliveJob](#)
[org.telegram.messenger.BringAppForegroundService](#)
[org.telegram.messenger.NotificationsService](#)
[org.telegram.messenger.NotificationRepeat](#)
[org.telegram.messenger.VideoEncodingService](#)
[org.telegram.ui.Stories.recorder.StoryUploadingService](#)
[org.telegram.messenger.ImportingService](#)
[org.telegram.messenger.LocationSharingService](#)
[org.telegram.messenger.voip.VoIPService](#)
[org.telegram.messenger.MusicPlayerService](#)
[org.telegram.messenger.MusicBrowserService](#)
[org.telegram.messenger.voip.TelegramConnectionService](#)
[org.telegram.messenger.ChatsWidgetService](#)
[org.telegram.messenger.UnifiedPushService](#)
[org.telegram.messenger.ContactsWidgetService](#)
[org.telegram.messenger.FilesMigrationService](#)
[androidx.sharetarget.ChooserTargetServiceCompat](#)
[org.unifiedpush.android.connector.internal.RaiseToForegroundService](#)

 RECEIVERS▼ Showing all **22** receivers

[org.telegram.messenger.AutoMessageHeardReceiver](#)
[org.telegram.messenger.CopyCodeReceiver](#)
[org.telegram.messenger.NotificationsDisabledReceiver](#)
[org.telegram.messenger.AutoMessageReplyReceiver](#)
[org.telegram.messenger.CallReceiver](#)
[org.telegram.messenger.MusicPlayerReceiver](#)
[org.telegram.messenger.voip.VoIPMediaButtonReceiver](#)
[org.telegram.messenger.AppStartReceiver](#)
[org.telegram.messenger.RefererReceiver](#)
[org.telegram.messenger.WearReplyReceiver](#)

[org.telegram.messenger.StopLiveLocationReceiver](#)
[org.telegram.messenger.PopupReplyReceiver](#)
[org.telegram.messenger.NotificationCallbackReceiver](#)
[org.telegram.messenger.ShareBroadcastReceiver](#)
[org.telegram.messenger.CustomTabsCopyReceiver](#)
[org.telegram.messenger.NotificationDismissReceiver](#)
[org.telegram.messenger.voip.VoIPActionsReceiver](#)
[org.telegram.messenger.ShortcutResultReceiver](#)
[org.telegram.messenger.ChatsWidgetProvider](#)
[org.telegram.messenger.ContactsWidgetProvider](#)
[org.unifiedpush.android.connector.internal.MessagingReceiverImpl](#)
[androidx.profileinstaller.ProfileInstallReceiver](#)

PROVIDERS

▼ Showing all **4** providers

[androidx.core.content.FileProvider](#)
[org.telegram.messenger.NotificationImageProvider](#)
[org.telegram.messenger.voip.CallNotificationSoundProvider](#)
[androidx.startup.InitializationProvider](#)

LIBRARIES

▼ Showing all **1** libraries

com.sec.android.app.multiwindow

SBOM

▼ Showing all **41** Versioned Packages

androidx.activity:activity@1.1.0
androidx.annotation:annotation-experimental@1.4.1
androidx.appcompat:appcompat-resources@1.2.0
androidx.appcompat:appcompat@1.2.0

androidx.arch.core:core-runtime@dynamic
androidx.biometric:biometric@1.1.0
androidx.core:core-ktx@1.16.0
androidx.core:core-viewtree@1.0.0
androidx.core:core@1.16.0
androidx.credentials:credentials@1.6.0-alpha04
androidx.cursoradapter:cursoradapter@1.0.0
androidx.customview:customview@1.0.0
androidx.documentfile:documentfile@1.0.0
androidx.drawerlayout:drawerlayout@1.0.0
androidx.dynamicanimation:dynamicanimation@1.0.0
androidx.exifinterface:exifinterface@1.3.6
androidx.fragment:fragment@1.2.5
androidx.interpolator:interpolator@1.0.0
androidx.legacy:legacy-support-core-utils@1.0.0
androidx.lifecycle:lifecycle-livedata-core@dynamic
androidx.lifecycle:lifecycle-livedata@dynamic
androidx.lifecycle:lifecycle-runtime@dynamic
androidx.lifecycle:lifecycle-viewmodel-savedstate@dynamic
androidx.lifecycle:lifecycle-viewmodel@dynamic
androidx.loader:loader@1.0.0
androidx.localbroadcastmanager:localbroadcastmanager@1.0.0
androidx.media:media@1.4.1
androidx.mediarouter:mediarouter@1.7.0
androidx.palette:palette@1.0.0
androidx.print:print@1.0.0
androidx.profileinstaller:profileinstaller@1.3.0
androidx.savedstate:savedstate@1.2.1
androidx.sharetarget:sharetarget@1.2.0
androidx.startup:startup-runtime@1.1.1
androidx.tracing:tracing@1.2.0
androidx.vectordrawable:vectordrawable-animated@1.1.0
androidx.vectordrawable:vectordrawable@1.1.0
androidx.versionedparcelable:versionedparcelable@1.1.1
androidx.viewpager:viewpager@1.0.0
org.jetbrains.kotlin:kotlinx-coroutines-android@1.8.1
org.jetbrains.kotlin:kotlinx-coroutines-core@1.8.1

 FILES

► Show all **11310** files

✔ APP SCORES



Security Score **67/100**
Trackers Detection **0/432**

📁 FILE INFORMATION

File Name chat.seers.app_7.apk
Size 25.07MB
MD5 56b1b071ef8210269cc1aa8353a1764d
SHA1 878499145c248784d4833c61a3e3425eb0e184fb
SHA256 2e096f8acc2673d95c236dbe7d67004beea795d182588126c037afc963f502b9

i APP INFORMATION

App Name Seers Lodge
Package Name chat.seers.app
Main Activity nand.apps.chat.MainActivity
Target SDK 35 Min SDK 26 Max SDK
Android Version Name 1.1.4 Android Version Code 7

0 / 2

EXPORTED ACTIVITIES

View All ⌵

1 / 1

EXPORTED RECEIVERS

View All ⌵

0 / 2

EXPORTED SERVICES

View All ⌵

0 / 3

EXPORTED PROVIDERS

View All ⌵

⚙️ SCAN OPTIONS

📄 DECOMPILED CODE

🔑 SIGNER CERTIFICATE

Binary is signed
v1 signature: False
v2 signature: True
v3 signature: False
v4 signature: False
X.509 Subject: C=US, ST=NY, L=Syracuse, O=NAND Apps, OU=Cat Psychiatry, CN=Cale Stockman
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2024-09-29 03:14:26+00:00
Valid To: 2074-09-17 03:14:26+00:00
Issuer: C=US, ST=NY, L=Syracuse, O=NAND Apps, OU=Cat Psychiatry, CN=Cale Stockman
Serial Number: 0x31c249e6f31a3f61
Hash Algorithm: sha384
md5: 3b7e59ceda748d3c1682a905bb679fc2
sha1: ea6865a9f0cb9ce928f8c0597a9ed13fd064cbc9
sha256: f0385c2195240e01d0800399e734a0573b7f52204900f6d65245ac37754d2fb5
sha512: 6fdc76cfe32c6c50580cc60af3c5f31920d5707cb984a9db95ef88fcd6bb2dd4e2d120cd70d0f44aadf325a436923c1e7b4373e23451ff2c5b238fee3b419f22
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: 4eb382b2a388a1313b156a95d7bd74c0a33852c642cb9c147381e725387767bb
Found 1 unique certificates

≡ APPLICATION PERMISSIONS

Search:

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
android.permission.CAMERA	dangerous	take pictures and videos	Allows application to take pictures and videos with the camera. This allows the application to collect images that the camera is seeing at any time.	
android.permission.FOREGROUND_SERVICE	normal	enables regular apps to use Service.startForeground.	Allows a regular application to use Service.startForeground.	

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
android.permission.FOREGROUND_SERVICE_SPECIAL_USE	normal	enables special-use foreground services.	Allows a regular application to use Service.startForeground with the type "specialUse".	
android.permission.INTERNET	normal	full Internet access	Allows an application to create network sockets.	
android.permission.MODIFY_AUDIO_SETTINGS	normal	change your audio settings	Allows application to modify global audio settings, such as volume and routing.	
android.permission.POST_NOTIFICATIONS	dangerous	allows an app to post notifications.	Allows an app to post notifications	
android.permission.RECORD_AUDIO	dangerous	record audio	Allows application to access the audio record path.	
android.permission.VIBRATE	normal	control vibrator	Allows the application to control the vibrator.	
chat.seers.app.DYNAMIC_RECEIVER_NOT_EXPORTED_PERMISSION	unknown	Unknown permission	Unknown permission from android reference	

Showing 1 to 9 of 9 entries

[Previous](#) [1](#) [Next](#) **ANDROID API**Search:

API	FILES
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

BROWSABLE ACTIVITIES

Search:

ACTIVITY	INTENT
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

NETWORK SECURITY

Search:

NO	SCOPE	SEVERITY	DESCRIPTION
No data available in table			

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

CERTIFICATE ANALYSIS

HIGH
0

WARNING
0

INFO
1

Search:

TITLE	SEVERITY	DESCRIPTION
Signed Application	info	Application is signed with a code signing certificate

Showing 1 to 1 of 1 entries

[Previous](#) [1](#) [Next](#)



MANIFEST ANALYSIS

HIGH
0

WARNING
3

INFO
0

SUPPRESSED
0

Search:

NO	ISSUE	SEVERITY	DESCRIPTION	OPTIONS
1	App can be installed on a vulnerable Android version 8.0, minSdk=26]	warning	This application can be installed on an older version of android that has multiple vulnerabilities. Support an Android version => 10, API 29 to receive reasonable security updates.	
2	Application Data can be Backed up [android:allowBackup=true]	warning	This flag allows anyone to backup your application data via adb. It allows users who have enabled USB debugging to copy application data off of the device.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
3	Broadcast Receiver (androidx.profileinstaller.ProfileInstallReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

Showing 1 to 3 of 3 entries

[Previous](#) [1](#) [Next](#)

</> CODE ANALYSIS

Search:

NO 	ISSUE 	SEVERITY 	STANDARDS 	FILES 	OPTIONS 
No data available in table					

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

🚩 SHARED LIBRARY BINARY ANALYSIS

Search:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	
1	arm64-v8a/libandroidjni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1 [S s

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
2	arm64-v8a/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1 (S)

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
3	arm64-v8a/libc++_shared.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1 (S)

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
				unless Dart FFI is used.					S
4	arm64-v8a/libgifjni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1 (S)

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
5	arm64-v8a/libimage_processing_util_jni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk']	1 [S]

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
6	arm64-v8a/libjnidispatch.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1 (S s

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
				unless Dart FFI is used.					S
7	arm64-v8a/liboboe.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__vsprintf_chk']	1 [S s

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
8	arm64-v8a/libopusjni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk', '__memset_chk']	1 info The binary has the following fortified functions: ['__memcpy_chk', '__memset_chk']

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
9	arm64-v8a/libsodium.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1 (S s

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
10	arm64-v8a/libsurface_util_jni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1 (S)

Showing 1 to 10 of 24 entries

 NIAP ANALYSIS v1.3Search:

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
No data available in table				

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **FILE ANALYSIS**Search:

NO	ISSUE	FILES
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **FIREBASE DATABASE ANALYSIS**Search:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

MALWARE LOOKUP

[VirusTotal Report](#)[Triage Report](#)[MetaDefender Report](#)[Hybrid Analysis Report](#)

APKiD ANALYSIS

Search:

DEX	DETECTIONS				
56b1b071ef8210269cc1aa8353a1764d.apk	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Manipulator Found</td><td>Resources Confusion</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Manipulator Found	Resources Confusion
FINDINGS	DETAILS				
Manipulator Found	Resources Confusion				

DEX	DETECTIONS						
classes.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti-VM Code</td><td>Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.PRODUCT check Build.HARDWARE check possible VM check</td></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 2 of 2 entries Previous1Next	FINDINGS	DETAILS	Anti-VM Code	Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.PRODUCT check Build.HARDWARE check possible VM check	Compiler	r8
FINDINGS	DETAILS						
Anti-VM Code	Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.PRODUCT check Build.HARDWARE check possible VM check						
Compiler	r8						
classes2.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti-VM Code</td><td>Build.FINGERPRINT check Build.MANUFACTURER check</td></tr><tr><td>Compiler</td><td>r8 without marker (suspicious)</td></tr></table> Showing 1 to 2 of 2 entries Previous1Next	FINDINGS	DETAILS	Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check	Compiler	r8 without marker (suspicious)
FINDINGS	DETAILS						
Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check						
Compiler	r8 without marker (suspicious)						

DEX	DETECTIONS				
classes3.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>r8 without marker (suspicious)</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Compiler	r8 without marker (suspicious)
FINDINGS	DETAILS				
Compiler	r8 without marker (suspicious)				
classes4.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>r8 without marker (suspicious)</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Compiler	r8 without marker (suspicious)
FINDINGS	DETAILS				
Compiler	r8 without marker (suspicious)				

Showing 1 to 5 of 5 entries

 BEHAVIOUR ANALYSIS

Search:

RULE ID	BEHAVIOUR	LABEL	FILES
No data available in table			

Showing 0 to 0 of 0 entries

ABUSED PERMISSIONS

Top Malware Permissions	4/25 Other Common Permissions	2/44
android.permission.INTERNET, android.permission.VIBRATE, android.permission.CAMERA, android.permission.RECORD_AUDIO	android.permission.FOREGROUND_SERVICE, android.permission.MODIFY_AUDIO_SETTINGS	

Malware Permissions are the top permissions that are widely abused by known malware.

Other Common Permissions are permissions that are commonly abused by known malware.

SERVER LOCATIONS



This app may communicate with the following OFAC sanctioned list of countries.

Search:

DOMAIN	COUNTRY/REGION
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

 DOMAIN MALWARE CHECK

Search:

DOMAIN	STATUS	GEOLOCATION
android.googleusercontent.com		IP: 142.251.127.82 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map

Showing 1 to 1 of 1 entries

[Previous](#) [1](#) [Next](#) **URLS**Search:

URL	FILE
https://android.googleusercontent.com/toolchain/llvm-project	lib/arm64-v8a/libsurface_util_jni.so
https://android.googleusercontent.com/toolchain/llvm-project	apktool_out/lib/arm64-v8a/libsurface_util_jni.so

Showing 1 to 2 of 2 entries

[Previous](#) [1](#) [Next](#) **EMAILS** **TRACKERS**

Search:

TRACKER NAME	CATEGORIES	URL
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

POSSIBLE HARDCODED SECRETS

A STRINGS

From APK Resource

► Show all **124** strings

From Code**From Shared Objects**

lib/arm64-v8a/libandroidjni.so

► Show all **43** strings

lib/arm64-v8a/libandroidx.graphics.path.so

► Show all **19** strings

lib/arm64-v8a/libc++_shared.so

► Show all **724** strings

lib/arm64-v8a/libgifjni.so

► Show all **5** strings

lib/arm64-v8a/libimage_processing_util_jni.so

► Show all **5** strings

lib/arm64-v8a/libjnidispatch.so

► Show all **268** strings

lib/arm64-v8a/liboboe.so

► Show all **466** strings

lib/arm64-v8a/libopusjni.so

► Show all **303** strings

lib/arm64-v8a/libsodium.so

► Show all **60** strings

lib/arm64-v8a/libsurface_util_jni.so

► Show all **40** strings

lib/arm64-v8a/libtoxjni.so

► Show all **2000** strings

lib/arm64-v8a/libzxingcpp_android.so

► Show all **841** strings

apktool_out/lib/arm64-v8a/libandroidjni.so

► Show all **43** strings

apktool_out/lib/arm64-v8a/libandroidx.graphics.path.so

► Show all **19** strings

apktool_out/lib/arm64-v8a/libc++_shared.so

► Show all **724** strings

apktool_out/lib/arm64-v8a/libgifjni.so

► Show all **5** strings

apktool_out/lib/arm64-v8a/libimage_processing_util_jni.so

► Show all **5** strings

apktool_out/lib/arm64-v8a/libjnidispatch.so

► Show all **268** strings

apktool_out/lib/arm64-v8a/liboboe.so

► Show all **466** strings

apktool_out/lib/arm64-v8a/libopusjni.so

► Show all **303** strings

apktool_out/lib/arm64-v8a/libsodium.so

► Show all **60** strings

apktool_out/lib/arm64-v8a/libsurface_util_jni.so

► Show all **40** strings

apktool_out/lib/arm64-v8a/libtoxjni.so

► Show all **2000** strings

apktool_out/lib/arm64-v8a/libzxingcpp_android.so

► Show all **841** strings

ACTIVITIES

▼ Showing all **2** activities

[nand.apps.chat.MainActivity](#)

[nand.apps.chat.camera.QrCodeCameraActivity](#)

SERVICES

▼ Showing all **2** services

[nand.apps.chat.ChatEngineService](#)

[androidx.camera.core.impl.MetadataHolderService](#)

RECEIVERS

▼ Showing all **1** receivers

[androidx.profileinstaller.ProfileInstallReceiver](#)

PROVIDERS

▼ Showing all **3** providers

[androidx.core.content.FileProvider](#)

[org.jetbrains.compose.resources.AndroidContextProvider](#)

[androidx.startup.InitializationProvider](#)

LIBRARIES

▼ Showing all **2** libraries

androidx.window.extensions

androidx.window.sidecar

SBOM

▼ Showing all **86** Versioned Packages

androidx.activity:activity-compose@1.10.0

androidx.activity:activity-ktx@1.10.0

androidx.activity:activity@1.10.0

androidx.annotation:annotation-experimental@1.4.1

androidx.appcompat:appcompat-resources@1.7.0

androidx.appcompat:appcompat@1.7.0
androidx.arch.core:core-runtime@dynamic
androidx.asynclayoutinflater:asynclayoutinflater@1.0.0
androidx.autofill:autofill@1.0.0
androidx.camera:camera-camera2@1.4.1
androidx.camera:camera-core@1.4.1
androidx.camera:camera-lifecycle@1.4.1
androidx.camera:camera-video@1.4.1
androidx.camera:camera-view@1.4.1
androidx.compose.animation:animation-core@1.7.8
androidx.compose.animation:animation@1.7.8
androidx.compose.foundation:foundation-layout@1.7.8
androidx.compose.foundation:foundation@1.7.8
androidx.compose.material3.adaptive:adaptive@1.0.0
androidx.compose.material:material-icons-core@1.7.6
androidx.compose.material:material-icons-extended@1.7.6
androidx.compose.material:material-ripple@1.7.6
androidx.compose.material:material@1.7.6
androidx.compose.runtime:runtime-saveable@1.7.8
androidx.compose.runtime:runtime@1.7.8
androidx.compose.ui:ui-geometry@1.7.8
androidx.compose.ui:ui-graphics@1.7.8
androidx.compose.ui:ui-text@1.7.8
androidx.compose.ui:ui-tooling-preview@1.7.8
androidx.compose.ui:ui-unit@1.7.8
androidx.compose.ui:ui-util@1.7.8
androidx.compose.ui:ui@1.7.8
androidx.coordinatorlayout:coordinatorlayout@1.0.0
androidx.core:core-ktx@1.15.0
androidx.core:core@1.15.0
androidx.cursoradapter:cursoradapter@1.0.0
androidx.customview:customview-poolingcontainer@1.0.0
androidx.customview:customview@1.1.0
androidx.documentfile:documentfile@1.0.0
androidx.drawerlayout:drawerlayout@1.0.0
androidx.emoji2:emoji2-views-helper@1.3.0
androidx.emoji2:emoji2@1.3.0
androidx.exifinterface:exifinterface@1.3.7

androidx.fragment:fragment-ktx@1.8.5
androidx.fragment:fragment@1.8.5
androidx.graphics:graphics-path@1.0.1
androidx.interpolator:interpolator@1.0.0
androidx.legacy:legacy-support-core-ui@1.0.0
androidx.legacy:legacy-support-core-utils@1.0.0
androidx.lifecycle:lifecycle-livedata-core-ktx@2.8.7
androidx.lifecycle:lifecycle-livedata-core@2.8.7
androidx.lifecycle:lifecycle-livedata@2.8.7
androidx.lifecycle:lifecycle-process@2.8.7
androidx.lifecycle:lifecycle-runtime-compose@2.8.7
androidx.lifecycle:lifecycle-runtime-ktx@2.8.7
androidx.lifecycle:lifecycle-runtime@2.8.7
androidx.lifecycle:lifecycle-service@2.8.7
androidx.lifecycle:lifecycle-viewmodel-compose@2.8.7
androidx.lifecycle:lifecycle-viewmodel-ktx@2.8.7
androidx.lifecycle:lifecycle-viewmodel-savedstate@2.8.7
androidx.lifecycle:lifecycle-viewmodel@2.8.7
androidx.loader:loader@1.0.0
androidx.localbroadcastmanager:localbroadcastmanager@1.0.0
androidx.preference:preference@1.2.1
androidx.print:print@1.0.0
androidx.profileinstaller:profileinstaller@1.4.1
androidx.recyclerview:recyclerview@1.0.0
androidx.savedstate:savedstate-ktx@1.2.1
androidx.savedstate:savedstate@1.2.1
androidx.slidingpanelayout:slidingpanelayout@1.2.0
androidx.startup:startup-runtime@1.1.1
androidx.swiperefreshlayout:swiperefreshlayout@1.0.0
androidx.tracing:tracing-ktx@1.2.0
androidx.tracing:tracing@1.2.0
androidx.transition:transition@1.4.1
androidx.vectordrawable:vectordrawable-animated@1.1.0
androidx.vectordrawable:vectordrawable@1.1.0
androidx.versionedparcelable:versionedparcelable@1.1.1
androidx.viewpager:viewpager@1.0.0
androidx.window.extensions.core:core@1.0.0
androidx.window:window-core@1.3.0

androidx.window:window@1.3.0
org.jetbrains.androidx.core:core-bundle@1.0.1
org.jetbrains.kotlin:kotlinx-coroutines-android@1.10.1
org.jetbrains.kotlin:kotlinx-coroutines-core@1.10.1
org.jetbrains.kotlin:kotlinx-coroutines-slf4j@1.10.1

FILES

► Show all **560** files

✔ APP SCORES

Security Score **38/100**Trackers Detection **0/432**

📁 FILE INFORMATION

File Name com.github.gotify_34.apk
Size 6.74MB
MD5 602fe30d9885d06f149f1ca8ab71d7e1
SHA1 a2260f5827fda61259585da78e9102effa62ece2
SHA256 dbc91d55692416db05b6aac5063389a69da0dcddce723855ca1f2d1064c75f49

i APP INFORMATION

App Name Gotify
Package Name com.github.gotify
Main Activity com.github.gotify.init.InitializationActivity
Target SDK 36 Min SDK 23 Max SDK
Android Version Name 2.9.0 Android Version Code 34

▶ PLAYSTORE INFORMATION

Title Gotify
Score 4.745763 Installs 10,000+ Price 0 Android Version Support Category Tools Play Store URL [com.github.gotify](https://play.google.com/store/apps/details?id=com.github.gotify)
Developer Gotify, Developer ID Gotify
Developer Address None
Developer Website <https://gotify.net/>
Developer Email gotify@protonmail.com
Release Date Jul 1, 2018 Privacy Policy [Privacy link](#)
Description

Gotify is a server for sending and receiving messages in real-time per web socket. This app subscribes to the web socket and creates push notifications on new messages.

Gotify and this app are open source. You can view the source code on GitHub <https://github.com/gotify>

Note: A self-hosted Gotify-server is needed for this app to work, an explanation on "how to set up Gotify server" is displayed on <https://gotify.net/docs/install>

1 / 7

EXPORTED ACTIVITIES

View All ↓

0 / 1

EXPORTED SERVICES

View All ↓

2 / 2

EXPORTED RECEIVERS

View All **0 / 1**

EXPORTED PROVIDERS

View All  **SCAN OPTIONS** **DECOMPILED CODE** **SIGNER CERTIFICATE**

```
Binary is signed
v1 signature: True
v2 signature: True
v3 signature: True
v4 signature: False
X.509 Subject: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2018-11-06 09:15:04+00:00
Valid To: 2046-03-24 09:15:04+00:00
Issuer: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid
Serial Number: 0x29b43be6
Hash Algorithm: sha256
md5: a895b74ccaf5f37d7a9e18a2786b76fa
sha1: 9b77d4fdf46f1a4cc68340a5c709150a8c3de747
sha256: 5d73c22fa3a466d602c5041774dcb05be624ea8e080ded752c1425b1a39c996b
sha512: 6564fb38b0cb9b7ec8e30fca98e5ebc586656caf2340b3a4a7bcd0233bdf37d6ab2d79b4e9ede3c1c3abdf3598f94237e825f49044915d4acd70edac20109ac
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: 7fc37bf82e8fa40c05928e141e9e007e7c2aa1f37bb6e4cde835c4b8e175eabd
Found 1 unique certificates
```

≡ APPLICATION PERMISSIONS

Search:

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
android.permission.ACCESS_NETWORK_STATE	normal	view network status	Allows an application to view the status of all networks.	
android.permission.FOREGROUND_SERVICE	normal	enables regular apps to use Service.startForeground.	Allows a regular application to use Service.startForeground.	
android.permission.FOREGROUND_SERVICE_SPECIAL_USE	normal	enables special-use foreground services.	Allows a regular application to use Service.startForeground with the type "specialUse".	
android.permission.INTERNET	normal	full Internet access	Allows an application to create network sockets.	
android.permission.POST_NOTIFICATIONS	dangerous	allows an app to post notifications.	Allows an app to post notifications	
android.permission.RECEIVE_BOOT_COMPLETED	normal	automatically start at boot	Allows an application to start itself as soon as the system has finished booting. This can make it take longer to start the phone and allow the application to slow down the overall phone by always running.	

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
android.permission.SCHEDULE_EXACT_ALARM	normal	permits exact alarm scheduling for background work.	Allows an app to use exact alarm scheduling APIs to perform timing sensitive background work.	
android.permission.SYSTEM_ALERT_WINDOW	dangerous	display system-level alerts	Allows an application to show system-alert windows. Malicious applications can take over the entire screen of the phone.	
com.github.gotify.DYNAMIC_RECEIVER_NOT_EXPORTED_PERMISSION	unknown	Unknown permission	Unknown permission from android reference	

Showing 1 to 9 of 9 entries

 ANDROID API

Search:

API	FILES
No data available in table	

Showing 0 to 0 of 0 entries

 BROWSABLE ACTIVITIES

Search:

ACTIVITY	INTENT
No data available in table	

Showing 0 to 0 of 0 entries

 NETWORK SECURITY

HIGH
2

WARNING
1

INFO
0

SECURE
0

Search:

NO	SCOPE	SEVERITY	DESCRIPTION
1	*	high	Base config is insecurely configured to permit clear text traffic to all domains.
2	*	warning	Base config is configured to trust system certificates.
3	*	high	Base config is configured to trust user installed certificates.

Showing 1 to 3 of 3 entries





 CERTIFICATE ANALYSIS

HIGH
0

WARNING
1

INFO
1

Search:

TITLE 	SEVERITY 	DESCRIPTION 
Application vulnerable to Janus Vulnerability	warning	Application is signed with v1 signature scheme, making it vulnerable to Janus vulnerability on Android 5.0-8.0, if signed only with v1 signature scheme. Applications running on Android 5.0-7.0 signed with v1, and v2/v3 scheme is also vulnerable.
Signed Application	info	Application is signed with a code signing certificate

Showing 1 to 2 of 2 entries

[Previous](#)[1](#)[Next](#)

MANIFEST ANALYSIS

HIGH
2**WARNING**
3**INFO**
0**SUPPRESSED**
0Search:

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
1	App can be installed on a vulnerable unpatched Android version 6.0-6.0.1, [minSdk=23]	high	This application can be installed on an older version of android that has multiple unfixed vulnerabilities. These devices won't receive reasonable security updates from Google. Support an Android version => 10, API 29 to receive reasonable security updates.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
2	Clear text traffic is Enabled For App[android:usesCleartextTraffic=true]	high	The app intends to use cleartext network traffic, such as cleartext HTTP, FTP stacks, DownloadManager, and MediaPlayer. The default value for apps that target API level 27 or lower is "true". Apps that target API level 28 or higher default to "false". The key reason for avoiding cleartext traffic is the lack of confidentiality, authenticity, and protections against tampering; a network attacker can eavesdrop on transmitted data and also modify it without being detected.	
3	App has a Network Security Configuration[android:networkSecurityConfig=@xml/network_security_config]	info	The Network Security Configuration feature lets apps customize their network security settings in a safe, declarative configuration file without modifying app code. These settings can be configured for specific domains and for a specific app.	
4	Activity (com.github.gotify.sharing.ShareActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
5	Broadcast Receiver (com.github.gotify.init.BootCompletedReceiver) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
6	Broadcast Receiver (androidx.profileinstaller.ProfileInstallReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

Showing 1 to 6 of 6 entries

[Previous](#) [1](#) [Next](#)**</> CODE ANALYSIS**Search:

NO 	ISSUE 	SEVERITY 	STANDARDS 	FILES 	OPTIONS 
No data available in table					

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

🚩 SHARED LIBRARY BINARY ANALYSIS

No Shared Objects found.

Search:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
No data available in table									

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

📄 NIAP ANALYSIS v1.3

Search:

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
No data available in table				

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

📁 FILE ANALYSIS

Search:

NO	ISSUE	FILES
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) FIREBASE DATABASE ANALYSISSearch:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) MALWARE LOOKUP[VirusTotal Report](#)[Triage Report](#)[MetaDefender Report](#)[Hybrid Analysis Report](#) APKId ANALYSISSearch:

DEX	DETECTIONS						
602fe30d9885d06f149f1ca8ab71d7e1.apk	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Manipulator Found</td><td>Resources Confusion</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Manipulator Found	Resources Confusion		
FINDINGS	DETAILS						
Manipulator Found	Resources Confusion						
classes.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti-VM Code</td><td>Build.FINGERPRINT check Build.MANUFACTURER check</td></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 2 of 2 entries Previous 1 Next	FINDINGS	DETAILS	Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check	Compiler	r8
FINDINGS	DETAILS						
Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check						
Compiler	r8						
classes2.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>unknown (please file detection issue!)</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Compiler	unknown (please file detection issue!)		
FINDINGS	DETAILS						
Compiler	unknown (please file detection issue!)						

DEX	DETECTIONS				
classes3.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>r8 without marker (suspicious)</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Compiler	r8 without marker (suspicious)
FINDINGS	DETAILS				
Compiler	r8 without marker (suspicious)				

Showing 1 to 4 of 4 entries

 BEHAVIOUR ANALYSIS

Search:			
RULE ID	BEHAVIOUR	LABEL	FILES
No data available in table			

Showing 0 to 0 of 0 entries

 ABUSED PERMISSIONS

Top Malware Permissions

android.permission.INTERNET,
android.permission.SYSTEM_ALERT_WINDOW,

4/25 Other Common Permissions

android.permission.FOREGROUND_SERVICE

android.permission.RECEIVE_BOOT_COMPLETED,
android.permission.ACCESS_NETWORK_STATE

Malware Permissions are the top permissions that are widely abused by known malware.

Other Common Permissions are permissions that are commonly abused by known malware.

SERVER LOCATIONS



DOMAIN MALWARE CHECK

URLs

 EMAILS **TRACKERS**Search:

TRACKER NAME	CATEGORIES	URL
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#) **POSSIBLE HARDCODED SECRETS**

▼ Showing all 7 secrets

`"password" : "Password"``"setting_key_exclude_from_recent" : "exclude_from_recent"``"setting_key_intent_dialog_permission" : "intent_dialog_permission"``"setting_key_notification_channels" : "notification_channels"``"setting_key_theme" : "theme"``"setting_key_time_format" : "time_format"``"username" : "Username"`**A STRINGS**

From APK Resource

► Show all **7750** strings

From Code**From Shared Objects****📄 ACTIVITIES**

▼ Showing all **7** activities

[com.github.gotify.init.InitializationActivity](#)

[com.github.gotify.messages.MessagesActivity](#)

[com.github.gotify.login.LoginActivity](#)

[com.github.gotify.log.LogsActivity](#)

[com.github.gotify.settings.SettingsActivity](#)

[com.github.gotify.sharing.ShareActivity](#)

[com.github.gotify.messages.IntentUrlDialogActivity](#)

⚙️ SERVICES

▼ Showing all **1** services

[com.github.gotify.service.WebSocketService](#)

📡 RECEIVERS

▼ Showing all **2** receivers

[com.github.gotify.init.BootCompletedReceiver](#)

[androidx.profileinstaller.ProfileInstallReceiver](#)

PROVIDERS

▼ Showing all **1** providers

[androidx.startup.InitializationProvider](#)

LIBRARIES

▼ Showing all **2** libraries

androidx.window.extensions

androidx.window.sidecar

SBOM

▼ Showing all **56** Versioned Packages

androidx.activity:activity-ktx@1.8.0

androidx.activity:activity@1.8.0

androidx.annotation:annotation-experimental@1.4.0

androidx.appcompat:appcompat-resources@1.7.1

androidx.appcompat:appcompat@1.7.1

androidx.arch.core:core-runtime@dynamic

androidx.cardview:cardview@1.0.0

androidx.constraintlayout:constraintlayout@2.2.1

androidx.coordinatorlayout:coordinatorlayout@1.1.0

androidx.core:core-ktx@1.13.0

androidx.core:core-splashscreen@1.0.1

androidx.core:core@1.13.0

androidx.cursoradapter:cursoradapter@1.0.0

androidx.customview:customview@1.1.0

androidx.databinding:viewbinding@8.11.0

androidx.documentfile:documentfile@1.0.0

androidx.drawerlayout:drawerlayout@1.1.1

androidx.dynamicanimation:dynamicanimation@1.0.0

androidx.emoji2:emoji2-views-helper@1.3.0

androidx.emoji2:emoji2@1.3.0

androidx.exifinterface:exifinterface@1.3.7
androidx.fragment:fragment-ktx@1.3.6
androidx.fragment:fragment@1.5.4
androidx.interpolator:interpolator@1.0.0
androidx.legacy:legacy-support-core-utils@1.0.0
androidx.lifecycle:lifecycle-livedata-core-ktx@2.7.0
androidx.lifecycle:lifecycle-livedata-core@2.7.0
androidx.lifecycle:lifecycle-livedata@2.7.0
androidx.lifecycle:lifecycle-process@2.7.0
androidx.lifecycle:lifecycle-runtime-ktx@2.7.0
androidx.lifecycle:lifecycle-runtime@2.7.0
androidx.lifecycle:lifecycle-viewmodel-savedstate@2.7.0
androidx.lifecycle:lifecycle-viewmodel@2.7.0
androidx.loader:loader@1.0.0
androidx.localbroadcastmanager:localbroadcastmanager@1.0.0
androidx.preference:preference-ktx@1.2.1
androidx.preference:preference@1.2.1
androidx.print:print@1.0.0
androidx.profileinstaller:profileinstaller@1.4.0
androidx.recyclerview:recyclerview@1.1.0
androidx.savedstate:savedstate-ktx@1.2.1
androidx.savedstate:savedstate@1.2.1
androidx.slidingpanelayout:slidingpanelayout@1.2.0
androidx.startup:startup-runtime@1.1.1
androidx.swiperefreshlayout:swiperefreshlayout@1.1.0
androidx.tracing:tracing@1.0.0
androidx.transition:transition@1.5.0
androidx.vectordrawable:vectordrawable-animated@1.1.0
androidx.vectordrawable:vectordrawable@1.2.0
androidx.versionedparcelable:versionedparcelable@1.1.1
androidx.viewpager2:viewpager2@1.0.0
androidx.viewpager:viewpager@1.0.0
androidx.window>window@1.0.0
com.google.android.material:material@1.12.0
org.jetbrains.kotlin:kotlinx-coroutines-android@1.8.1
org.jetbrains.kotlin:kotlinx-coroutines-core@1.8.1

 FILES

► Show all **992** files

✔ APP SCORES



Security Score **60/100**
Trackers Detection **0/432**

📁 FILE INFORMATION

File Name com.vayunmathur.games.unblockjam_20260427.apk
Size 5.12MB
MD5 2e74ccefa594c6d995eecaa04c2ba2f5
SHA1 bef74534f542cf3778e22c8268c583ba81586ea4
SHA256 316c2660e9208cd351903e9be0b7eb8a918827d817069faf5aa5f76d02a31e68

i APP INFORMATION

App Name Unblock Jam
Package Name com.vayunmathur.games.unblockjam
Main Activity com.vayunmathur.games.unblockjam.MainActivity
Target SDK 37 Min SDK 31 Max SDK
Android Version Name v2.4.2 Android Version Code 20260427

0 / 3

EXPORTED ACTIVITIES

View All ⌵

2 / 7

EXPORTED RECEIVERS

View All ⌵

2 / 5

EXPORTED SERVICES

View All ⌵

0 / 1

EXPORTED PROVIDERS

View All ⌵

⚙️ SCAN OPTIONS

📄 DECOMPILED CODE

🔑 SIGNER CERTIFICATE

```
Binary is signed
v1 signature: False
v2 signature: False
v3 signature: True
v4 signature: False
X.509 Subject: CN=Vayun
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2025-02-17 23:06:00+00:00
Valid To: 2050-02-11 23:06:00+00:00
Issuer: CN=Vayun
Serial Number: 0x1
Hash Algorithm: sha256
md5: a0822e80e4d9de7c19019e706bb75eef
sha1: 102806d7c6f421360f19a743fdd56dbcc125b4d7
sha256: 176fcb2525573e5be8e1cb3a496dd97b137e81ca5b887a1d32cb894b4e5717b4
sha512: 62346191d3169b7513fec0358ed12763e740935c4243ba66374573236e8ca83e51270a4d9b43199c1bba5cb0fd6a41046443d1f7cad8bbdf42e137252642f3fe
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: 887abcd31f1cf495a01771cca885ea114c8cb2c27a4eb44273e4edc04c26819c
Found 1 unique certificates
```

≡ APPLICATION PERMISSIONS

Search:

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPP
android.permission.ACCESS_NETWORK_STATE	normal	view network status	Allows an application to view the status of all networks.	
android.permission.FOREGROUND_SERVICE	normal	enables regular apps to use Service.startForeground.	Allows a regular application to use Service.startForeground.	

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPP
android.permission.INTERNET	normal	full Internet access	Allows an application to create network sockets.	
android.permission.RECEIVE_BOOT_COMPLETED	normal	automatically start at boot	Allows an application to start itself as soon as the system has finished booting. This can make it take longer to start the phone and allow the application to slow down the overall phone by always running.	
android.permission.USE_BIOMETRIC	normal	allows use of device-supported biometric modalities.	Allows an app to use device supported biometric modalities.	
android.permission.USE_FINGERPRINT	normal	allow use of fingerprint	This constant was deprecated in API level 28. Applications should request USE_BIOMETRIC instead.	
android.permission.WAKE_LOCK	normal	prevent phone from sleeping	Allows an application to prevent the phone from going to sleep.	
com.vayunmathur.games.unblockjam.DYNAMIC_RECEIVER_NOT_EXPORTED_PERMISSION	unknown	Unknown permission	Unknown permission from android reference	

Showing 1 to 8 of 8 entries

[Previous](#)[1](#)[Next](#)

 ANDROID APISearch:

API	FILES
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **BROWSABLE ACTIVITIES**Search:

ACTIVITY	INTENT
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **NETWORK SECURITY**Search:

NO	SCOPE	SEVERITY	DESCRIPTION
No data available in table			

Showing 0 to 0 of 0 entries

 CERTIFICATE ANALYSIS

HIGH0

WARNING0

INFO1

Search:

TITLE	SEVERITY	DESCRIPTION
Signed Application	info	Application is signed with a code signing certificate

Showing 1 to 1 of 1 entries



 MANIFEST ANALYSIS

HIGH0

WARNING6

INFO0

SUPPRESSED0

Search:

NO	ISSUE	SEVERITY	DESCRIPTION	OPTIONS
1	Application Data can be Backed up [android:allowBackup=true]	warning	This flag allows anyone to backup your application data via adb. It allows users who have enabled USB debugging to copy application data off of the device.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
2	TaskAffinity is set for activity (androidx.glance.appwidget.action.InvisibleActionTrampolineActivity)	warning	If taskAffinity is set, then other application could read the Intents sent to Activities belonging to another task. Always use the default setting keeping the affinity as the package name in order to prevent sensitive information inside sent or received Intents from being read by another application.	
3	Service (androidx.glance.appwidget.GlanceRemoteViewsService) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.BIND_REMOTEVIEWS [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	
4	Service (androidx.work.impl.background.systemjob.SystemJobService) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.BIND_JOB_SERVICE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
5	Broadcast Receiver (androidx.work.impl.diagnostics.DiagnosticsReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	
6	Broadcast Receiver (androidx.profileinstaller.ProfileInstallReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

Showing 1 to 6 of 6 entries

[Previous](#)[1](#)[Next](#)

 CODE ANALYSIS

Search:

NO	ISSUE	SEVERITY	STANDARDS	FILES	OPTIONS
No data available in table					

Showing 0 to 0 of 0 entries

[Previous](#)

[Next](#)

 SHARED LIBRARY BINARY ANALYSIS

Search:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	
1	arm64-v8a/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1 [S S

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
2	arm64-v8a/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1 (S)

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
				unless Dart FFI is used.					S
3	arm64-v8a/libsqlcipher.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__vsprintf_chk', '__strlen_chk', '__memcpy_chk', '__memset_chk', '__strchr_chk', '__memmove_chk']	1 [S

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
4	arm64-v8a/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1 (S)

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
5	arm64-v8a/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1 (S)

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
				unless Dart FFI is used.					S
6	arm64-v8a/libsqlcipher.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__vsprintf_chk', '__strlen_chk', '__memcpy_chk', '__memset_chk', '__strchr_chk', '__memmove_chk']	1 [S s

Showing 1 to 6 of 6 entries

[Previous](#)[1](#)[Next](#)

 NIAP ANALYSIS v1.3Search:

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
No data available in table				

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **FILE ANALYSIS**Search:

NO	ISSUE	FILES
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **FIREBASE DATABASE ANALYSIS**Search:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)**MALWARE LOOKUP**[VirusTotal Report](#)[Triage Report](#)[MetaDefender Report](#)[Hybrid Analysis Report](#)**APKiD ANALYSIS**Search:

DEX	DETECTIONS				
2e74ccefa594c6d995eecaa04c2ba2f5.apk	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Manipulator Found</td><td>Resources Confusion</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Manipulator Found	Resources Confusion
FINDINGS	DETAILS				
Manipulator Found	Resources Confusion				

DEX	DETECTIONS						
classes.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>unknown (please file detection issue!)</td></tr><tr><td>yara_issue</td><td>yara issue - dex file recognized by apkid but not yara module</td></tr></table> Showing 1 to 2 of 2 entries Previous1Next	FINDINGS	DETAILS	Compiler	unknown (please file detection issue!)	yara_issue	yara issue - dex file recognized by apkid but not yara module
FINDINGS	DETAILS						
Compiler	unknown (please file detection issue!)						
yara_issue	yara issue - dex file recognized by apkid but not yara module						

Showing 1 to 2 of 2 entries

 BEHAVIOUR ANALYSIS

Search:			
RULE ID	BEHAVIOUR	LABEL	FILES
No data available in table			

Showing 0 to 0 of 0 entries

 ABUSED PERMISSIONS

Top Malware Permissions

4/25 Other Common Permissions

1/44

android.permission.WAKE_LOCK,
android.permission.ACCESS_NETWORK_STATE,
android.permission.RECEIVE_BOOT_COMPLETED,
android.permission.INTERNET

android.permission.FOREGROUND_SERVICE

Malware Permissions are the top permissions that are widely abused by known malware.

Other Common Permissions are permissions that are commonly abused by known malware.

SERVER LOCATIONS



DOMAIN MALWARE CHECK

 URLS

 EMAILS

 TRACKERS

Search:

TRACKER NAME	CATEGORIES	URL
No data available in table		

Showing 0 to 0 of 0 entries

 POSSIBLE HARDCODED SECRETS

A STRINGS

From APK Resource

► Show all **1113** strings

From Code

From Shared Objects

lib/arm64-v8a/libandroidx.graphics.path.so

► Show all **19** strings

lib/arm64-v8a/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

lib/arm64-v8a/libsqlcipher.so

► Show all **2667** strings

apktool_out/lib/arm64-v8a/libandroidx.graphics.path.so

► Show all **19** strings

apktool_out/lib/arm64-v8a/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

apktool_out/lib/arm64-v8a/libsqlcipher.so

► Show all **2667** strings

ACTIVITIES

▼ Showing all **3** activities

[com.vayunmathur.games.unblockjam.MainActivity](#)

[androidx.glance.appwidget.action.ActionTrampolineActivity](#)

[androidx.glance.appwidget.action.InvisibleActionTrampolineActivity](#)

SERVICES

▼ Showing all **5** services

[androidx.glance.appwidget.GlanceRemoteViewsService](#)

[androidx.core.widget.RemoteViewsCompatService](#)

[androidx.work.impl.background.systemjob.SystemJobService](#)
[androidx.work.impl.foreground.SystemForegroundService](#)
[androidx.room.MultiInstanceInvalidationService](#)

RECEIVERS

▼ Showing all **7** receivers

[androidx.glance.appwidget.action.ActionCallbackBroadcastReceiver](#)
[androidx.glance.appwidget.UnmanagedSessionReceiver](#)
[androidx.glance.appwidget.MyPackageReplacedReceiver](#)
[androidx.work.impl.utils.ForceStopRunnable\\$BroadcastReceiver](#)
[androidx.work.impl.background.systemalarm.RescheduleReceiver](#)
[androidx.work.impl.diagnostics.DiagnosticsReceiver](#)
[androidx.profileinstaller.ProfileInstallReceiver](#)

PROVIDERS

▼ Showing all **1** providers

[androidx.startup.InitializationProvider](#)

LIBRARIES

▼ Showing all **2** libraries

androidx.window.extensions
androidx.window.sidecar

SBOM

▼ Showing all **94** Versioned Packages

androidx.activity:activity-compose@1.13.0
androidx.activity:activity-ktx@1.13.0

androidx.activity:activity@1.13.0
androidx.annotation:annotation-experimental@1.5.1
androidx.appcompat:appcompat-resources@1.2.0
androidx.appcompat:appcompat@1.2.0
androidx.arch.core:core-runtime@dynamic
androidx.autofill:autofill@1.0.0
androidx.biometric:biometric@1.2.0-alpha05
androidx.compose.animation:animation-core@1.11.0
androidx.compose.animation:animation@1.11.0
androidx.compose.foundation:foundation-layout@1.11.0
androidx.compose.foundation:foundation@1.11.0
androidx.compose.material3.adaptive:adaptive-layout@1.3.0-alpha10
androidx.compose.material3.adaptive:adaptive-navigation3@1.3.0-alpha10
androidx.compose.material3.adaptive:adaptive-navigation@1.3.0-alpha10
androidx.compose.material3.adaptive:adaptive@1.3.0-alpha10
androidx.compose.material3:material3@1.5.0-alpha18
androidx.compose.material:material-ripple@1.11.0
androidx.compose.runtime:runtime-annotation@1.11.0
androidx.compose.runtime:runtime-retain@1.11.0
androidx.compose.runtime:runtime-saveable@1.11.0
androidx.compose.runtime:runtime@1.11.0
androidx.compose.ui:ui-geometry@1.11.0
androidx.compose.ui:ui-graphics@1.11.0
androidx.compose.ui:ui-text@1.11.0
androidx.compose.ui:ui-unit@1.11.0
androidx.compose.ui:ui-util@1.11.0
androidx.compose.ui:ui@1.11.0
androidx.core:core-ktx@1.18.0
androidx.core:core-remoteviews@1.1.0
androidx.core:core-viewtree@1.0.0
androidx.core:core@1.18.0
androidx.cursoradapter:cursoradapter@1.0.0
androidx.customview:customview-poolingcontainer@1.0.0
androidx.customview:customview@1.0.0
androidx.datastore:datastore-core@1.2.1
androidx.datastore:datastore-preferences-core@1.2.1
androidx.datastore:datastore-preferences@1.2.1
androidx.datastore:datastore@1.2.1

androidx.documentfile:documentfile@1.0.0
androidx.drawerlayout:drawerlayout@1.0.0
androidx.dynamicanimation:dynamicanimation@1.0.0
androidx.emoji2:emoji2@1.4.0
androidx.fragment:fragment-ktx@1.8.9
androidx.fragment:fragment@1.8.9
androidx.glance:glance-appwidget@1.1.1
androidx.glance:glance-material3@1.1.1
androidx.glance:glance@1.1.1
androidx.graphics:graphics-path@1.0.1
androidx.graphics:graphics-shapes@1.0.1
androidx.interpolator:interpolator@1.0.0
androidx.legacy:legacy-support-core-utils@1.0.0
androidx.lifecycle:lifecycle-livedata-core-ktx@2.10.0
androidx.lifecycle:lifecycle-livedata-core@2.10.0
androidx.lifecycle:lifecycle-livedata@2.10.0
androidx.lifecycle:lifecycle-process@2.10.0
androidx.lifecycle:lifecycle-runtime-compose@2.10.0
androidx.lifecycle:lifecycle-runtime-ktx@2.10.0
androidx.lifecycle:lifecycle-runtime@2.10.0
androidx.lifecycle:lifecycle-service@2.10.0
androidx.lifecycle:lifecycle-viewmodel-compose@2.10.0
androidx.lifecycle:lifecycle-viewmodel-ktx@2.10.0
androidx.lifecycle:lifecycle-viewmodel-savedstate@2.10.0
androidx.lifecycle:lifecycle-viewmodel@2.10.0
androidx.loader:loader@1.0.0
androidx.localbroadcastmanager:localbroadcastmanager@1.0.0
androidx.navigation3:navigation3-runtime@1.1.1
androidx.navigation3:navigation3-ui@1.1.1
androidx.navigationevent:navigationevent-compose@1.0.2
androidx.navigationevent:navigationevent@1.0.2
androidx.print:print@1.0.0
androidx.profileinstaller:profileinstaller@1.4.0
androidx.room:room-ktx@2.8.4
androidx.room:room-runtime@2.8.4
androidx.savedstate:savedstate-compose@1.4.0
androidx.savedstate:savedstate-ktx@1.4.0
androidx.savedstate:savedstate@1.4.0

androidx.sqlite:sqlite-framework@2.6.2
androidx.sqlite:sqlite@2.6.2
androidx.startup:startup-runtime@1.2.0
androidx.tracing:tracing-ktx@1.2.0
androidx.tracing:tracing@1.2.0
androidx.transition:transition@1.6.0
androidx.vectordrawable:vectordrawable-animated@1.1.0
androidx.vectordrawable:vectordrawable@1.1.0
androidx.versionedparcelable:versionedparcelable@1.1.1
androidx.viewpager:viewpager@1.0.0
androidx.window:window-core@1.5.0
androidx.window:window@1.5.0
androidx.work:work-runtime-ktx@2.11.2
androidx.work:work-runtime@2.11.2
org.jetbrains.kotlin:kotlin-coroutines-android@1.9.0
org.jetbrains.kotlin:kotlin-coroutines-core@1.9.0

FILES

► Show all **411** files

✔ APP SCORES

Security Score **37/100**Trackers Detection **1/432**

📁 FILE INFORMATION

File Name com.tacticmaster_30.apk

Size 17.11MB

MD5 33bb2bff7a50f855f6744c2cba38710a

SHA1 5db7519aae363d43d0e91777ec52ff5e9e3c5936

SHA256 58651b4fd5ff354bec964e70dca6e1cd3845771840c6e804ded07ea076821e15

i APP INFORMATION

App Name TacticMaster

Package Name com.tacticmaster

Main Activity com.tacticmaster.MainActivity

Target SDK 36 Min SDK 24 Max SDK

Android Version Name 1.0.30 Android Version Code 30

▶ PLAYSTORE INFORMATION

Title Tactic Master

Score 0 Installs 100+ Price 0 Android Version Support Category Board Play Store URL [com.tacticmaster](https://play.google.com/store/apps/details?id=com.tacticmaster)

Developer jazzmo, Developer ID jazzmo

Developer Address None

Developer Website <https://github.com/jazzm0/tactic-master>Developer Email tibor.tarnai@gmail.comRelease Date Apr 7, 2025 Privacy Policy [Privacy link](#)

Description

TacticMaster is the ultimate chess companion designed to help players of all levels improve their game. Whether you're a beginner learning the basics or an advanced player sharpening your tactics, TacticMaster offers a rich and engaging experience.

Key Features:

Interactive Chessboard: Play through puzzles and scenarios with an intuitive and responsive chessboard.

Tactical Challenges: Solve curated chess puzzles to enhance your strategic thinking and decision-making skills.

Hints and Guidance: Stuck on a move? Use hints to learn the best strategies and improve your gameplay.

Player Progress Tracking: Monitor your performance and track your improvement over time.

Offline Mode: Play and practice anytime, anywhere, without needing an internet connection.

Why Choose TacticMaster?

Learn from the Best: Access puzzles inspired by real-world games and grandmaster strategies.

Improve Your Rating: Practice regularly to climb the ranks and become a stronger player.

Fun and Engaging: Enjoy a sleek design and smooth gameplay that makes learning chess enjoyable.

Download TacticMaster today and take your chess skills to the next level! Whether you're preparing for tournaments or just playing for fun, TacticMaster is your go-to app for mastering the game of kings.

Problems are rated from 1000 to 3000+.

0 / 2

EXPORTED ACTIVITIES

View All 

1 / 1

EXPORTED RECEIVERS

0 / 2

EXPORTED SERVICES

View All 

0 / 2

EXPORTED PROVIDERS

View All View All 

SCAN OPTIONS

DECOMPILED CODE

SIGNER CERTIFICATE

```
Binary is signed
v1 signature: False
v2 signature: True
v3 signature: False
v4 signature: False
X.509 Subject: CN=Tibor Tarnai
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2020-09-23 15:18:18+00:00
Valid To: 2045-09-17 15:18:18+00:00
Issuer: CN=Tibor Tarnai
Serial Number: 0x267de221
Hash Algorithm: sha256
md5: 3a690fbede9242b9231f56ae19df8566
sha1: 82c1b09eafcd850989386fb3946627f2f95a9192
sha256: 7dfe7396002974a2d4d7ec50fba97366e3872d52e4b2a7c9872a979d773b6257
sha512: 0994ab53868ae134c2525c4f8bfb7d6093ee7cb951cbd7e449138d3d51d9e0438a7664d59615b1658f07010209fc0ff5194bbcbdd799cd8ce7d5075590ad9988
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: 2e44241a5445948116968ff4ea41998ae462dd6a5b7ed4b648de17278d80c9f3
Found 1 unique certificates
```

APPLICATION PERMISSIONS

Search:

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
com.tacticmaster.DYNAMIC_RECEIVER_NOT_EXPORTED_PERMISSION	unknown	Unknown permission	Unknown permission from android reference	

Showing 1 to 1 of 1 entries

 ANDROID API

Search:

API	FILES
No data available in table	

Showing 0 to 0 of 0 entries

 BROWSABLE ACTIVITIES

Search:

ACTIVITY	INTENT
No data available in table	

Showing 0 to 0 of 0 entries

 NETWORK SECURITY

Search:

NO	SCOPE	SEVERITY	DESCRIPTION
No data available in table			

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

 CERTIFICATE ANALYSIS

HIGH

0

WARNING

0

INFO

1

Search:

TITLE	SEVERITY	DESCRIPTION
Signed Application	info	Application is signed with a code signing certificate

Showing 1 to 1 of 1 entries

[Previous](#) [1](#) [Next](#)



 MANIFEST ANALYSIS

HIGH

1

WARNING

2

INFO

0

SUPPRESSED

0

Search:

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
1	App can be installed on a vulnerable unpatched Android version 7.0, [minSdk=24]	high	This application can be installed on an older version of android that has multiple unfixed vulnerabilities. These devices won't receive reasonable security updates from Google. Support an Android version => 10, API 29 to receive reasonable security updates.	
2	Application Data can be Backed up [android:allowBackup=true]	warning	This flag allows anyone to backup your application data via adb. It allows users who have enabled USB debugging to copy application data off of the device.	
3	Broadcast Receiver (androidx.profileinstaller.ProfileInstallReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

Showing 1 to 3 of 3 entries

[Previous](#)[1](#)[Next](#)

</> CODE ANALYSIS

Search:

NO	ISSUE	SEVERITY	STANDARDS	FILES	OPTIONS
No data available in table					

Showing 0 to 0 of 0 entries

🚩 SHARED LIBRARY BINARY ANALYSIS

No Shared Objects found.

Search:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
No data available in table									

Showing 0 to 0 of 0 entries

📖 NIAP ANALYSIS v1.3

Search:

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
No data available in table				

Showing 0 to 0 of 0 entries

FILE ANALYSISSearch:

NO	ISSUE	FILES
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)**FIREBASE DATABASE ANALYSIS**Search:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)**MALWARE LOOKUP**[VirusTotal Report](#)[Triage Report](#)[MetaDefender Report](#)[Hybrid Analysis Report](#)**APKiD ANALYSIS**Search:

DEX	DETECTIONS								
33bb2bff7a50f855f6744c2cba38710a.apk	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Manipulator Found</td><td>Resources Confusion</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Manipulator Found	Resources Confusion				
FINDINGS	DETAILS								
Manipulator Found	Resources Confusion								
classes.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti Debug Code</td><td>Debug.isDebuggerConnected() check</td></tr><tr><td>Anti-VM Code</td><td>Build.FINGERPRINT check possible Build.SERIAL check</td></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 3 of 3 entries Previous 1 Next	FINDINGS	DETAILS	Anti Debug Code	Debug.isDebuggerConnected() check	Anti-VM Code	Build.FINGERPRINT check possible Build.SERIAL check	Compiler	r8
FINDINGS	DETAILS								
Anti Debug Code	Debug.isDebuggerConnected() check								
Anti-VM Code	Build.FINGERPRINT check possible Build.SERIAL check								
Compiler	r8								

Showing 1 to 2 of 2 entries

[Previous](#) [1](#) [Next](#)

Search:

RULE ID	BEHAVIOUR	LABEL	FILES
No data available in table			

Showing 0 to 0 of 0 entries

Previous

Next

ABUSED PERMISSIONS

Top Malware Permissions

0/25 Other Common Permissions

0/44

Malware Permissions are the top permissions that are widely abused by known malware.
Other Common Permissions are permissions that are commonly abused by known malware.

SERVER LOCATIONS



 **DOMAIN MALWARE CHECK**

 **URLS**

 **EMAILS**

 **TRACKERS**

Search:

TRACKER NAME	CATEGORIES	URL
ACRA	Crash reporting	https://reports.exodus-privacy.eu.org/trackers/444

Showing 1 to 1 of 1 entries

[Previous](#)

1

[Next](#)

POSSIBLE HARDCODED SECRETS

A STRINGS

From APK Resource

► Show all **2058** strings

From Code

From Shared Objects

ACTIVITIES

▼ Showing all **2** activities

[com.tacticmaster.MainActivity](#)

[com.tacticmaster.settings.SettingsActivity](#)

SERVICES

▼ Showing all **2** services

[org.acra.sender.LegacySenderService](#)

[org.acra.sender.JobSenderService](#)

RECEIVERS

▼ Showing all **1** receivers

[androidx.profileinstaller.ProfileInstallReceiver](#)

PROVIDERS

▼ Showing all **2** providers

[org.acra.attachment.AcraContentProvider](#)

[androidx.startup.InitializationProvider](#)

LIBRARIES

▼ Showing all **2** libraries

androidx.window.extensions

androidx.window.sidecar

SBOM

▼ Showing all **48** Versioned Packages

androidx.activity:activity-ktx@1.8.0

androidx.activity:activity@1.8.0

androidx.annotation:annotation-experimental@1.4.1

androidx.appcompat:appcompat-resources@1.7.1

androidx.appcompat:appcompat@1.7.1

androidx.arch.core:core-runtime@dynamic

androidx.cardview:cardview@1.0.0

androidx.coordinatorlayout:coordinatorlayout@1.1.0

androidx.core:core-ktx@1.13.0
androidx.core:core@1.13.0
androidx.cursoradapter:cursoradapter@1.0.0
androidx.customview:customview@1.1.0
androidx.drawerlayout:drawerlayout@1.1.1
androidx.dynamicanimation:dynamicanimation@1.1.0
androidx.emoji2:emoji2-views-helper@1.3.0
androidx.emoji2:emoji2@1.3.0
androidx.fragment:fragment-ktx@1.3.6
androidx.fragment:fragment@1.5.4
androidx.graphics:graphics-shapes@1.0.1
androidx.interpolator:interpolator@1.0.0
androidx.lifecycle:lifecycle-livedata-core-ktx@dynamic
androidx.lifecycle:lifecycle-livedata-core@dynamic
androidx.lifecycle:lifecycle-livedata@dynamic
androidx.lifecycle:lifecycle-process@dynamic
androidx.lifecycle:lifecycle-runtime-ktx@dynamic
androidx.lifecycle:lifecycle-runtime@dynamic
androidx.lifecycle:lifecycle-viewmodel-ktx@dynamic
androidx.lifecycle:lifecycle-viewmodel-savedstate@dynamic
androidx.lifecycle:lifecycle-viewmodel@dynamic
androidx.loader:loader@1.0.0
androidx.preference:preference@1.2.1
androidx.profileinstaller:profileinstaller@1.3.1
androidx.recyclerview:recyclerview@1.2.1
androidx.savedstate:savedstate-ktx@1.2.1
androidx.savedstate:savedstate@1.2.1
androidx.slidingpanelayout:slidingpanelayout@1.2.0
androidx.startup:startup-runtime@1.1.1
androidx.tracing:tracing@1.0.0
androidx.transition:transition@1.5.0
androidx.vectordrawable:vectordrawable-animated@1.1.0
androidx.vectordrawable:vectordrawable@1.1.0
androidx.versionedparcelable:versionedparcelable@1.1.1
androidx.viewpager2:viewpager2@1.0.0
androidx.viewpager:viewpager@1.0.0
androidx.window>window@1.0.0
com.google.android.material:material@1.13.0

org.jetbrains.kotlin:kotlinx-coroutines-android@1.6.4
org.jetbrains.kotlin:kotlinx-coroutines-core@1.6.4

FILES

► Show all **736** files

✔ APP SCORES



Security Score **54/100**
Trackers Detection **0/432**

📁 FILE INFORMATION

File Name **com.nvllz.stepsy_20.apk**
Size **3.13MB**
MD5 **34ee4b531b6cf56f4e955fbc8e68df20**
SHA1 **50c8f9a674151c6b395444a22298d70a055a0b2f**
SHA256 **73b15967d647c685b592bc03fc4983bee7f3009d526fd69b2a743bb3dd964429**

i APP INFORMATION

App Name **Stepsy**
Package Name **com.nvllz.stepsy**
Main Activity **com.nvllz.stepsy.ui.MainActivity**
Target SDK **35** Min SDK **26** Max SDK
Android Version Name **1.6.2** Android Version Code **20**

3 / 9

EXPORTED ACTIVITIES

View All ⌵

7 / 16

EXPORTED RECEIVERS

View All ⌵

2 / 6

EXPORTED SERVICES

View All ⌵

0 / 1

EXPORTED PROVIDERS

View All ⌵

⚙️ SCAN OPTIONS

📄 DECOMPILED CODE

🔑 SIGNER CERTIFICATE

Binary is signed
v1 signature: False
v2 signature: True
v3 signature: False
v4 signature: False
X.509 Subject: CN=nvllz
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2025-04-06 16:13:32+00:00
Valid To: 2050-03-31 16:13:32+00:00
Issuer: CN=nvllz
Serial Number: 0x1
Hash Algorithm: sha256
md5: 2546a75ecbaedcbac3ab7195015cd854
sha1: 988a028261359b0ba8c77f701f9ab234428e54a2
sha256: 91e4cd099c31aeaf1bc5ed4029467eb7181d5a7dd893fd98832713ce3be58816
sha512: d73bb4b1fcc74947c897b4f9fc9a92069dbba0702dcb642e0743d91a776d6c8b352512a11c30c7777825741f40a60841737c7111477bd8261580572199ba078a
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: 5c62648c8a8c5940a1317ae36950e7dd7e474714d53a9652268317fdb66b7837
Found 1 unique certificates

≡ APPLICATION PERMISSIONS

Search:

PERMISSION	STATUS	INFO	DESCRIPTION
android.permission.ACCESS_NETWORK_STATE	normal	view network status	Allows an applic
android.permission.ACTIVITY_RECOGNITION	dangerous	allow application to recognize physical activity	Allows an applic
android.permission.FOREGROUND_SERVICE	normal	enables regular apps to use Service.startForeground.	Allows a regular
android.permission.FOREGROUND_SERVICE_HEALTH	normal	enables foreground services with health-related functionality.	Allows a regular the type "health

PERMISSION	STATUS	INFO	DESCRIPTION
android.permission.HIGH_SAMPLING_RATE_SENSORS	normal	Access higher sampling rate sensor data	Allows an app to than 200 Hz.
android.permission.POST_NOTIFICATIONS	dangerous	allows an app to post notifications.	Allows an app to
android.permission.RECEIVE_BOOT_COMPLETED	normal	automatically start at boot	Allows an applic finished booting and allow the ap always running.
android.permission.REQUEST_IGNORE_BATTERY_OPTIMIZATIONS	normal	permission for using Settings.ACTION_REQUEST_IGNORE_BATTERY_OPTIMIZATIONS.	Permission an a Settings.ACTION
android.permission.WAKE_LOCK	normal	prevent phone from sleeping	Allows an applic
com.nvllz.stepsy.DYNAMIC_RECEIVER_NOT_EXPORTED_PERMISSION	unknown	Unknown permission	Unknown permi

Showing 1 to 10 of 10 entries

🤖 ANDROID API

Search:

API	FILES
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

BROWSABLE ACTIVITIES

Search:

ACTIVITY	INTENT
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

NETWORK SECURITY

Search:

NO	SCOPE	SEVERITY	DESCRIPTION
No data available in table			

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

CERTIFICATE ANALYSIS

HIGH
0**WARNING**
0**INFO**
1Search:

TITLE	SEVERITY	DESCRIPTION
Signed Application	info	Application is signed with a code signing certificate

Showing 1 to 1 of 1 entries

[Previous](#) [1](#) [Next](#)

MANIFEST ANALYSIS

HIGH
0**WARNING**
14**INFO**
0**SUPPRESSED**
0Search:

NO	ISSUE	SEVERITY	DESCRIPTION	OPTIONS
1	App can be installed on a vulnerable Android version 8.0, minSdk=26]	warning	This application can be installed on an older version of android that has multiple vulnerabilities. Support an Android version => 10, API 29 to receive reasonable security updates.	
2	Application Data can be Backed up [android:allowBackup=true]	warning	This flag allows anyone to backup your application data via adb. It allows users who have enabled USB debugging to copy application data off of the device.	
3	Activity (com.nvllz.stepsy.ui.WidgetIconConfigureActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
4	Activity (com.nvllz.stepsy.ui.WidgetCompactConfigureActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
5	Activity (com.nvllz.stepsy.ui.WidgetPlainConfigureActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
6	Service (com.nvllz.stepsy.service.StepsyTileService) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.BIND_QUICK_SETTINGS_TILE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	
7	Broadcast Receiver (com.nvllz.stepsy.AppUpdateReceiver) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
8	Broadcast Receiver (com.nvllz.stepsy.ui.WidgetIconProvider) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
9	Broadcast Receiver (com.nvllz.stepsy.ui.WidgetCompactProvider) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
10	Broadcast Receiver (com.nvllz.stepsy.ui.WidgetPlainProvider) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	

Showing 1 to 10 of 14 entries

 CODE ANALYSIS

Search:

NO	ISSUE	SEVERITY	STANDARDS	FILES	OPTIONS
No data available in table					

Showing 0 to 0 of 0 entries

[Previous](#)

[Next](#)

 SHARED LIBRARY BINARY ANALYSIS

Search:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
1	arm64-v8a/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
2	armeabi-v7a/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
3	x86/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
4	x86_64/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
5	arm64-v8a/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
6	armeabi-v7a/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
7	x86/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
8	x86_64/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

Showing 1 to 8 of 8 entries

 NIAP ANALYSIS v1.3Search:

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
No data available in table				

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#) **FILE ANALYSIS**Search:

NO	ISSUE	FILES
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#) **FIREBASE DATABASE ANALYSIS**Search:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

MALWARE LOOKUP

[VirusTotal Report](#)[Triage Report](#)[MetaDefender Report](#)[Hybrid Analysis Report](#)

APKiD ANALYSIS

Search:

DEX	DETECTIONS				
34ee4b531b6cf56f4e955fbc8e68df20.apk	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Manipulator Found</td><td>Resources Confusion</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Manipulator Found	Resources Confusion
FINDINGS	DETAILS				
Manipulator Found	Resources Confusion				

DEX	DETECTIONS						
classes.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti-VM Code</td><td>Build.FINGERPRINT check Build.MANUFACTURER check</td></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 2 of 2 entries Previous 1 Next	FINDINGS	DETAILS	Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check	Compiler	r8
FINDINGS	DETAILS						
Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check						
Compiler	r8						

Showing 1 to 2 of 2 entries

 BEHAVIOUR ANALYSIS

Search:			
RULE ID	BEHAVIOUR	LABEL	FILES
No data available in table			

Showing 0 to 0 of 0 entries

 ABUSED PERMISSIONS

Top Malware Permissions

android.permission.RECEIVE_BOOT_COMPLETED,
android.permission.WAKE_LOCK,
android.permission.ACCESS_NETWORK_STATE

3/25 Other Common Permissions**3/44**

android.permission.ACTIVITY_RECOGNITION,
android.permission.FOREGROUND_SERVICE,
android.permission.REQUEST_IGNORE_BATTERY_OPTIMIZATIONS

Malware Permissions are the top permissions that are widely abused by known malware.

Other Common Permissions are permissions that are commonly abused by known malware.

🌐 SERVER LOCATIONS

This app may communicate with the following OFAC sanctioned list of countries.

Search:

DOMAIN	COUNTRY/REGION
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

🔍 DOMAIN MALWARE CHECK

Search:

DOMAIN	STATUS	GEOLOCATION
github.com	ok	IP: 140.82.114.3 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
www.gnu.org	ok	IP: 209.51.188.116 Country: United States of America Region: Massachusetts City: Boston Latitude: 42.358429 Longitude: -71.059769 View: Google Map

Showing 1 to 2 of 2 entries

[Previous](#)[1](#)[Next](#)

 URLSSearch:

URL	FILE
https://github.com/0xf4b1/motionmate https://github.com/nvllz/stepsy/releases https://github.com/nvllz/stepsy/issues https://github.com/0xf4b1 https://github.com/nvllz/stepsy https://github.com/nvllz https://www.gnu.org/licenses/gpl-3.0.html	Android String Resource

Showing 1 to 1 of 1 entries

[Previous](#) [1](#) [Next](#) **EMAILS** **TRACKERS**Search:

TRACKER NAME	CATEGORIES	URL
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

POSSIBLE HARDCODED SECRETS

A STRINGS

From APK Resource

► Show all **6579** strings

From Code

From Shared Objects

lib/arm64-v8a/libdatastore_shared_counter.so

▼ Showing all **3** strings

ro.arch

exynos9810

java/io/IOException

lib/armeabi-v7a/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

lib/x86/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

lib/x86_64/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

apktool_out/lib/arm64-v8a/libdatastore_shared_counter.so

▼ Showing all **3** strings

ro.arch
exynos9810
java/io/IOException

apktool_out/lib/armeabi-v7a/libdatastore_shared_counter.so

▼ Showing all **1** strings
java/io/IOException

apktool_out/lib/x86/libdatastore_shared_counter.so

▼ Showing all **1** strings
java/io/IOException

apktool_out/lib/x86_64/libdatastore_shared_counter.so

▼ Showing all **1** strings
java/io/IOException

ACTIVITIES

▼ Showing all **9** activities
[com.nvllz.stepsy.ui.MainActivity](#)
[com.nvllz.stepsy.ui.SettingsActivity](#)
[com.nvllz.stepsy.ui.BackupActivity](#)
[com.nvllz.stepsy.ui.AchievementsActivity](#)
[com.nvllz.stepsy.ui.DailyGoalsActivity](#)
[com.nvllz.stepsy.ui.WidgetIconConfigureActivity](#)
[com.nvllz.stepsy.ui.WidgetCompactConfigureActivity](#)
[com.nvllz.stepsy.ui.WidgetPlainConfigureActivity](#)
[com.nvllz.stepsy.ui.TileDialogActivity](#)

SERVICES

▼ Showing all **6** services

[com.nvllz.stepsy.service.MotionService](#)
[com.nvllz.stepsy.service.StepsyTileService](#)
[androidx.work.impl.background.systemalarm.SystemAlarmService](#)
[androidx.work.impl.background.systemjob.SystemJobService](#)
[androidx.work.impl.foreground.SystemForegroundService](#)
[androidx.room.MultiInstanceInvalidationService](#)

RECEIVERS

▼ Showing all **16** receivers

[com.nvllz.stepsy.service.OnBootReceiver](#)
[com.nvllz.stepsy.AppUpdateReceiver](#)
[com.nvllz.stepsy.service.MidnightResetReceiver](#)
[com.nvllz.stepsy.ui.WidgetIconProvider](#)
[com.nvllz.stepsy.ui.WidgetCompactProvider](#)
[com.nvllz.stepsy.ui.WidgetPlainProvider](#)
[com.nvllz.stepsy.api.StepsyControlReceiver](#)
[androidx.work.impl.utils.ForceStopRunnable\\$BroadcastReceiver](#)
[androidx.work.impl.background.systemalarm.ConstraintProxy\\$BatteryChargingProxy](#)
[androidx.work.impl.background.systemalarm.ConstraintProxy\\$BatteryNotLowProxy](#)
[androidx.work.impl.background.systemalarm.ConstraintProxy\\$StorageNotLowProxy](#)
[androidx.work.impl.background.systemalarm.ConstraintProxy\\$NetworkStateProxy](#)
[androidx.work.impl.background.systemalarm.RescheduleReceiver](#)
[androidx.work.impl.background.systemalarm.ConstraintProxyUpdateReceiver](#)
[androidx.work.impl.diagnostics.DiagnosticsReceiver](#)
[androidx.profileinstaller.ProfileInstallReceiver](#)

PROVIDERS

▼ Showing all **1** providers

[androidx.startup.InitializationProvider](#)

LIBRARIES

▼ Showing all **2** libraries

androidx.window.extensions
androidx.window.sidecar

SBOM

▼ Showing all **64** Versioned Packages


androidx.activity:activity-ktx@1.8.0
androidx.activity:activity@1.8.0
androidx.annotation:annotation-experimental@1.4.1
androidx.appcompat:appcompat-resources@1.7.1
androidx.appcompat:appcompat@1.7.1
androidx.arch.core:core-runtime@dynamic
androidx.cardview:cardview@1.0.0
androidx.coordinatorlayout:coordinatorlayout@1.1.0
androidx.core:core-ktx@1.13.1
androidx.core:core-viewtree@1.0.0
androidx.core:core@1.13.1
androidx.cursoradapter:cursoradapter@1.0.0
androidx.customview:customview@1.1.0
androidx.databinding:viewbinding@8.9.1
androidx.datastore:datastore-core@1.1.7
androidx.datastore:datastore-preferences-core@1.1.7
androidx.datastore:datastore-preferences@1.1.7
androidx.datastore:datastore@1.1.7
androidx.documentfile:documentfile@1.1.0
androidx.drawerlayout:drawerlayout@1.1.1
androidx.dynamicanimation:dynamicanimation@1.1.0
androidx.emoji2:emoji2-views-helper@1.3.0
androidx.emoji2:emoji2@1.3.0
androidx.fragment:fragment-ktx@1.3.6
androidx.fragment:fragment@1.5.4
androidx.graphics:graphics-shapes@1.0.1
androidx.interpolator:interpolator@1.0.0
androidx.lifecycle:lifecycle-livedata-core-ktx@2.9.1

androidx.lifecycle:lifecycle-livedata-core@2.9.1
androidx.lifecycle:lifecycle-livedata@2.9.1
androidx.lifecycle:lifecycle-process@2.9.1
androidx.lifecycle:lifecycle-runtime-ktx@2.9.1
androidx.lifecycle:lifecycle-runtime@2.9.1
androidx.lifecycle:lifecycle-service@2.9.1
androidx.lifecycle:lifecycle-viewmodel-ktx@2.9.1
androidx.lifecycle:lifecycle-viewmodel-savedstate@2.9.1
androidx.lifecycle:lifecycle-viewmodel@2.9.1
androidx.loader:loader@1.0.0
androidx.preference:preference-ktx@1.2.1
androidx.preference:preference@1.2.1
androidx.profileinstaller:profileinstaller@1.4.0
androidx.recyclerview:recyclerview@1.2.1
androidx.room:room-ktx@2.6.1
androidx.room:room-runtime@2.6.1
androidx.savedstate:savedstate-ktx@1.3.0
androidx.savedstate:savedstate@1.3.0
androidx.slidingpanelayout:slidingpanelayout@1.2.0
androidx.sqlite:sqlite-framework@2.4.0
androidx.sqlite:sqlite@2.4.0
androidx.startup:startup-runtime@1.1.1
androidx.tracing:tracing-ktx@1.2.0
androidx.tracing:tracing@1.2.0
androidx.transition:transition@1.5.0
androidx.vectordrawable:vectordrawable-animated@1.1.0
androidx.vectordrawable:vectordrawable@1.1.0
androidx.versionedparcelable:versionedparcelable@1.1.1
androidx.viewpager2:viewpager2@1.0.0
androidx.viewpager:viewpager@1.0.0
androidx.window>window@1.0.0
androidx.work:work-runtime-ktx@2.10.1
androidx.work:work-runtime@2.10.1
com.google.android.material:material@1.13.0
org.jetbrains.kotlin:kotlinx-coroutines-android@1.7.3
org.jetbrains.kotlin:kotlinx-coroutines-core@1.7.3

 FILES

► Show all **876** files

✔ APP SCORES



Security Score **54/100**
Trackers Detection **0/432**

📁 FILE INFORMATION

File Name	org.xolatgames.dima.defense_2.apk
Size	9.93MB
MD5	1d519e94cca8d865638d95c230a72eba
SHA1	aab1969d9eacdf93bb95f9ba8b5fa1712d601f60
SHA256	74dee3ede51d632bdbc93efb842f3dfafff51db3150f09d98d44df9511e97826

i APP INFORMATION

App Name

Dima Defense

Package Name

org.xolatgames.dima.defense

Main Activity

org.xolatgames.dima.defense.android.AndroidLauncher

Target SDK

35

Min SDK

21

Max SDK

Android Version Name

0.6.0

Android Version Code

2

0 / 1

EXPORTED ACTIVITIES

View All ⌵

1 / 1

EXPORTED RECEIVERS

View All ⌵

0 / 0

EXPORTED SERVICES

View All ⌵

0 / 1

EXPORTED PROVIDERS

View All ⌵

⚙️ SCAN OPTIONS

📄 DECOMPILED CODE

🔑 SIGNER CERTIFICATE

```
Binary is signed
v1 signature: True
v2 signature: True
v3 signature: True
v4 signature: False
X.509 Subject: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2026-04-08 07:00:12+00:00
Valid To: 2053-08-24 07:00:12+00:00
Issuer: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid
Serial Number: 0xf75e34a7a346dc0d
Hash Algorithm: sha256
md5: 616a468011b2a4f2d1762fe8123b22bb
sha1: 2d952bd253437ad66c42bfa36bd65cbd952bd799
sha256: 388cf5e536d3065fdacfc1cbbfa2e40d8fc8432e8cf1cdb9952521ade214fb
sha512: 7b4409cbf0080e99becb1082faca155f9ab77e178b53a40806aab34737cc293a894add916d12c2844b7f0aebec8e71760d32001e5d5467c31244ced9cda314fd
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: 07826d36a03d66c0c1763a1b4f1428acf953e90662217d4a709a1886ec6fff12
Found 1 unique certificates
```

≡ APPLICATION PERMISSIONS

Search:

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
org.xolatgames.dima.defense.DYNAMIC_RECEIVER_NOT_EXPORTED_PERMISSION	unknown	Unknown permission	Unknown permission from android reference	

Showing 1 to 1 of 1 entries

[Previous](#)[1](#)[Next](#)

Search:

API	FILES
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

BROWSABLE ACTIVITIES

Search:

ACTIVITY	INTENT
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

NETWORK SECURITY

Search:

NO	SCOPE	SEVERITY	DESCRIPTION
No data available in table			

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

CERTIFICATE ANALYSIS**HIGH**
0**WARNING**
1**INFO**
1Search:

TITLE 	SEVERITY 	DESCRIPTION 
Application vulnerable to Janus Vulnerability	warning	Application is signed with v1 signature scheme, making it vulnerable to Janus vulnerability on Android 5.0-8.0, if signed only with v1 signature scheme. Applications running on Android 5.0-7.0 signed with v1, and v2/v3 scheme is also vulnerable.
Signed Application	info	Application is signed with a code signing certificate

Showing 1 to 2 of 2 entries

[Previous](#) [1](#) [Next](#)**MANIFEST ANALYSIS****HIGH**
1**WARNING**
2**INFO**
0**SUPPRESSED**
0Search:

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
1	App can be installed on a vulnerable unpatched Android version 5.0-5.0.2, [minSdk=21]	high	This application can be installed on an older version of android that has multiple unfixed vulnerabilities. These devices won't receive reasonable security updates from Google. Support an Android version => 10, API 29 to receive reasonable security updates.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
2	Application Data can be Backed up [android:allowBackup=true]	warning	This flag allows anyone to backup your application data via adb. It allows users who have enabled USB debugging to copy application data off of the device.	
3	Broadcast Receiver (androidx.profileinstaller.ProfileInstallReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

Showing 1 to 3 of 3 entries

[Previous](#) [1](#) [Next](#)

</> CODE ANALYSIS

Search:

NO 	ISSUE 	SEVERITY 	STANDARDS 	FILES 	OPTIONS 
No data available in table					

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

SHARED LIBRARY BINARY ANALYSIS

Search:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
1	arm64-v8a/libgdx-freetype.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk', '__vsprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
2	arm64-v8a/libgdx.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
3	armeabi-v7a/libgdx-freetype.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk', '__vsprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
4	armeabi-v7a/libgdx.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
5	x86/libgdx-freetype.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__memcpy_chk', '__vsprintf_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
6	x86/libgdx.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
7	x86_64/libgdx-freetype.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__memcpy_chk', '__vsprintf_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
8	x86_64/libgdx.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__memcpy_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
9	arm64-v8a/libgdx-freetype.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk', '__vsprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
10	arm64-v8a/libgdx.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__memcpy_chk']	True  Symbols are stripped.

Showing 1 to 10 of 16 entries

[Previous](#)
[1](#)
[2](#)
[Next](#)
Search:

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
No data available in table				

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

FILE ANALYSIS

Search:

NO	ISSUE	FILES
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

FIREBASE DATABASE ANALYSIS

Search:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

MALWARE LOOKUP

 APKiD ANALYSISSearch:

DEX	DETECTIONS				
1d519e94cca8d865638d95c230a72eba.apk	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Manipulator Found</td><td>Resources Confusion</td></tr></table> Showing 1 to 1 of 1 entries Previous1Next	FINDINGS	DETAILS	Manipulator Found	Resources Confusion
FINDINGS	DETAILS				
Manipulator Found	Resources Confusion				
classes.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 1 of 1 entries Previous1Next	FINDINGS	DETAILS	Compiler	r8
FINDINGS	DETAILS				
Compiler	r8				

DEX	DETECTIONS				
classes2.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>unknown (please file detection issue!)</td></tr></table> Showing 1 to 1 of 1 entries Previous1Next	FINDINGS	DETAILS	Compiler	unknown (please file detection issue!)
FINDINGS	DETAILS				
Compiler	unknown (please file detection issue!)				

Showing 1 to 3 of 3 entries

 BEHAVIOUR ANALYSIS

Search:

RULE ID	BEHAVIOUR	LABEL	FILES
No data available in table			

Showing 0 to 0 of 0 entries

 ABUSED PERMISSIONS

Top Malware Permissions

0/25 Other Common Permissions

0/44

Malware Permissions are the top permissions that are widely abused by known malware.

Other Common Permissions are permissions that are commonly abused by known malware.

SERVER LOCATIONS



DOMAIN MALWARE CHECK

URLS

✉ EMAILS

👤 TRACKERS

Search:

TRACKER NAME	CATEGORIES	URL
No data available in table		

Showing 0 to 0 of 0 entries

Previous

Next

🔑 POSSIBLE HARDCODED SECRETS

A STRINGS

From APK Resource

► Show all 504 strings

From Code

From Shared Objects

lib/arm64-v8a/libgdx-freetype.so

► Show all 681 strings

lib/arm64-v8a/libgdx.so

► Show all **49** strings

lib/armeabi-v7a/libgdx-freetype.so

► Show all **672** strings

lib/armeabi-v7a/libgdx.so

► Show all **52** strings

lib/x86/libgdx-freetype.so

► Show all **672** strings

lib/x86/libgdx.so

► Show all **50** strings

lib/x86_64/libgdx-freetype.so

► Show all **671** strings

lib/x86_64/libgdx.so

► Show all **49** strings

apktool_out/lib/arm64-v8a/libgdx-freetype.so

► Show all **681** strings

apktool_out/lib/arm64-v8a/libgdx.so

► Show all **49** strings

apktool_out/lib/armeabi-v7a/libgdx-freetype.so

► Show all **672** strings

apktool_out/lib/armeabi-v7a/libgdx.so

► Show all **52** strings

apktool_out/lib/x86/libgdx-freetype.so

► Show all **672** strings

apktool_out/lib/x86/libgdx.so

► Show all **50** strings

apktool_out/lib/x86_64/libgdx-freetype.so

► Show all **671** strings

apktool_out/lib/x86_64/libgdx.so

► Show all **49** strings

ACTIVITIES

▼ Showing all **1** activities

[org.xolatgames.dima.defense.android.AndroidLauncher](#)

SERVICES

RECEIVERS

▼ Showing all **1** receivers

[androidx.profileinstaller.ProfileInstallReceiver](#)

PROVIDERS

▼ Showing all **1** providers

[androidx.startup.InitializationProvider](#)

LIBRARIES

SBOM

▼ Showing all **11** Versioned Packages

androidx.annotation:annotation-experimental@1.4.0

androidx.arch.core:core-runtime@dynamic

androidx.core:core@1.13.1

androidx.interpolator:interpolator@1.0.0

androidx.lifecycle:lifecycle-runtime@dynamic

androidx.profileinstaller:profileinstaller@1.3.0

androidx.startup:startup-runtime@1.1.1

androidx.tracing:tracing@1.0.0

androidx.versionedparcelable:versionedparcelable@1.1.1


org.jetbrains.kotlinx:kotlinx-coroutines-android@1.6.4

org.jetbrains.kotlinx:kotlinx-coroutines-core@1.6.4

FILES

► Show all **222** files

✔ APP SCORES



Security Score **51/100**
Trackers Detection **0/432**

📁 FILE INFORMATION

File Name net.stargw.fok_66.apk
Size 1.56MB
MD5 ffd6d888aeb8e4ba31e5b8613848e2b
SHA1 3f02cb1d0453323b8399f960772e48dd3c7764ac
SHA256 09cf5b146cc1562b3c3295f2af9a80d97060d80c270e0565407f88610a7d21f9

i APP INFORMATION

App Name Karma FW
Package Name net.stargw.fok
Main Activity net.stargw.karma.ActivityMain
Target SDK 29 Min SDK 21 Max SDK
Android Version Name 66 Android Version Code 66

1 / 3

EXPORTED ACTIVITIES

View All ⌵

3 / 3

EXPORTED RECEIVERS

View All ⌵

2 / 2

EXPORTED SERVICES

View All ⌵

0 / 1

EXPORTED PROVIDERS

View All ⌵

⚙️ SCAN OPTIONS

📄 DECOMPILED CODE

🔑 SIGNER CERTIFICATE

```
Binary is signed
v1 signature: True
v2 signature: True
v3 signature: False
v4 signature: False
X.509 Subject: C=EU, O=SWSS, CN=Steve
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2014-03-17 12:00:43+00:00
Valid To: 2114-02-21 12:00:43+00:00
Issuer: C=EU, O=SWSS, CN=Steve
Serial Number: 0x5326e3eb
Hash Algorithm: sha1
md5: def62a8cbaacc756d507b02ac00be27d
sha1: d61a7e48d09abb9e46160b6169e8a5007602872a
sha256: 0506d8a76c40c47815395ddb9deaff30d6290d123de508290e482d993f376131
sha512: e7ef1f7d83a423e0a4dd80589d6bdf1492922ddb144fbafa1928311e55eb3c3dd21042813680ba1d6019280f93aef1c3de1031fae4ed1edf196c37a30488463
PublicKey Algorithm: rsa
Bit Size: 1024
Fingerprint: 6f4ff9232c26c9a829fb126d52b7a26b7c060203168b884c2abf8f5370fd9394
Found 1 unique certificates
```

≡ APPLICATION PERMISSIONS

Search:

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
android.permission.FOREGROUND_SERVICE	normal	enables regular apps to use Service.startForeground.	Allows a regular application to use Service.startForeground.	
android.permission.RECEIVE_BOOT_COMPLETED	normal	automatically start at boot	Allows an application to start itself as soon as the system has finished booting. This can make it take longer to start the phone and allow the application to slow down the overall phone by always running.	

Showing 1 to 2 of 2 entries

[Previous](#)[1](#)[Next](#)

ANDROID API

Search:

API	FILES
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

BROWSABLE ACTIVITIES

Search:

ACTIVITY	INTENT
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

NETWORK SECURITY

Search:

NO	SCOPE	SEVERITY	DESCRIPTION
No data available in table			

Showing 0 to 0 of 0 entries

CERTIFICATE ANALYSIS

HIGH 0	WARNING 2	INFO 1	Search:
-----------	--------------	-----------	------------------------------

TITLE	SEVERITY	DESCRIPTION
Application vulnerable to Janus Vulnerability	warning	Application is signed with v1 signature scheme, making it vulnerable to Janus vulnerability on Android 5.0-8.0, if signed only with v1 signature scheme. Applications running on Android 5.0-7.0 signed with v1, and v2/v3 scheme is also vulnerable.
Certificate algorithm might be vulnerable to hash collision	warning	Application is signed with SHA1withRSA. SHA1 hash algorithm is known to have collision issues. The manifest file indicates SHA256withRSA is in use.
Signed Application	info	Application is signed with a code signing certificate

Showing 1 to 3 of 3 entries



MANIFEST ANALYSIS

HIGH 1	WARNING 7	INFO 0	SUPPRESSED 0
-----------	--------------	-----------	-----------------

Search:

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
1	App can be installed on a vulnerable unpatched Android version 5.0-5.0.2, [minSdk=21]	high	This application can be installed on an older version of android that has multiple unfixed vulnerabilities. These devices won't receive reasonable security updates from Google. Support an Android version => 10, API 29 to receive reasonable security updates.	
2	Application Data can be Backed up [android:allowBackup=true]	warning	This flag allows anyone to backup your application data via adb. It allows users who have enabled USB debugging to copy application data off of the device.	
3	Broadcast Receiver (net.stargw.karma.BroadcastReceiverBoot) is not Protected. An intent-filter exists.	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Broadcast Receiver is explicitly exported.	
4	Service (net.stargw.karma.ServiceFW) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.BIND_VPN_SERVICE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
5	Service (net.stargw.karma.MyQSTileService) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.BIND_QUICK_SETTINGS_TILE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	
6	Broadcast Receiver (net.stargw.karma.Widget1Provider) is not Protected. An intent-filter exists.	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Broadcast Receiver is explicitly exported.	
7	Broadcast Receiver (net.stargw.karma.Widget2Provider) is not Protected. An intent-filter exists.	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Broadcast Receiver is explicitly exported.	
8	Activity (net.stargw.karma.Widget2Configure) is not Protected. An intent-filter exists.	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Activity is explicitly exported.	

Showing 1 to 8 of 8 entries

</> CODE ANALYSISSearch:

NO	ISSUE	SEVERITY	STANDARDS	FILES	OPTIONS
No data available in table					

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)**🚩 SHARED LIBRARY BINARY ANALYSIS**

No Shared Objects found.

Search:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
No data available in table									

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)**📖 NIAP ANALYSIS v1.3**Search:

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
No data available in table				

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)**FILE ANALYSIS**Search:

NO	ISSUE	FILES
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)**FIREBASE DATABASE ANALYSIS**Search:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)**MALWARE LOOKUP**[VirusTotal Report](#)[Triage Report](#)[MetaDefender Report](#)[Hybrid Analysis Report](#)

 APKiD ANALYSISSearch:

DEX	DETECTIONS				
classes.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 1 of 1 entries Previous1Next	FINDINGS	DETAILS	Compiler	r8
FINDINGS	DETAILS				
Compiler	r8				
ffdf6d888aeb8e4ba31e5b8613848e2b.apk	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Manipulator Found</td><td>Resources Confusion</td></tr></table> Showing 1 to 1 of 1 entries Previous1Next	FINDINGS	DETAILS	Manipulator Found	Resources Confusion
FINDINGS	DETAILS				
Manipulator Found	Resources Confusion				

Showing 1 to 2 of 2 entries

Previous1Next

 **BEHAVIOUR ANALYSIS**Search:

RULE ID	BEHAVIOUR	LABEL	FILES
No data available in table			

Showing 0 to 0 of 0 entries

Previous

Next

ABUSED PERMISSIONS

Top Malware Permissions

1/25 Other Common Permissions

1/44

android.permission.RECEIVE_BOOT_COMPLETED

android.permission.FOREGROUND_SERVICE

Malware Permissions are the top permissions that are widely abused by known malware.
Other Common Permissions are permissions that are commonly abused by known malware.

SERVER LOCATIONS



 **DOMAIN MALWARE CHECK**

 **URLS**

 **EMAILS**

 **TRACKERS**

Search:

TRACKER NAME	CATEGORIES	URL
No data available in table		

Showing 0 to 0 of 0 entries

 POSSIBLE HARDCODED SECRETS

A STRINGS

From APK Resource

► Show all 2133 strings

From Code

From Shared Objects

A ACTIVITIES

▼ Showing all 3 activities

[net.stargw.karma.ActivityMain](#)

[net.stargw.karma.ActivityLogs](#)

[net.stargw.karma.Widget2Configure](#)

 SERVICES

▼ Showing all 2 services

[net.stargw.karma.ServiceFW](#)
[net.stargw.karma.MyQSTileService](#)

RECEIVERS

▼ Showing all **3** receivers

[net.stargw.karma.BroadcastReceiverBoot](#)
[net.stargw.karma.Widget1Provider](#)
[net.stargw.karma.Widget2Provider](#)

PROVIDERS

▼ Showing all **1** providers

[androidx.core.content.FileProvider](#)

LIBRARIES

SBOM

▼ Showing all **26** Versioned Packages

androidx.appcompat:appcompat@1.0.0
androidx.arch.core:core-runtime@2.0.0
androidx.asynclayoutinflater:asynclayoutinflater@1.0.0
androidx.coordinatorlayout:coordinatorlayout@1.0.0
androidx.core:core@1.0.0
androidx.cursoradapter:cursoradapter@1.0.0
androidx.customview:customview@1.0.0
androidx.documentfile:documentfile@1.0.0
androidx.drawerlayout:drawerlayout@1.0.0
androidx.fragment:fragment@1.0.0

androidx.interpolator:interpolator@1.0.0
androidx.legacy:legacy-support-core-ui@1.0.0
androidx.legacy:legacy-support-core-utils@1.0.0
androidx.lifecycle:lifecycle-livedata-core@2.0.0
androidx.lifecycle:lifecycle-livedata@2.0.0
androidx.lifecycle:lifecycle-runtime@2.0.0
androidx.lifecycle:lifecycle-viewmodel@2.0.0
androidx.loader:loader@1.0.0
androidx.localbroadcastmanager:localbroadcastmanager@1.0.0
androidx.print:print@1.0.0
androidx.slidingpanelayout:slidingpanelayout@1.0.0
androidx.swiperefreshlayout:swiperefreshlayout@1.0.0
androidx.vectordrawable:vectordrawable-animated@1.0.0
androidx.vectordrawable:vectordrawable@1.0.0
androidx.versionedparcelable:versionedparcelable@1.0.0
androidx.viewpager:viewpager@1.0.0

FILES

► Show all **449** files

✔ APP SCORES

Security Score **52/100**Trackers Detection **0/432**

📁 FILE INFORMATION

File Name com.kin.athena_306.apk

Size 5.98MB

MD5 3bda899229cd0e792a9cbc2ef8d75326

SHA1 5a4ccf115d64d25a96db0cdef263e5100c400ed0

SHA256 ff0cf9b520fb4dd2459033bd8ace400a9181c61bb53ce8751c6d7796fa0eb69b

i APP INFORMATION

App Name Athena

Package Name com.kin.athena

Main Activity com.kin.athena.presentation.MainActivity

Target SDK 36 Min SDK 24 Max SDK

Android Version Name 1.80 Android Version Code 306

▶ PLAYSTORE INFORMATION

Title Athena: Firewall DNS AdBlocker

Score 2.9384615 Installs 100,000+ Price 0 Android Version Support Category Tools Play Store URL [com.kin.athena](https://play.google.com/store/apps/details?id=com.kin.athena)

Developer Easy Apps (FOSS), Developer ID Easy+Apps+(FOSS)

Developer Address None

Developer Website <https://easyapps.me>Developer Email contact@easyapps.meRelease Date Jul 27, 2025 Privacy Policy [Privacy link](#)

Description

Athena Firewall combines powerful DNS-based ad blocking with complete network control. Block ads, trackers, and unwanted connections across all apps. Works with Root, Shizuku, or VPN mode - choose what fits your device.

- ✓ DNS ad & tracker blocking
- ✓ Custom & pre-made blocklists
- ✓ Per-app firewall rules
- ✓ Root, Shizuku & VPN modes
- ✓ Network monitor & kill switch
- ✓ Material 3 design

🚫 DNS AD BLOCKING & FILTERING

Stop ads and trackers before they load with powerful DNS filtering. Block ads in apps, games, and browsers system-wide.

- DNS-based ad & tracker blocking
- Pre-made blocklists (AdGuard, Steven Black, more)
- Custom blocklists - add your own URLs
- Auto-update blocklists daily
- Custom DNS servers (Cloudflare, Quad9, AdGuard DNS, custom)
- Block specific domains manually
- Allow/block by IP address
- DNS request logging
- See every DNS query in real-time

🔥 FIREWALL - THREE POWERFUL MODES

Choose the mode that works for YOUR device:

ROOT MODE (Rooted devices)

- Direct iptables firewall control
- Most powerful option
- System-level blocking
- Maximum control

SHIZUKU MODE (No root needed)

- Advanced features without rooting
- Enhanced firewall capabilities
- Works with Shizuku app
- Power user features

VPN MODE (Any device)

- Works on stock Android
- Local VPN only (no external servers)

- No root or Shizuku needed
- Privacy-focused

PER-APP NETWORK CONTROL

Control exactly which apps can access the internet. Block apps individually or by category.

- Block apps from WiFi or mobile data
- Separate rules for WiFi/data
- Whitelist or blacklist mode
- System app control
- Show offline apps
- Track install source
- Real-time connection monitoring
- Connection logs per app
- See app permissions

Perfect for stopping background data usage, preventing tracking, and saving battery.

ADVANCED MONITORING

Watch your network activity in real-time with comprehensive logging and monitoring.

- Status bar network monitor
- Real-time connection logs
- DNS query logs
- Per-app connection history
- See which domains apps contact
- Export logs for analysis
- Live traffic statistics
- Bandwidth usage tracking

NETWORK SECURITY FEATURES

- Kill switch - block all traffic when firewall stops
- Allow local network IPs (for printers, smart home)
- Block specific IP addresses
- Screen protection bypass
- VPN slot functions
- Auto-start on boot
- Background protection

MODERN MATERIAL 3 DESIGN

- Material You dynamic colors
- AMOLED dark theme (true black)
- Clean, intuitive interface
- Smooth animations
- Tablet optimized
- Multi-language support

CUSTOM DNS CONTROL

Take full control of your DNS for privacy and speed.

- Custom DNS servers (DoH coming soon)
- Popular DNS providers built-in:
 - Custom DNS IPs
- DNS leak protection
- Encrypted DNS queries (roadmap)
- Change DNS per network

PRIVACY & OPEN SOURCE

- 100% open-source (GPL)
- No data collection
- No analytics or tracking
- No ads anywhere
- Community-driven

POWER USER FEATURES

- Import/export blocklists
- Backup/restore settings
- Root OR non-root operation
- Shizuku integration
- Detailed logging
- Custom filtering rules
- Advanced DNS options
- Developer options

LIGHTWEIGHT & EFFICIENT

- Minimal battery drain
- Low memory footprint
- Runs efficiently in background
- Optimized for performance

- No bloat - focused features

📱 PERFECT FOR:

- Blocking ads in apps & games
- Stopping trackers & analytics
- Reducing mobile data usage
- Privacy-conscious users
- Parents controlling kid's devices
- Developers & security researchers
- Users who want DNS control
- Anyone wanting network visibility
- Rooted AND non-rooted devices

🎯 USE CASES

Stop App Tracking: Block analytics and trackers in all apps

Save Mobile Data: Block ads = less data used

Parent Controls: Block inappropriate domains

Gaming: Block ads in free games

Privacy: Stop apps phoning home

Security Research: Monitor all connections

Custom Blocking: Block specific domains/IPs

0 / 1

EXPORTED ACTIVITIES

View All ⬇

3 / 10

EXPORTED RECEIVERS

View All ⬇

3 / 10

EXPORTED SERVICES

View All ⬇

1 / 2

EXPORTED PROVIDERS

View All ⬇

 SCAN OPTIONS **DECOMPILED CODE** **SIGNER CERTIFICATE**

```
Binary is signed
v1 signature: False
v2 signature: True
v3 signature: True
v4 signature: False
X.509 Subject: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2025-11-15 07:39:44+00:00
Valid To: 2053-04-02 07:39:44+00:00
Issuer: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid
Serial Number: 0xfef3e77c6f805022
Hash Algorithm: sha256
md5: e4e9bb40eaf1edb73ef4ffb6f50dcf02
sha1: cf0d279277220a1fd6e8eeb22632029bcd9e5ad5
sha256: b49f6ee0ac81a0678817ce6864567b0d1c0a2823cb2999f2a4ab0c17edbd2981
sha512: eb4fe7eaa6c166f812ea8f7d80d26d61c268e9a664d37ad77ebb1d67d4577c65c5f7ce3dd284bff040611e132bd746feba1b15491bff9e6d57ed06dfedba050
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: 419a8a0fae0285492284b8c0a99eb11c772b4b653ff20b4185a80971cac21d36
Found 1 unique certificates
```

 APPLICATION PERMISSIONSSearch:

PERMISSION	STATUS	INFO	DESCRIPTION
android.permission.ACCESS_NETWORK_STATE	normal	view network status	Allows an applicati
android.permission.CHANGE_NETWORK_STATE	normal	change network connectivity	Allows application:
android.permission.FOREGROUND_SERVICE	normal	enables regular apps to use Service.startForeground.	Allows a regular ap
android.permission.FOREGROUND_SERVICE_DATA_SYNC	normal	permits foreground services for data synchronization.	Allows a regular ap the type "dataSync
android.permission.FOREGROUND_SERVICE_SPECIAL_USE	normal	enables special-use foreground services.	Allows a regular ap the type "specialU:
android.permission.INTERNET	normal	full Internet access	Allows an applicati
android.permission.POST_NOTIFICATIONS	dangerous	allows an app to post notifications.	Allows an app to p
android.permission.QUERY_ALL_PACKAGES	normal	enables querying any normal app on the device.	Allows query of any manifest declaratic
android.permission.RECEIVE_BOOT_COMPLETED	normal	automatically start at boot	Allows an applicati finished booting. T and allow the appl always running.
android.permission.REQUEST_IGNORE_BATTERY_OPTIMIZATIONS	normal	permission for using Settings.ACTION_REQUEST_IGNORE_BATTERY_OPTIMIZATIONS.	Permission an appl Settings.ACTION_R

Showing 1 to 10 of 15 entries

 ANDROID APISearch:

API	FILES
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **BROWSABLE ACTIVITIES**Search:

ACTIVITY	INTENT
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **NETWORK SECURITY**Search:

NO	SCOPE	SEVERITY	DESCRIPTION
No data available in table			

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

CERTIFICATE ANALYSIS

HIGH
0**WARNING**
0**INFO**
1Search:

TITLE 	SEVERITY 	DESCRIPTION 
Signed Application	info	Application is signed with a code signing certificate

Showing 1 to 1 of 1 entries

[Previous](#)[1](#)[Next](#)

MANIFEST ANALYSIS

HIGH
1**WARNING**
8**INFO**
0**SUPPRESSED**
0Search:

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
1	App can be installed on a vulnerable unpatched Android version 7.0, [minSdk=24]	high	This application can be installed on an older version of android that has multiple unfixed vulnerabilities. These devices won't receive reasonable security updates from Google. Support an Android version => 10, API 29 to receive reasonable security updates.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
2	Application Data can be Backed up [android:allowBackup=true]	warning	This flag allows anyone to backup your application data via adb. It allows users who have enabled USB debugging to copy application data off of the device.	
3	Content Provider (rikka.shizuku.ShizukuProvider) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.INTERACT_ACROSS_USERS_FULL [android:exported=true]	warning	A Content Provider is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	
4	Service (com.kin.athena.service.vpn.service.VpnConnectionClient) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.BIND_VPN_SERVICE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
5	Service (com.kin.athena.service.tiles.DnsQuickSettingsTile) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.BIND_QUICK_SETTINGS_TILE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	
6	Broadcast Receiver (com.kin.athena.data.service.BootReceiver) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
7	Service (androidx.work.impl.background.systemjob.SystemJobService) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.BIND_JOB_SERVICE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
8	Broadcast Receiver (androidx.work.impl.diagnostics.DiagnosticsReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	
9	Broadcast Receiver (androidx.profileinstaller.ProfileInstallReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

Showing 1 to 9 of 9 entries

[Previous](#)[1](#)[Next](#)

</> CODE ANALYSIS

Search:

NO	ISSUE	SEVERITY	STANDARDS	FILES	OPTIONS
No data available in table					

Showing 0 to 0 of 0 entries

 SHARED LIBRARY BINARY ANALYSIS

Search:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	
1	arm64-v8a/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1 [S]

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
2	arm64-v8a/libathena.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__write_chk', '__vsprintf_chk', '__vsprintf_chk', '__strlen_chk', '__memcpy_chk']	1 info The binary has the following fortified functions:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
3	arm64-v8a/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1 (S)

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
4	arm64-v8a/libnftlog.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Position Independent Executable (PIE) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
				unless Dart FFI is used.					S
5	armeabi-v7a/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
6	armeabi-v7a/libathena.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__write_chk', '__vsprintf_chk', '__vsprintf_chk', '__strlen_chk', '__memcpy_chk']	1 info The binary has the following fortified functions:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
7	armeabi-v7a/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1 (S)

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
8	armeabi-v7a/libnftlog.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Position Independent Executable (PIE) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1 (S)

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
				unless Dart FFI is used.					S
9	x86/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
10	x86/libathena.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__write_chk', '__vsprintf_chk', '__vsprintf_chk', '__strlen_chk', '__memcpy_chk']	1

Showing 1 to 10 of 28 entries

 NIAP ANALYSIS v1.3Search:

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
No data available in table				

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **FILE ANALYSIS**Search:

NO	ISSUE	FILES
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **FIREBASE DATABASE ANALYSIS**Search:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

MALWARE LOOKUP

[VirusTotal Report](#)[Triage Report](#)[MetaDefender Report](#)[Hybrid Analysis Report](#)

APKiD ANALYSIS

Search:

DEX	DETECTIONS				
3bda899229cd0e792a9cbc2ef8d75326.apk	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Manipulator Found</td><td>Resources Confusion</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Manipulator Found	Resources Confusion
FINDINGS	DETAILS				
Manipulator Found	Resources Confusion				

DEX	DETECTIONS						
classes.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti-VM Code</td><td>Build.FINGERPRINT check Build.MANUFACTURER check possible ro.secure check</td></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 2 of 2 entries Previous1Next	FINDINGS	DETAILS	Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check possible ro.secure check	Compiler	r8
FINDINGS	DETAILS						
Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check possible ro.secure check						
Compiler	r8						
lib/arm64-v8a/libnftlog.so	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>anti_hook</td><td>syscalls</td></tr></table> Showing 1 to 1 of 1 entries Previous1Next	FINDINGS	DETAILS	anti_hook	syscalls		
FINDINGS	DETAILS						
anti_hook	syscalls						

Showing 1 to 3 of 3 entries

Previous1Next

BEHAVIOUR ANALYSIS

Search:

RULE ID	BEHAVIOUR	LABEL	FILES
No data available in table			

Showing 0 to 0 of 0 entries

ABUSED PERMISSIONS

Top Malware Permissions

android.permission.INTERNET,
android.permission.ACCESS_NETWORK_STATE,
android.permission.RECEIVE_BOOT_COMPLETED,
android.permission.WAKE_LOCK

4/25 Other Common Permissions

android.permission.FOREGROUND_SERVICE,
android.permission.REQUEST_IGNORE_BATTERY_OPTIMIZATIONS,
android.permission.CHANGE_NETWORK_STATE

3/44

Malware Permissions are the top permissions that are widely abused by known malware.
Other Common Permissions are permissions that are commonly abused by known malware.

SERVER LOCATIONS



This app may communicate with the following OFAC sanctioned list of countries.

Search:

DOMAIN	COUNTRY/REGION
No data available in table	

Showing 0 to 0 of 0 entries

Search:

DOMAIN	STATUS	GEOLOCATION
example.com	ok	IP: 104.20.23.154 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map

Showing 1 to 1 of 1 entries

[Previous](#)

1

[Next](#)

URLS

Search:

URL	FILE
https://example.com/blocklist.txt	Android String Resource

Showing 1 to 1 of 1 entries

[Previous](#)

1

[Next](#)

EMAILS

TRACKERS

Search:

TRACKER NAME	CATEGORIES	URL
No data available in table		

Showing 0 to 0 of 0 entries

 POSSIBLE HARDCODED SECRETS

A STRINGS

From APK Resource

► Show all 1659 strings

From Code

From Shared Objects

lib/arm64-v8a/libandroidx.graphics.path.so

► Show all 19 strings

lib/arm64-v8a/libathena.so

► Show all 60 strings

lib/arm64-v8a/libdatastore_shared_counter.so

▼ Showing all 3 strings

ro.arch
exynos9810

java/io/IOException

lib/arm64-v8a/libniflog.so

► Show all **19** strings

lib/armeabi-v7a/libandroidx.graphics.path.so

► Show all **19** strings

lib/armeabi-v7a/libathena.so

► Show all **60** strings

lib/armeabi-v7a/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

lib/armeabi-v7a/libniflog.so

► Show all **19** strings

lib/x86/libandroidx.graphics.path.so

► Show all **19** strings

lib/x86/libathena.so

► Show all **60** strings

lib/x86/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

lib/x86_64/libandroidx.graphics.path.so

► Show all **19** strings

lib/x86_64/libathena.so

► Show all **60** strings

lib/x86_64/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

apktool_out/lib/arm64-v8a/libandroidx.graphics.path.so

► Show all **19** strings

apktool_out/lib/arm64-v8a/libathena.so

► Show all **60** strings

apktool_out/lib/arm64-v8a/libdatastore_shared_counter.so

▼ Showing all **3** strings

ro.arch

exynos9810

java/io/IOException

apktool_out/lib/arm64-v8a/libniflog.so

► Show all **19** strings

apktool_out/lib/armeabi-v7a/libandroidx.graphics.path.so

► Show all **19** strings

apktool_out/lib/armeabi-v7a/libathena.so

► Show all **60** strings

apktool_out/lib/armeabi-v7a/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

apktool_out/lib/armeabi-v7a/libniflog.so

► Show all **19** strings

apktool_out/lib/x86/libandroidx.graphics.path.so

► Show all **19** strings

apktool_out/lib/x86/libathena.so

► Show all **60** strings

apktool_out/lib/x86/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

apktool_out/lib/x86_64/libandroidx.graphics.path.so

► Show all **19** strings

apktool_out/lib/x86_64/libathena.so

► Show all **60** strings

apktool_out/lib/x86_64/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

ACTIVITIES

▼ Showing all **1** activities

[com.kin.athena.presentation.MainActivity](#)

SERVICES

▼ Showing all **10** services

[com.kin.athena.service.vpn.service.VpnConnectionClient](#)
[com.kin.athena.service.vpn.service.VpnConnectionServer](#)
[com.kin.athena.service.root.service.RootConnectionService](#)
[com.kin.athena.service.shizuku.ShizukuConnectionService](#)
[com.kin.athena.service.tiles.DnsQuickSettingsTile](#)
[com.kin.athena.service.utils.notifications.NetworkSpeedMonitorService](#)
[androidx.work.impl.background.systemalarm.SystemAlarmService](#)
[androidx.work.impl.background.systemjob.SystemJobService](#)
[androidx.work.impl.foreground.SystemForegroundService](#)
[androidx.room.MultiInstanceInvalidationService](#)

RECEIVERS

▼ Showing all **10** receivers

[com.kin.athena.data.service.BootReceiver](#)
[androidx.work.impl.utils.ForceStopRunnable\\$BroadcastReceiver](#)
[androidx.work.impl.background.systemalarm.ConstraintProxy\\$BatteryChargingProxy](#)
[androidx.work.impl.background.systemalarm.ConstraintProxy\\$BatteryNotLowProxy](#)
[androidx.work.impl.background.systemalarm.ConstraintProxy\\$StorageNotLowProxy](#)
[androidx.work.impl.background.systemalarm.ConstraintProxy\\$NetworkStateProxy](#)
[androidx.work.impl.background.systemalarm.RescheduleReceiver](#)
[androidx.work.impl.background.systemalarm.ConstraintProxyUpdateReceiver](#)
[androidx.work.impl.diagnostics.DiagnosticsReceiver](#)
[androidx.profileinstaller.ProfileInstallReceiver](#)

PROVIDERS

▼ Showing all **2** providers

[androidx.startup.InitializationProvider](#)
[rikka.shizuku.ShizukuProvider](#)

 LIBRARIES SBOM▼ Showing all **84** Versioned Packages

androidx.activity:activity-compose@1.10.1
androidx.activity:activity-ktx@1.10.1
androidx.activity:activity@1.10.1
androidx.annotation:annotation-experimental@1.4.1
androidx.appcompat:appcompat-resources@1.7.1
androidx.appcompat:appcompat@1.7.1
androidx.arch.core:core-runtime@dynamic
androidx.autofill:autofill@1.0.0
androidx.biometric:biometric@1.2.0-alpha05
androidx.compose.animation:animation-core@1.7.8
androidx.compose.animation:animation@1.7.8
androidx.compose.foundation:foundation-layout@1.7.8
androidx.compose.foundation:foundation@1.7.8
androidx.compose.material3:material3@1.3.2
androidx.compose.material:material-icons-core@1.7.8
androidx.compose.material:material-icons-extended@1.7.8
androidx.compose.material:material-ripple@1.7.0
androidx.compose.runtime:runtime-saveable@1.7.8
androidx.compose.runtime:runtime@1.7.8
androidx.compose.ui:ui-geometry@1.7.8
androidx.compose.ui:ui-graphics@1.7.8
androidx.compose.ui:ui-text@1.7.8
androidx.compose.ui:ui-unit@1.7.8
androidx.compose.ui:ui-util@1.7.8
androidx.compose.ui:ui@1.7.8
androidx.core:core-ktx@1.16.0
androidx.core:core-splashscreen@1.0.1
androidx.core:core-viewtree@1.0.0
androidx.core:core@1.16.0
androidx.cursoradapter:cursoradapter@1.0.0
androidx.customview:customview-poolingcontainer@1.0.0

androidx.customview:customview@1.0.0
androidx.datastore:datastore-core@1.1.7
androidx.datastore:datastore-preferences-core@1.1.7
androidx.datastore:datastore-preferences@1.1.7
androidx.datastore:datastore@1.1.7
androidx.drawerlayout:drawerlayout@1.0.0
androidx.emoji2:emoji2-views-helper@1.3.0
androidx.emoji2:emoji2@1.3.0
androidx.fragment:fragment@1.5.4
androidx.graphics:graphics-path@1.0.1
androidx.hilt:hilt-navigation-compose@1.2.0
androidx.hilt:hilt-navigation@1.2.0
androidx.hilt:hilt-work@1.2.0
androidx.interpolator:interpolator@1.0.0
androidx.lifecycle:lifecycle-livedata-core-ktx@2.9.0
androidx.lifecycle:lifecycle-livedata-core@2.9.0
androidx.lifecycle:lifecycle-livedata@2.9.0
androidx.lifecycle:lifecycle-process@2.9.0
androidx.lifecycle:lifecycle-runtime-compose@2.9.0
androidx.lifecycle:lifecycle-runtime-ktx@2.9.0
androidx.lifecycle:lifecycle-runtime@2.9.0
androidx.lifecycle:lifecycle-service@2.9.0
androidx.lifecycle:lifecycle-viewmodel-compose@2.9.0
androidx.lifecycle:lifecycle-viewmodel-ktx@2.9.0
androidx.lifecycle:lifecycle-viewmodel-savedstate@2.9.0
androidx.lifecycle:lifecycle-viewmodel@2.9.0
androidx.loader:loader@1.0.0
androidx.navigation:navigation-common@2.9.2
androidx.navigation:navigation-compose@2.9.2
androidx.navigation:navigation-runtime@2.9.2
androidx.profileinstaller:profileinstaller@1.4.0
androidx.room:room-ktx@2.7.2
androidx.room:room-runtime@2.7.2
androidx.savedstate:savedstate-compose@1.3.0
androidx.savedstate:savedstate-ktx@1.3.0
androidx.savedstate:savedstate@1.3.0
androidx.sqlite:sqlite-framework@2.5.1
androidx.sqlite:sqlite@2.5.1

androidx.startup:startup-runtime@1.1.1
androidx.tracing:tracing-ktx@1.2.0
androidx.tracing:tracing@1.2.0
androidx.vectordrawable:vectordrawable-animated@1.1.0
androidx.vectordrawable:vectordrawable@1.1.0
androidx.versionedparcelable:versionedparcelable@1.1.1
androidx.viewpager:viewpager@1.0.0
androidx.work:work-runtime-ktx@2.10.2
androidx.work:work-runtime@2.10.2
com.google.dagger:dagger-lint-aar@2.57
com.google.dagger:dagger@2.57
com.google.dagger:hilt-android@2.57
com.google.dagger:hilt-core@2.57
org.jetbrains.kotlin:kotlinx-coroutines-android@1.7.3
org.jetbrains.kotlin:kotlinx-coroutines-core@1.7.3

FILES

► Show all **497** files

✔ APP SCORES



Security Score **42/100**

Trackers Detection **1/432**

📁 FILE INFORMATION

File Name	net.kollnig.missioncontrol.fdroid_2025121801.apk
Size	14.38MB
MD5	c24a65af46fc0ad4bf3f7cf229f876f6
SHA1	7757c7eeabcba6b4973c1dabcf17627eec2253e4
SHA256	ea4054da38afe42067938a30e1c8e53ebad9008537511d7f431c52552102f6a0

i APP INFORMATION

App Name	TrackerControl				
Package Name	net.kollnig.missioncontrol.fdroid				
Main Activity	eu.faircode.netguard.ActivityMain				
Target SDK	35	Min SDK	23	Max SDK	
Android Version Name	2025.12.18-fdroid				
Android Version Code	2025121801				

3 / 8

EXPORTED ACTIVITIES

View All ⌵

5 / 5

EXPORTED RECEIVERS

View All ⌵

3 / 5

EXPORTED SERVICES

View All ⌵

0 / 3

EXPORTED PROVIDERS

View All ⌵

⚙️ SCAN OPTIONS

📄 DECOMPILED CODE

🌟 SIGNER CERTIFICATE

```
Binary is signed
v1 signature: True
v2 signature: True
v3 signature: True
v4 signature: False
X.509 Subject: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2020-05-04 09:47:34+00:00
Valid To: 2047-09-20 09:47:34+00:00
Issuer: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid
Serial Number: 0xa3a4548
Hash Algorithm: sha256
md5: 76296e41132821cf09f36b9afdaa2106
sha1: 14501672c570afe9ac6b2191e6460878f7b83a9a
sha256: d54de792e8b68cb22d3dad7b5c9f37316489724ce6fb21572463ee5d4e074f01
sha512: 061ef2205037111d52375a43f42a2cce6461fae43968f6d30c54b8d0bc1946e05bb1c59d255edf02e90860324613fe78af2f0a2d4e31887913aecca4c8e4bc79
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: bdf11d59bfcd13c32cdab624726d6b94fdec0b1fadf12cb20a0e3ed7775e0862
Found 1 unique certificates
```

≡ APPLICATION PERMISSIONS

Search:

PERMISSION	STATUS	INFO	DESCRIPTION
android.permission.ACCESS_NETWORK_STATE	normal	view network status	Allows an applicati
android.permission.ACCESS_WIFI_STATE	normal	view Wi-Fi status	Allows an applicati of Wi-Fi.
android.permission.FOREGROUND_SERVICE	normal	enables regular apps to use Service.startForeground.	Allows a regular ap
android.permission.FOREGROUND_SERVICE_SPECIAL_USE	normal	enables special-use foreground services.	Allows a regular ap the type "specialU:

PERMISSION	STATUS	INFO	DESCRIPTION
android.permission.INTERNET	normal	full Internet access	Allows an applicati
android.permission.POST_NOTIFICATIONS	dangerous	allows an app to post notifications.	Allows an app to p
android.permission.QUERY_ALL_PACKAGES	normal	enables querying any normal app on the device.	Allows query of any manifest declaratic
android.permission.READ_PHONE_STATE	dangerous	read phone state and identity	Allows the applicat device. An applicat phone number and is active, the numb
android.permission.RECEIVE_BOOT_COMPLETED	normal	automatically start at boot	Allows an applicati finished booting. T and allow the appl always running.
android.permission.REQUEST_IGNORE_BATTERY_OPTIMIZATIONS	normal	permission for using Settings.ACTION_REQUEST_IGNORE_BATTERY_OPTIMIZATIONS.	Permission an appl Settings.ACTION_R

Showing 1 to 10 of 14 entries

🔌 ANDROID API

Search:

API	FILES
No data available in table	

Showing 0 to 0 of 0 entries

 BROWSABLE ACTIVITIES

Search:

ACTIVITY	INTENT
No data available in table	

Showing 0 to 0 of 0 entries

 NETWORK SECURITY

HIGH2

WARNING1

INFO0

SECURE0

Search:

NO	SCOPE	SEVERITY	DESCRIPTION
1	*	high	Base config is insecurely configured to permit clear text traffic to all domains.
2	*	warning	Base config is configured to trust system certificates.
3	*	high	Base config is configured to trust user installed certificates.

Showing 1 to 3 of 3 entries

 CERTIFICATE ANALYSIS**HIGH**
0**WARNING**
1**INFO**
1Search:

TITLE 	SEVERITY 	DESCRIPTION 
Application vulnerable to Janus Vulnerability	warning	Application is signed with v1 signature scheme, making it vulnerable to Janus vulnerability on Android 5.0-8.0, if signed only with v1 signature scheme. Applications running on Android 5.0-7.0 signed with v1, and v2/v3 scheme is also vulnerable.
Signed Application	info	Application is signed with a code signing certificate

Showing 1 to 2 of 2 entries

[Previous](#)**1**[Next](#) MANIFEST ANALYSIS**HIGH**
1**WARNING**
12**INFO**
0**SUPPRESSED**
0Search:

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
1	App can be installed on a vulnerable unpatched Android version 6.0-6.0.1, [minSdk=23]	high	This application can be installed on an older version of android that has multiple unfixed vulnerabilities. These devices won't receive reasonable security updates from Google. Support an Android version => 10, API 29 to receive reasonable security updates.	
2	App has a Network Security Configuration[android:networkSecurityConfig=@xml/network_security_config]	info	The Network Security Configuration feature lets apps customize their network security settings in a safe, declarative configuration file without modifying app code. These settings can be configured for specific domains and for a specific app.	
3	Broadcast Receiver (eu.faircode.netguard.WidgetAdmin) is Protected by a permission, but the protection level of the permission should be checked. Permission: net.kollnig.missioncontrol.fdroid.permission.ADMIN [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
4	Activity (eu.faircode.netguard.ActivitySettings) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
5	Activity (eu.faircode.netguard.ActivityForwardApproval) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
6	Activity (net.kollnig.missioncontrol.DetailsActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
7	Service (eu.faircode.netguard.ServiceSinkhole) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.BIND_VPN_SERVICE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
8	Service (eu.faircode.netguard.ServiceExternal) is not Protected. [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
9	Service (eu.faircode.netguard.ServiceTileMain) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.BIND_QUICK_SETTINGS_TILE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	
10	Broadcast Receiver (eu.faircode.netguard.ReceiverAutostart) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	

Showing 1 to 10 of 14 entries

Search:

NO	ISSUE	SEVERITY	STANDARDS	FILES	OPTIONS
No data available in table					

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

🚩 SHARED LIBRARY BINARY ANALYSIS

Search:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
1	arm64-v8a/libnetguard.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__strcpy_chk', '__vsprintf_chk', '__strlen_chk', '__memcpy_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
2	armeabi-v7a/libnetguard.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__strcpy_chk', '__vsprintf_chk', '__strlen_chk', '__memcpy_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
3	x86/libnetguard.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__strcpy_chk', '__vsprintf_chk', '__strlen_chk', '__memcpy_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
4	x86_64/libnetguard.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__strcpy_chk', '__vsprintf_chk', '__strlen_chk', '__memcpy_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
5	arm64-v8a/libnetguard.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__strcpy_chk', '__vsprintf_chk', '__strlen_chk', '__memcpy_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
6	armeabi-v7a/libnetguard.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__strcpy_chk', '__vsprintf_chk', '__strlen_chk', '__memcpy_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
7	x86/libnetguard.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__strcpy_chk', '__vsprintf_chk', '__strlen_chk', '__memcpy_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
8	x86_64/libnetguard.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__strcpy_chk', '__vsprintf_chk', '__strlen_chk', '__memcpy_chk']	True  Symbols are stripped.

Showing 1 to 8 of 8 entries

[Previous](#)
[1](#)
[Next](#)
Search:

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
No data available in table				

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

FILE ANALYSIS

Search:

NO	ISSUE	FILES
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

FIREBASE DATABASE ANALYSIS

Search:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

MALWARE LOOKUP

[VirusTotal Report](#)[Triage Report](#)[MetaDefender Report](#)[Hybrid Analysis Report](#)

APKiD ANALYSIS

Search:

DEX	DETECTIONS						
c24a65af46fc0ad4bf3f7cf229f876f6.apk	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Manipulator Found</td><td>Resources Confusion</td></tr></table> Showing 1 to 1 of 1 entries Previous1Next	FINDINGS	DETAILS	Manipulator Found	Resources Confusion		
FINDINGS	DETAILS						
Manipulator Found	Resources Confusion						
classes.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti-VM Code</td><td>Build.FINGERPRINT check Build.MANUFACTURER check</td></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 2 of 2 entries Previous1Next	FINDINGS	DETAILS	Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check	Compiler	r8
FINDINGS	DETAILS						
Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check						
Compiler	r8						

DEX	DETECTIONS								
classes2.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>unknown (please file detection issue!)</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Compiler	unknown (please file detection issue!)				
FINDINGS	DETAILS								
Compiler	unknown (please file detection issue!)								
classes3.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Compiler	r8				
FINDINGS	DETAILS								
Compiler	r8								
classes4.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti Debug Code</td><td>Debug.isDebuggerConnected() check</td></tr><tr><td>Anti-VM Code</td><td>possible Build.SERIAL check</td></tr><tr><td>Compiler</td><td>r8 without marker (suspicious)</td></tr></table> Showing 1 to 3 of 3 entries Previous 1 Next	FINDINGS	DETAILS	Anti Debug Code	Debug.isDebuggerConnected() check	Anti-VM Code	possible Build.SERIAL check	Compiler	r8 without marker (suspicious)
FINDINGS	DETAILS								
Anti Debug Code	Debug.isDebuggerConnected() check								
Anti-VM Code	possible Build.SERIAL check								
Compiler	r8 without marker (suspicious)								

DEX	DETECTIONS				
classes5.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>r8 without marker (suspicious)</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Compiler	r8 without marker (suspicious)
FINDINGS	DETAILS				
Compiler	r8 without marker (suspicious)				

Showing 1 to 6 of 6 entries

 BEHAVIOUR ANALYSIS

Search:

RULE ID	BEHAVIOUR	LABEL	FILES
No data available in table			

Showing 0 to 0 of 0 entries

 ABUSED PERMISSIONS

Top Malware Permissions

android.permission.ACCESS_NETWORK_STATE,
android.permission.READ_PHONE_STATE,

7/25 Other Common Permissions

android.permission.REQUEST_IGNORE_BATTERY_OPTIMIZATIONS,
android.permission.FOREGROUND_SERVICE

2/44

android.permission.ACCESS_WIFI_STATE,
android.permission.RECEIVE_BOOT_COMPLETED,
android.permission.WAKE_LOCK, android.permission.INTERNET,
android.permission.VIBRATE

Malware Permissions are the top permissions that are widely abused by known malware.

Other Common Permissions are permissions that are commonly abused by known malware.

SERVER LOCATIONS



This app may communicate with the following OFAC sanctioned list of countries.

Search:

DOMAIN	COUNTRY/REGION
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

🔍 DOMAIN MALWARE CHECK

Search:

DOMAIN	STATUS	GEOLOCATION
edpb.europa.eu	ok	IP: 3.124.141.60 Country: Germany Region: Hessen City: Frankfurt am Main Latitude: 50.115520 Longitude: 8.684170 View: Google Map
github.com	ok	IP: 140.82.121.4 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map

Showing 1 to 2 of 2 entries

[Previous](#)[1](#)[Next](#)

 URLSSearch:

URL	FILE
https://github.com/TrackerControl/tracker-control-android#privacy-notice https://edpb.europa.eu/about-edpb/board/members https://github.com/TrackerControl/tracker-control-android#cookie-policy https://edpb.europa.eu/about-edpb/about-edpb/members_sl	Android String Resource

Showing 1 to 1 of 1 entries

[Previous](#) [1](#) [Next](#) **EMAILS**Search:

EMAIL	FILE
hello@trackercontrol.org これがどのように起こったかをtc@kollnig.netに伝えてくださ うtc@kollnig.net hello@trackercontrol.orgで開発者にこれ ta-protection-office@google.com tc@kollnig.net 请告诉tc@kollnig.net这是怎么发生的	Android String Resource

Showing 1 to 1 of 1 entries

[Previous](#) [1](#) [Next](#) **TRACKERS**

Search:

TRACKER NAME	CATEGORIES	URL
ACRA	Crash reporting	https://reports.exodus-privacy.eu.org/trackers/444

Showing 1 to 1 of 1 entries

[Previous](#)[1](#)[Next](#)

🔑 POSSIBLE HARDCODED SECRETS

▼ Showing all 5 secrets

"menu_app_user": "显示用户应用"

"instructions_monitoring_private_dns": "スイッチを切り替えて、いくつかのアプリと連動させます。プライベートDNSを無効にする必要があります。"

"menu_app_user": "顯示使用者應用程式"

"instructions_monitoring_private_dns": "切换开关并与一些应用程序进行交互。必须禁用私有DNS。"

"menu_app_user": "ユーザアプリを表示"

A STRINGS

From APK Resource

► Show all 15613 strings

From Code

From Shared Objects

lib/arm64-v8a/libnetguard.so

► Show all 340 strings

lib/armeabi-v7a/libnetguard.so

► Show all 340 strings

lib/x86/libnetguard.so

► Show all **340** strings

lib/x86_64/libnetguard.so

► Show all **340** strings

apktool_out/lib/arm64-v8a/libnetguard.so

► Show all **340** strings

apktool_out/lib/armeabi-v7a/libnetguard.so

► Show all **340** strings

apktool_out/lib/x86/libnetguard.so

► Show all **340** strings

apktool_out/lib/x86_64/libnetguard.so

► Show all **340** strings

ACTIVITIES

▼ Showing all **8** activities

[eu.faircode.netguard.ActivityMain](#)

[eu.faircode.netguard.ActivitySettings](#)

[eu.faircode.netguard.ActivityForwarding](#)

[eu.faircode.netguard.ActivityForwardApproval](#)

[eu.faircode.netguard.ActivityLog](#)

[eu.faircode.netguard.ActivityDns](#)

[net.kollnig.missioncontrol.DetailsActivity](#)

[org.acra.dialog.CrashReportDialog](#)

SERVICES

▼ Showing all 5 services

[eu.faircode.netguard.ServiceSinkhole](#)

[eu.faircode.netguard.ServiceExternal](#)

[eu.faircode.netguard.ServiceTileMain](#)

[org.acra.sender.LegacySenderService](#)

[org.acra.sender.JobSenderService](#)

RECEIVERS

▼ Showing all 5 receivers

[eu.faircode.netguard.WidgetAdmin](#)

[eu.faircode.netguard.ReceiverAutostart](#)

[eu.faircode.netguard.ReceiverPackageRemoved](#)

[eu.faircode.netguard.WidgetMain](#)

[androidx.profileinstaller.ProfileInstallReceiver](#)

PROVIDERS

▼ Showing all 3 providers

[androidx.core.content.FileProvider](#)

[androidx.startup.InitializationProvider](#)

[org.acra.attachment.AcraContentProvider](#)

LIBRARIES

▼ Showing all 2 libraries

androidx.window.extensions

androidx.window.sidecar

 SBOM▼ Showing all **54** Versioned Packages

androidx.activity:activity-ktx@1.8.0
androidx.activity:activity@1.8.0
androidx.annotation:annotation-experimental@1.4.1
androidx.appcompat:appcompat-resources@1.7.1
androidx.appcompat:appcompat@1.7.1
androidx.arch.core:core-runtime@dynamic
androidx.cardview:cardview@1.0.0
androidx.constraintlayout:constraintlayout@2.2.1
androidx.coordinatorlayout:coordinatorlayout@1.1.0
androidx.core:core-ktx@1.13.1
androidx.core:core-viewtree@1.0.0
androidx.core:core@1.13.1
androidx.cursoradapter:cursoradapter@1.0.0
androidx.customview:customview-poolingcontainer@1.0.0
androidx.customview:customview@1.1.0
androidx.drawerlayout:drawerlayout@1.1.1
androidx.dynamicanimation:dynamicanimation@1.1.0
androidx.emoji2:emoji2-views-helper@1.3.0
androidx.emoji2:emoji2@1.3.0
androidx.exifinterface:exifinterface@1.3.6
androidx.fragment:fragment-ktx@1.6.1
androidx.fragment:fragment@1.6.1
androidx.graphics:graphics-shapes@1.0.1
androidx.interpolator:interpolator@1.0.0
androidx.lifecycle:lifecycle-livedata-core-ktx@2.10.0
androidx.lifecycle:lifecycle-livedata-core@2.10.0
androidx.lifecycle:lifecycle-livedata@2.10.0
androidx.lifecycle:lifecycle-process@2.10.0
androidx.lifecycle:lifecycle-runtime-ktx@2.10.0
androidx.lifecycle:lifecycle-runtime@2.10.0
androidx.lifecycle:lifecycle-viewmodel-ktx@2.10.0
androidx.lifecycle:lifecycle-viewmodel-savedstate@2.10.0
androidx.lifecycle:lifecycle-viewmodel@2.10.0
androidx.loader:loader@1.0.0

androidx.localbroadcastmanager:localbroadcastmanager@1.1.0
androidx.preference:preference@1.2.1
androidx.profileinstaller:profileinstaller@1.4.0
androidx.recyclerview:recyclerview@1.4.0
androidx.savedstate:savedstate-ktx@1.4.0
androidx.savedstate:savedstate@1.4.0
androidx.slidingpanelayout:slidingpanelayout@1.2.0
androidx.startup:startup-runtime@1.1.1
androidx.swiperefreshlayout:swiperefreshlayout@1.2.0
androidx.tracing:tracing@1.0.0
androidx.transition:transition@1.5.0
androidx.vectordrawable:vectordrawable-animated@1.1.0
androidx.vectordrawable:vectordrawable@1.1.0
androidx.versionedparcelable:versionedparcelable@1.1.1
androidx.viewpager2:viewpager2@1.1.0-beta02
androidx.viewpager:viewpager@1.0.0
androidx.window>window@1.0.0
com.google.android.material:material@1.13.0
org.jetbrains.kotlinx:kotlinx-coroutines-android@1.9.0
org.jetbrains.kotlinx:kotlinx-coroutines-core@1.9.0

FILES

► Show all **1278** files

✔ APP SCORES

Security Score **52/100**Trackers Detection **0/432**

📁 FILE INFORMATION

File Name com.starry.greenstash_430.apk
Size 6.85MB
MD5 9dfb608e991cec8984a8858c0fe3ee18
SHA1 eebadb9cc6d0129bf411116f369df7fddd015ca3
SHA256 87b6c930bb178f96de64dbf8d3af0d0c54b0af256d6f726271fc33947e755b34

i APP INFORMATION

App Name GreenStash
Package Name com.starry.greenstash
Main Activity com.starry.greenstash.MainActivity
Target SDK 36 Min SDK 24 Max SDK
Android Version Name 4.3.0 Android Version Code 430

▶ PLAYSTORE INFORMATION

Title GreenStash: Track Your Savings
Score 0 Installs 100+ Price 1.49 Android Version Support Category Finance Play Store URL [com.starry.greenstash](https://play.google.com/store/apps/details?id=com.starry.greenstash)
Developer Pool-Of-Tears, Developer ID 6315274861602029291
Developer Address None
Developer Website None
Developer Email loafy.hawk@gmail.com
Release Date Mar 14, 2023 Privacy Policy [Privacy link](#)
Description

GreenStash is a straightforward, open-source, and privacy-friendly app designed to assist you in effortlessly planning and managing your saving goals, fostering the habit of saving money for better things.

🌟 Features / Highlights:

- Clean and beautiful UI based on Google's Material Design guidelines.
- Add images to your savings goals to maintain motivation!
- Monitor the daily, weekly, or monthly amount required to achieve your goal by the deadline.
- Track detailed transaction history (withdrawals/deposits).
- Receive daily, semi-weekly, or weekly reminders for your savings goals based on priority.
- Supports approximately 100+ local currency symbols.
- Built-in biometric app lock ensures the safety and security of your financial data.
- Completely offline functionality; GreenStash operates without requiring internet permission.
- Compatible with the Material You theme on devices running Android 12+.
- Available in both light and dark mode.

Thank you for choosing GreenStash! 💖

1 / 4

EXPORTED ACTIVITIES

View All 

3 / 15

EXPORTED RECEIVERS

View All 

1 / 4

EXPORTED SERVICES

View All 

0 / 3

EXPORTED PROVIDERS

View All 

 SCAN OPTIONS

 DECOMPILED CODE

 SIGNER CERTIFICATE

Binary is signed
v1 signature: False
v2 signature: True
v3 signature: True
v4 signature: False
X.509 Subject: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2022-07-19 19:56:28+00:00
Valid To: 2049-12-04 19:56:28+00:00
Issuer: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid
Serial Number: 0x414dc5a8
Hash Algorithm: sha256
md5: 6553964b43193d60d8f2fab52d044020
sha1: 3086cc081a35ffef6a3e69c740f99f0ca88146b5
sha256: b110fe435921af7694334b3e99ff74a7e4559bc3fe395d0cd70cf001ad10a051
sha512: 96a6f67146d385c167bb47983b8653654a42def85226cdad0321406d65bcb961ca3d2b4dab38b4686e50799ec484d2a38f5a26ed5d4e7f0702b1118111b61c96
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: 025b3a6f34447f517dab074a5b62d8c0149dc1ca711d16538d61e65312bbefc5
Found 1 unique certificates

≡ APPLICATION PERMISSIONS

Search:

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
android.permission.ACCESS_NETWORK_STATE	normal	view network status	Allows an application to view the status of all networks.	
android.permission.FOREGROUND_SERVICE	normal	enables regular apps to use Service.startForeground.	Allows a regular application to use Service.startForeground.	
android.permission.POST_NOTIFICATIONS	dangerous	allows an app to post notifications.	Allows an app to post notifications	

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
android.permission.RECEIVE_BOOT_COMPLETED	normal	automatically start at boot	Allows an application to start itself as soon as the system has finished booting. This can make it take longer to start the phone and allow the application to slow down the overall phone by always running.	
android.permission.USE_BIOMETRIC	normal	allows use of device-supported biometric modalities.	Allows an app to use device supported biometric modalities.	
android.permission.USE_FINGERPRINT	normal	allow use of fingerprint	This constant was deprecated in API level 28. Applications should request USE_BIOMETRIC instead.	
android.permission.WAKE_LOCK	normal	prevent phone from sleeping	Allows an application to prevent the phone from going to sleep.	
com.starry.greenstash.DYNAMIC_RECEIVER_NOT_EXPORTED_PERMISSION	unknown	Unknown permission	Unknown permission from android reference	

Showing 1 to 8 of 8 entries

[Previous](#)[1](#)[Next](#) **ANDROID API**

Search:

API	FILES
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

BROWSABLE ACTIVITIES

Search:

ACTIVITY	INTENT
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

NETWORK SECURITY

Search:

NO	SCOPE	SEVERITY	DESCRIPTION
No data available in table			

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

CERTIFICATE ANALYSIS

HIGH
0WARNING
0INFO
1Search:

TITLE	SEVERITY	DESCRIPTION
Signed Application	info	Application is signed with a code signing certificate

Showing 1 to 1 of 1 entries

[Previous](#) [1](#) [Next](#)

MANIFEST ANALYSIS

HIGH
1WARNING
6INFO
0SUPPRESSED
0Search:

NO	ISSUE	SEVERITY	DESCRIPTION	OPTIONS
1	App can be installed on a vulnerable unpatched Android version 7.0, [minSdk=24]	high	This application can be installed on an older version of android that has multiple unfixed vulnerabilities. These devices won't receive reasonable security updates from Google. Support an Android version => 10, API 29 to receive reasonable security updates.	
2	Application Data can be Backed up [android:allowBackup=true]	warning	This flag allows anyone to backup your application data via adb. It allows users who have enabled USB debugging to copy application data off of the device.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
3	Broadcast Receiver (com.starry.greenstash.widget.GoalWidget) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
4	Service (androidx.work.impl.background.systemjob.SystemJobService) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.BIND_JOB_SERVICE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	
5	Broadcast Receiver (androidx.work.impl.diagnostics.DiagnosticsReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	
6	Activity (androidx.compose.ui.tooling.PreviewActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
7	Broadcast Receiver (androidx.profileinstaller.ProfileInstallReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

Showing 1 to 7 of 7 entries

[Previous](#)[1](#)[Next](#)

</> CODE ANALYSIS

Search:

NO 	ISSUE 	SEVERITY 	STANDARDS 	FILES 	OPTIONS 
No data available in table					

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

🚩 SHARED LIBRARY BINARY ANALYSIS

Search:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
1	arm64-v8a/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
2	arm64-v8a/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
				unless Dart FFI is used.				
3	armeabi-v7a/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
4	armeabi-v7a/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
				unless Dart FFI is used.				
5	x86/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
6	x86/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
7	x86_64/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
8	x86_64/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
				unless Dart FFI is used.				
9	arm64-v8a/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
10	arm64-v8a/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY
				unless Dart FFI is used.				

Showing 1 to 10 of 16 entries

NIAP ANALYSIS v1.3

Search:

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
No data available in table				

Showing 0 to 0 of 0 entries

FILE ANALYSIS

Search:

NO	ISSUE	FILES
No data available in table		

Showing 0 to 0 of 0 entries

FIREBASE DATABASE ANALYSISSearch:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)**MALWARE LOOKUP**[VirusTotal Report](#)[Triage Report](#)[MetaDefender Report](#)[Hybrid Analysis Report](#)**APKiD ANALYSIS**Search:

DEX	DETECTIONS				
9dfb608e991cec8984a8858c0fe3ee18.apk	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Manipulator Found</td><td>Resources Confusion</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Manipulator Found	Resources Confusion
FINDINGS	DETAILS				
Manipulator Found	Resources Confusion				

DEX	DETECTIONS						
classes.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti-VM Code</td><td>Build.FINGERPRINT check Build.MANUFACTURER check</td></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 2 of 2 entries Previous1Next	FINDINGS	DETAILS	Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check	Compiler	r8
FINDINGS	DETAILS						
Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check						
Compiler	r8						
classes2.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 1 of 1 entries Previous1Next	FINDINGS	DETAILS	Compiler	r8		
FINDINGS	DETAILS						
Compiler	r8						

Showing 1 to 3 of 3 entries

Previous1Next

BEHAVIOUR ANALYSIS

Search:

RULE ID	BEHAVIOUR	LABEL	FILES
No data available in table			

Showing 0 to 0 of 0 entries

Previous

Next

ABUSED PERMISSIONS

Top Malware Permissions

android.permission.RECEIVE_BOOT_COMPLETED,
android.permission.WAKE_LOCK,
android.permission.ACCESS_NETWORK_STATE

3/25 Other Common Permissions

android.permission.FOREGROUND_SERVICE

1/44

Malware Permissions are the top permissions that are widely abused by known malware.
Other Common Permissions are permissions that are commonly abused by known malware.

SERVER LOCATIONS



 **DOMAIN MALWARE CHECK**

 **URLS**

 **EMAILS**

 **TRACKERS**

Search:

TRACKER NAME	CATEGORIES	URL
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

POSSIBLE HARDCODED SECRETS

▼ Showing all **2** secrets

"app_lock_unable_to_authenticate": "由於裝置無法進行驗證，應用程式鎖定已停用"

"app_lock_unable_to_authenticate": "由于设备无法进行身份验证，应用程序锁定已禁用"

A STRINGS

From APK Resource

► Show all **9427** strings

From Code

From Shared Objects

lib/arm64-v8a/libandroidx.graphics.path.so

► Show all **19** strings

lib/arm64-v8a/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

lib/armeabi-v7a/libandroidx.graphics.path.so

► Show all **19** strings

lib/armeabi-v7a/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

lib/x86/libandroidx.graphics.path.so

► Show all **19** strings

lib/x86/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

lib/x86_64/libandroidx.graphics.path.so

► Show all **19** strings

lib/x86_64/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

apktool_out/lib/arm64-v8a/libandroidx.graphics.path.so

► Show all **19** strings

apktool_out/lib/arm64-v8a/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

apktool_out/lib/armeabi-v7a/libandroidx.graphics.path.so

► Show all **19** strings

apktool_out/lib/armeabi-v7a/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

apktool_out/lib/x86/libandroidx.graphics.path.so

► Show all **19** strings

apktool_out/lib/x86/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

apktool_out/lib/x86_64/libandroidx.graphics.path.so

► Show all **19** strings

apktool_out/lib/x86_64/libdatastore_shared_counter.so

▼ Showing all **1** strings

java/io/IOException

ACTIVITIES

▼ Showing all **4** activities

[com.starry.greenstash.MainActivity](#)

[com.starry.greenstash.widget.configuration.WidgetConfigActivity](#)

[cat.ereza.customactivityoncrash.activity.DefaultErrorActivity](#)

[androidx.compose.ui.tooling.PreviewActivity](#)

SERVICES

▼ Showing all **4** services

[androidx.work.impl.background.systemalarm.SystemAlarmService](#)

[androidx.work.impl.background.systemjob.SystemJobService](#)

[androidx.work.impl.foreground.SystemForegroundService](#)

[androidx.room.MultiInstanceInvalidationService](#)

RECEIVERS

▼ Showing all **15** receivers

[com.starry.greenstash.widget.GoalWidget](#)

[com.starry.greenstash.reminder.receivers.AlarmReceiver](#)

[com.starry.greenstash.reminder.receivers.ReminderDepositReceiver](#)

[com.starry.greenstash.reminder.receivers.ReminderDismissReceiver](#)

[com.starry.greenstash.reminder.receivers.BootReceiver](#)

[com.starry.greenstash.reminder.receivers.DateTimeChangeReceiver](#)

[androidx.work.impl.utils.ForceStopRunnable\\$BroadcastReceiver](#)

[androidx.work.impl.background.systemalarm.ConstraintProxy\\$BatteryChargingProxy](#)

[androidx.work.impl.background.systemalarm.ConstraintProxy\\$BatteryNotLowProxy](#)

[androidx.work.impl.background.systemalarm.ConstraintProxy\\$StorageNotLowProxy](#)

[androidx.work.impl.background.systemalarm.ConstraintProxy\\$NetworkStateProxy](#)

[androidx.work.impl.background.systemalarm.RescheduleReceiver](#)

[androidx.work.impl.background.systemalarm.ConstraintProxyUpdateReceiver](#)

[androidx.work.impl.diagnostics.DiagnosticsReceiver](#)

[androidx.profileinstaller.ProfileInstallReceiver](#)

PROVIDERS

▼ Showing all **3** providers

[androidx.core.content.FileProvider](#)

[androidx.startup.InitializationProvider](#)

[cat.ereza.customactivityoncrash.provider.CaocInitProvider](#)

LIBRARIES

▼ Showing all **2** libraries

androidx.window.extensions

androidx.window.sidecar

SBOM

► Show all **109** Versioned Packages

FILES

► Show all **953** files

✔ APP SCORES



Security Score **64/100**
Trackers Detection **0/432**

📁 FILE INFORMATION

File Name io.github.dorumrr.happytaxes_10.apk
Size 27.3MB
MD5 44be6a278211e5a54dadbb4a42969796
SHA1 d6a671f58aeda958ef378ef49841b5e9d30d1989
SHA256 b3608a275fe58985b5eebdecde40f23f13178625c083f317af32c22fd987addc

i APP INFORMATION

App Name HappyTaxes
Package Name io.github.dorumrr.happytaxes
Main Activity io.github.dorumrr.happytaxes.MainActivity
Target SDK 36 Min SDK 26 Max SDK
Android Version Name 1.0.9 Android Version Code 10

0 / 1

EXPORTED ACTIVITIES

View All ⌵

2 / 9

EXPORTED RECEIVERS

View All ⌵

1 / 5

EXPORTED SERVICES

View All ⌵

0 / 2

EXPORTED PROVIDERS

View All ⌵

⚙️ SCAN OPTIONS

📄 DECOMPILED CODE

🔑 SIGNER CERTIFICATE

```
Binary is signed
v1 signature: False
v2 signature: True
v3 signature: False
v4 signature: False
X.509 Subject: C=Unknown, ST=Unknown, L=Unknown, O=Unknown, OU=Unknown, CN=Doru Moraru
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2025-11-08 00:19:38+00:00
Valid To: 2053-03-26 00:19:38+00:00
Issuer: C=Unknown, ST=Unknown, L=Unknown, O=Unknown, OU=Unknown, CN=Doru Moraru
Serial Number: 0x455c1d8a83d43301
Hash Algorithm: sha256
md5: 1537c96eb408b7d42b76b227ce775d70
sha1: 8b186fdb21ba272551394775052cbc2f9b4dae3c
sha256: 6803c37a6c8efc3ca4747305a15377d2e3680569b4101efbd01e9c5016320b42
sha512: dd9d5d4ac7e7065307a99b6a56e1266875c4b3bf5a649736aef636c559b98aae6af21ba7c05e8bc86b9c02878562fdf96d3be38aba08585377c96b25fa650360
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: 2b3ac2feec937f1cb25954a5ada8309edc84741588499a0fcf5748be11968d43
Found 1 unique certificates
```

≡ APPLICATION PERMISSIONS

Search:

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
android.permission.ACCESS_NETWORK_STATE	normal	view network status	Allows an application to view the status of all networks.	
android.permission.CAMERA	dangerous	take pictures and videos	Allows application to take pictures and videos with the camera. This allows the application to collect images that the camera is seeing at any time.	

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
android.permission.FOREGROUND_SERVICE	normal	enables regular apps to use Service.startForeground.	Allows a regular application to use Service.startForeground.	
android.permission.POST_NOTIFICATIONS	dangerous	allows an app to post notifications.	Allows an app to post notifications	
android.permission.READ_EXTERNAL_STORAGE	dangerous	read external storage contents	Allows an application to read from external storage.	
android.permission.READ_MEDIA_IMAGES	dangerous	allows reading image files from external storage.	Allows an application to read image files from external storage.	
android.permission.RECEIVE_BOOT_COMPLETED	normal	automatically start at boot	Allows an application to start itself as soon as the system has finished booting. This can make it take longer to start the phone and allow the application to slow down the overall phone by always running.	
android.permission.USE_BIOMETRIC	normal	allows use of device-supported biometric modalities.	Allows an app to use device supported biometric modalities.	
android.permission.USE_FINGERPRINT	normal	allow use of fingerprint	This constant was deprecated in API level 28. Applications should request USE_BIOMETRIC instead.	
android.permission.WAKE_LOCK	normal	prevent phone from sleeping	Allows an application to prevent the phone from going to sleep.	

Showing 1 to 10 of 12 entries

 ANDROID APISearch:

API	FILES
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **BROWSABLE ACTIVITIES**Search:

ACTIVITY	INTENT
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **NETWORK SECURITY**Search:

NO	SCOPE	SEVERITY	DESCRIPTION
No data available in table			

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

📄 CERTIFICATE ANALYSIS

HIGH
0**WARNING**
0**INFO**
1Search:

TITLE 	SEVERITY 	DESCRIPTION 
Signed Application	info	Application is signed with a code signing certificate

Showing 1 to 1 of 1 entries

[Previous](#)[1](#)[Next](#)

🔍 MANIFEST ANALYSIS

HIGH
0**WARNING**
4**INFO**
0**SUPPRESSED**
0Search:

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
1	App can be installed on a vulnerable Android version 8.0, minSdk=26]	warning	This application can be installed on an older version of android that has multiple vulnerabilities. Support an Android version => 10, API 29 to receive reasonable security updates.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
2	Service (androidx.work.impl.background.systemjob.SystemJobService) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.BIND_JOB_SERVICE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	
3	Broadcast Receiver (androidx.work.impl.diagnostics.DiagnosticsReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
4	Broadcast Receiver (androidx.profileinstaller.ProfileInstallReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

Showing 1 to 4 of 4 entries

[Previous](#)

1

[Next](#)

</> CODE ANALYSIS

Search:

NO 	ISSUE 	SEVERITY 	STANDARDS 	FILES 	OPTIONS 
No data available in table					

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

🚩 SHARED LIBRARY BINARY ANALYSIS

Search:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	S
1	arm64-v8a/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	T info S

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	STATUS
2	arm64-v8a/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	Truncated [...]

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	STATUS
3	arm64-v8a/libimage_processing_util_jni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk']	T info The binary is...

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	STATUS
4	arm64-v8a/libjpeg.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__vsprintf_chk']	T info The binary is...

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	STATUS
5	arm64-v8a/libleptonica.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk', '__vsprintf_chk', '__vsprintf_chk', '__strlen_chk']	T info The binary is...

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	STATUS
6	arm64-v8a/libpngx.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk']	Trusted info

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	STATUS
7	arm64-v8a/libtesseract.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__strlen_chk', '__vsprintf_chk', '__strchr_chk', '__memcpy_chk', '__strncpy_chk', '__memset_chk', '__vsprintf_chk']	T info S

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	STATUS
8	arm64-v8a/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	Truncated [...]

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	STATUS
9	arm64-v8a/libdatastore_shared_counter.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	Tracked [S]

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	STATUS
10	arm64-v8a/libimage_processing_util_jni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk']	Truncated info

Showing 1 to 10 of 14 entries

 NIAP ANALYSIS v1.3Search:

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
No data available in table				

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **FILE ANALYSIS**Search:

NO	ISSUE	FILES
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **FIREBASE DATABASE ANALYSIS**Search:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

MALWARE LOOKUP

[VirusTotal Report](#)[Triage Report](#)[MetaDefender Report](#)[Hybrid Analysis Report](#)

APKiD ANALYSIS

Search:

DEX	DETECTIONS				
44be6a278211e5a54dadbb4a42969796.apk	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Manipulator Found</td><td>Resources Confusion</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Manipulator Found	Resources Confusion
FINDINGS	DETAILS				
Manipulator Found	Resources Confusion				

DEX	DETECTIONS						
classes.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti-VM Code</td><td>Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.PRODUCT check Build.HARDWARE check</td></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 2 of 2 entries Previous1Next	FINDINGS	DETAILS	Anti-VM Code	Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.PRODUCT check Build.HARDWARE check	Compiler	r8
FINDINGS	DETAILS						
Anti-VM Code	Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.PRODUCT check Build.HARDWARE check						
Compiler	r8						
classes2.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 1 of 1 entries Previous1Next	FINDINGS	DETAILS	Compiler	r8		
FINDINGS	DETAILS						
Compiler	r8						

Showing 1 to 3 of 3 entries

Previous1Next

Search:

RULE ID	BEHAVIOUR	LABEL	FILES
No data available in table			

Showing 0 to 0 of 0 entries

[Previous](#)

[Next](#)

ABUSED PERMISSIONS

Top Malware Permissions

android.permission.CAMERA,
android.permission.READ_EXTERNAL_STORAGE,
android.permission.WRITE_EXTERNAL_STORAGE,
android.permission.WAKE_LOCK,
android.permission.ACCESS_NETWORK_STATE,
android.permission.RECEIVE_BOOT_COMPLETED

6/25 Other Common Permissions

android.permission.FOREGROUND_SERVICE

1/44

Malware Permissions are the top permissions that are widely abused by known malware.
Other Common Permissions are permissions that are commonly abused by known malware.

SERVER LOCATIONS



This app may communicate with the following OFAC sanctioned list of countries.

Search:

DOMAIN	COUNTRY/REGION
No data available in table	

Showing 0 to 0 of 0 entries

Search:

DOMAIN	STATUS	GEOLOCATION
www.w3.org	ok	IP: 104.18.23.19 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map

Showing 1 to 1 of 1 entries

[Previous](#)[1](#)[Next](#)

URLs

Search:

URL	FILE
http://www.w3.org/TR/2000/03/WD-SVG-20000303/DTD/svg-20000303-stylable.dtd	lib/arm64-v8a/libleptonica.so
http://www.w3.org/TR/2000/03/WD-SVG-20000303/DTD/svg-20000303-stylable.dtd	apktool_out/lib/arm64-v8a/libleptonica.so

Showing 1 to 2 of 2 entries

[Previous](#)[1](#)[Next](#)

EMAILS

TRACKERS

Search:

TRACKER NAME	CATEGORIES	URL
No data available in table		

Showing 0 to 0 of 0 entries

Previous

Next

 POSSIBLE HARDCODED SECRETS

A STRINGS

From APK Resource

► Show all 8854 strings

From Code

From Shared Objects

lib/arm64-v8a/libandroidx.graphics.path.so

► Show all 19 strings

lib/arm64-v8a/libdatastore_shared_counter.so

▼ Showing all 3 strings

- ro.arch
- exynos9810
- java/io/IOException

lib/arm64-v8a/libimage_processing_util_jni.so

► Show all **5** strings

lib/arm64-v8a/libjpeg.so

► Show all **130** strings

lib/arm64-v8a/libleptonica.so

► Show all **6336** strings

lib/arm64-v8a/libpngx.so

► Show all **366** strings

lib/arm64-v8a/libtesseract.so

► Show all **3261** strings

apktool_out/lib/arm64-v8a/libandroidx.graphics.path.so

► Show all **19** strings

apktool_out/lib/arm64-v8a/libdatastore_shared_counter.so

▼ Showing all **3** strings

ro.arch

exynos9810

java/io/IOException

apktool_out/lib/arm64-v8a/libimage_processing_util_jni.so

► Show all **5** strings

apktool_out/lib/arm64-v8a/libjpeg.so

► Show all **130** strings

apktool_out/lib/arm64-v8a/libleptonica.so

► Show all **6336** strings

apktool_out/lib/arm64-v8a/libpngx.so

► Show all **366** strings

apktool_out/lib/arm64-v8a/libtesseract.so

► Show all **3261** strings

ACTIVITIES

▼ Showing all **1** activities

[io.github.dorumrr.happytaxes.MainActivity](#)

SERVICES

▼ Showing all **5** services

[androidx.work.impl.background.systemalarm.SystemAlarmService](#)

[androidx.work.impl.background.systemjob.SystemJobService](#)

[androidx.work.impl.foreground.SystemForegroundService](#)

[androidx.room.MultiInstanceInvalidationService](#)

[androidx.camera.core.impl.MetadataHolderService](#)

RECEIVERS

▼ Showing all **9** receivers

[androidx.work.impl.utils.ForceStopRunnable\\$BroadcastReceiver](#)

[androidx.work.impl.background.systemalarm.ConstraintProxy\\$BatteryChargingProxy](#)

[androidx.work.impl.background.systemalarm.ConstraintProxy\\$BatteryNotLowProxy](#)

[androidx.work.impl.background.systemalarm.ConstraintProxy\\$StorageNotLowProxy](#)

[androidx.work.impl.background.systemalarm.ConstraintProxy\\$NetworkStateProxy](#)

[androidx.work.impl.background.systemalarm.RescheduleReceiver](#)

[androidx.work.impl.background.systemalarm.ConstraintProxyUpdateReceiver](#)
[androidx.work.impl.diagnostics.DiagnosticsReceiver](#)
[androidx.profileinstaller.ProfileInstallReceiver](#)

PROVIDERS

▼ Showing all **2** providers

[androidx.core.content.FileProvider](#)
[androidx.startup.InitializationProvider](#)

LIBRARIES

SBOM

▼ Showing all **94** Versioned Packages

androidx.activity:activity-compose@1.9.3
androidx.activity:activity-ktx@1.9.3
androidx.activity:activity@1.9.3
androidx.annotation:annotation-experimental@1.4.1
androidx.appcompat:appcompat-resources@1.7.0
androidx.appcompat:appcompat@1.7.0
androidx.arch.core:core-runtime@dynamic
androidx.autofill:autofill@1.0.0
androidx.biometric:biometric@1.1.0
androidx.camera:camera-camera2@1.4.0
androidx.camera:camera-core@1.4.0
androidx.camera:camera-lifecycle@1.4.0
androidx.camera:camera-video@1.4.0
androidx.camera:camera-view@1.4.0
androidx.compose.animation:animation-core@1.7.6
androidx.compose.animation:animation@1.7.6
androidx.compose.foundation:foundation-layout@1.7.6

androidx.compose.foundation:foundation@1.7.6
androidx.compose.material3:material3@1.3.1
androidx.compose.material:material-icons-core@1.7.6
androidx.compose.material:material-icons-extended@1.7.6
androidx.compose.material:material-ripple@1.7.6
androidx.compose.runtime:runtime-saveable@1.7.6
androidx.compose.runtime:runtime@1.7.6
androidx.compose.ui:ui-geometry@1.7.6
androidx.compose.ui:ui-graphics@1.7.6
androidx.compose.ui:ui-text@1.7.6
androidx.compose.ui:ui-tooling-preview@1.7.6
androidx.compose.ui:ui-unit@1.7.6
androidx.compose.ui:ui-util@1.7.6
androidx.compose.ui:ui@1.7.6
androidx.core:core-ktx@1.15.0
androidx.core:core@1.15.0
androidx.cursoradapter:cursoradapter@1.0.0
androidx.customview:customview-poolingcontainer@1.0.0
androidx.customview:customview@1.0.0
androidx.datastore:datastore-core@1.1.1
androidx.datastore:datastore-preferences@1.1.1
androidx.datastore:datastore@1.1.1
androidx.drawerlayout:drawerlayout@1.0.0
androidx.emoji2:emoji2-views-helper@1.3.0
androidx.emoji2:emoji2@1.3.0
androidx.exifinterface:exifinterface@1.3.7
androidx.fragment:fragment@1.5.4
androidx.graphics:graphics-path@1.0.1
androidx.hilt:hilt-navigation-compose@1.2.0
androidx.hilt:hilt-navigation@1.2.0
androidx.hilt:hilt-work@1.2.0
androidx.interpolator:interpolator@1.0.0
androidx.lifecycle:lifecycle-livedata-core-ktx@2.8.7
androidx.lifecycle:lifecycle-livedata-core@2.8.7
androidx.lifecycle:lifecycle-livedata-ktx@2.8.7
androidx.lifecycle:lifecycle-livedata@2.8.7
androidx.lifecycle:lifecycle-process@2.8.7
androidx.lifecycle:lifecycle-runtime-compose@2.8.7

androidx.lifecycle:lifecycle-runtime-ktx@2.8.7
androidx.lifecycle:lifecycle-runtime@2.8.7
androidx.lifecycle:lifecycle-service@2.8.7
androidx.lifecycle:lifecycle-viewmodel-compose@2.8.7
androidx.lifecycle:lifecycle-viewmodel-ktx@2.8.7
androidx.lifecycle:lifecycle-viewmodel-savedstate@2.8.7
androidx.lifecycle:lifecycle-viewmodel@2.8.7
androidx.loader:loader@1.0.0
androidx.navigation:navigation-common-ktx@2.5.1
androidx.navigation:navigation-common@2.5.1
androidx.navigation:navigation-compose@2.5.1
androidx.navigation:navigation-runtime-ktx@2.5.1
androidx.navigation:navigation-runtime@2.5.1
androidx.paging:paging-common@3.3.5
androidx.paging:paging-compose@3.3.5
androidx.paging:paging-runtime@3.3.5
androidx.recyclerview:recyclerview@1.2.1
androidx.room:room-ktx@2.6.1
androidx.room:room-paging@2.6.1
androidx.room:room-runtime@2.6.1
androidx.savedstate:savedstate-ktx@1.2.1
androidx.savedstate:savedstate@1.2.1
androidx.sqlite:sqlite-framework@2.4.0
androidx.sqlite:sqlite@2.4.0
androidx.startup:startup-runtime@1.1.1
androidx.tracing:tracing-ktx@1.2.0
androidx.tracing:tracing@1.2.0
androidx.vectordrawable:vectordrawable-animated@1.1.0
androidx.vectordrawable:vectordrawable@1.1.0
androidx.versionedparcelable:versionedparcelable@1.1.1
androidx.viewpager:viewpager@1.0.0
androidx.work:work-runtime-ktx@2.10.0
androidx.work:work-runtime@2.10.0
com.google.dagger:dagger-lint-aar@2.57.1
com.google.dagger:dagger@2.57.1
com.google.dagger:hilt-android@2.57.1
com.google.dagger:hilt-core@2.57.1

org.jetbrains.kotlin:kotlinx-coroutines-android@1.9.0
org.jetbrains.kotlin:kotlinx-coroutines-core@1.9.0

 FILES

► Show all **646** files

✔ APP SCORES



Security Score **53/100**

Trackers Detection **0/432**

📁 FILE INFORMATION

File Name com.xvzan.simplemoneytracker_20250704.apk
Size 37.95MB
MD5 8499afbc6fba19fa7075b4f7eb024abc
SHA1 ede6f1700b3aef55779f2ca9efa33f542bb2e610
SHA256 97e650ed1af6d4afdf187268f21a8d4e4232a7fa9c98e9514bdb59980124066b

i APP INFORMATION

App Name Simple Money Tracker
Package Name com.xvzan.simplemoneytracker
Main Activity com.xvzan.simplemoneytracker.MainActivity
Target SDK 36 Min SDK 24 Max SDK
Android Version Name 0.8.11 Android Version Code 20250704

▶ PLAYSTORE INFORMATION

Title Simple Money Tracker
Score 0 Installs 100+ Price 0 Android Version Support Category Finance Play Store URL [com.xvzan.simplemoneytracker](https://play.google.com/store/apps/details?id=com.xvzan.simplemoneytracker)
Developer Xv Zan, Developer ID Xv+Zan
Developer Address None
Developer Website None
Developer Email xvzan0@gmail.com
Release Date Oct 15, 2019 Privacy Policy [Privacy link](#)
Description

A simple personal accounting app designed to make it easy to keep track of your income and expenses on your Android device.

Features:

- Fast and easy entry and editing of income and expenses.
- Summary balance sheet and income/expense statement shows you where you stand on selected period.
- Easy reconciliation with your bank statements.
- Import/Export .csv files.

2 / 3

EXPORTED ACTIVITIES

0 / 0

EXPORTED SERVICES

View All 

1 / 1

EXPORTED RECEIVERS

View All 

View All 

0 / 1

EXPORTED PROVIDERS

View All 

 SCAN OPTIONS

 DECOMPILED CODE

 SIGNER CERTIFICATE

```
Binary is signed
v1 signature: False
v2 signature: True
v3 signature: True
v4 signature: False
X.509 Subject: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2020-07-15 22:09:06+00:00
Valid To: 2047-12-01 22:09:06+00:00
Issuer: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid
Serial Number: 0x206a257
Hash Algorithm: sha256
md5: 79e119605e3c66ee0f3a72c7a913cea1
sha1: 77532b9720806d0ec87cc6d004c5f763f90e1e8f
sha256: bd3011bb39c90dc501201507fdcf5f8e30afcd7f601a550e795fa5ae436ca9f1
sha512: e16622686f8305c20b9bd08b98d5162ce9387a65f85d16eaa5cca7c87223a66ab246316f90c3d874cd449b5c88682eada5c299ccb407235ba9a52bd2bee96271
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: d7b443753272afa37bdc9da1f26b085ac90821332471447eed5f49de825f6ad8
Found 1 unique certificates
```

≡ APPLICATION PERMISSIONS

Search:

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
com.xvzan.simplemoneytracker.DYNAMIC_RECEIVER_NOT_EXPORTED_PERMISSION	unknown	Unknown permission	Unknown permission from android reference	

Showing 1 to 1 of 1 entries

[Previous](#)[1](#)[Next](#)

Search:

API	FILES
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

BROWSABLE ACTIVITIES

Search:

ACTIVITY	INTENT
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

NETWORK SECURITY

Search:

NO	SCOPE	SEVERITY	DESCRIPTION
No data available in table			

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

CERTIFICATE ANALYSIS**HIGH**
0**WARNING**
0**INFO**
1Search:

TITLE	SEVERITY	DESCRIPTION
Signed Application	info	Application is signed with a code signing certificate

Showing 1 to 1 of 1 entries

[Previous](#) [1](#) [Next](#)**MANIFEST ANALYSIS****HIGH**
1**WARNING**
4**INFO**
0**SUPPRESSED**
0Search:

NO	ISSUE	SEVERITY	DESCRIPTION	OPTIONS
1	App can be installed on a vulnerable unpatched Android version 7.0, [minSdk=24]	high	This application can be installed on an older version of android that has multiple unfixed vulnerabilities. These devices won't receive reasonable security updates from Google. Support an Android version => 10, API 29 to receive reasonable security updates.	
2	Application Data can be Backed up [android:allowBackup=true]	warning	This flag allows anyone to backup your application data via adb. It allows users who have enabled USB debugging to copy application data off of the device.	

NO	ISSUE	SEVERITY	DESCRIPTION	OPTIONS
3	Activity (com.xvzan.simplemoneytracker.BalanceActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
4	Activity (com.xvzan.simplemoneytracker.NewTransactionActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
5	Broadcast Receiver (androidx.profileinstaller.ProfileInstallReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

Showing 1 to 5 of 5 entries

[Previous](#) [1](#) [Next](#)

</> CODE ANALYSIS

Search:

NO	ISSUE	SEVERITY	STANDARDS	FILES	OPTIONS
No data available in table					

Showing 0 to 0 of 0 entries

[Previous](#)
[Next](#)

SHARED LIBRARY BINARY ANALYSIS

Search:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
1	arm64-v8a/librealm-jni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk', '__memset_chk', '__memmove_chk', '__strlen_chk', '__strchr_chk', '__vsprintf_chk', '__read_chk', '__vsnprintf_chk', '__FD_SET_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
2	armeabi-v7a/librealm-jni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
3	x86/librealm-jni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
4	x86_64/librealm-jni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk', '__memset_chk', '__memmove_chk', '__strlen_chk', '__strchr_chk', '__vsprintf_chk', '__read_chk', '__vsnprintf_chk', '__FD_SET_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
5	arm64-v8a/librealm-jni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk', '__memset_chk', '__memmove_chk', '__strlen_chk', '__strchr_chk', '__vsprintf_chk', '__read_chk', '__vsnprintf_chk', '__FD_SET_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
6	armeabi-v7a/librealm-jni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
7	x86/librealm-jni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
8	x86_64/librealm-jni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk', '__memset_chk', '__memmove_chk', '__strlen_chk', '__strchr_chk', '__vsprintf_chk', '__read_chk', '__vsnprintf_chk', '__FD_SET_chk']	True info Symbols are stripped.

Showing 1 to 8 of 8 entries

[Previous](#)[1](#)[Next](#)

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
No data available in table				

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

FILE ANALYSIS

Search:

NO	ISSUE	FILES
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

FIREBASE DATABASE ANALYSIS

Search:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

MALWARE LOOKUP

[VirusTotal Report](#)[Triage Report](#)[MetaDefender Report](#)[Hybrid Analysis Report](#) **APKiD ANALYSIS**Search:

DEX	DETECTIONS				
8499afbc6fba19fa7075b4f7eb024abc.apk	Search: <table><tr><th data-bbox="1014 578 1455 656">FINDINGS</th><th data-bbox="1455 578 1948 656">DETAILS</th></tr><tr><td data-bbox="1014 656 1455 740">Manipulator Found</td><td data-bbox="1455 656 1948 740">Resources Confusion</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Manipulator Found	Resources Confusion
FINDINGS	DETAILS				
Manipulator Found	Resources Confusion				

DEX	DETECTIONS						
classes.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti-VM Code</td><td>Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.BRAND check Build.DEVICE check Build.PRODUCT check possible VM check</td></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 2 of 2 entries Previous1Next	FINDINGS	DETAILS	Anti-VM Code	Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.BRAND check Build.DEVICE check Build.PRODUCT check possible VM check	Compiler	r8
FINDINGS	DETAILS						
Anti-VM Code	Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.BRAND check Build.DEVICE check Build.PRODUCT check possible VM check						
Compiler	r8						
classes2.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>r8 without marker (suspicious)</td></tr></table> Showing 1 to 1 of 1 entries Previous1Next	FINDINGS	DETAILS	Compiler	r8 without marker (suspicious)		
FINDINGS	DETAILS						
Compiler	r8 without marker (suspicious)						

Showing 1 to 3 of 3 entries

Previous1Next

 BEHAVIOUR ANALYSIS

Search:

RULE ID	BEHAVIOUR	LABEL	FILES
No data available in table			

Showing 0 to 0 of 0 entries

PreviousNext

 ABUSED PERMISSIONS

Top Malware Permissions

0/25 Other Common Permissions

0/44

Malware Permissions are the top permissions that are widely abused by known malware.
Other Common Permissions are permissions that are commonly abused by known malware.

 SERVER LOCATIONS



This app may communicate with the following OFAC sanctioned list of countries.

Search:

DOMAIN	COUNTRY/REGION
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

 DOMAIN MALWARE CHECK

Search:

DOMAIN	STATUS	GEOLOCATION
github.com	ok	IP: 140.82.112.4 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map

Showing 1 to 1 of 1 entries

[Previous](#)

1

[Next](#)

URLS

Search:

URL	FILE
https://github.com/realm/realm-core/issues/new/choose http://%s	lib/arm64-v8a/librealm-jni.so
https://github.com/realm/realm-core/issues/new/choose http://%s	lib/armeabi-v7a/librealm-jni.so
https://github.com/realm/realm-core/issues/new/choose http://%s	lib/x86/librealm-jni.so
https://github.com/realm/realm-core/issues/new/choose http://%s	lib/x86_64/librealm-jni.so

URL	FILE
https://github.com/realm/realm-core/issues/new/choose http://%s	apktool_out/lib/arm64-v8a/librealm-jni.so
https://github.com/realm/realm-core/issues/new/choose http://%s	apktool_out/lib/armeabi-v7a/librealm-jni.so
https://github.com/realm/realm-core/issues/new/choose http://%s	apktool_out/lib/x86/librealm-jni.so
https://github.com/realm/realm-core/issues/new/choose http://%s	apktool_out/lib/x86_64/librealm-jni.so

Showing 1 to 8 of 8 entries

[Previous](#) [1](#) [Next](#)

✉ EMAILS

Search:

EMAIL	FILE
android.studio@android.com	Android String Resource

Showing 1 to 1 of 1 entries

[Previous](#) [1](#) [Next](#)

🏠 TRACKERS

Search:

TRACKER NAME	CATEGORIES	URL
No data available in table		

Showing 0 to 0 of 0 entries

 POSSIBLE HARDCODED SECRETS

A STRINGS

From APK Resource

► Show all 10030 strings

From Code

From Shared Objects

lib/arm64-v8a/librealm-jni.so

► Show all 9656 strings

lib/armeabi-v7a/librealm-jni.so

► Show all 9581 strings

lib/x86/librealm-jni.so

► Show all 9541 strings

lib/x86_64/librealm-jni.so

► Show all 9573 strings

apktool_out/lib/arm64-v8a/librealm-jni.so

► Show all **9656** strings

apktool_out/lib/armeabi-v7a/librealm-jni.so

► Show all **9581** strings

apktool_out/lib/x86/librealm-jni.so

► Show all **9541** strings

apktool_out/lib/x86_64/librealm-jni.so

► Show all **9573** strings

ACTIVITIES

▼ Showing all **3** activities

[com.xvzan.simplemoneytracker.MainActivity](#)

[com.xvzan.simplemoneytracker.BalanceActivity](#)

[com.xvzan.simplemoneytracker.NewTransactionActivity](#)

SERVICES

RECEIVERS

▼ Showing all **1** receivers

[androidx.profileinstaller.ProfileInstallReceiver](#)

PROVIDERS

▼ Showing all **1** providers

[androidx.startup.InitializationProvider](#)

LIBRARIES

▼ Showing all **2** libraries

androidx.window.extensions

androidx.window.sidecar

SBOM

▼ Showing all **59** Versioned Packages

androidx.activity:activity-ktx@1.8.0

androidx.activity:activity@1.8.0

androidx.annotation:annotation-experimental@1.4.0

androidx.appcompat:appcompat-resources@1.7.0

androidx.appcompat:appcompat@1.7.0

androidx.arch.core:core-runtime@dynamic

androidx.cardview:cardview@1.0.0

androidx.coordinatorlayout:coordinatorlayout@1.1.0

androidx.core:core-ktx@1.13.0

androidx.core:core@1.13.0

androidx.cursoradapter:cursoradapter@1.0.0

androidx.customview:customview@1.1.0

androidx.documentfile:documentfile@1.0.0

androidx.drawerlayout:drawerlayout@1.1.1

androidx.dynamicanimation:dynamicanimation@1.0.0

androidx.emoji2:emoji2-views-helper@1.3.0

androidx.emoji2:emoji2@1.3.0

androidx.fragment:fragment-ktx@1.6.2

androidx.fragment:fragment@1.6.2

androidx.interpolator:interpolator@1.0.0

androidx.legacy:legacy-support-core-utils@1.0.0
androidx.lifecycle:lifecycle-extensions@2.2.0
androidx.lifecycle:lifecycle-livedata-core-ktx@dynamic
androidx.lifecycle:lifecycle-livedata-core@dynamic
androidx.lifecycle:lifecycle-livedata@dynamic
androidx.lifecycle:lifecycle-process@dynamic
androidx.lifecycle:lifecycle-runtime-ktx@dynamic
androidx.lifecycle:lifecycle-runtime@dynamic
androidx.lifecycle:lifecycle-service@dynamic
androidx.lifecycle:lifecycle-viewmodel-ktx@dynamic
androidx.lifecycle:lifecycle-viewmodel-savedstate@dynamic
androidx.lifecycle:lifecycle-viewmodel@dynamic
androidx.loader:loader@1.0.0
androidx.localbroadcastmanager:localbroadcastmanager@1.0.0
androidx.media:media@1.4.1
androidx.mediarouter:mediarouter@1.7.0
androidx.navigation:navigation-common@2.7.7
androidx.navigation:navigation-fragment@2.7.7
androidx.navigation:navigation-runtime@2.7.7
androidx.navigation:navigation-ui@2.7.7
androidx.palette:palette@1.0.0
androidx.print:print@1.0.0
androidx.profileinstaller:profileinstaller@1.3.1
androidx.recyclerview:recyclerview@1.1.0
androidx.savedstate:savedstate-ktx@1.2.1
androidx.savedstate:savedstate@1.2.1
androidx.slidingpanelayout:slidingpanelayout@1.2.0
androidx.startup:startup-runtime@1.1.1
androidx.tracing:tracing@1.0.0
androidx.transition:transition@1.5.0
androidx.vectordrawable:vectordrawable-animated@1.1.0
androidx.vectordrawable:vectordrawable@1.1.0
androidx.versionedparcelable:versionedparcelable@1.1.1
androidx.viewpager2:viewpager2@1.0.0
androidx.viewpager:viewpager@1.0.0
androidx.window:window@1.0.0
com.google.android.material:material@1.12.0

org.jetbrains.kotlin:kotlinx-coroutines-android@1.6.4
org.jetbrains.kotlin:kotlinx-coroutines-core@1.6.4

FILES

► Show all **1474** files

✔ APP SCORES



Security Score **52/100**
Trackers Detection **0/432**

📁 FILE INFORMATION

File Name **com.nvllz.piggsy_5.apk**
Size **2.53MB**
MD5 **89cb5da9ae85506ee033e67b66325835**
SHA1 **b0e299b61e30829a1af026d006a1afc75120df21**
SHA256 **5a2cde3008a187a20225a6246a02eb4fee983ec4e3ceb128425116f1b17a3676**

i APP INFORMATION

App Name **Piggsy**
Package Name **com.nvllz.piggsy**
Main Activity **com.nvllz.piggsy.ui.activities.MainActivity**
Target SDK **36** Min SDK **24** Max SDK
Android Version Name **1.11.1** Android Version Code **5**

0 / 8

EXPORTED ACTIVITIES

View All ⌵

2 / 5

EXPORTED RECEIVERS

View All ⌵

1 / 3

EXPORTED SERVICES

View All ⌵

0 / 1

EXPORTED PROVIDERS

View All ⌵

⚙️ SCAN OPTIONS

📄 DECOMPILED CODE

🔑 SIGNER CERTIFICATE

Binary is signed
v1 signature: False
v2 signature: True
v3 signature: False
v4 signature: False
X.509 Subject: CN=nvllz
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2025-08-10 19:52:02+00:00
Valid To: 2050-08-04 19:52:02+00:00
Issuer: CN=nvllz
Serial Number: 0x1
Hash Algorithm: sha256
md5: 5171c939c34aa9fe143dbf2c8d93efab
sha1: 5c8cc408d76bbb2e003d52f698be512ab27d458f
sha256: 9242b92c7df80e474b091d6083b273be4912b4aca87e53dae7ffc8530413876e
sha512: d777c42173a8f4949d5f649e1cbc4bdd9500be4fbc207a6a357d918faf6c15c316f234fb65b90d153bfd4c736383472b6f81ad8adfc8c7345bd2813994ed610
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: 32964a55db0b3b1142b06767921b9d8295f549d26bb089697453beaaae38d393
Found 1 unique certificates

≡ APPLICATION PERMISSIONS

Search:

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
android.permission.ACCESS_NETWORK_STATE	normal	view network status	Allows an application to view the status of all networks.	
android.permission.FOREGROUND_SERVICE	normal	enables regular apps to use Service.startForeground.	Allows a regular application to use Service.startForeground.	
android.permission.POST_NOTIFICATIONS	dangerous	allows an app to post notifications.	Allows an app to post notifications	

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
android.permission.RECEIVE_BOOT_COMPLETED	normal	automatically start at boot	Allows an application to start itself as soon as the system has finished booting. This can make it take longer to start the phone and allow the application to slow down the overall phone by always running.	
android.permission.SCHEDULE_EXACT_ALARM	normal	permits exact alarm scheduling for background work.	Allows an app to use exact alarm scheduling APIs to perform timing sensitive background work.	
android.permission.WAKE_LOCK	normal	prevent phone from sleeping	Allows an application to prevent the phone from going to sleep.	
com.nvllz.piggsy.DYNAMIC_RECEIVER_NOT_EXPORTED_PERMISSION	unknown	Unknown permission	Unknown permission from android reference	

Showing 1 to 7 of 7 entries

🔌 ANDROID API

Search:

API	FILES
No data available in table	

Showing 0 to 0 of 0 entries

 BROWSABLE ACTIVITIESSearch:

ACTIVITY	INTENT
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **NETWORK SECURITY**Search:

NO	SCOPE	SEVERITY	DESCRIPTION
No data available in table			

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **CERTIFICATE ANALYSIS****HIGH**
0**WARNING**
0**INFO**
1Search:

TITLE	SEVERITY	DESCRIPTION
Signed Application	info	Application is signed with a code signing certificate

Showing 1 to 1 of 1 entries

MANIFEST ANALYSIS

HIGH

1

WARNING

4

INFO

0

SUPPRESSED

0

Search:

NO	ISSUE	SEVERITY	DESCRIPTION	OPTIONS
1	App can be installed on a vulnerable unpatched Android version 7.0, [minSdk=24]	high	This application can be installed on an older version of android that has multiple unfixed vulnerabilities. These devices won't receive reasonable security updates from Google. Support an Android version => 10, API 29 to receive reasonable security updates.	
2	Application Data can be Backed up [android:allowBackup=true]	warning	This flag allows anyone to backup your application data via adb. It allows users who have enabled USB debugging to copy application data off of the device.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
3	Service (androidx.work.impl.background.systemjob.SystemJobService) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.BIND_JOB_SERVICE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	
4	Broadcast Receiver (androidx.work.impl.diagnostics.DiagnosticsReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
5	Broadcast Receiver (androidx.profileinstaller.ProfileInstallReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

Showing 1 to 5 of 5 entries

[Previous](#)

1

[Next](#)

</> CODE ANALYSIS

Search:

NO 	ISSUE 	SEVERITY 	STANDARDS 	FILES 	OPTIONS 
No data available in table					

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

🚩 SHARED LIBRARY BINARY ANALYSIS

No Shared Objects found.

Search:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
No data available in table									

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

NIAP ANALYSIS v1.3

Search:

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
No data available in table				

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

FILE ANALYSIS

Search:

NO	ISSUE	FILES
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

FIREBASE DATABASE ANALYSIS

Search:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

MALWARE LOOKUP

[VirusTotal Report](#)[Triage Report](#)[MetaDefender Report](#)[Hybrid Analysis Report](#)

APKiD ANALYSIS

Search:

DEX	DETECTIONS				
89cb5da9ae85506ee033e67b66325835.apk	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Manipulator Found</td><td>Resources Confusion</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Manipulator Found	Resources Confusion
FINDINGS	DETAILS				
Manipulator Found	Resources Confusion				

DEX	DETECTIONS						
classes.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti-VM Code</td><td>Build.FINGERPRINT check Build.MANUFACTURER check</td></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 2 of 2 entries Previous 1 Next	FINDINGS	DETAILS	Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check	Compiler	r8
FINDINGS	DETAILS						
Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check						
Compiler	r8						

Showing 1 to 2 of 2 entries

 BEHAVIOUR ANALYSIS

Search:			
RULE ID	BEHAVIOUR	LABEL	FILES
No data available in table			

Showing 0 to 0 of 0 entries



 ABUSED PERMISSIONS

Top Malware Permissions

android.permission.RECEIVE_BOOT_COMPLETED,
android.permission.WAKE_LOCK,
android.permission.ACCESS_NETWORK_STATE

3/25 Other Common Permissions

android.permission.FOREGROUND_SERVICE

1/44

Malware Permissions are the top permissions that are widely abused by known malware.

Other Common Permissions are permissions that are commonly abused by known malware.

🌐 SERVER LOCATIONS

This app may communicate with the following OFAC sanctioned list of countries.

Search:

DOMAIN	COUNTRY/REGION
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

DOMAIN MALWARE CHECK

Search:

DOMAIN	STATUS	GEOLOCATION
github.com		IP: 140.82.112.4 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map

Showing 1 to 1 of 1 entries

[Previous](#) [1](#) [Next](#)

URLS

Search:

URL	FILE
https://github.com/nvllz https://github.com/nvllz/Piggsy https://github.com/mowtiie	Android String Resource

Showing 1 to 1 of 1 entries

[Previous](#) [1](#) [Next](#)

✉ EMAILS

🏠 TRACKERS

Search:

TRACKER NAME	CATEGORIES	URL
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

🔑 POSSIBLE HARDCODED SECRETS

▼ Showing all 3 secrets

`"app_author" : "nvllz"``"link_app_author" : "https://github.com/nvllz"``"preference_app_author" : "Author"`

STRINGS

From APK Resource

► Show all **4836** strings

From Code

From Shared Objects

ACTIVITIES

▼ Showing all **8** activities

[com.nvllz.piggsy.ui.activities.AboutActivity](#)

[com.nvllz.piggsy.ui.activities.HistoryActivity](#)

[com.nvllz.piggsy.ui.activities.EditActivity](#)

[com.nvllz.piggsy.ui.activities.CreateActivity](#)

[com.nvllz.piggsy.ui.activities.ArchiveActivity](#)

[com.nvllz.piggsy.ui.activities.SettingsActivity](#)

[com.nvllz.piggsy.ui.activities.MainActivity](#)

[com.nvllz.piggsy.ui.activities.BackupActivity](#)

SERVICES

▼ Showing all **3** services

[androidx.work.impl.background.systemjob.SystemJobService](#)

[androidx.work.impl.foreground.SystemForegroundService](#)

[androidx.room.MultiInstanceInvalidationService](#)

RECEIVERS

▼ Showing all **5** receivers

[com.nvllz.piggsy.receiver.DeadlineReceiver](#)

[androidx.work.impl.utils.ForceStopRunnable\\$BroadcastReceiver](#)

[androidx.work.impl.background.systemalarm.RescheduleReceiver](#)

[androidx.work.impl.diagnostics.DiagnosticsReceiver](#)

[androidx.profileinstaller.ProfileInstallReceiver](#)

PROVIDERS

▼ Showing all **1** providers

[androidx.startup.InitializationProvider](#)

LIBRARIES

▼ Showing all **2** libraries

androidx.window.extensions

androidx.window.sidecar

SBOM

▼ Showing all **58** Versioned Packages

androidx.activity:activity-ktx@1.11.0

androidx.activity:activity@1.11.0

androidx.annotation:annotation-experimental@1.4.1

androidx.appcompat:appcompat-resources@1.7.1

androidx.appcompat:appcompat@1.7.1

androidx.arch.core:core-runtime@dynamic

androidx.cardview:cardview@1.0.0

androidx.constraintlayout:constraintlayout@2.2.1

androidx.coordinatorlayout:coordinatorlayout@1.1.0

androidx.core:core-ktx@1.13.0

androidx.core:core-viewtree@1.0.0

androidx.core:core@1.13.0

androidx.cursoradapter:cursoradapter@1.0.0
androidx.customview:customview@1.1.0
androidx.databinding:viewbinding@8.10.1
androidx.documentfile:documentfile@1.1.0
androidx.drawerlayout:drawerlayout@1.1.1
androidx.dynamicanimation:dynamicanimation@1.1.0
androidx.emoji2:emoji2-views-helper@1.3.0
androidx.emoji2:emoji2@1.3.0
androidx.fragment:fragment-ktx@1.3.6
androidx.fragment:fragment@1.5.4
androidx.graphics:graphics-shapes@1.0.1
androidx.interpolator:interpolator@1.0.0
androidx.lifecycle:lifecycle-livedata-core-ktx@dynamic
androidx.lifecycle:lifecycle-livedata-core@dynamic
androidx.lifecycle:lifecycle-livedata@dynamic
androidx.lifecycle:lifecycle-process@dynamic
androidx.lifecycle:lifecycle-runtime-ktx@dynamic
androidx.lifecycle:lifecycle-runtime@dynamic
androidx.lifecycle:lifecycle-service@dynamic
androidx.lifecycle:lifecycle-viewmodel-ktx@dynamic
androidx.lifecycle:lifecycle-viewmodel-savedstate@dynamic
androidx.lifecycle:lifecycle-viewmodel@dynamic
androidx.loader:loader@1.0.0
androidx.preference:preference@1.2.1
androidx.profileinstaller:profileinstaller@1.4.0
androidx.recyclerview:recyclerview@1.2.1
androidx.room:room-runtime@2.7.0
androidx.savedstate:savedstate-ktx@1.2.1
androidx.savedstate:savedstate@1.2.1
androidx.slidingpanelayout:slidingpanelayout@1.2.0
androidx.sqlite:sqlite-framework@2.5.0
androidx.sqlite:sqlite@2.5.0
androidx.startup:startup-runtime@1.1.1
androidx.tracing:tracing-ktx@1.2.0
androidx.tracing:tracing@1.2.0
androidx.transition:transition@1.5.0
androidx.vectordrawable:vectordrawable-animated@1.1.0
androidx.vectordrawable:vectordrawable@1.1.0

androidx.versionedparcelable:versionedparcelable@1.1.1
androidx.viewpager2:viewpager2@1.0.0
androidx.viewpager:viewpager@1.0.0
androidx.window>window@1.0.0
androidx.work:work-runtime@2.11.2
com.google.android.material:material@1.13.0
org.jetbrains.kotlin:kotlinx-coroutines-android@1.9.0
org.jetbrains.kotlin:kotlinx-coroutines-core@1.9.0

FILES

► Show all **880** files

✔ APP SCORES



Security Score **50/100**
Trackers Detection **1/432**

📁 FILE INFORMATION

File Name com.money.manager.ex_1111.apk
Size 49.8MB
MD5 a28822ef93267db740d681fca1533968
SHA1 bb2244bf718f551f935c2d3045285acd21f47057
SHA256 00865f526aaf8bd05cfb31beed9547bba62cfb5003c24ca060c5515902769f78

i APP INFORMATION

App Name Money Manager Ex
Package Name com.money.manager.ex
Main Activity com.money.manager.ex.home.MainActivity
Target SDK 36 Min SDK 29 Max SDK
Android Version Name 5.5.6 Android Version Code 1111

13 / 47

EXPORTED ACTIVITIES

View All ⌵

9 / 18

EXPORTED RECEIVERS

View All ⌵

2 / 8

EXPORTED SERVICES

View All ⌵

1 / 5

EXPORTED PROVIDERS

View All ⌵

⚙️ SCAN OPTIONS

📄 DECOMPILED CODE

🔑 SIGNER CERTIFICATE

```
Binary is signed
v1 signature: False
v2 signature: False
v3 signature: True
v4 signature: False
X.509 Subject: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2019-02-20 11:38:03+00:00
Valid To: 2046-07-08 11:38:03+00:00
Issuer: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid
Serial Number: 0x66d4a071
Hash Algorithm: sha256
md5: a4ad5ec0d0270855faea143a9a6c0349
sha1: b3a71bead7019ab0c13b5cb7dbd4916ca32105e3
sha256: 5070f673f6a62b6634b0b953b0e2821578efc2f17d05bbf3ebe7bb8b24b15a61
sha512: bb4786611c4edadcd7ff4ef0759ebec209a1a187fa2fa5cfadb714d30b48c6d3fd44f2dcbeff9b2221b4977606907b1a535da0db9e2c95dfff712a37fd499dd8
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: f2e3a64f4730934e526a35c2c0ad4a69a1a062331ac7b0297abba413b6e51f03
Found 1 unique certificates
```

≡ APPLICATION PERMISSIONS

Search:

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
android.permission.ACCESS_NETWORK_STATE	normal	view network status	Allows an application to view the status of all networks.	
android.permission.FOREGROUND_SERVICE	normal	enables regular apps to use Service.startForeground.	Allows a regular application to use Service.startForeground.	

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
android.permission.FOREGROUND_SERVICE_DATA_SYNC	normal	permits foreground services for data synchronization.	Allows a regular application to use Service.startForeground with the type "dataSync".	
android.permission.INTERNET	normal	full Internet access	Allows an application to create network sockets.	
android.permission.POST_NOTIFICATIONS	dangerous	allows an app to post notifications.	Allows an app to post notifications	
android.permission.RECEIVE_BOOT_COMPLETED	normal	automatically start at boot	Allows an application to start itself as soon as the system has finished booting. This can make it take longer to start the phone and allow the application to slow down the overall phone by always running.	
android.permission.RECEIVE_SMS	dangerous	receive SMS	Allows application to receive and process SMS messages. Malicious applications may monitor your messages or delete them without showing them to you.	
android.permission.USE_BIOMETRIC	normal	allows use of device-supported biometric modalities.	Allows an app to use device supported biometric modalities.	
android.permission.USE_FINGERPRINT	normal	allow use of fingerprint	This constant was deprecated in API level 28. Applications should request USE_BIOMETRIC instead.	
android.permission.VIBRATE	normal	control vibrator	Allows the application to control the vibrator.	

Previous 1 2 Next

Search:

API	FILES
No data available in table	

Previous

Search:

[illegible]

Showing 1 to 2 of 2 entries

 NETWORK SECURITY

Search:

NO	SCOPE	SEVERITY	DESCRIPTION
No data available in table			

Showing 0 to 0 of 0 entries

 CERTIFICATE ANALYSIS

HIGH0

WARNING0

INFO1

Search:

TITLE	SEVERITY	DESCRIPTION
Signed Application	info	Application is signed with a code signing certificate

Showing 1 to 1 of 1 entries



 MANIFEST ANALYSIS

HIGH
0WARNING
26INFO
0SUPPRESSED
0Search:

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
1	Application Data can be Backed up [android:allowBackup=true]	warning	This flag allows anyone to backup your application data via adb. It allows users who have enabled USB debugging to copy application data off of the device.	
2	Broadcast Receiver (com.money.manager.ex.notifications.SmsReceiverTransactions) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.BROADCAST_SMS [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	
3	Broadcast Receiver (com.money.manager.ex.widget.ButtonAddTransactionWidgetProvider) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
4	Broadcast Receiver (com.money.manager.ex.widget.SummaryWidgetProvider) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
5	Broadcast Receiver (com.money.manager.ex.widget.AccountBillsWidgetProvider) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
6	Broadcast Receiver (com.money.manager.ex.sync.SyncSchedulerBroadcastReceiver) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
7	Broadcast Receiver (com.money.manager.ex.core.RecurringTransactionBootReceiver) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
8	Broadcast Receiver (com.money.manager.ex.widget.SingleAccountWidget) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
9	Activity (com.money.manager.ex.transactions.CheckingTransactionEditActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	
10	Activity (com.money.manager.ex.payee.PayeeActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.	

Showing 1 to 10 of 26 entries

 CODE ANALYSIS

Search:

NO	ISSUE	SEVERITY	STANDARDS	FILES	OPTIONS
No data available in table					

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

 SHARED LIBRARY BINARY ANALYSIS

Search:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
1	arm64-v8a/libsqlcipher.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__vsprintf_chk', '__strlen_chk', '__memcpy_chk', '__memset_chk', '__strchr_chk', '__memmove_chk', '__FD_SET_chk', '__read_chk', '__strncpy_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
2	armeabi-v7a/libsqlcipher.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__vsprintf_chk', '__memcpy_chk', '__strlen_chk', '__memset_chk', '__strchr_chk', '__memmove_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
3	x86/libsqlcipher.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__vsprintf_chk', '__strlen_chk', '__memcpy_chk', '__memset_chk', '__strchr_chk', '__memmove_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
4	x86_64/libsqlcipher.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__vsprintf_chk', '__strlen_chk', '__memcpy_chk', '__memset_chk', '__strchr_chk', '__memmove_chk', '__FD_SET_chk', '__read_chk', '__strncpy_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
5	arm64-v8a/libsqlcipher.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__vsprintf_chk', '__strlen_chk', '__memcpy_chk', '__memset_chk', '__strchr_chk', '__memmove_chk', '__FD_SET_chk', '__read_chk', '__strncpy_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
6	armeabi-v7a/libsqlcipher.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__vsprintf_chk', '__memcpy_chk', '__strlen_chk', '__memset_chk', '__strchr_chk', '__memmove_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
7	x86/libsqlcipher.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__vsprintf_chk', '__strlen_chk', '__memcpy_chk', '__memset_chk', '__strchr_chk', '__memmove_chk']	True  Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
8	x86_64/libsqlcipher.so	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO)  The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True  This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO  This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None  The binary does not have run-time search path or RPATH set.	None  The binary does not have RUNPATH set.	True  The binary has the following fortified functions: ['__vsprintf_chk', '__strlen_chk', '__memcpy_chk', '__memset_chk', '__strchr_chk', '__memmove_chk', '__FD_SET_chk', '__read_chk', '__strncpy_chk']	True  Symbols are stripped.

Showing 1 to 8 of 8 entries

[Previous](#)[1](#)[Next](#)

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
No data available in table				

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

FILE ANALYSIS

Search:

NO	ISSUE	FILES
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

FIREBASE DATABASE ANALYSIS

Search:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

MALWARE LOOKUP

[VirusTotal Report](#)[Triage Report](#)[MetaDefender Report](#)[Hybrid Analysis Report](#) **APKiD ANALYSIS**Search:

DEX

a28822ef93267db740d681fca1533968.apk

DETECTIONS

Search:

FINDINGS

Manipulator Found

DETAILS

Resources Confusion

Showing 1 to 1 of 1 entries

Previous

1

Next

DEX	DETECTIONS								
classes.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti-VM Code</td><td>Build.FINGERPRINT check Build.MANUFACTURER check network operator name check device ID check</td></tr><tr><td>Compiler</td><td>unknown (please file detection issue!)</td></tr><tr><td>yara_issue</td><td>yara issue - dex file recognized by apkid but not yara module</td></tr></table> Showing 1 to 3 of 3 entries Previous1Next	FINDINGS	DETAILS	Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check network operator name check device ID check	Compiler	unknown (please file detection issue!)	yara_issue	yara issue - dex file recognized by apkid but not yara module
FINDINGS	DETAILS								
Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check network operator name check device ID check								
Compiler	unknown (please file detection issue!)								
yara_issue	yara issue - dex file recognized by apkid but not yara module								
classes2.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Anti-VM Code</td><td>Build.MANUFACTURER check</td></tr><tr><td>Compiler</td><td>unknown (please file detection issue!)</td></tr><tr><td>yara_issue</td><td>yara issue - dex file recognized by apkid but not yara module</td></tr></table> Showing 1 to 3 of 3 entries Previous1Next	FINDINGS	DETAILS	Anti-VM Code	Build.MANUFACTURER check	Compiler	unknown (please file detection issue!)	yara_issue	yara issue - dex file recognized by apkid but not yara module
FINDINGS	DETAILS								
Anti-VM Code	Build.MANUFACTURER check								
Compiler	unknown (please file detection issue!)								
yara_issue	yara issue - dex file recognized by apkid but not yara module								

DEX	DETECTIONS						
classes3.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>unknown (please file detection issue!)</td></tr><tr><td>yara_issue</td><td>yara issue - dex file recognized by apkid but not yara module</td></tr></table> Showing 1 to 2 of 2 entries Previous1Next	FINDINGS	DETAILS	Compiler	unknown (please file detection issue!)	yara_issue	yara issue - dex file recognized by apkid but not yara module
FINDINGS	DETAILS						
Compiler	unknown (please file detection issue!)						
yara_issue	yara issue - dex file recognized by apkid but not yara module						

Showing 1 to 4 of 4 entries

 BEHAVIOUR ANALYSIS

Search:			
RULE ID	BEHAVIOUR	LABEL	FILES
No data available in table			

Showing 0 to 0 of 0 entries

 ABUSED PERMISSIONS

Top Malware Permissions

6/25 Other Common Permissions

1/44


android.permission.RECEIVE_SMS, android.permission.INTERNET,
android.permission.ACCESS_NETWORK_STATE,
android.permission.VIBRATE,
android.permission.RECEIVE_BOOT_COMPLETED,
android.permission.WAKE_LOCK

android.permission.FOREGROUND_SERVICE

Malware Permissions are the top permissions that are widely abused by known malware.

Other Common Permissions are permissions that are commonly abused by known malware.

SERVER LOCATIONS

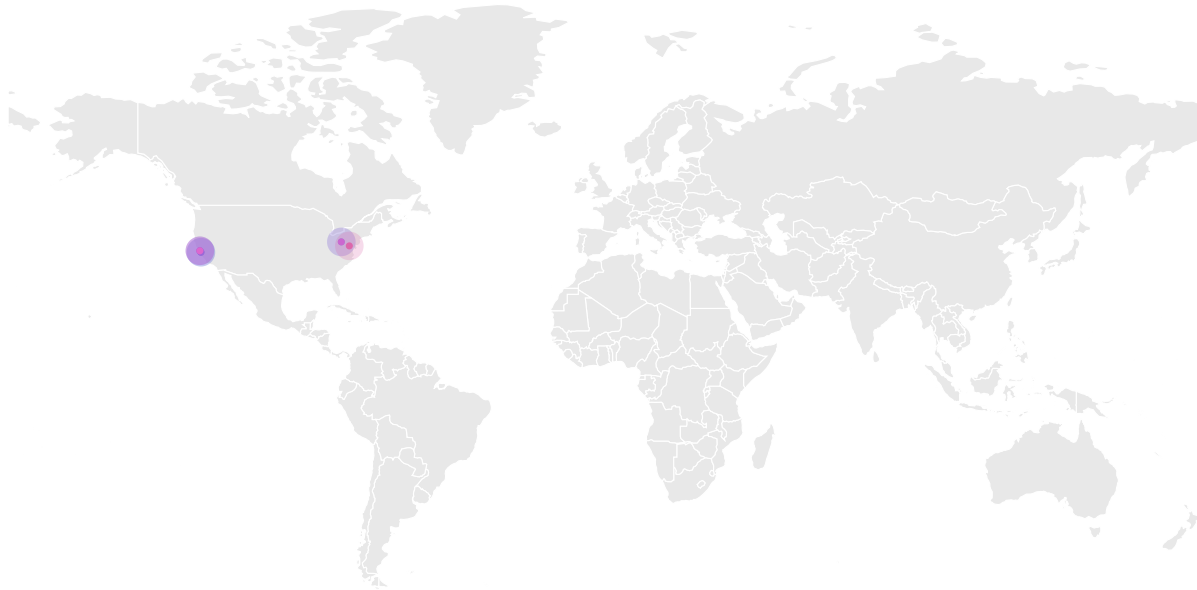

This app may communicate with the following OFAC sanctioned list of countries.

Search:

DOMAIN	COUNTRY/REGION
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

🔍 DOMAIN MALWARE CHECK

Search:

DOMAIN	STATUS	GEOLOCATION
android.moneymanagerex.org	ok	IP: 185.199.111.153 Country: United States of America Region: Pennsylvania City: California Latitude: 40.065632 Longitude: -79.891708 View: Google Map
design.google.com	ok	IP: 216.58.206.14 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map

DOMAIN	STATUS	GEOLOCATION
fontawesome.io	ok	IP: 104.21.83.201 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
github.com	ok	IP: 140.82.121.4 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
materialdesignicons.com	ok	IP: 34.234.179.93 Country: United States of America Region: Virginia City: Ashburn Latitude: 39.043720 Longitude: -77.487488 View: Google Map
mikepenz.com	ok	IP: 172.67.141.197 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map

DOMAIN	STATUS	GEOLOCATION
moneymanagerex.org	ok	IP: 185.199.108.153 Country: United States of America Region: Pennsylvania City: California Latitude: 40.065632 Longitude: -79.891708 View: Google Map
www.google.com	ok	IP: 142.251.156.119 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map

Showing 1 to 8 of 8 entries

[Previous](#)

1

[Next](#)

URLs

Search:

URL	FILE
http://%s	lib/arm64-v8a/libsqlcipher.so
http://%s	lib/armeabi-v7a/libsqlcipher.so
http://%s	lib/x86/libsqlcipher.so
http://%s	lib/x86_64/libsqlcipher.so

URL	FILE
http://%s	apktool_out/lib/arm64-v8a/libsqlcipher.so
http://%s	apktool_out/lib/armeabi-v7a/libsqlcipher.so
http://%s	apktool_out/lib/x86/libsqlcipher.so
http://%s	apktool_out/lib/x86_64/libsqlcipher.so
http://moneymanagerex.org/ https://github.com/mikepenz/FastAdapter https://www.google.com/ https://github.com/mikepenz/Android-Iconics https://moneymanagerex.org/ https://github.com/google/material-design-icons/ https://materialdesignicons.com/ https://moneymanagerex.org// https://design.google.com/icons/ http://mikepenz.com/ http://android.moneymanagerex.org/ https://github.com/FortAwesome/Font-Awesome http://fontawesome.io/icons/	Android String Resource

Showing 1 to 9 of 9 entries

[Previous](#)

1

[Next](#) EMAILS TRACKERS

Search:

TRACKER NAME	CATEGORIES	URL
Amplitude	Profiling, Analytics	https://reports.exodus-privacy.eu.org/trackers/125

Showing 1 to 1 of 1 entries

[Previous](#)

1

[Next](#)

🔑 POSSIBLE HARDCODED SECRETS

▼ Showing all 52 secrets

`"enter_password" : "输入密码（可选）"``"user" : "صارف"``"library_FontAwesome_authorWebsite" : "https://materialdesignicons.com/"``"username" : "用户名"``"user" : "Utilizador"``"pref_last_version_key" : "preflastversioncodekey"``"user" : "Utente"``"library_fastadapter_authorWebsite" : "http://mikepenz.com/"``"user" : "Kullanıcı"``"user" : "Korisnik"``"user" : "用户"``"user" : "Χρήστης"``"user" : "பயனர்"``"username" : "Brugernavn"``"user" : "Utilisateur"``"user" : "Usuario"``"user" : "مستخدم"``"user" : "Usuário"``"user" : "Benutzer"``"user" : "Utilizator"``"username" : "Benutzername"``"user" : "Felhasználó"``"user" : "Pengguna"``"username" : "使用者姓名"``"user" : "Användare"`

```
"username" : "ユーザー名"
"user" : "Użytkownik"
"library_AndroidIconics_authorWebsite" : "http://mikepenz.com/"
"username" : "Användarnamn"
"pref_user_name" : "username"
"username" : "Gebruikersnaam"
"preferences_fingerprint_auth_key" : "指纹认证密钥"
"user" : "שׂוֹתֵשׁוֹת"
"user" : "ユーザー"
"user" : "Пользователь"
"user" : "Uživatel"
"pref_donate_last_version_key" : "prefdonatelastversioncodekey"
"user" : "Uzivatel"
"user" : "کاربر"
"donate_bitcoin" : "现在我们同样也接受比特币捐赠。"
"user" : "Tagagamit"
"user" : "Упорабник"
"user" : "მომხმარებელი"
"user" : "User"
"user" : "使用者"
"user" : "Gebruiker"
"user" : "사용자"
"library_GoogleMaterialDesignIcons_authorWebsite" : "https://www.google.com/"
"donate_bitcoin" : "我們也接受比特幣捐贈。"
"user" : "Bruger"
"preferences_fingerprint_auth_key" : "Fingerabdruck-Authentifizierungsschlüssel"
"user" : "Користувач"
```

A STRINGS

From APK Resource

► Show all **31628** strings

From Code

From Shared Objects

lib/arm64-v8a/libsqlcipher.so

► Show all **9440** strings

lib/armeabi-v7a/libsqlcipher.so

► Show all **9426** strings

lib/x86/libsqlcipher.so

► Show all **9370** strings

lib/x86_64/libsqlcipher.so

► Show all **9396** strings

apktool_out/lib/arm64-v8a/libsqlcipher.so

► Show all **9440** strings

apktool_out/lib/armeabi-v7a/libsqlcipher.so

► Show all **9426** strings

apktool_out/lib/x86/libsqlcipher.so

► Show all **9370** strings

apktool_out/lib/x86_64/libsqlcipher.so

► Show all **9396** strings

📄 ACTIVITIES

▼ Showing all **47** activities

[com.money.manager.ex.reports.GeneralReportActivity](#)

[com.money.manager.ex.home.MainActivity](#)

[com.money.manager.ex.transactions.CheckingTransactionEditActivity](#)

[com.money.manager.ex.payee.PayeeActivity](#)
[com.money.manager.ex.tag.TagActivity](#)
[com.money.manager.ex.account.AccountListActivity](#)
[com.money.manager.ex.common.CategoryListActivity](#)
[com.money.manager.ex.currency.list.CurrencyListActivity](#)
[com.money.manager.ex.about.AboutActivity](#)
[com.money.manager.ex.currency.CurrencyEditActivity](#)
[com.money.manager.ex.account.AccountEditActivity](#)
[com.money.manager.ex.scheduled.ScheduledTransactionListActivity](#)
[com.money.manager.ex.scheduled.ScheduledTransactionEditActivity](#)
[com.money.manager.ex.settings.SettingsActivity](#)
[com.money.manager.ex.settings.GeneralSettingsActivity](#)
[com.money.manager.ex.settings.LookFeelSettingsActivity](#)
[com.money.manager.ex.settings.BehaviourSettingsActivity](#)
[com.money.manager.ex.settings.InvestmentSettingsActivity](#)
[com.money.manager.ex.settings.BudgetSettingsActivity](#)
[com.money.manager.ex.settings.SecuritySettingsActivity](#)
[com.money.manager.ex.settings.DatabaseSettingsActivity](#)
[com.money.manager.ex.passcode.PasscodeActivity](#)
[com.money.manager.ex.reports.IncomeVsExpensesActivity](#)
[com.money.manager.ex.reports.cashflow.CashFlowReportActivity](#)
[com.money.manager.ex.reports.PayeesReportActivity](#)
[com.money.manager.ex.reports.CategoriesReportActivity](#)
[com.money.manager.ex.reports.SummaryOfAccountsReportActivity](#)
[com.money.manager.ex.reports.SummaryOfAccountsChartActivity](#)
[com.money.manager.ex.settings.SyncPreferencesActivity](#)
[com.money.manager.ex.search.SearchActivity](#)
[com.money.manager.ex.transactions.SplitCategoriesActivity](#)
[com.money.manager.ex.HelpActivity](#)
[com.money.manager.ex.tutorial.TutorialActivity](#)
[com.money.manager.ex.currency.CurrencyChartActivity](#)
[com.money.manager.ex.budget.BudgetListActivity](#)
[com.money.manager.ex.widget.SingleAccountWidgetConfigureActivity](#)
[com.money.manager.ex.investment.InvestmentTransactionEditActivity](#)
[com.money.manager.ex.common.WebViewActivity](#)
[com.money.manager.ex.database.PasswordActivity](#)
[com.money.manager.ex.investment.PortfolioActivity](#)
[com.money.manager.ex.budget.BudgetEditActivity](#)

[com.money.manager.ex.home.SelectDatabaseActivity](#)
[com.money.manager.ex.common.CalculatorActivity](#)
[com.money.manager.ex.investment.PriceEditActivity](#)
[com.money.manager.ex.crashreport.CrashReportActivity](#)
[com.github.pedrovgs.lynx.LynxActivity](#)
[com.mikepenz.aboutlibraries.ui.LibsActivity](#)

⚙️ SERVICES

▼ Showing all 8 services

[com.money.manager.ex.widget.AccountBillsWidgetService](#)
[com.money.manager.ex.sync.SyncService](#)
[com.money.manager.ex.sync.adapter.AuthenticatorService](#)
[com.money.manager.ex.sync.adapter.SyncAdapterService](#)
[androidx.work.impl.background.systemalarm.SystemAlarmService](#)
[androidx.work.impl.background.systemjob.SystemJobService](#)
[androidx.work.impl.foreground.SystemForegroundService](#)
[androidx.room.MultiInstanceInvalidationService](#)

📡 RECEIVERS

▼ Showing all 18 receivers

[com.money.manager.ex.notifications.SmsReceiverTransactions](#)
[com.money.manager.ex.widget.ButtonAddTransactionWidgetProvider](#)
[com.money.manager.ex.widget.SummaryWidgetProvider](#)
[com.money.manager.ex.widget.AccountBillsWidgetProvider](#)
[com.money.manager.ex.sync.SyncSchedulerBroadcastReceiver](#)
[com.money.manager.ex.sync.SyncBroadcastReceiver](#)
[com.money.manager.ex.core.RecurringTransactionBootReceiver](#)
[com.money.manager.ex.notifications.RecurringTransactionReceiver](#)
[com.money.manager.ex.widget.SingleAccountWidget](#)
[androidx.work.impl.utils.ForceStopRunnable\\$BroadcastReceiver](#)
[androidx.work.impl.background.systemalarm.ConstraintProxy\\$BatteryChargingProxy](#)

[androidx.work.impl.background.systemalarm.ConstraintProxy\\$BatteryNotLowProxy](#)
[androidx.work.impl.background.systemalarm.ConstraintProxy\\$StorageNotLowProxy](#)
[androidx.work.impl.background.systemalarm.ConstraintProxy\\$NetworkStateProxy](#)
[androidx.work.impl.background.systemalarm.RescheduleReceiver](#)
[androidx.work.impl.background.systemalarm.ConstraintProxyUpdateReceiver](#)
[androidx.work.impl.diagnostics.DiagnosticsReceiver](#)
[androidx.profileinstaller.ProfileInstallReceiver](#)

PROVIDERS

▼ Showing all 5 providers

[com.money.manager.ex.MmxContentProvider](#)
[androidx.core.content.FileProvider](#)
[com.money.manager.ex.sync.adapter.StubSyncProvider](#)
[androidx.startup.InitializationProvider](#)
[com.squareup.picasso.PicassoProvider](#)

LIBRARIES

▼ Showing all 3 libraries

com.sec.android.app.multiwindow
androidx.window.extensions
androidx.window.sidecar

SBOM

▼ Showing all 78 Versioned Packages

androidx.activity:activity-ktx@1.9.1
androidx.activity:activity@1.9.1
androidx.annotation:annotation-experimental@1.4.1
androidx.appcompat:appcompat-resources@1.7.1
androidx.appcompat:appcompat@1.7.1
androidx.arch.core:core-runtime@dynamic

androidx.asynclayoutinflater:asynclayoutinflater@1.0.0
androidx.biometric:biometric@1.1.0
androidx.cardview:cardview@1.0.0
androidx.constraintlayout:constraintlayout@2.2.1
androidx.coordinatorlayout:coordinatorlayout@1.3.0
androidx.core:core-ktx@1.17.0
androidx.core:core-splashscreen@1.0.1
androidx.core:core-viewtree@1.0.0
androidx.core:core@1.17.0
androidx.cursoradapter:cursoradapter@1.0.0
androidx.customview:customview-poolingcontainer@1.0.0
androidx.customview:customview@1.1.0
androidx.databinding:baseAdapters@9.1.0
androidx.databinding:library@9.1.0
androidx.databinding:viewbinding@9.1.0
androidx.documentfile:documentfile@1.0.1
androidx.drawerlayout:drawerlayout@1.1.1
androidx.dynamicanimation:dynamicanimation@1.1.0
androidx.emoji2:emoji2-views-helper@1.3.0
androidx.emoji2:emoji2@1.3.0
androidx.exifinterface:exifinterface@1.0.0
androidx.fragment:fragment-ktx@1.6.2
androidx.fragment:fragment@1.6.2
androidx.graphics:graphics-shapes@1.0.1
androidx.gridlayout:gridlayout@1.1.0
androidx.interpolator:interpolator@1.0.0
androidx.legacy:legacy-support-core-ui@1.0.0
androidx.legacy:legacy-support-core-utils@1.0.0
androidx.legacy:legacy-support-v4@1.0.0
androidx.lifecycle:lifecycle-livedata-core-ktx@2.9.3
androidx.lifecycle:lifecycle-livedata-core@2.9.3
androidx.lifecycle:lifecycle-livedata-ktx@2.9.3
androidx.lifecycle:lifecycle-livedata@2.9.3
androidx.lifecycle:lifecycle-process@2.9.3
androidx.lifecycle:lifecycle-runtime-ktx@2.9.3
androidx.lifecycle:lifecycle-runtime@2.9.3
androidx.lifecycle:lifecycle-service@2.9.3
androidx.lifecycle:lifecycle-viewmodel-ktx@2.9.3

androidx.lifecycle:lifecycle-viewmodel-savedstate@2.9.3
androidx.lifecycle:lifecycle-viewmodel@2.9.3
androidx.loader:loader@1.0.0
androidx.localbroadcastmanager:localbroadcastmanager@1.0.0
androidx.media:media@1.0.0
androidx.navigation:navigation-common@2.9.5
androidx.navigation:navigation-fragment@2.9.5
androidx.navigation:navigation-runtime@2.9.5
androidx.preference:preference@1.2.1
androidx.print:print@1.0.0
androidx.profileinstaller:profileinstaller@1.4.0
androidx.recyclerview:recyclerview-selection@1.1.0
androidx.recyclerview:recyclerview@1.4.0
androidx.room:room-runtime@2.5.0
androidx.savedstate:savedstate-ktx@1.3.1
androidx.savedstate:savedstate@1.3.1
androidx.slidingpanelayout:slidingpanelayout@1.2.0
androidx.sqlite:sqlite-framework@2.6.2
androidx.sqlite:sqlite@2.6.2
androidx.startup:startup-runtime@1.1.1
androidx.swiperefreshlayout:swiperefreshlayout@1.0.0
androidx.tracing:tracing@1.2.0
androidx.transition:transition@1.5.0
androidx.vectordrawable:vectordrawable-animated@1.1.0
androidx.vectordrawable:vectordrawable@1.1.0
androidx.versionedparcelable:versionedparcelable@1.1.1
androidx.viewpager2:viewpager2@1.1.0-beta02
androidx.viewpager:viewpager@1.0.0
androidx.window>window@1.0.0
androidx.work:work-runtime@2.8.1
com.google.android.material:material@1.13.0
com.google.dagger:dagger@2.59.2
org.jetbrains.kotlin:kotlinx-coroutines-android@1.10.2
org.jetbrains.kotlin:kotlinx-coroutines-core@1.10.2

**FILES**

► Show all **1997** files

✔ APP SCORES



Security Score **85/100**
Trackers Detection **0/432**

📁 FILE INFORMATION

File Name com.vagujhelyigergely.calculatorm3_10.apk
Size 1.3MB
MD5 52ddf44d816b22fd3f31a61cd07d4327
SHA1 7712d51d2233898313f3297509687999917f3452
SHA256 48c187eaed9d83d23e0fd9d41a34b02e0e8758a42afde08edc5b970e91936607

i APP INFORMATION

App Name Calculator
Package Name com.vagujhelyigergely.calculatorm3
Main Activity
com.vagujhelyigergely.calculatorm3.MainActivity
Target SDK 35 Min SDK 26 Max SDK
Android Version Name 1.4.3 Android Version Code 10

0 / 1

EXPORTED ACTIVITIES

View All ⌵

1 / 1

EXPORTED RECEIVERS

View All ⌵

0 / 0

EXPORTED SERVICES

View All ⌵

0 / 1

EXPORTED PROVIDERS

View All ⌵

⚙️ SCAN OPTIONS

📄 DECOMPILED CODE

🔑 SIGNER CERTIFICATE

```
Binary is signed
v1 signature: False
v2 signature: True
v3 signature: False
v4 signature: False
X.509 Subject: C=HU, ST=Unknown, L=Unknown, O=Personal, OU=Personal, CN=gergelyvagujhelyi
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2026-03-18 00:57:19+00:00
Valid To: 2053-08-03 00:57:19+00:00
Issuer: C=HU, ST=Unknown, L=Unknown, O=Personal, OU=Personal, CN=gergelyvagujhelyi
Serial Number: 0xab95ea7ed24c889f
Hash Algorithm: sha384
md5: 70740f3acfb291b2e742f4b08870ead5
sha1: 7248b6bda88093bce55af0f530634f81888c9057
sha256: 49646ed216aa6e8f23326999052f6704b6e9228be310b56b6e8b3ab8113bae04
sha512: efaf32c112f261279d8bbf1c26cc113aff4d32e6ad0c9526dffc279989f0d98e8a662f528ff82c6169d4cb5fd658b5fd759ab1ecfc031764ff15d072469161f3
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: c938e2593276e9d09d459e84cb22dc2625b70b8762eb4f8fc649217b0e87ea37
Found 1 unique certificates
```

≡ APPLICATION PERMISSIONS

Search:

PERMISSION	STATUS	INFO	DESCRIPTION	CODE MAPPINGS
com.vagujhelyigergely.calculatorm3.DYNAMIC_RECEIVER_NOT_EXPORTED_PERMISSION	unknown	Unknown permission	Unknown permission from android reference	

Showing 1 to 1 of 1 entries

[Previous](#)[1](#)[Next](#)

 ANDROID API

Search:

API	FILES
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

 BROWSABLE ACTIVITIES

Search:

ACTIVITY	INTENT
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

 NETWORK SECURITY

HIGH

0

WARNING

0

INFO

0

SECURE

1

Search:

NO	SCOPE	SEVERITY	DESCRIPTION
1	*	secure	Base config is configured to disallow clear text traffic to all domains.

Showing 1 to 1 of 1 entries

CERTIFICATE ANALYSIS

HIGH0

WARNING0

INFO1

Search:

TITLE	SEVERITY	DESCRIPTION
Signed Application	info	Application is signed with a code signing certificate

Showing 1 to 1 of 1 entries

MANIFEST ANALYSIS

HIGH
0

WARNING
2

INFO
0

SUPPRESSED
0

Search:

NO	ISSUE	SEVERITY	DESCRIPTION	OPTIONS
1	App can be installed on a vulnerable Android version 8.0, minSdk=26]	warning	This application can be installed on an older version of android that has multiple vulnerabilities. Support an Android version => 10, API 29 to receive reasonable security updates.	

NO 	ISSUE 	SEVERITY 	DESCRIPTION 	OPTIONS 
2	App has a Network Security Configuration[android:networkSecurityConfig=@xml/network_security_config]	info	The Network Security Configuration feature lets apps customize their network security settings in a safe, declarative configuration file without modifying app code. These settings can be configured for specific domains and for a specific app.	
3	Broadcast Receiver (androidx.profileinstaller.ProfileInstallReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.	

Showing 1 to 3 of 3 entries

[Previous](#)[1](#)[Next](#)

</> CODE ANALYSIS

Search:

NO	ISSUE	SEVERITY	STANDARDS	FILES	OPTIONS
No data available in table					

Showing 0 to 0 of 0 entries

🚩 SHARED LIBRARY BINARY ANALYSIS

Search:

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	
1	arm64-v8a/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	
2	armeabi-v7a/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	
3	x86/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	
4	x86_64/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	
5	arm64-v8a/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	
6	armeabi-v7a/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	
7	x86/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	
8	x86_64/libandroidx.graphics.path.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	1

Showing 1 to 8 of 8 entries

 NIAP ANALYSIS v1.3Search:

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
No data available in table				

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **FILE ANALYSIS**Search:

NO	ISSUE	FILES
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#) **FIREBASE DATABASE ANALYSIS**Search:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#)[Next](#)

MALWARE LOOKUP

[VirusTotal Report](#)[Triage Report](#)[MetaDefender Report](#)[Hybrid Analysis Report](#)

APKiD ANALYSIS

Search:

DEX	DETECTIONS				
52ddf44d816b22fd3f31a61cd07d4327.apk	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Manipulator Found</td><td>Resources Confusion</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Manipulator Found	Resources Confusion
FINDINGS	DETAILS				
Manipulator Found	Resources Confusion				
classes.dex	Search: <table><tr><th>FINDINGS</th><th>DETAILS</th></tr><tr><td>Compiler</td><td>r8</td></tr></table> Showing 1 to 1 of 1 entries Previous 1 Next	FINDINGS	DETAILS	Compiler	r8
FINDINGS	DETAILS				
Compiler	r8				

Showing 1 to 2 of 2 entries

 BEHAVIOUR ANALYSIS

Search:

RULE ID	BEHAVIOUR	LABEL	FILES
No data available in table			

Showing 0 to 0 of 0 entries

 ABUSED PERMISSIONS

Top Malware Permissions

0/25 Other Common Permissions

0/44

Malware Permissions are the top permissions that are widely abused by known malware.
Other Common Permissions are permissions that are commonly abused by known malware.

 SERVER LOCATIONS



 **DOMAIN MALWARE CHECK**

 **URLS**

 **EMAILS**

 **TRACKERS**

Search:

TRACKER NAME	CATEGORIES	URL
No data available in table		

Showing 0 to 0 of 0 entries

 POSSIBLE HARDCODED SECRETS

A STRINGS

From APK Resource

► Show all 6277 strings

From Code

From Shared Objects

lib/arm64-v8a/libandroidx.graphics.path.so

► Show all 19 strings

lib/armeabi-v7a/libandroidx.graphics.path.so

► Show all 19 strings

lib/x86/libandroidx.graphics.path.so

► Show all 19 strings

lib/x86_64/libandroidx.graphics.path.so

► Show all 19 strings

apktool_out/lib/arm64-v8a/libandroidx.graphics.path.so

► Show all **19** strings

apktool_out/lib/armeabi-v7a/libandroidx.graphics.path.so

► Show all **19** strings

apktool_out/lib/x86/libandroidx.graphics.path.so

► Show all **19** strings

apktool_out/lib/x86_64/libandroidx.graphics.path.so

► Show all **19** strings

ACTIVITIES

▼ Showing all **1** activities

[com.vagujhelyigergely.calculatorm3.MainActivity](#)

SERVICES

RECEIVERS

▼ Showing all **1** receivers

[androidx.profileinstaller.ProfileInstallReceiver](#)

PROVIDERS

▼ Showing all 1 providers

[androidx.startup.InitializationProvider](#)

LIBRARIES

SBOM

▼ Showing all 45 Versioned Packages

androidx.activity:activity-compose@1.9.3

androidx.activity:activity-ktx@1.9.3

androidx.activity:activity@1.9.3

androidx.annotation:annotation-experimental@1.4.1

androidx.arch.core:core-runtime@dynamic

androidx.autofill:autofill@1.0.0

androidx.compose.animation:animation-core@1.7.6

androidx.compose.animation:animation@1.7.6

androidx.compose.foundation:foundation-layout@1.7.6

androidx.compose.foundation:foundation@1.7.6

androidx.compose.material3:material3@1.3.1

androidx.compose.material:material-icons-core@1.7.6

androidx.compose.material:material-icons-extended@1.7.6

androidx.compose.material:material-ripple@1.7.6

androidx.compose.runtime:runtime-saveable@1.7.6

androidx.compose.runtime:runtime@1.7.6

androidx.compose.ui:ui-geometry@1.7.6

androidx.compose.ui:ui-graphics@1.7.6

androidx.compose.ui:ui-text@1.7.6

androidx.compose.ui:ui-tooling-preview@1.7.6

androidx.compose.ui:ui-unit@1.7.6

androidx.compose.ui:ui-util@1.7.6

androidx.compose.ui:ui@1.7.6

androidx.core:core-ktx@1.15.0

androidx.core:core@1.15.0

androidx.customview:customview-poolingcontainer@1.0.0

androidx.emoji2:emoji2@1.3.0
androidx.graphics:graphics-path@1.0.1
androidx.interpolator:interpolator@1.0.0
androidx.lifecycle:lifecycle-livedata-core@2.8.7
androidx.lifecycle:lifecycle-process@2.8.7
androidx.lifecycle:lifecycle-runtime-compose@2.8.7
androidx.lifecycle:lifecycle-runtime-ktx@2.8.7
androidx.lifecycle:lifecycle-runtime@2.8.7
androidx.lifecycle:lifecycle-viewmodel-ktx@2.8.7
androidx.lifecycle:lifecycle-viewmodel-savedstate@2.8.7
androidx.lifecycle:lifecycle-viewmodel@2.8.7
androidx.profileinstaller:profileinstaller@1.3.1
androidx.savedstate:savedstate-ktx@1.2.1
androidx.savedstate:savedstate@1.2.1
androidx.startup:startup-runtime@1.1.1
androidx.tracing:tracing@1.2.0
androidx.versionedparcelable:versionedparcelable@1.1.1
org.jetbrains.kotlinx:kotlinx-coroutines-android@1.7.3
org.jetbrains.kotlinx:kotlinx-coroutines-core@1.7.3

FILES

▼ Showing all **124** files

META-INF/com/android/build/gradle/app-metadata.properties
META-INF/version-control-info.textproto
assets/dexopt/baseline.prof
assets/dexopt/baseline.profm
classes.dex
lib/arm64-v8a/libandroidx.graphics.path.so
lib/armeabi-v7a/libandroidx.graphics.path.so
lib/x86/libandroidx.graphics.path.so
lib/x86_64/libandroidx.graphics.path.so
DebugProbesKt.bin
META-INF/androidx.activity_activity-compose.version
META-INF/androidx.activity_activity-ktx.version
META-INF/androidx.activity_activity.version
META-INF/androidx.annotation_annotation-experimental.version

META-INF/androidx.arch.core_core-runtime.version
META-INF/androidx.autofill_autofill.version
META-INF/androidx.compose.animation_animation-core.version
META-INF/androidx.compose.animation_animation.version
META-INF/androidx.compose.foundation_foundation-layout.version
META-INF/androidx.compose.foundation_foundation.version
META-INF/androidx.compose.material3_material3.version
META-INF/androidx.compose.material_material-icons-core.version
META-INF/androidx.compose.material_material-icons-extended.version
META-INF/androidx.compose.material_material-ripple.version
META-INF/androidx.compose.runtime_runtime-saveable.version
META-INF/androidx.compose.runtime_runtime.version
META-INF/androidx.compose.ui_ui-geometry.version
META-INF/androidx.compose.ui_ui-graphics.version
META-INF/androidx.compose.ui_ui-text.version
META-INF/androidx.compose.ui_ui-tooling-preview.version
META-INF/androidx.compose.ui_ui-unit.version
META-INF/androidx.compose.ui_ui-util.version
META-INF/androidx.compose.ui_ui.version
META-INF/androidx.core_core-ktx.version
META-INF/androidx.core_core.version
META-INF/androidx.customview_customview-poolingcontainer.version
META-INF/androidx.emoji2_emoji2.version
META-INF/androidx.graphics_graphics-path.version
META-INF/androidx.interpolator_interpolator.version
META-INF/androidx.lifecycle_lifecycle-livedata-core.version
META-INF/androidx.lifecycle_lifecycle-process.version
META-INF/androidx.lifecycle_lifecycle-runtime-compose.version
META-INF/androidx.lifecycle_lifecycle-runtime-ktx.version
META-INF/androidx.lifecycle_lifecycle-runtime.version
META-INF/androidx.lifecycle_lifecycle-viewmodel-ktx.version
META-INF/androidx.lifecycle_lifecycle-viewmodel-savedstate.version
META-INF/androidx.lifecycle_lifecycle-viewmodel.version
META-INF/androidx.profileinstaller_profileinstaller.version
META-INF/androidx.savedstate_savedstate-ktx.version
META-INF/androidx.savedstate_savedstate.version
META-INF/androidx.startup_startup-runtime.version
META-INF/androidx.tracing_tracing.version

META-INF/androidx.versionedparcelable_versionedparcelable.version
META-INF/kotlinx_coroutines_android.version
META-INF/kotlinx_coroutines_core.version
META-INF/services/C1.u
META-INF/services/D1.a
kotlin-tooling-metadata.json
kotlin/annotation/annotation.kotlin_builtins
kotlin/collections/collections.kotlin_builtins
kotlin/coroutines/coroutines.kotlin_builtins
kotlin/internal/internal.kotlin_builtins
kotlin/kotlin.kotlin_builtins
kotlin/ranges/ranges.kotlin_builtins
kotlin/reflect/reflect.kotlin_builtins
AndroidManifest.xml
res/0K.xml
res/2K.9.png
res/4z.xml
res/5c.png
res/8G.xml
res/8c.png
res/9m.xml
res/9w.png
res/BW.xml
res/C_.9.png
res/Ce.xml
res/Em.png
res/FS.png
res/Gc.png
res/Lf.png
res/Ma.9.png
res/N3.xml
res/QZ.png
res/Qr.xml
res/RJ.png
res/S8.xml
res/U-.9.png
res/WU.xml
res/Ws.xml

res/Xk.xml
res/_y.xml
res/a0.xml
res/as.png
res/bX.xml
res/c6.xml
res/cV.xml
res/color/vector_tint_color.xml
res/color/vector_tint_theme_color.xml
res/cr.xml
res/df.xml
res/f0.png
res/gK.9.png
res/iQ.xml
res/je.9.png
res/lR.xml
res/nz.xml
res/o-.png
res/o_.9.png
res/pY.png
res/pu.png
res/s4.png
res/sA.9.png
res/vL.9.png
res/wN.9.png
res/wb.png
res/x4.xml
res/xN.xml
res/xa.9.png
res/yn.png
res/z-.9.png
res/zR.png
res/zr.png
resources.arsc