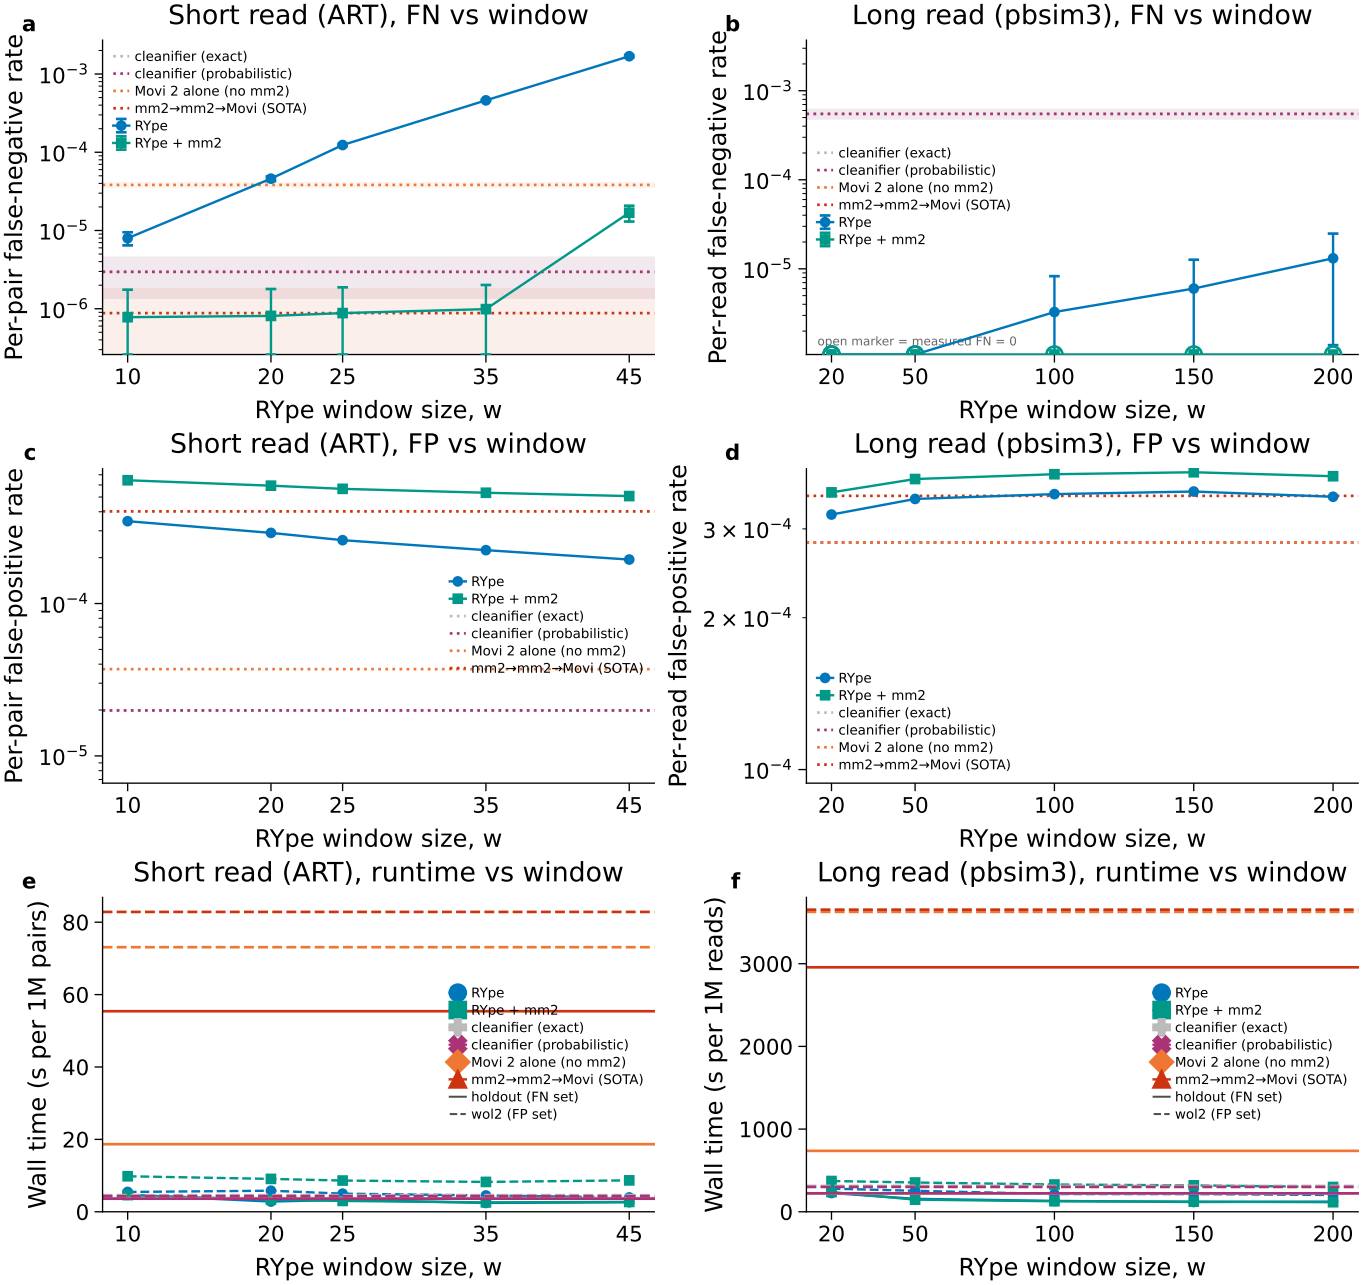
a
Short read (ART), FN vs window
Per-pair false-negative rate
cleanifier (exact)
cleanifier (probabilistic)
Movi 2 alone (no mm2)
mm2→mm2→Movi (SOTA)
RYpe
RYpe + mm2
RYpe window size, w
b
Long read (pbsim3), FN vs window
Per-read false-negative rate
open marker = measured FN = 0
c
Short read (ART), FP vs window
Per-pair false-positive rate
d
Long read (pbsim3), FP vs window
Per-read false-positive rate
e
Short read (ART), runtime vs window
Wall time (s per 1M pairs)
holdout (FN set)
wol2 (FP set)
f
Long read (pbsim3), runtime vs window
Wall time (s per 1M reads)