🏠 Home(/)

Fun with CSS

💼 CSS 📋 Front-end My Planning(/planning/me)

⚙️ Weight: 1

🔀 Projects(/projects/current)

📁 Project over - took place from Aug 5, 2024 6:00 AM to Aug 12, 2024 6:00 AM

✔️ QA Reviews I can make(/corrections/to_review)

In this project, you will experiment and implement fun layout with HTML and CSS **ONLY**!

❓ Yes, no JavaScript! Evaluation quizzes(/dashboards/my_current_evaluation_quizzes)

Enjoy!

🎓 Curriculums(/dashboards/my_curriculums)

Tasks 📋 Concepts(/concepts)

0. Sprite languages   #advanced

💬 Conference rooms(/dashboards/video_rooms)

By using this HTML:

🖥️ Servers(/servers)

```
<!DOCTYPE html>
<html lang="en">
    <head>
        <meta charset="UTF-8" />
        <title>HBTN - 0- Sprite</title>
        <link href="0-styles.css" media="all" rel="stylesheet" type="text/css">
    </head>
    <body>
        <ul>
            <li>HTML<span class="icon i-html"></span></li>
            <li>CSS<span class="icon i-css"></span></li>
            <li>JavaScript<span class="icon i-js"></span></li>
        </ul>
    </body>
</html>
```
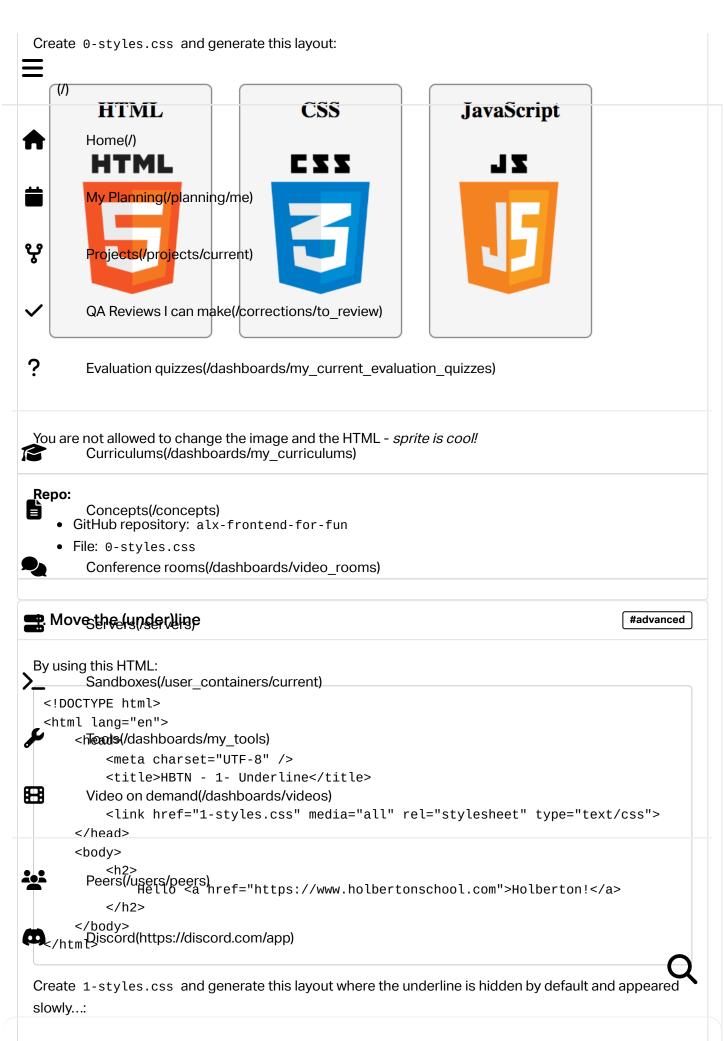
> Sandboxes(/user_containers/current)

🔧 Tools(/dashboards/my_tools)

🎞️ Video on demand(/dashboards/videos)

👥 Peers(/users/peers)

Discord(https://discord.com/app)

And this image file: 0-sprite.png (https://s3.amazonaws.com/alx-intranet.hbtn.io/uploads/medias/2020/2/d416199ca6ecdbd0f8a3.png?X-Amz-Algorithm=AWS4-HMAC-SHA256&X-Amz-Credential=AKIARDDGGGOUSBVO6H7D%2F20241102%2Fus-east-1%2Fs3%2Faws4_request&X-Amz-Date=20241102T221741Z&X-Amz-Expires=345600&X-Amz-SignedHeaders=host&X-Amz-Signature=7c291fea78ef62cb9774d900e173f4e415563aa2b8f8d77b7c42e72776435559)

My Profile(/users/my_profile)

Create `0-styles.css` and generate this layout:

You are not allowed to change the image and the HTML - *sprite is cool!*

Repo:

- GitHub repository: `alx-frontend-for-fun`
- File: `0-styles.css`

1. Move the (under)line   #advanced

By using this HTML:

```
<!DOCTYPE html>
<html lang="en">
    <head>
        <meta charset="UTF-8" />
        <title>HBTN - 1- Underline</title>
        <link href="1-styles.css" media="all" rel="stylesheet" type="text/css">
    </head>
    <body>
        <h2>
            Hello <a href="https://www.holbertonschool.com">Holberton!</a>
        </h2>
    </body>
</html>
```

Create `1-styles.css` and generate this layout where the underline is hidden by default and appeared slowly…:

You are not allowed to change the HTML

Repo:

- GitHub repository: `alx-frontend-for-fun`
- File: `1-styles.css`

2. Toggle `#advanced`

By using this HTML:

```
<!DOCTYPE html>
<html lang="en">
    <head>
        <meta charset="UTF-8" />
        <title>HBTN - 2- toggle</title>
        <link href="2-styles.css" media="all" rel="stylesheet" type="text/css">
    </head>
    <body>
        <div class="toggle">
            <input type="checkbox" name="toggle" class="toggle-cb" id="toggle-0" checked>
            <label class="toggle-label" for="toggle-0">
                <div class="toggle-inner"></div>
                <div class="toggle-switch"></div>
            </label>
        </div>
    </body>
</html>
```
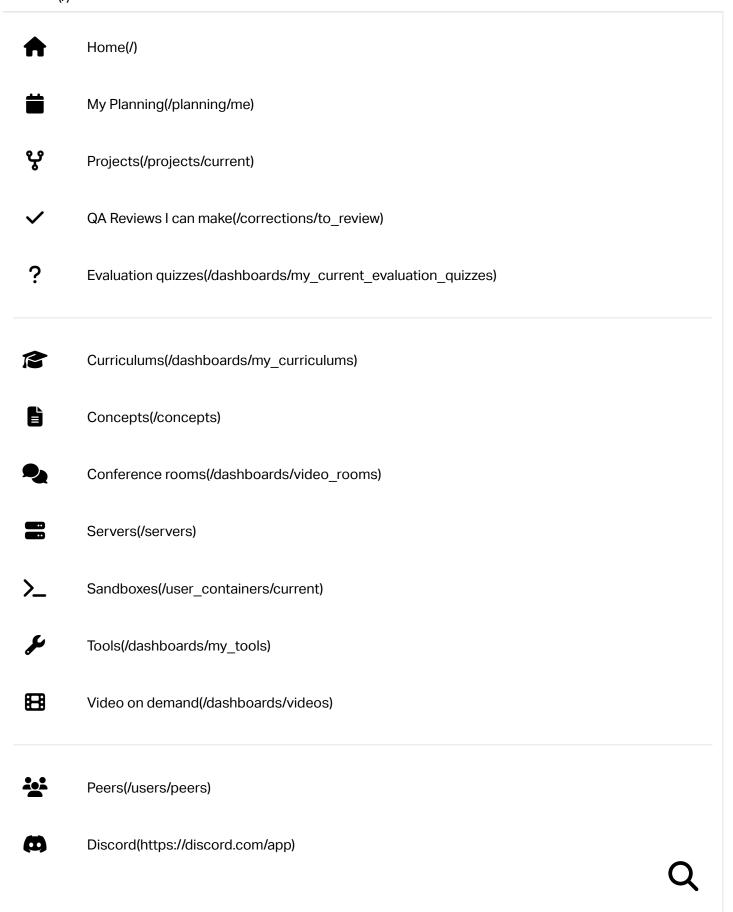
Create `2-styles.css` and generate this layout where the `<input>` is has this custom toggle layout:

Checked:

Unchecked:

You are not allowed to change the HTML

Repo:

- GitHub repository: `alx-frontend-for-fun`
- File: `2-styles.css`

3. Menu `#advanced`

By using this HTML:

```html
<!DOCTYPE html>
<html lang="en">

  <head>
    <meta charset="UTF-8" />
    <title>HBTN - 2- toggle</title>

    <link rel="stylesheet" href="https://maxcdn.bootstrapcdn.com/font-awesome/4.7.0/css/font-awesome.min.css">
    <link href="3-styles.css" media="all" rel="stylesheet" type="text/css">
  </head>
  <body>

    <nav class="menu">
      <input type="checkbox" href="#" class="menu-open" name="menu-open" id="menu-open"/>
      <label class="menu-open-button" for="menu-open">
        <span class="menu-line menu-line-1"></span>
        <span class="menu-line menu-line-2"></span>
        <span class="menu-line menu-line-3"></span>
      </label>
      <a href="#" class="menu-item"> <i class="fa fa-area-chart"></i> </a>
      <a href="#" class="menu-item"> <i class="fa fa-bar-chart"></i> </a>
      <a href="#" class="menu-item"> <i class="fa fa-line-chart"></i> </a>
      <a href="#" class="menu-item"> <i class="fa fa-pie-chart"></i> </a>
      <a href="#" class="menu-item"> <i class="fa fa-table"></i> </a>
    </nav>

  </body>
</html>
```

Create `3-styles.css` and generate this layout/animation:

You are not allowed to change the HTML

Repo:

- GitHub repository: `alx-frontend-for-fun`
- File: `3-styles.css`

☰
(/)

🏠 Home(/)

📅 My Planning(/planning/me)

⑆ Projects(/projects/current)

✓ QA Reviews I can make(/corrections/to_review)

? Evaluation quizzes(/dashboards/my_current_evaluation_quizzes)

🎓 Curriculums(/dashboards/my_curriculums)

📄 Concepts(/concepts)

💬 Conference rooms(/dashboards/video_rooms)

🖥 Servers(/servers)

>_ Sandboxes(/user_containers/current)

🔧 Tools(/dashboards/my_tools)

🎞 Video on demand(/dashboards/videos)

👥 Peers(/users/peers)

🎮 Discord(https://discord.com/app)

🔍

My Profile(/users/my_profile)