



### Question 1

#### Part (a)

Compare the first number in the initial list with the second number. If the first number is smaller, interchange the positions; otherwise compare the second number with the third, and so on. At the end of the first iteration, the smallest number will be found at the bottom of the list. Repeat the procedure for the next iteration. (See illustration below.)

	21	21	21	30	
	14	14	30	52	
	12	30	52	21	
	30	52	14	14	
	52	12	12	12	
Number of	→	→	→		
comparisons	4	3	2		

Suppose there are  $N$  numbers in the list (where  $N = k^2$ ). 



Obtaining the smallest number requires  $(N - 1)$  comparisons

Obtaining the 2nd smallest number requires  $(N - 2)$  comparisons

Obtaining the 3rd smallest number requires  $(N - 3)$  comparisons

and so on.

Since we are only interested in the median value, there is no need to sort the entire list. The number of comparisons required to determine the median is

$$C_1 = \text{} (N - 1) + (N - 2) + \dots + \frac{1}{2} \text{} (N - 1) \quad (1)$$


$$= \frac{3}{8} (N^2 - 1) \quad \text{} \quad (2)$$

$$= \frac{3}{8} (k^4 - 1) \quad (3)$$

(Eq. (1) is an arithmetic series whose sum can be obtained with a standard formula.)

## Part (b)

As the window is moved from pixel to pixel, discard those pixel values that are no longer in the window, and insert the new pixel values in the appropriate places in the sequence.

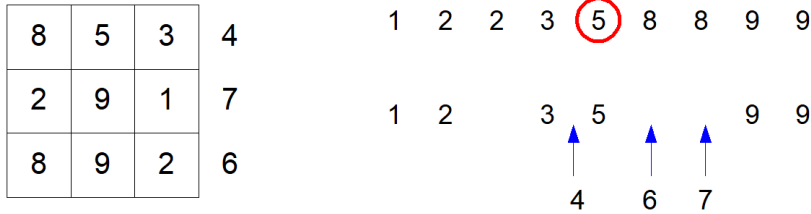

Assume that the initial set of pixel intensities have already been fully sorted. Each time we shift the window, we drop  $k$  numbers and take in  $k$  new numbers. In the worst case:

the 1st new number is compared with  $(N - k)$  numbers

the 2nd new number is compared with  $(N - k) + 1$  numbers 

...

the  $k$ th new number is compared with  $(N - k) + (k - 1)$  numbers

The total number of comparisons is

$$\begin{aligned}
 C_2 &= k(N - k) + \frac{k}{2}(k - 1) \\
 &= \frac{k}{2}(k - 1)(2k + 1)
 \end{aligned}$$

## Part (c)

	$\underline{C_1}$	$\underline{C_2}$	$\underline{C_2/C_1}$
$k = 3$	30	21	0.70
$k = 5$	234	110	0.47
$k = 7$	900	315	0.35



## Question 2



60	60	60	60	60	60	60	60
60	60	60	60	60	60	60	60
60	60	60	60	60	60	60	60
60	60	60	60	60	60	60	60
60	60	60	60	160	160	160	160
60	60	60	60	160	160	160	160
60	60	60	60	160	160	160	160
60	60	60	60	160	160	160	160

f (original)

60	66	66	63	70	66	52	60
64	70	60	48	76	40	76	50
70	0	52	64	76	72	50	76
64	56	50	68	58	55	74	64
60	54	71	52	158	146	162	152
51	54	60	68	164	140	142	148
66	52	75	55	160	172	171	166
58	62	50	66	156	160	168	156

f1 (noise added)

56	54	64	64	64	60
54	52	61	62	64	62
53	52	72	83	95	95
58	59	83	101	122	120
60	60	96	124	157	155
59	60	95	127	159	158

f2 (nbhd averaging)

64	63	64	66	70	60
60	56	60	64	72	64
56	54	64	68	74	74
56	56	68	68	142	142
60	55	71	146	160	152
58	60	68	156	160	160

f3 (median)

35	35	62	58	58	58
35	35	62	58	58	58
36	36	104	105	106	106
61	61	107	108	110	109
63	64	108	112	156	156
63	63	107	114	156	156

f4 (mid-point)


63	61	65	67	67	60
59	56	60	63	67	63
57	56	63	68	85	86
57	58	65	96	132	130
59	58	86	134	158	155
57	59	85	137	162	160

f5 (alpha-trimmed)

	Nbhd avg	Median	Mid-point	Alpha-tr
Pepper noise	B	A	C	A
Edges	B	A	C	B




original

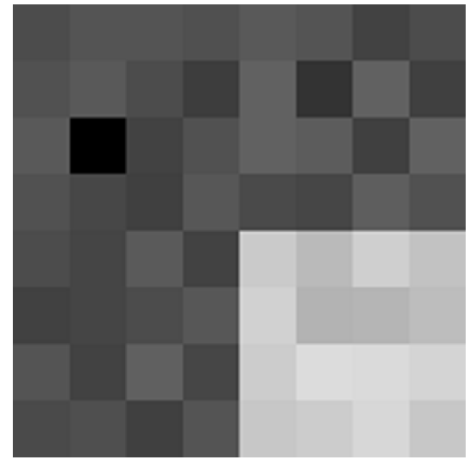

with noise added




nbhd avr.

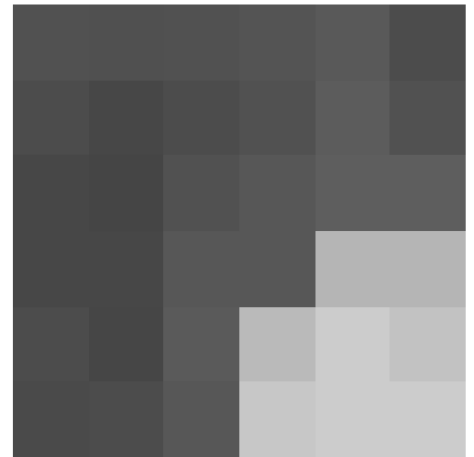

median





mid-point

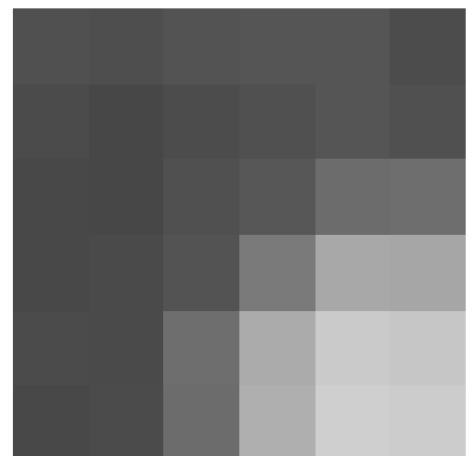

alpha-trimmed

### Question 3

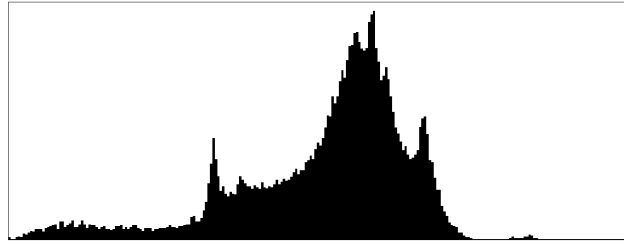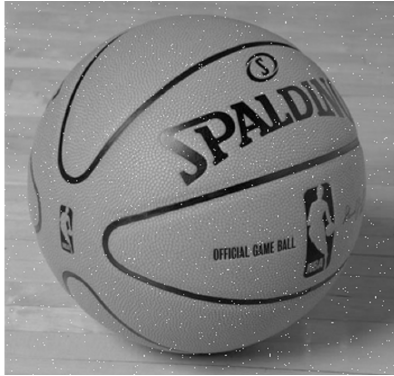


#### Part (a)

The output of the MMSE filter is:

$$g(x, y) = f(x, y) - \frac{\sigma_{\eta}^2}{\sigma_l^2} [f(x, y) - m_l(x, y)]$$




$\sigma_{\eta}^2$  = noise variance

$\sigma_l^2$  = local variance (in the window under consideration) 

$m_l$  = local mean (in the window under consideration) 

Consider a  $3 \times 3$  neighbourhood centred at a noise point; one out of nine pixels is an extreme value (255). Compare this local variance with the noise variance, where the latter is determined by the fact that 0.01 (or 1 in 100) of the pixels is a noise pixel (of value 255). Hence, it is likely that the local variance will be much greater than the noise variance:

$$\sigma_l^2 \gg \sigma_{\eta}^2$$

Thus the output at this point is   

$$g(x, y) \approx f(x, y)$$

i.e., there is very little filtering of the noise value. Hence, the MMSE filter will have very little effect on the image.

## Part (b)


The image formed by averaging  $K$  different noisy images is

$$\bar{g}(x, y) = \frac{1}{K} \sum_{t=1}^K g_t(x, y)$$

Consider a pixel at  $(p, q)$ . Suppose  $g_1(p, q) = 255$ , i.e., pixel  $(p, q)$  in the first image is a noise pixel. This value of 255 is likely to be very different from the noise-free pixel value,  $f(p, q)$ . For example, if we have 10 frames,

$$\begin{aligned} g_1(p, q) &= 255 \\ g_2(p, q) &= f(p, q) = 100 \\ g_3(p, q) &= f(p, q) = 100 \\ g_4(p, q) &= f(p, q) = 100 \\ &\dots \end{aligned}$$

$$\bar{g}(p, q) = \frac{1}{10}(255 + 100 + 100 + \dots) = 116$$

which is still substantially different from the noise-free value of 100. 

Hence, many image frames will be required before  $\bar{g}(x, y)$  approaches  $f(x, y)$ , i.e., image averaging is not suitable.