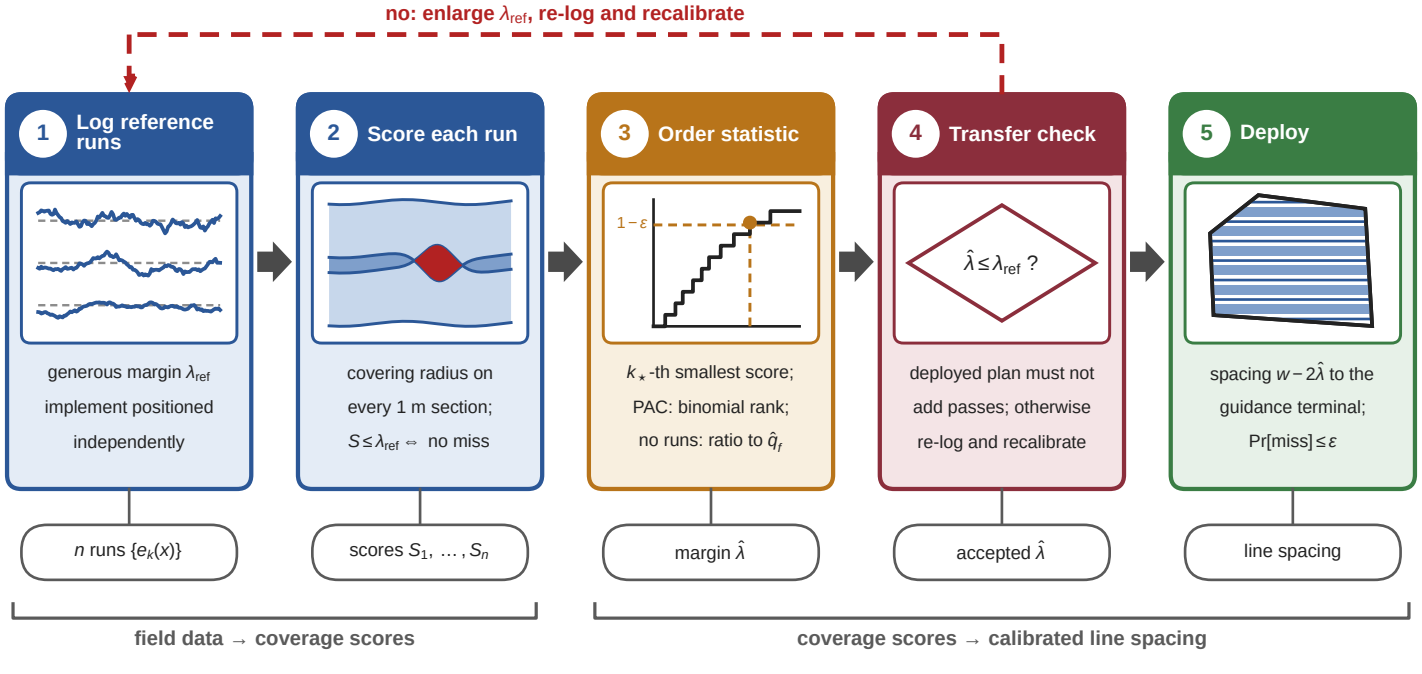
no: enlarge λ_{ref}, re-log and recalibrate
1 Log reference runs
generous margin λ_{ref}
implement positioned
independently
2 Score each run
covering radius on
every 1 m section;
$S \le \lambda_{ref} \Leftrightarrow$ no miss
3 Order statistic
$1-\varepsilon$
$k_\star$-th smallest score;
PAC: binomial rank;
no runs: ratio to $\hat{q}_f$
4 Transfer check
$\hat{\lambda} \le \lambda_{ref}$?
deployed plan must not
add passes; otherwise
re-log and recalibrate
5 Deploy
spacing $w - 2\hat{\lambda}$ to the
guidance terminal;
Pr[miss] $\le \varepsilon$
n runs $\{e_k(x)\}$
scores $S_1, \ldots, S_n$
margin $\hat{\lambda}$
accepted $\hat{\lambda}$
line spacing
field data → coverage scores
coverage scores → calibrated line spacing