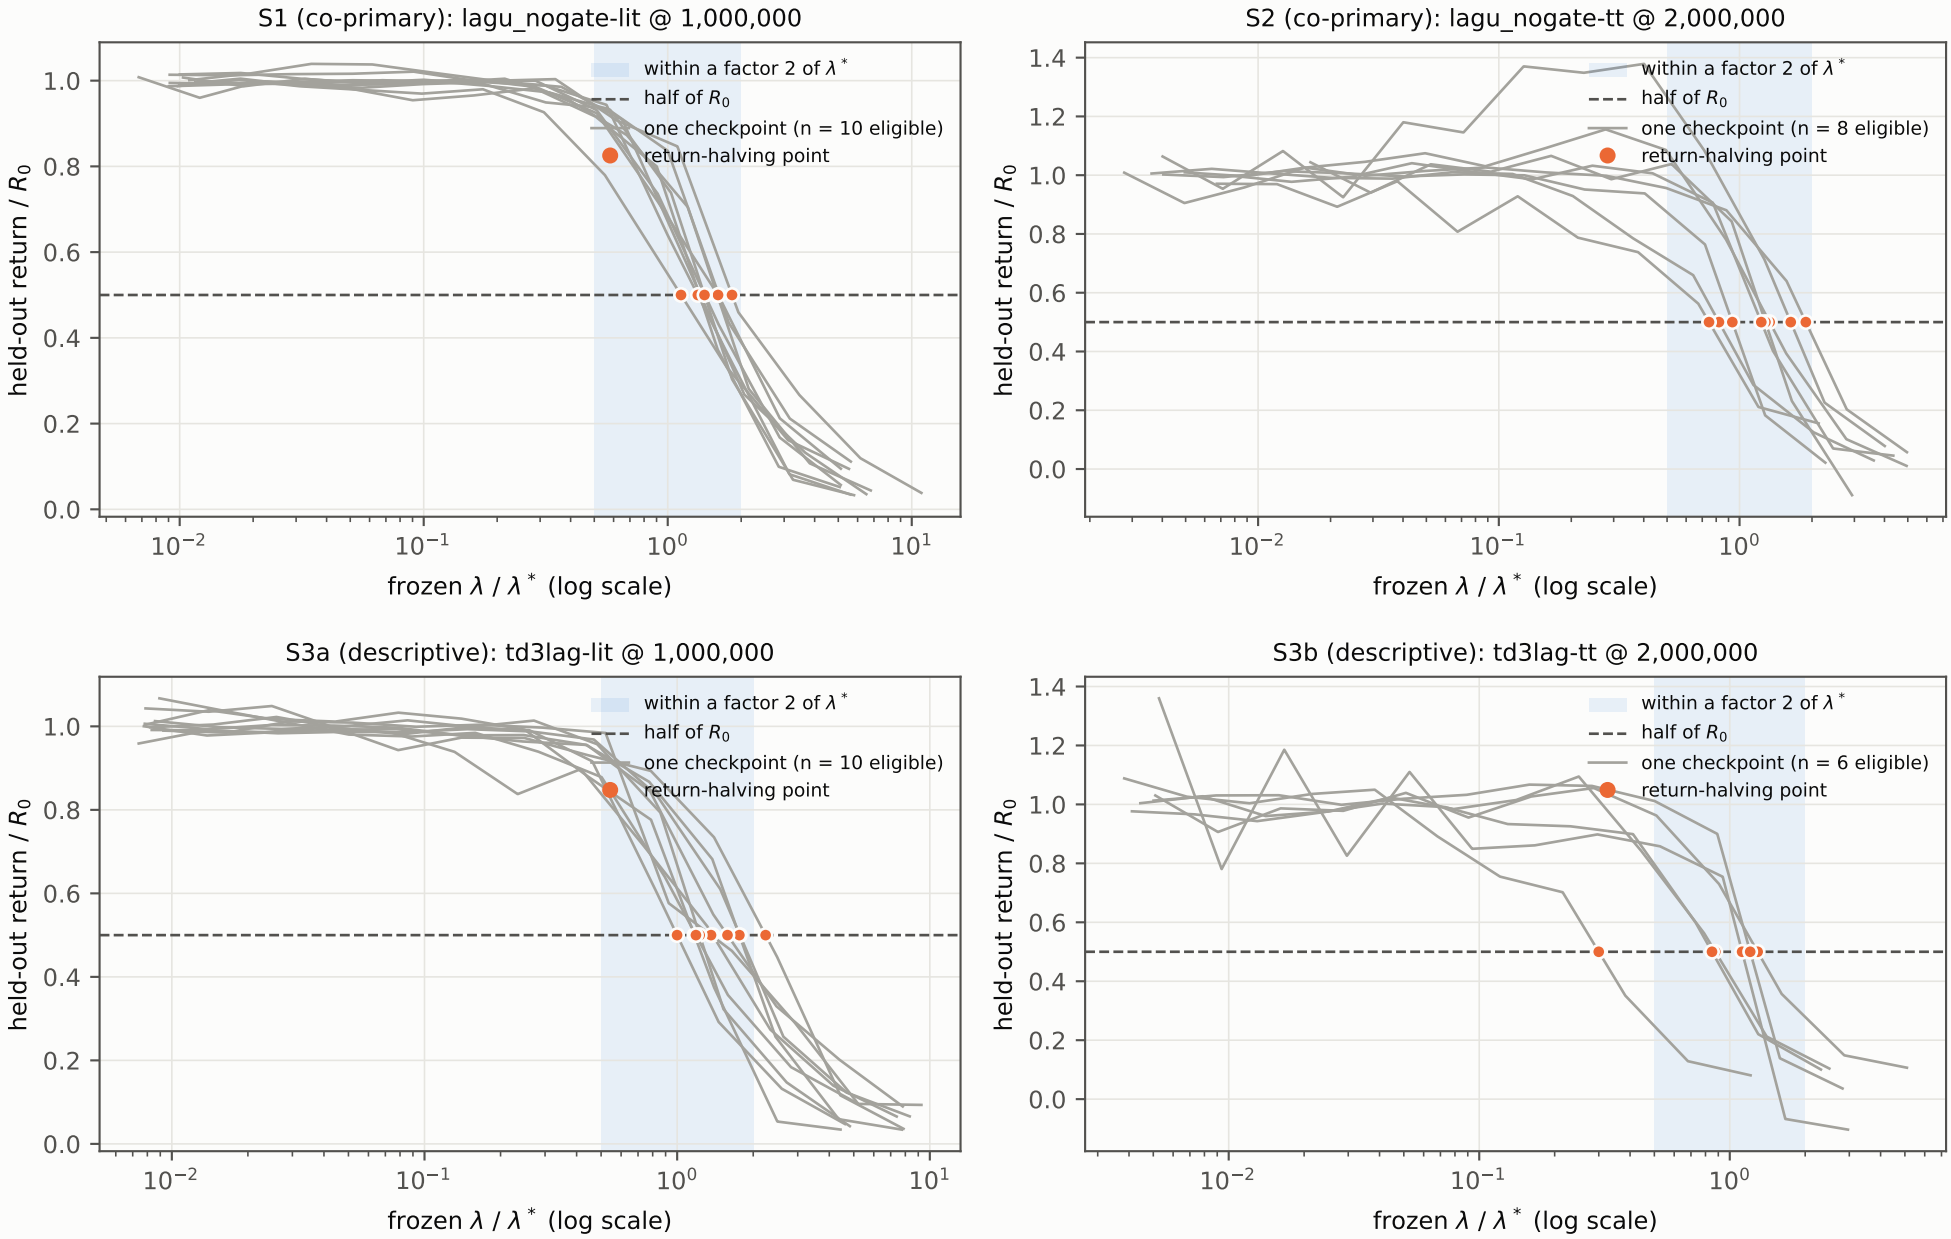
EXPLORATORY: gradient-parity probe (prereg.md section 9; outside the Holm family; protocol fixed in lagu/probe.py before any study snapshot was read)
return after 10,000 frozen-λ actor updates (mean of 3 repetitions), relative to λ = 0 (R_0)
S1 (co-primary): lagu_nogate-lit @ 1,000,000
S2 (co-primary): lagu_nogate-tt @ 2,000,000
S3a (descriptive): td3lag-lit @ 1,000,000
S3b (descriptive): td3lag-tt @ 2,000,000
held-out return / R_0
frozen λ / λ* (log scale)
within a factor 2 of λ*
half of R_0
one checkpoint (n = 10 eligible)
one checkpoint (n = 8 eligible)
one checkpoint (n = 6 eligible)
return-halving point