LOCALE ADMIN

Editor onboarding

How to translate app texts in Locale Admin

26 October 2026

Contents

1. Introduction: signing in and projects
2. Overview
3. Translations
4. Editing a translation
5. Versions
6. History
7. Languages
8. Members
9. Settings
10. Workflow and FAQ

Introduction: signing in and projects

What is Locale Admin

Locale Admin is where all the texts of our apps live, in every language. The project manager adds new keys (texts) to it, editors translate them, and the manager downloads the finished translations back into the app.


A few terms you will come across:

Term	Meaning
Project	one app or a part of it (e.g. B2B admin, Web Salon Catalog). You see only the projects an admin added you to.
Key	one text in the app, e.g. `orders.empty.title` or a whole sentence `Book an appointment at {salonName}`.
Translation	the value of a key in one language. An empty value = **Untranslated**.
Base language	the language you translate from (the reference text). The project manager sets it. Most often it is Slovak, which is written directly during software development.
Namespace	a group of keys by the file in the code (`loc` , `messages` , …). It works as a filter; you do not need to change it.
Project manager	the manager of the project (the **Manager** role in the app): manages versions, languages, keys, imports and project settings. You can see who it is on the Overview.
Version	a release of the app (e.g. `v2.45`) with a deadline for translating its texts. More in the chapter Versions.

Signing in

Path: `/login`


An administrator creates your account and sends you your sign-in email and password. There is no registration and no email invitations. Change your password in **My profile** after you sign in for the first time.

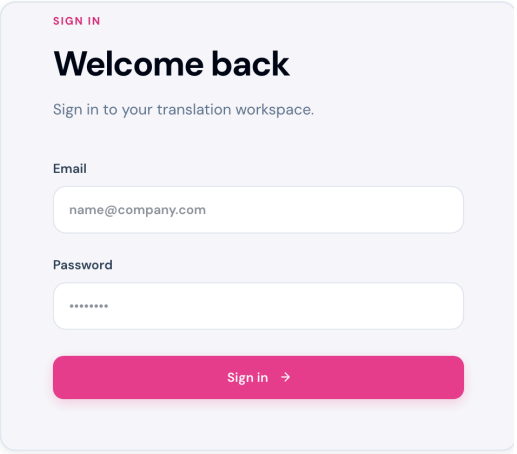

Project list

Path: `/`

After signing in you see the projects you are a member of. For each project you see the number of keys, the share of translated texts and the project languages. Clicking a project opens it straight on the **Translations** screen.

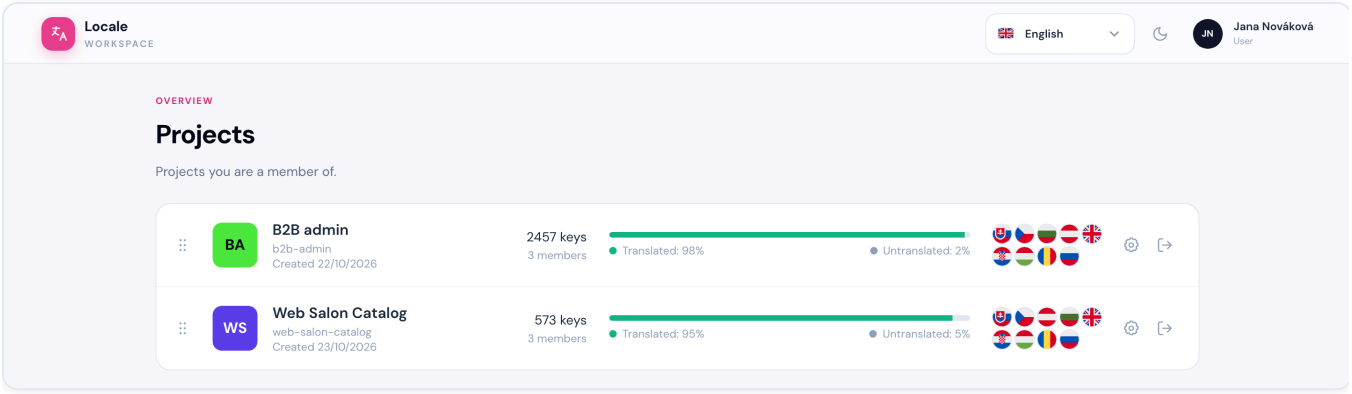


App layout


When you open a project, there is a **sidebar** on the left and a **header** at the top.

The sidebar contains:

- **Project switcher** (the card with the project name) – moves you to another project while you stay on the same page.
- Project pages: Overview, Translations, Versions, History, Languages, Members and Settings. Each has its own chapter in this guide.
- The arrow at the bottom collapses the menu to icons, leaving more room for the table.

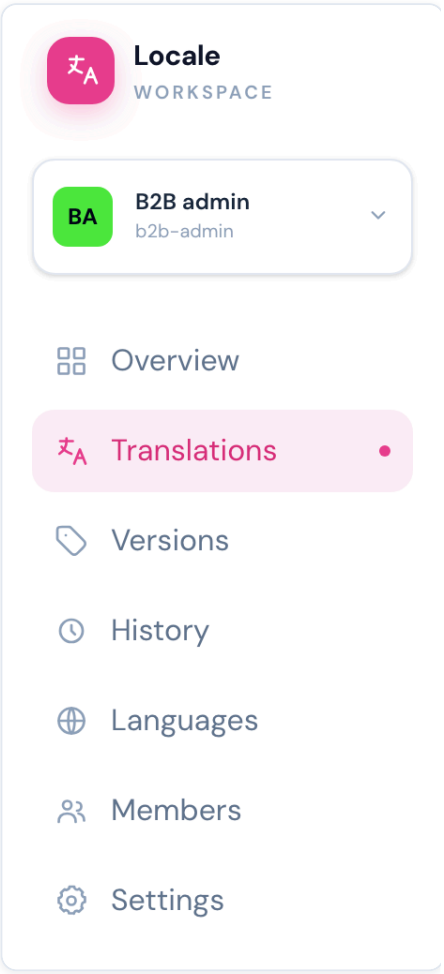


On the right of the header are the app language (it changes only the interface texts, not the translations), the light and dark mode switch, and your name. Clicking your name opens a menu with **My profile** (name and password change) and **Sign out**.

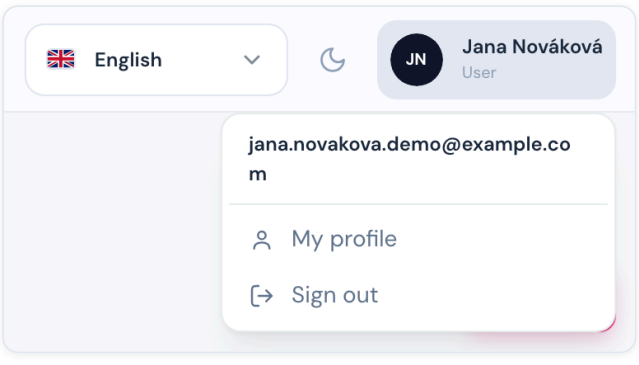

Overview

Path: `/projects/{projectSlug}/dashboard`

The **Overview** page shows the state of the project in one place. At the top right you pick the **version** for the cards and the chart; **Open translations** opens the Translations screen.

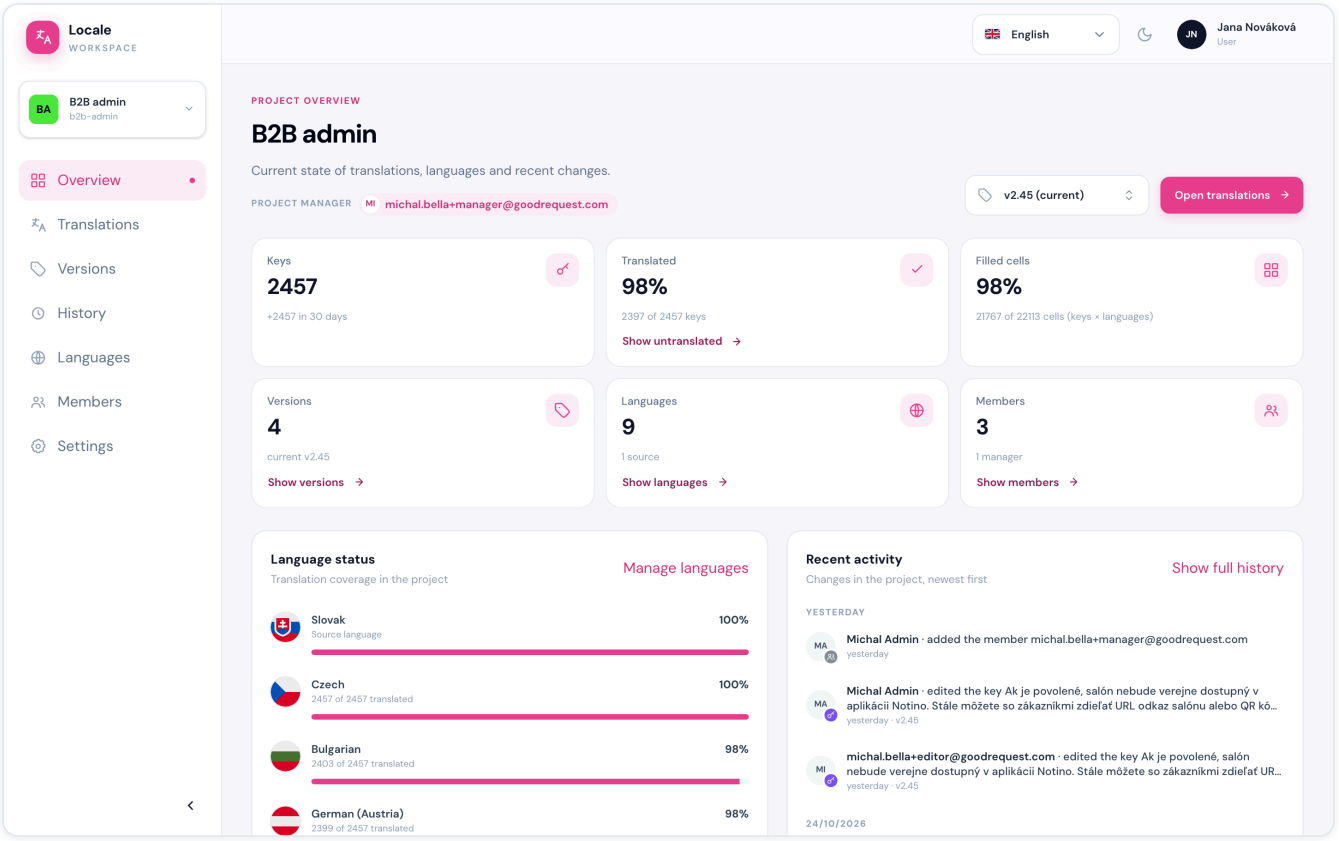


- **Project manager** – under the project name is the name of the project manager. **Turn to them** with a bug, a version to unlock, a missing language or key, or a question about a translation.
- **Cards** (for the chosen version, except the counts of versions, languages and members):
  - **Keys** – keys in the version and how many were added in the last 30 days.
  - **Translated** – the share of keys with a text in every language (“2397 of 2457 keys”). **Show untranslated** opens the untranslated keys.
  - **Filled cells** – the share of filled translations (keys × languages). It counts each language separately, so it shows progress even for keys missing only the last language.
  - **Versions** – the number of versions and the current one, **Show versions**.
  - **Languages** – the number of languages, **Show languages**.
  - **Members** – people in the project and how many are managers, **Show members**.
- **Language status** – the translated percentage of each language, the fastest way to see what is missing in yours: clicking a row opens its untranslated keys.
- **Recent activity** – the last 10 changes in the project, with a link to the full History.
- **Daily activity** – a chart of changes per day for 7, 30 or 90 days, and the most active members.

Translations

Path: `/projects/{projectSlug}/translations`

The **Translations** screen is a table of all the keys of one project version. A row is a key, the columns are languages.

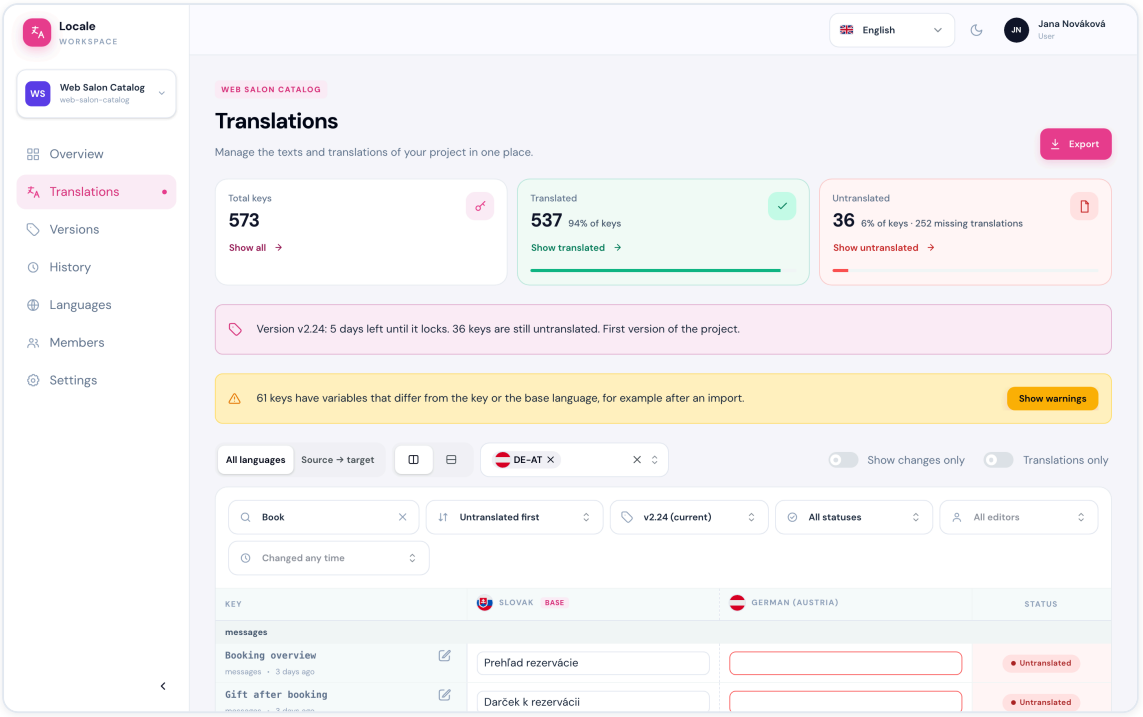

From top to bottom you will find:

1. **Statistics** – how many keys are translated and how many are missing.
2. **Version banner** – by when the translations must be finished and what is new since the previous version.
3. **Warnings banner** (yellow) – only when some translations have a problem with variables. The project manager should prevent this already when importing the texts, so fixing it will usually not be the editor's job.
4. **View controls** – how the table looks.
5. **Filters** – which keys the table shows.
6. **The table** and the pagination below it.

The **Export** button at the top right downloads the translations to a file (see Import and export).


Statistics



- **Total keys** – the number of keys in the chosen version.
- **Translated** – keys that have a text **in every language**.
- **Untranslated** – keys missing at least one language. After the dot is the total number of missing translations (empty cells).

The link under the number (**Show untranslated** and so on) sets the table filter right away, so you see exactly the keys the card counts. The fastest way to start working is **Show untranslated**.

Version banner




The version banner is the most important information on the page for an editor. It tells you:

- **how many days are left until the chosen version locks** – by when the translations must be finished,
- **how many keys are still untranslated**,
- **what changed since the previous version** – how many keys were added, changed and removed.


After the deadline the version **locks** and you can no longer edit its translations: a cell opens a read-only window and the banner turns blue with the text “is locked”. If you still need to translate or fix something in a locked version, ask the project manager to unlock it. More in the chapter Versions.

Table view

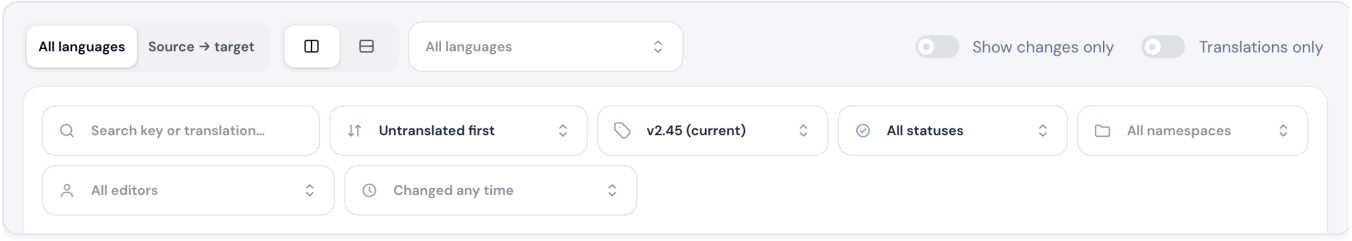


Above the table you set how it should look. Your choice is saved to your account and applies on another computer too.

- **All languages** – each project language has its own column. Useful for checking whether a key is missing a language.
- **Source → target** – only two languages side by side: the source (usually the base language) and the one you translate into. Useful when you translate one language. Statistics and the row status then count only the target language.

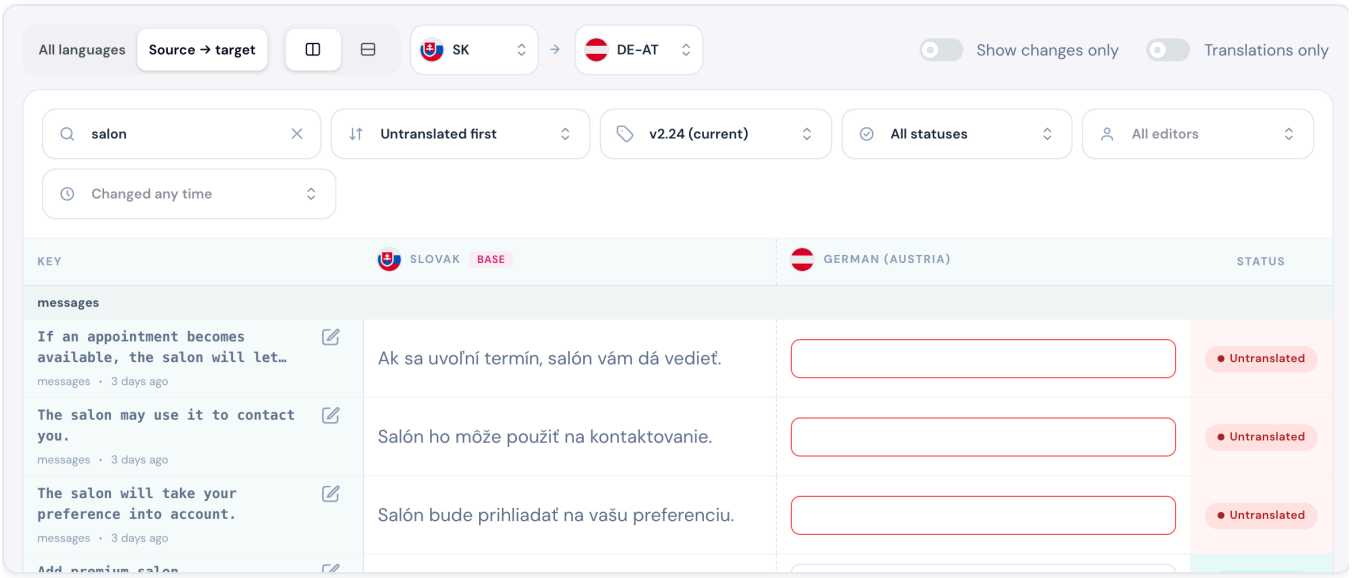

- **Layout** (the two icons next to it) – languages **side by side** in columns, or **stacked** in one cell. Stacked suits long texts and smaller screens.

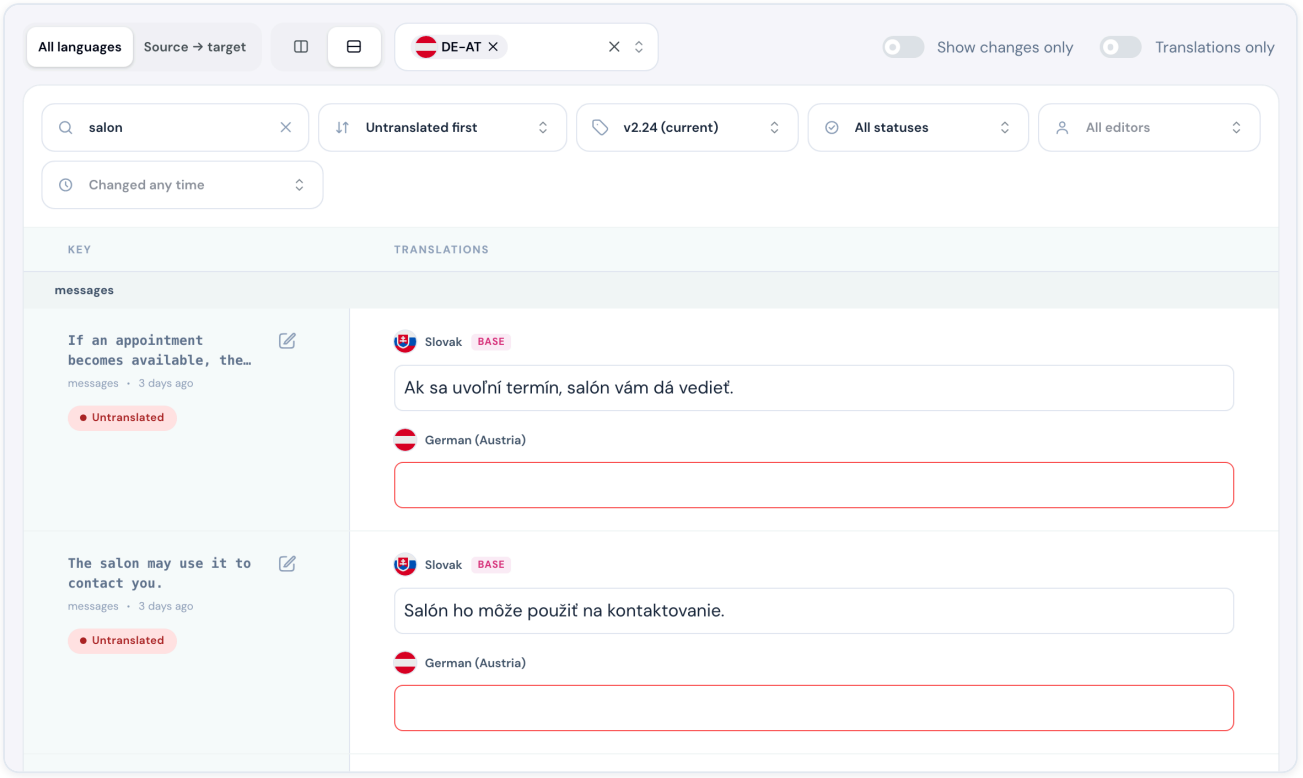

- **Shown languages** (in the All languages view) – choose only the languages you care about. The base language is always shown.
- You can widen a language column by dragging the right edge of its header (it resets when you reload the page).
- **Show changes only** (switch on the right) – only keys new or changed since the previous version (see Versions).
- **Translations only** (switch on the right) – hides the Key and Status columns and leaves only the texts (handy on a phone and narrow screens).


Filters

Filter	What it does
Search key or translation	searches the key name and the translation texts
Sort	**Untranslated first** (default), **By key**, **Recently updated**
Version	which project version you are looking at, the current one by default
Status	**Translated** / **Untranslated**
Namespace	only keys from one file (if the project has more of them)
Editor	keys last edited by the given person
Changed	keys changed in the last 24 hours, 7 or 30 days


The filters are in the page address. When you send a colleague the link, they see exactly what you see.

The most common combinations:

- **Untranslated first** + the filter **Status: Untranslated** – what still needs translating.
- **Recently updated** + **Changed: In the last 24 hours** – what changed today.
- **Editor** + your name – what you edited (or a colleague you are standing in for).

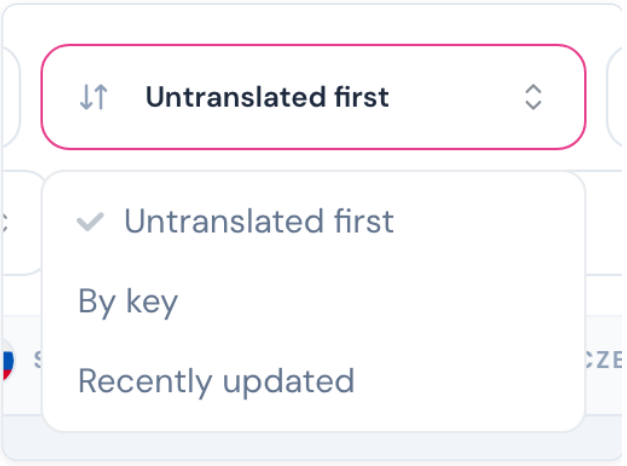

Table

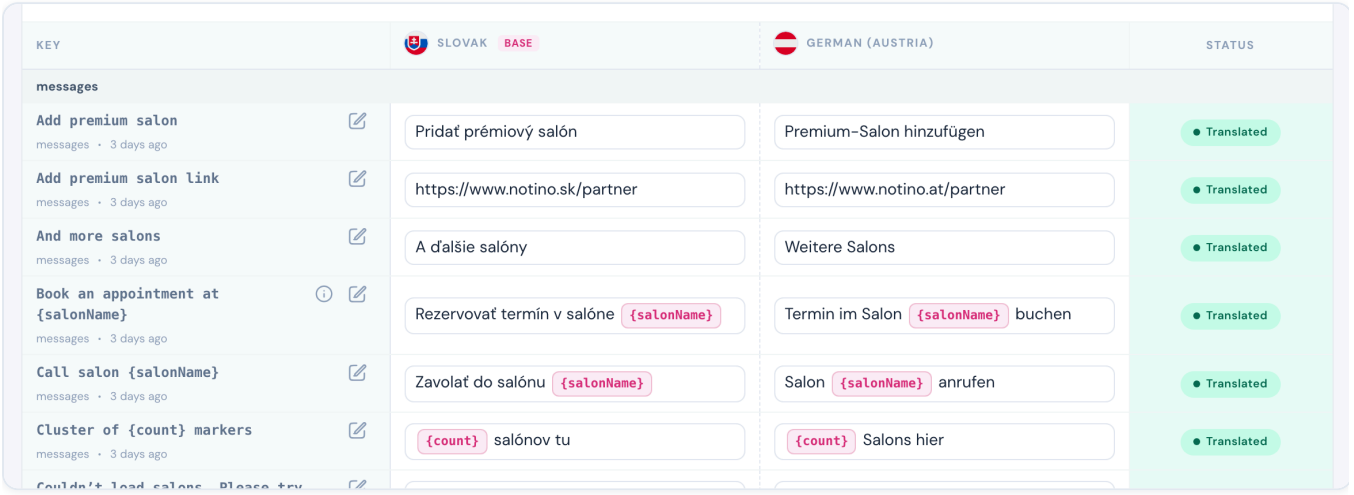

- **Key** – the key name, with the namespace and the time of the last change below it. The ⓘ icon after the name means the key has a **description** – it shows when you hover over it. The pencil icon opens the **Edit key** window, where you can edit the description.
- **The base language column** has the **BASE** badge. You translate from it.


- **Language cells** – clicking a cell opens translation editing. Long text is cut to two lines in the cell; you see all of it in the edit window.
- Pink tags in the text (`{salonName}` , `{{day}}`) are **variables**, grey ones (`<strong>`) are **HTML tags**. More in the sections Variables and HTML tags.
- **Status** – **Translated** (green) when the key has a text in every language, otherwise **Untranslated** (red).

Keys are grouped by prefix (e.g. all `day_pluralized.*` together); a grey row is the group name.

Key description


The description is helpful information for editors: where the text is shown, what the variables mean, how long it can be and so on. Both the project manager and an editor can write it, so when you find out something while translating that the next translator should know, add it to the description.


Click the pencil icon next to the key name. In the **Edit key** window you change only the **Description** field (at most 500 characters). The namespace, the key itself and the plural setting are read-only: only the project manager creates and changes keys. In a locked version the description is read-only too.

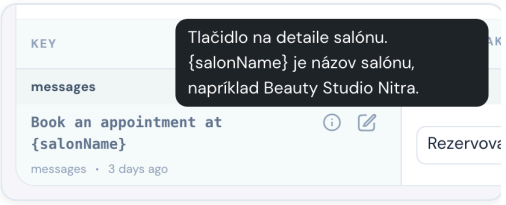

Untranslated cells

An empty cell has a **red border**. With the **Untranslated first** sort these keys are at the top of the table.

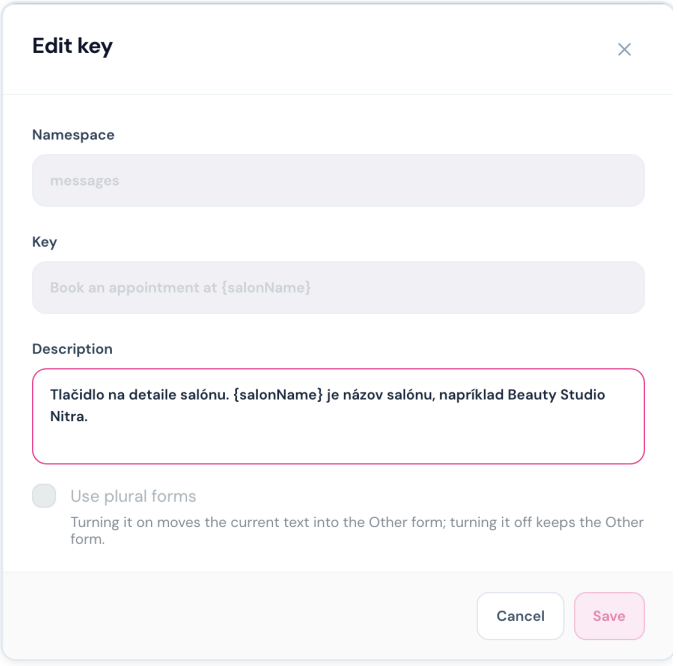


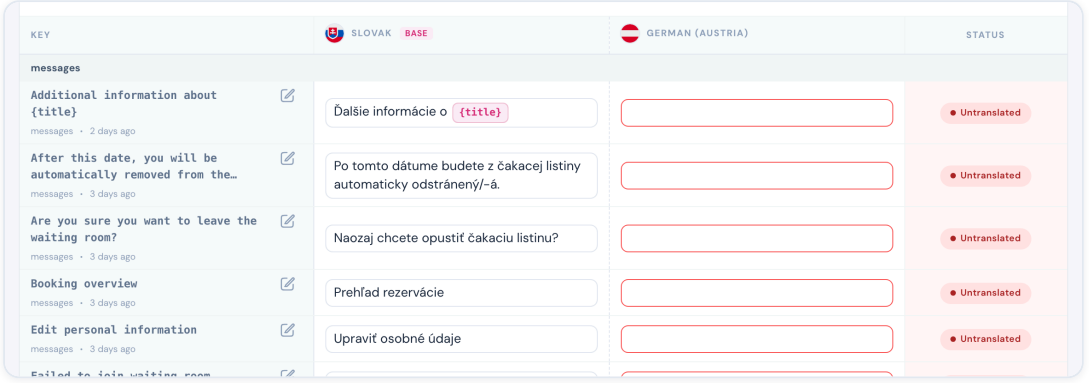


Variable warnings

When the variables in a translation do not match the key or the base language (a variable is missing, or has a typo), the cell has an **orange border** and a warning triangle. The yellow banner above the table tells you how many such keys there are, and the **Show warnings** button filters to just them.

In practice this should not happen. The project manager should catch it when importing the texts, and when an editor edits a translation the system does not let wrong variables be saved (see Validation on save). If you do see a warning, let the project manager know.

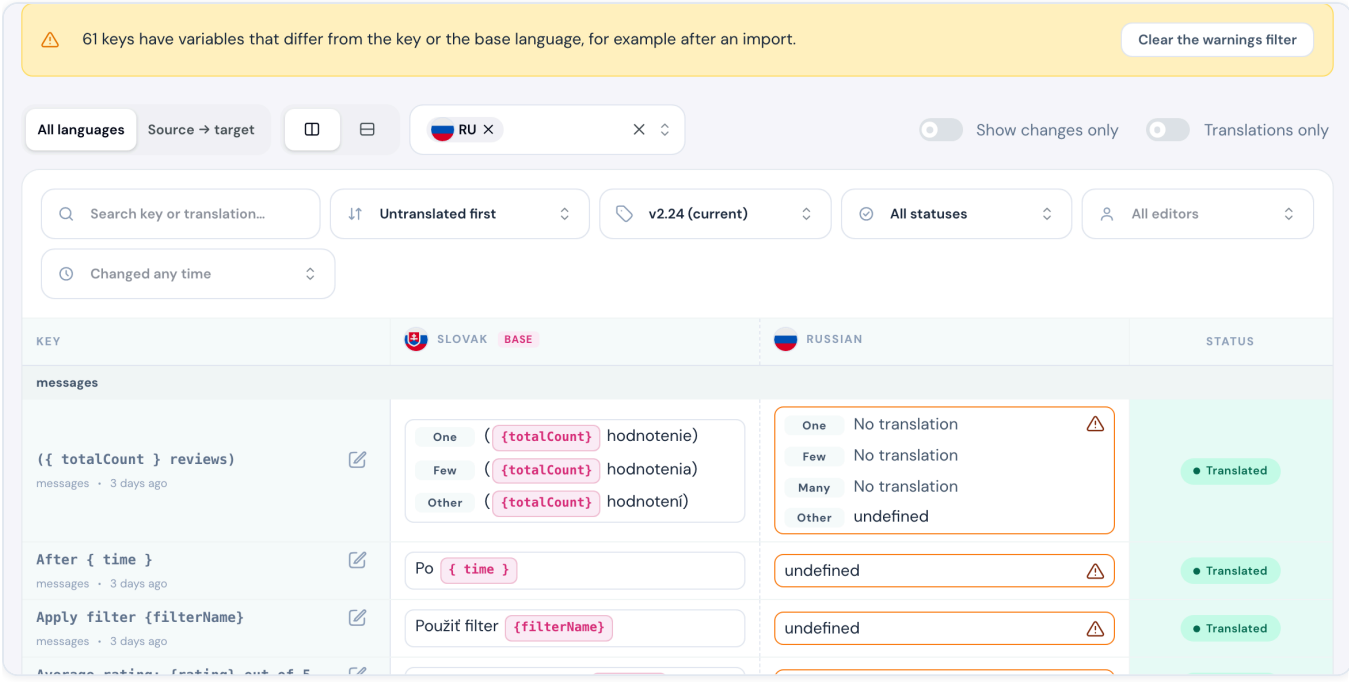


When you hover over a cell with a warning, a tooltip tells you which variable is missing or extra:

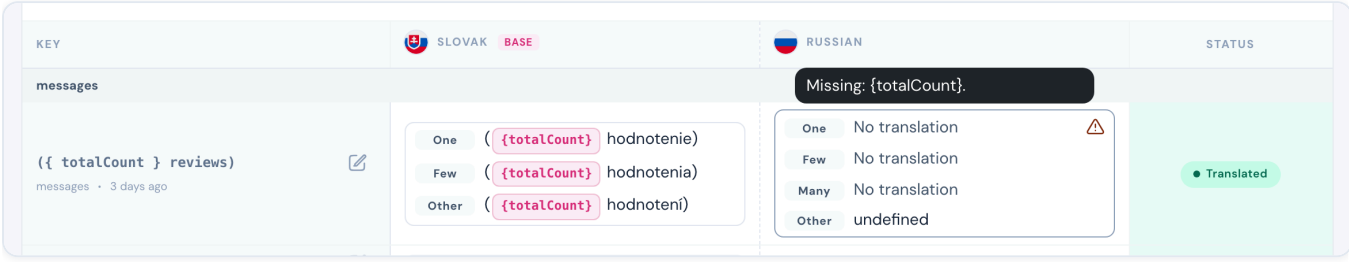

Pagination


Below the table are the number of shown keys, page navigation (**Previous**, page numbers, **Next**) and the **Keys per page** select (25, 50, 100). With more keys per page you go through more texts without clicking around; with fewer the page loads faster. Changing a filter always takes the list back to the first page.



Import and export

Both **import** and **export** of translations are mostly done by the project manager: an import brings new keys into a version, and an export syncs the finished translations back into the code. An editor does not see the **Import** button.

You do see **Export**, but use it only in exceptional cases, for example when someone without access to Locale Admin needs the translations. The main point of the app is that everyone who edits translations works directly in it. If someone you work with has no access, ask an administrator to create an account for them and add them to the project.

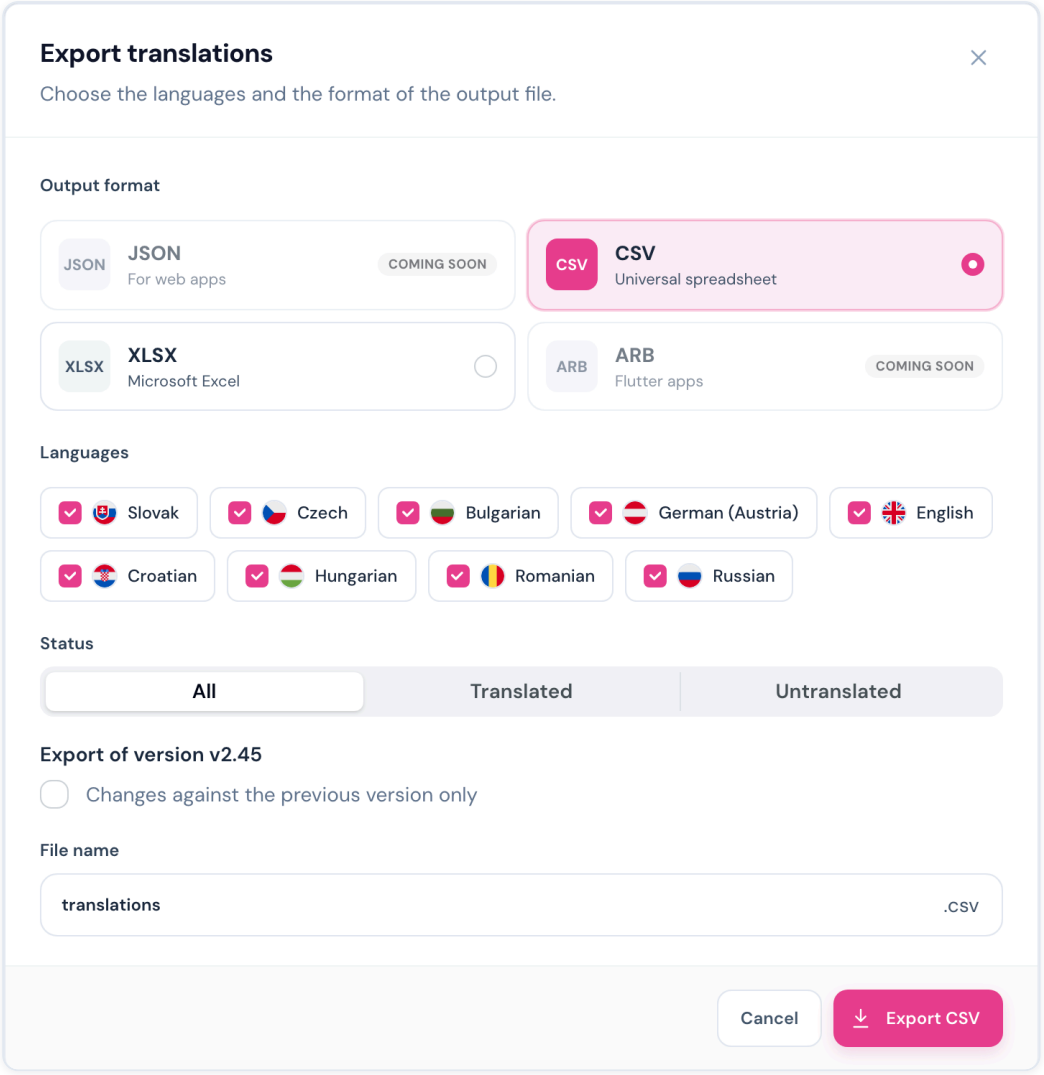

In the export window you choose:


- **Output format** – CSV or XLSX (Excel).
- **Languages** – which languages the file contains.
- **Status** – all keys, only translated or only untranslated.
- **Changes against the previous version only** – only new and changed keys.
- **File name**.

Editing a translation


Path: a window on the Translations screen (`/projects/{projectSlug}/translations`)

You edit a translation by clicking a language cell in the table. The **Edit translation** window opens.

The window contains:

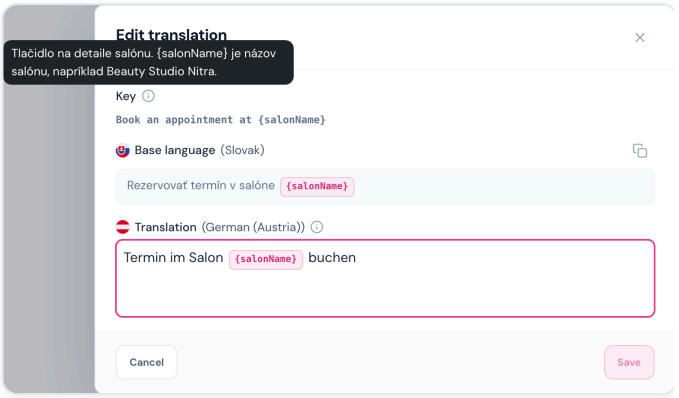

- **Key** – the key name. If the key has a description (context of where the text is shown), there is an ⓘ icon after the name and the description shows when you hover over it. You edit the description with the pencil icon next to the key in the table.
- **Base language** – the read-only reference text. You translate from it.
- The **Copy from the base language** icon (two squares on the right) – fills the translation field with the base language text including all variables and HTML tags, and you then rewrite only the words. Nothing is saved by this. We recommend starting with it for every text with variables or tags.
- **Translation (language)** – the field you type into. The ⓘ icon next to it shows who last edited the translation and when.

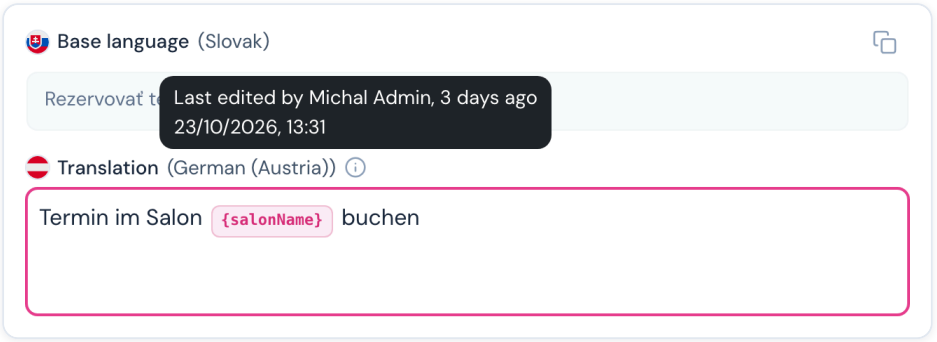


Saving

- **Save** – saves the translation and closes the window. The button is active only after you change the text.
- **Cancel**, the cross or **Esc** – closes the window without saving.
- An empty text is saved as **Untranslated**.
- **Enter** in the field adds a new line; it does not save.

Save and next

When there is another untranslated cell on the current page of the table, the window offers **Save and next**. It saves the translation and opens the next untranslated cell right away, so you do not have to keep closing and opening the window. The shortcut is **Cmd + Enter** (Mac) or **Ctrl + Enter** (Windows).

Tip for fast work: turn on **Show untranslated**, choose your language in the **Source → target** view, open the first cell and continue with **Cmd/Ctrl + Enter**.

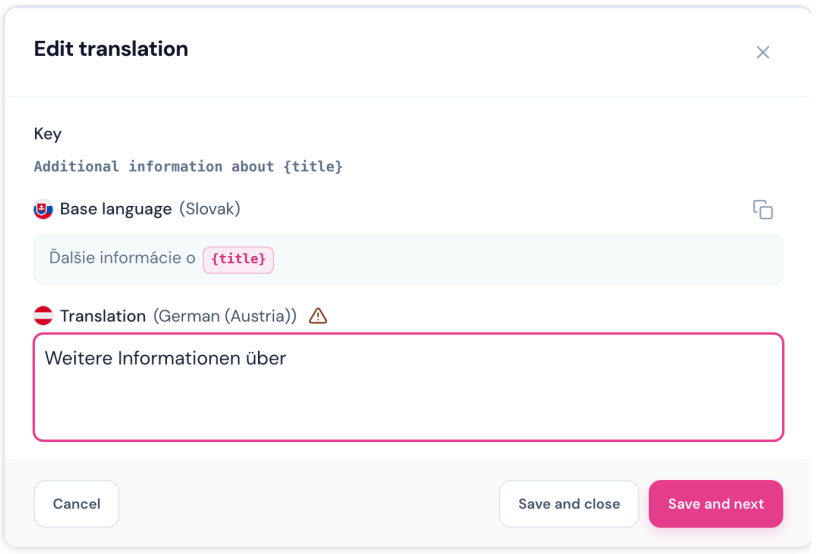

Good to know

- **Undo (Ctrl/Cmd + Z) does not work in the translation field.** If you make a mistake, close the window with **Cancel** and open it again – you start from the saved value.
- Pasted text (Ctrl/Cmd + V) is pasted without formatting.
- For a cell changed since the previous version, there is **Show the translation from v2.44** below the field (see Versions).

Variables

A variable is a place where the app fills in a value, such as the salon name or a number of days. In the projects you will meet two notations:

Notation	Example	Project
`{variable}`	`Rezervovať termín v salóne {salonName}`	Web Salon Catalog
`{{variable}}`	`{{day}} dní`	B2B admin

Rules:


- **Do not translate or rename a variable.** `{salonName}` stays `{salonName}` in every language.
- **A variable can move** to another place in the sentence if the language needs it (`Termin im Salon {salonName} buchen`).
- **No variable may go missing or be added.** Every variable from the base language must also be in the translation.

In the translation field a variable is a **locked pink tag**: the cursor cannot enter it, and **Backspace** or **Delete** removes it all at once. If you delete a variable by mistake, cancel the window and open it again.

HTML tags

Some texts contain HTML tags: bold `<strong>…</strong>`, a link `<aTermsOfServices>…</aTermsOfServices>`, a line break `<br/>` and so on. The app uses them to format the text or turn part of it into a link.

Rules:

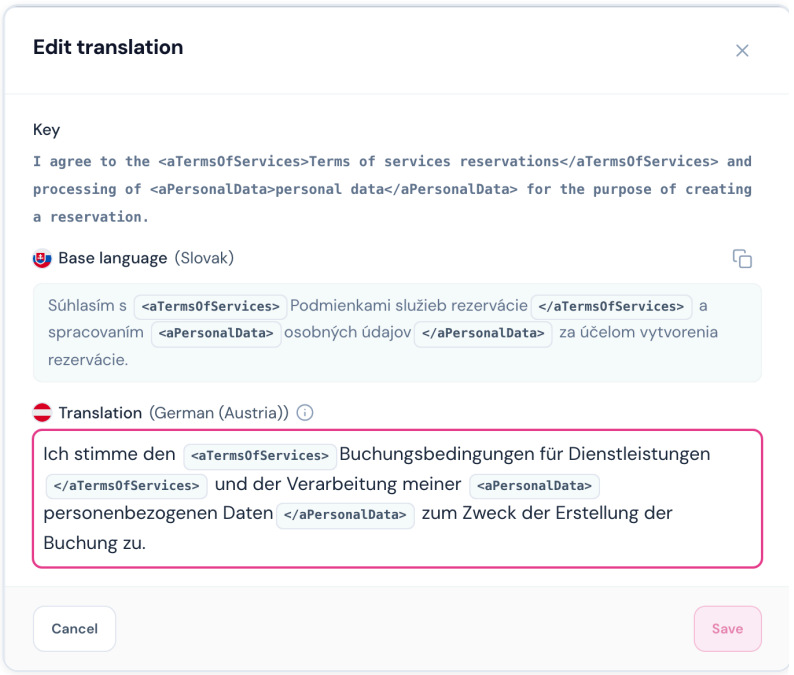

- **Keep all the tags in the translation, with the pairs in the same order.** Every opening tag (`<aPersonalData>`) must have its closing tag (`</aPersonalData>`).
- **Translate the text between the tags**, not the tags themselves. In the example above you translate “Podmienkami služieb rezervácie”; the `<aTermsOfServices>` tags around it stay.
- You can move the text between tags within the sentence if the language needs it, but the whole pair must stay together.
- Tags are **grey locked tags** in the field and behave just like variables.

Variables and tags can be combined, for example `Další volný termín je <button>{ date }</button>`. Both rules apply at once: the tags stay in pairs and the variable inside stays unchanged.

Plurals


Texts with a count (“1 deň”, “2 dni”, “5 dní”) need a different form in each language depending on the number, so they are translated by **forms**:

Form	When it is used (simplified)	Slovak / Czech	Russian	English
One	1	1 deň	1, 21, 31 …	1
Few	small counts	2 – 4 dni	2 – 4, 22 – 24 …	–
Many	large counts	decimals	5 – 20, 25 …	–
Other	everything else (always required)	5 a viac dní	decimals	0, 2, 3 …
Zero	only if the project uses it for zero	0 dní	0 дней	0 days

The **Other** form is always required; the app uses it when another form is missing. In the projects you will meet two notations of plurals.


Plural in one key (Web Salon Catalog)

The key is one message in ICU format, for example `{starCount, plural, one {# star} other {# stars}}`. In the table the forms are stacked, each with a form label.

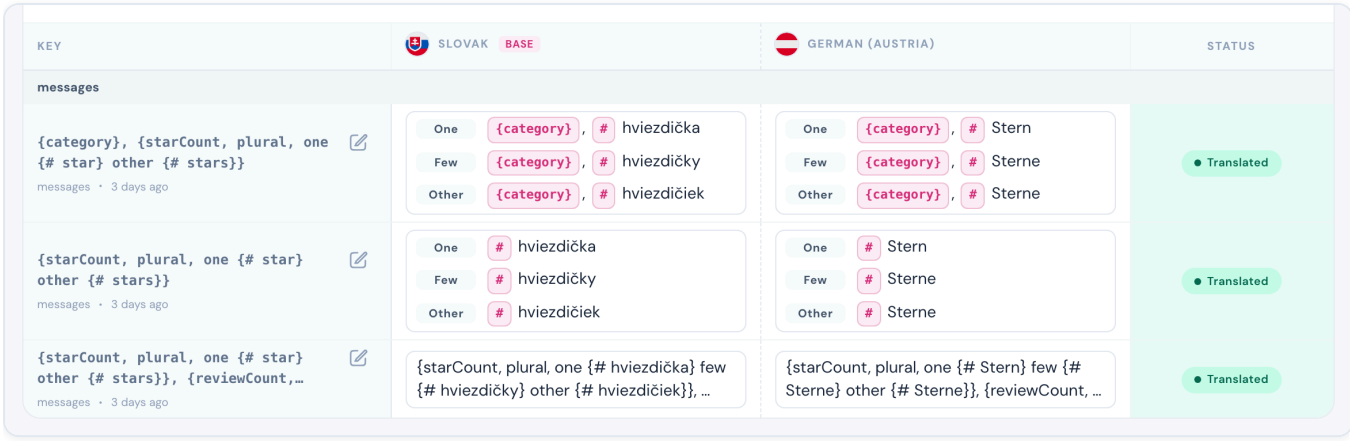


In the **Edit translation** window each form has its own field. Locale Admin offers the forms by language (Slovak **One, Few, Other**, English **One, Other**); a form that is already saved is always shown (in the picture German with **Few**).

- The **#** tag is where the app fills in the number. Leave it where the number should be.
- Fill in all the forms; an empty form stays untranslated.
- **Copy from the base language** copies each form into the translation form of the same name.

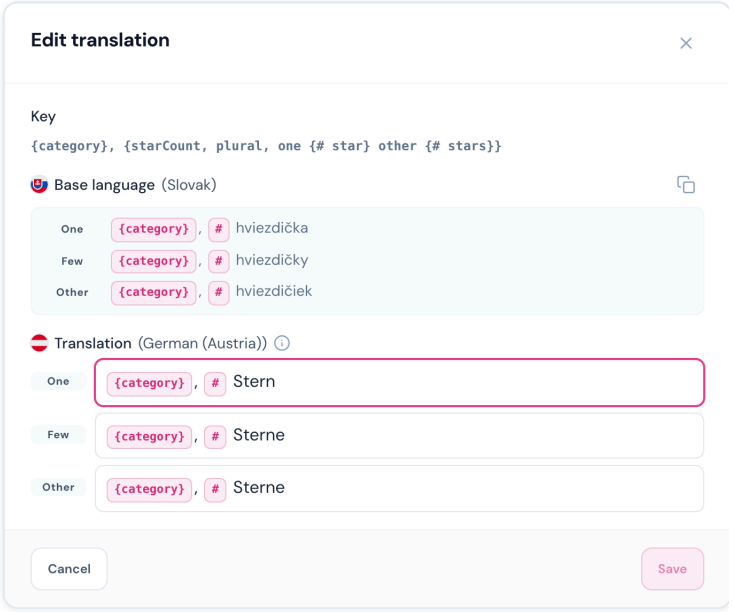

Plural as separate keys (B2B admin)

In B2B admin each form is a separate key with a suffix (`day_pluralized.one`, `.few`, `.many`, `.other`, `.zero`). You find them by searching for `day_pluralized` and sorting **By key**.

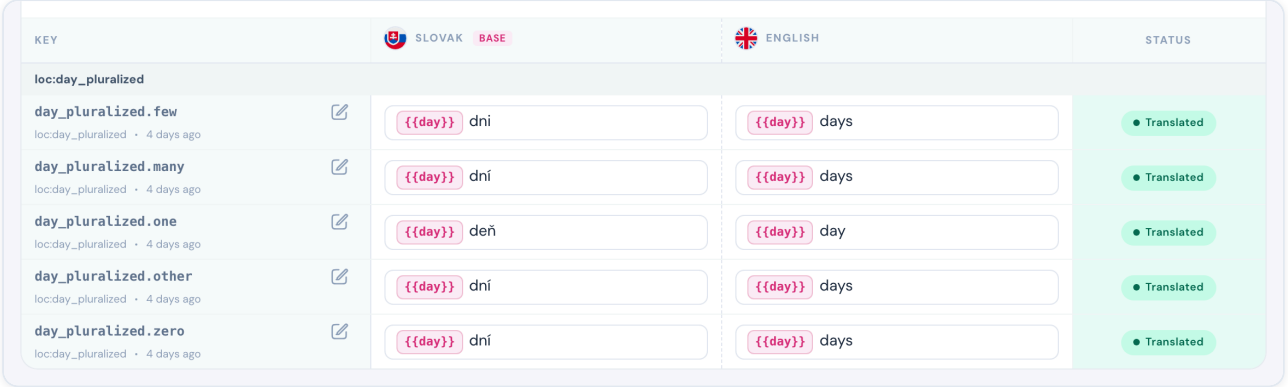


You translate each key separately as an ordinary text. Fill in **all** the keys of the group even when your language does not use a given form – then put the same text in it as in the **Other** form (e.g. English has `few`, `many` and `zero` as “{{day}} days”).

Validation on save


The system checks variables twice:

- **While you type** – when the translation contains a variable the base language does not have (for example the typo `{salon}` instead of `{salonName}`), the tag turns yellow and a warning triangle appears next to the language name. On hover it shows what is missing and what is extra.
- **When you click Save** – if the variables do not match the key or the base language, the translation is **not saved**. The window stays open, the field is highlighted and below it you see which variable is missing and which is extra.

On the left a variable was changed to another one, on the right a variable is missing from the translation:

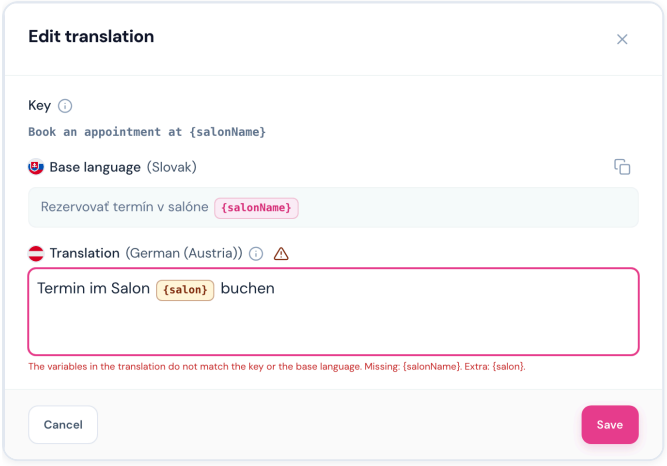

Variable changed to another one

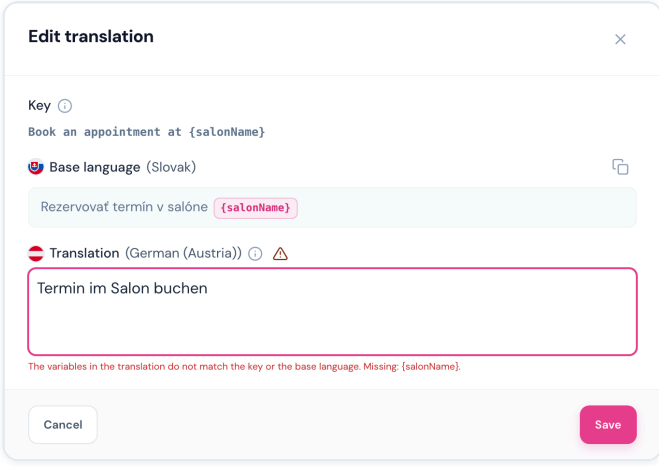

Variable missing

The project manager turns on the check on save for each project separately in the project settings (variable check).

How to avoid the error:


- Start with the **Copy from the base language** icon; the variables and tags will then be right in the translation and you edit only the words.
- We do not recommend tinkering with variables. You can delete a variable in the field or type a new one, but validation catches such a change anyway and does not save the translation.
- If the translation still cannot be saved after you edit the text, contact the project manager.

In a **locked version** the cell opens read-only: you can read the whole text, but not save it (see Versions).

Versions

Path: `/projects/{projectSlug}/versions`

The **Versions** page lists all the versions of the project, newest first. The project manager creates, edits and locks versions; an editor only sees them.

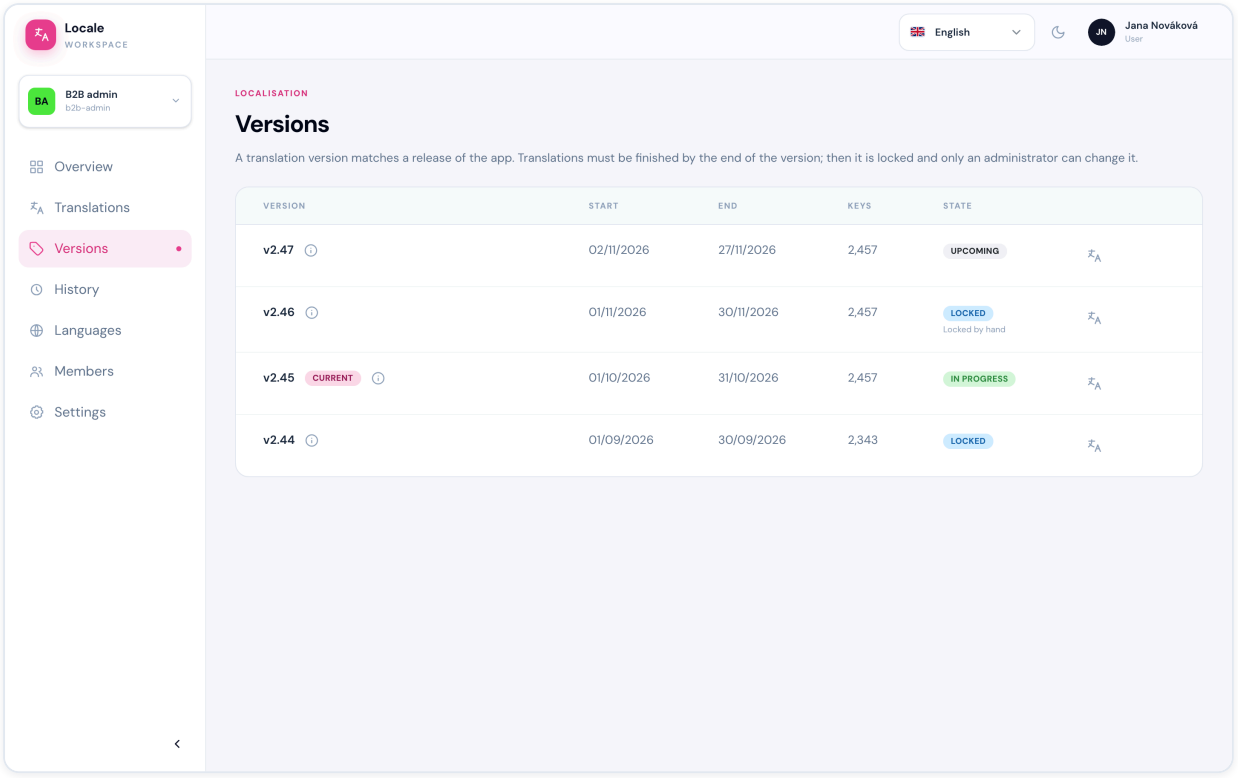

For each version the table shows:

- **Version** – the version name. The current version has the **Current** badge. The ⓘ icon shows who created it and when it was imported.
- **Start** and **End** – the time window of the version (see below).
- **Keys** – keys in the version, or “no import”.
- **State** – **Upcoming** (not started yet), **In progress** (you can translate) or **Locked** (past the deadline). “Locked by hand” or “Unlocked for late changes” below it means the manager changed it by hand.
- The **Open translations** icon (or the version name) opens Translations with this version.

Start and end of a version

A version matches an app release (e.g. `v2.45`) and has two dates set by the project manager, fixed in advance by the agreed sprints:

- **Start** – the new texts are delivered, you can translate.
- **End** – the deadline for the translations. That day the manager syncs them with the app code and the version **locks**; an editor can no longer edit it.


For a late change after the lock, tell the project manager: they unlock the version and ship the fix at the next sync.

Every version has **its own copy of all keys and translations**. Editing `v2.45` does not change `v2.44` or `v2.46`, so translate in the right version – almost always the **current** one, the default on Translations.

Choosing a version on the Translations screen

You switch the version in the **Version** filter on the Translations screen. The current version has “(current)” in brackets.


The statistics, the version banner (deadline and lock) and the table always show the chosen version.

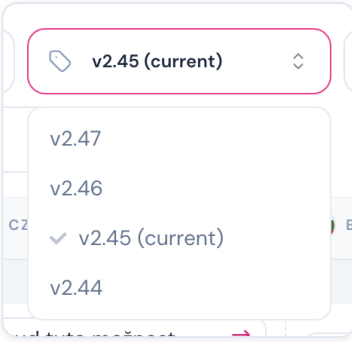

What changed since the previous version

The **Show changes only** switch above the table shows only keys new or changed since the previous version – exactly what you need to look at in a new version.


- A new key has the **New** badge next to its name.
- A changed cell has the ⇄ icon in its top right corner.
- In **Edit translation** of a changed cell, **Show the translation from v2.44** below the field shows the previous text with removed words struck through, to check the change.

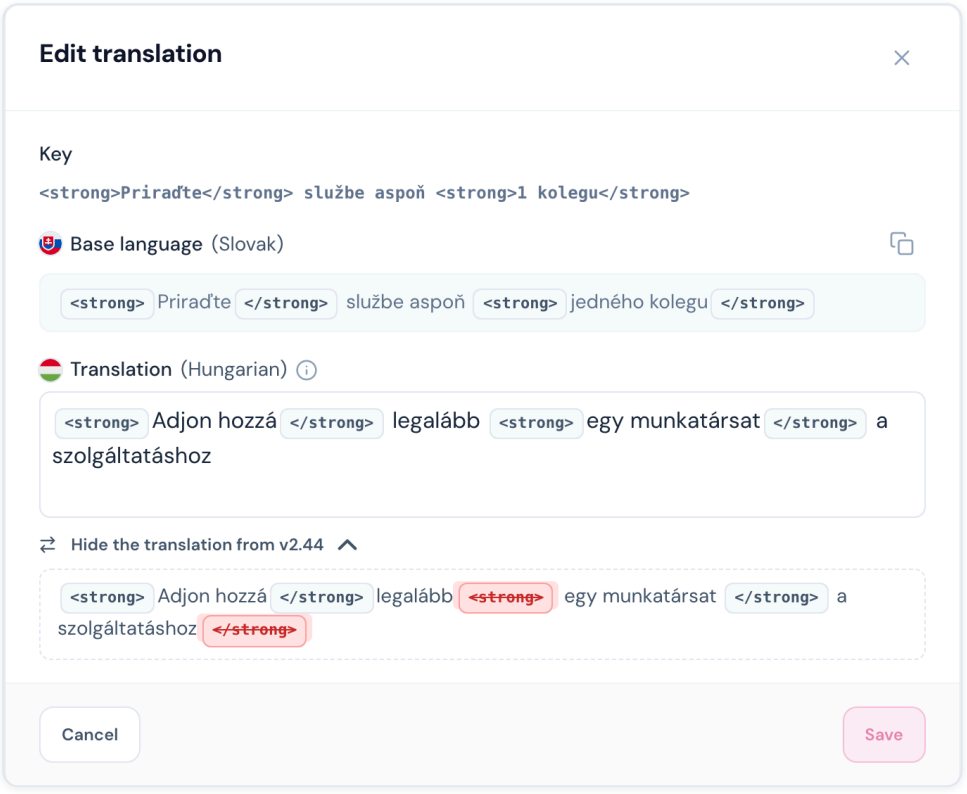

History

Path: `/projects/{projectSlug}/history`

The **History** page lists all the changes in the project, newest first: translation edits, imports, new keys, versions, languages and members.

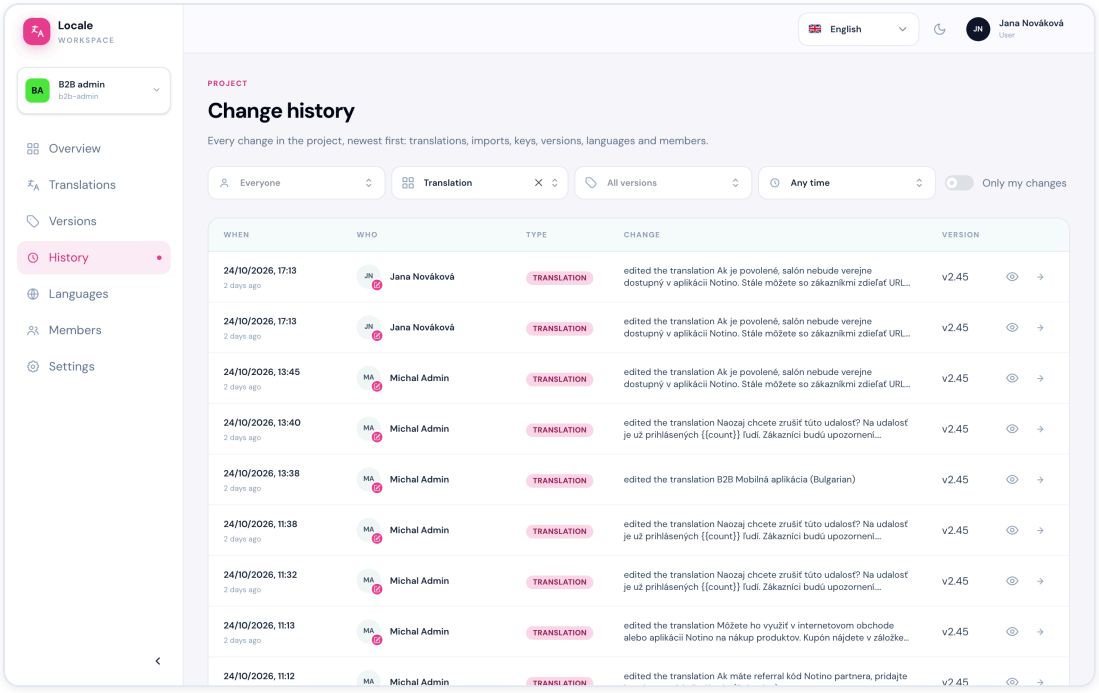


- The **Who**, **Change type**, **Version** and **Period** filters narrow the list. The **Only my changes** switch shows only your edits.
- The version name in a row opens the translations of that version.
- The arrow on the right opens the key on the Translations screen with the edit window already open.

Translation change detail

The **eye** icon next to a translation edit shows what the text looked like **before** and **after** the change. Removed words are struck through in red, added ones highlighted in green.


History comes in handy when you want to find out who changed a text and when, or to restore the original wording: copy the text from the **Before** block and save it in Translations. The **Open translation** button opens the edit window of this translation directly.

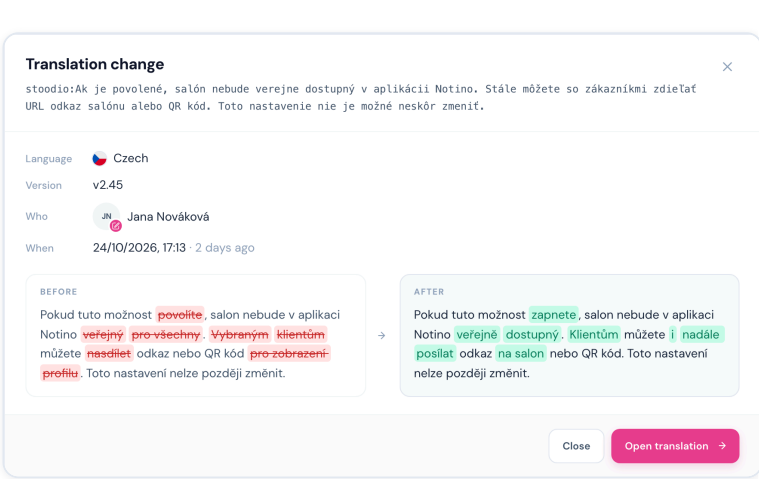

Languages

Path: `/projects/{projectSlug}/languages`

The **Languages** page lists the languages the project is translated into. Each language shows its name, its name in that language and its code (`sk` , `de-AT`).

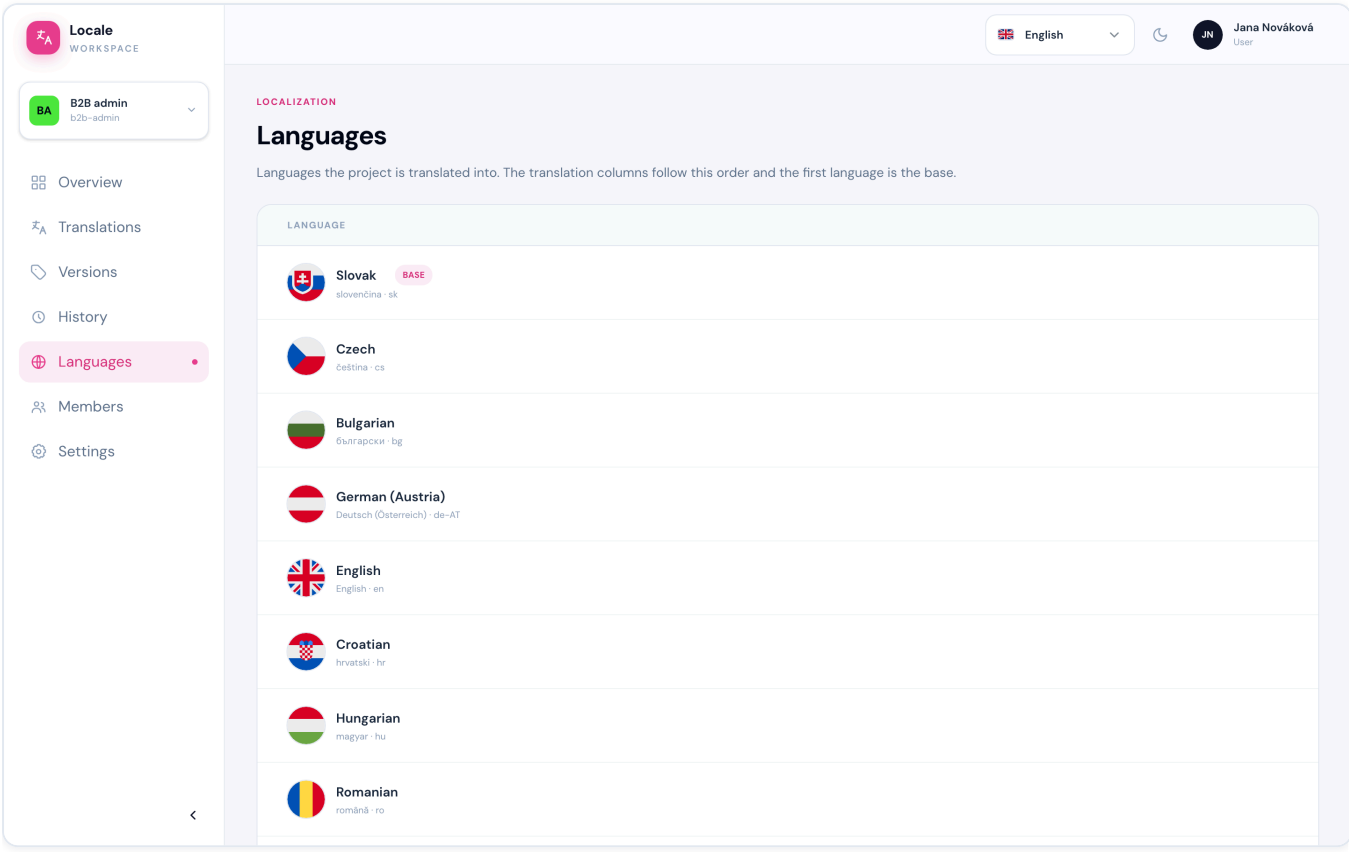


- The language in first place with the **BASE** badge is the base language you translate from.
- The language columns in the table on the Translations screen follow this order too.

The project manager adds and removes languages and changes their order. If the project is missing a language you are supposed to translate into, contact them.

Members

Path: `/projects/{projectSlug}/members`

The **Members** page lists the people who have access to the project: name and email, role in this project (**Manager**, **Editor** or **Visitor**, who only reads translations), how many projects they are a member of and when they were added to the project.

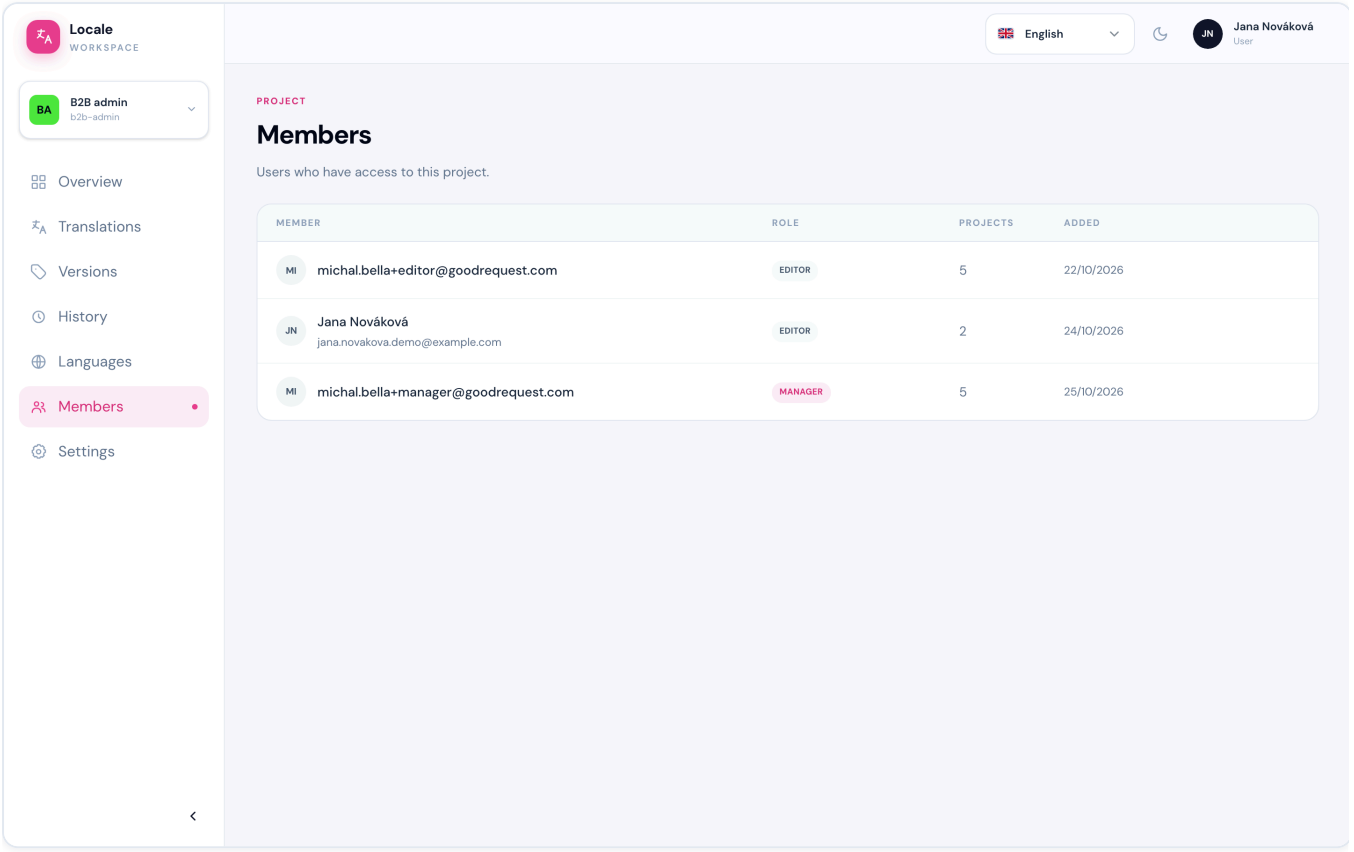


An administrator adds and removes members; administrators are not in the list because they have access to every project. The page is handy when you need to find out who else works on the project. Who to turn to is also shown on the Overview (project manager).

Settings

Path: `/projects/{projectSlug}/settings`

The **Project settings** page shows the basic details of the project and the translation rules. An editor sees them read-only; the project manager changes them.

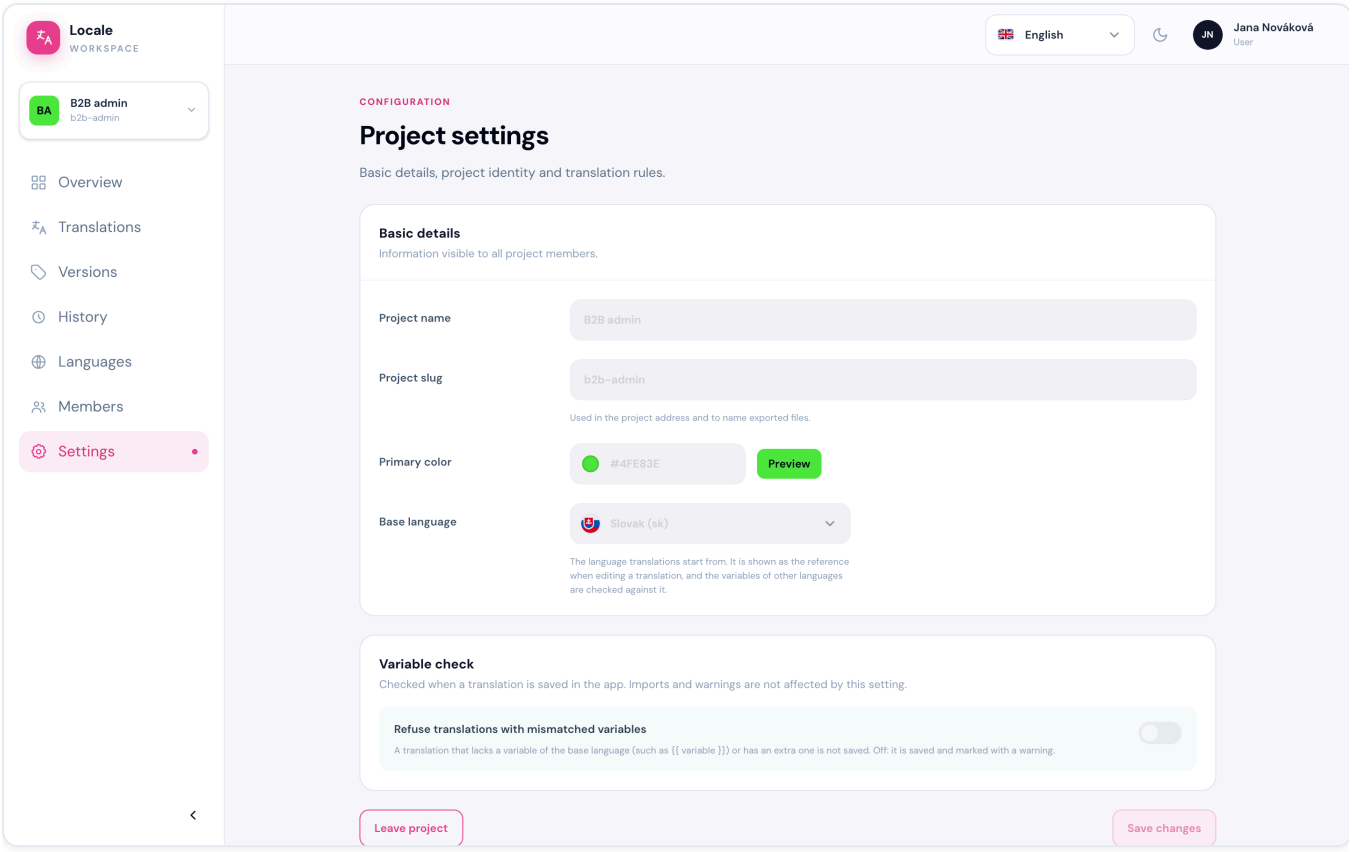

- **Project name** and **Project slug** – the slug is part of the project address (`/projects/b2b-admin/…`).
- **Primary color** – the color of the project icon in the project list.
- **Base language** – the language you translate from and against which variables are checked.
- **Variable check** – when it is on, a translation with wrong variables is not saved (see Validation on save). When it is off, the translation is saved and marked with a warning.

The only thing an editor can do here is **Leave project**. The project then disappears from your project list and only an administrator can add you back.

Workflow and FAQ

Recommended workflow for a new version

1. On Translations, check the **current version** is chosen and see the deadline in the banner.
2. Turn on **Show changes only**, go through new keys (**New**) and changed texts (⇄) and compare with **Show the translation from …**.
3. Click **Show untranslated** in the statistics.
4. Switch to **Source → target** and choose your language as the target.
5. Open the first cell and translate with **Save and next** (**Cmd/Ctrl + Enter**).
6. If there is a yellow warnings banner, click **Show warnings** and fix the variables.
7. At the end, check that the **Untranslated** card shows zero for your language.

Checklist before saving

- All variables from the base language are in the translation, without typos.
- HTML tags are in pairs and none of them is missing.
- For a plural, all forms are filled in.
- The text has no extra spaces at the start or end.

FAQ

I do not see the project I am supposed to translate in. An administrator adds you to projects. Write to them.

The cell opens, but I cannot save it. The version is locked (past the deadline), so it is read-only. Ask the project manager (shown on the Overview) to unlock it.

I do not see the Import or Add key button. Imports and adding keys are done by the project manager. An editor edits translations.

An older version still has the original text. That is correct: every version has its own copy of the texts. Edit the current one.

How do I restore the previous text? In **History** open the change detail (eye icon), copy the text from **Before** and save it in Translations.

The key is an English sentence, but the base language is Slovak. What do I translate from? From the **base language** (the BASE column). The key is only an identifier in the code, even if it looks like a sentence.

I have a question about the context of a text (where it is shown, how long it can be). Check the key description (the ⓘ icon next to the key name). If there is none, ask the project manager and add the answer to the key description so the next translator has it too.