

Technical University of Košice  
Faculty of Mining, Ecology, Process Control and Geotechnologies

# Application of Virtual and Augmented Reality in Education

Master's Thesis

2017

Bc. Michal Takáč

**Technical University of Košice**  
**Faculty of Mining, Ecology, Process Control and Geotechnologies**

# **Application of Virtual and Augmented Reality in Education**

## **Master's Thesis**

Study Programme: Informatization Process of Obtaining and Processing  
Raw Materials

Field of study: Gathering and Processing of Earth Resources

Department: Institute of Control and Informatization of Production  
Processes (ÚRaIVP)

Supervisor: RNDr. Andrea Mojžišová, PhD.

Consultant(s): RNDr. Jana Pócsová, PhD.

**Košice 2017**

**Bc. Michal Takáč**

## **Abstract**

In this thesis we set to explore the possibilities of virtual and augmented reality (VR/AR) through the use of modern web technologies and development practices with the goal of finding novel approaches and applications in higher education with focus on mathematics. First a brief history of VR and AR is described followed by overview regarding the current problems and use cases of VR and AR systems and overview of current commercially available headsets. Then the novel, experimental Graphical User Interface (GUI) is presented, utilizing six degrees of freedom in room-scale virtual world within web page with use of interactions with VR hand controllers to provide strong visual representations and visualizations of parametrized functions, helping students to approach learning differently and understand difficult math concepts faster. In the end of thesis we propose future possibilities and how the technology could shape student's knowledge.

## **Keywords**

Virtual reality, Augmented reality, Education, Mathematics

## Assign Thesis

Namiesto tejto strany vložte naskenované zadanie úlohy. Odporúčame skenovať s rozlíšením 200 až 300 dpi, čierno-bielo! V jednej vytlačenej ZP musí byť vložený originál zadávacieho listu!

## **Declaration**

I hereby declare that this thesis is my own work and effort. Where other sources of information have been used, they have been acknowledged.

Košice, April 24, 2017

.....

*Signature*

## **Acknowledgement**

I would like to express my sincere thanks to RNDr Andrea Mojžišová, PhD, the main Supervisor, for her constant and constructive guidance throughout the study, valuable feedback and brainstorming sessions. Special mention should go to RNDr Jana Pócsová, PhD. for her interest in new approaches to teaching and her ability to listen and give feedback to novel ideas when others are not interested and also to prof. Steven Abbott for helping me out with Oculus Touch support. To all other who gave a hand, I say thank you very much.

# Preface

Mathematical knowledge is often fundamental when solving real life problems. Especially, problems situated in the three-dimensional domain that require spatial skills are sometimes hard to understand for students. Many students have difficulties with spatial imagination and lack spatial abilities. Recently, a number of training studies have shown the usefulness of virtual reality in training spatial ability. Therefore I set myself a goal for finding intersections between virtual reality and higher education by building experimental virtual user interface(s) and testing them in educational environments, e.g. colleges and universities. In this thesis I'll focus on mathematics.

# Contents

<b>Introduction</b>	<b>1</b>
<b>1 Problem expression</b>	<b>2</b>
1.1 Methodology of the thesiss . . . . .	2
<b>2 Theoretical analysis</b>	<b>4</b>
<b>3 Analysis of current state</b>	<b>5</b>
3.1 Building virtual reality applications and experiences . . . . .	5
3.2 Virtual reality on the web . . . . .	5
<b>4 Technologies and tools for development</b>	<b>6</b>
4.1 JavaScript . . . . .	6
4.2 NPM . . . . .	7
4.3 Three.js . . . . .	8
4.4 A-Frame . . . . .	8
4.4.1 JavaScript and Aframe . . . . .	9
4.4.2 Entity-Component System . . . . .	9
4.4.3 Component Ecosystem . . . . .	10
4.4.4 A-Frame Inspector . . . . .	11
4.4.5 Device and Platform Support . . . . .	11
4.4.6 Hardware specification . . . . .	12
4.5 Math.js . . . . .	13
4.6 React . . . . .	13
4.7 Flux . . . . .	13
4.7.1 Structure and Data Flow in Flux architecture . . . . .	14
4.8 Redux . . . . .	16
4.8.1 Three Principles of Redux . . . . .	17
4.9 Webpack . . . . .	18



---

<b>5</b>	<b>Conceptualisation and design</b>	<b>20</b>
5.1	Inputs and objections . . . . .	20
5.2	Functionality planning . . . . .	20
5.3	Virtual user interface . . . . .	20
<b>6</b>	<b>Implementation of virtual reality application</b>	<b>21</b>
6.1	Virtual calculator entity . . . . .	21
6.1.1	Parsing equations with Math.js . . . . .	23
6.2	Parametrized function grid entity . . . . .	23
6.3	Interactive function settings panel entity . . . . .	23
6.4	Interactions . . . . .	23
6.4.1	Grabbing . . . . .	23
6.4.2	Scaling . . . . .	23
6.5	Building and deploying the application to web hosting . . . . .	23
<b>7</b>	<b>Conclusion</b>	<b>24</b>
	<b>Bibliography</b>	<b>25</b>

## List of Figures

4–1 A-Frame Inspector window. . . . .	12
4–2 Data in a Flux application flows in a single direction. . . . .	15
4–3 Detailed Flux application architecture diagram. . . . .	16
4–4 Bundling dependencies and static assets with Webpack . . . . .	19
6–1 Virtual calculator entity 6–1 . . . . .	21
6–2 Function settings entity 6–2 . . . . .	22
6–3 Grabbing functionality 6–3 . . . . .	22
6–4 Scaling functionality 6–4 . . . . .	23

## List of Terms

## Introduction

Our experimental project will be called MathworldVR, which sets to explore the possibilities and introduce novel methods of using web technologies for creating room-scale, immersive learning environment in virtual reality for helping students to explore, learn about and experiment with various parametrized functions. It's also a practical tool for teachers to showcase abstract concepts in concrete 3D space during lectures.

# 1 Problem expression

The main goal of master's thesis with the name "Application of Virtual and Augmented Reality in Education" is to conceptualize, design and implement a virtual learning environment (VLE) for higher education, primarily focused on mathematics. This environment will be available on the web in form of client-side, web application and accessible through desktop and mobile web browser. Application we'll be developing is called MathworldVR. Main emphasis will be put into desktop platform, since currently, it's the only platform that supports interactive VR capabilities of six degrees of freedom, head-mounted display (HMD) and hand controllers. We're specifically focused on consumer version of HTC Vive (HMD) since we have one at our disposal and on which we'll be testing the implementation of application.

## 1.1 Methodology of the thesiss

Development of MathworldVR web application will include these steps:

- At the beginning it's necessary to become familiar with current state of VR support on the web and WebVR frameworks. This will require us to study the available WebVR API and it's state of implementation in modern, popular browsers.
- After acknowledgement of limitations and possibilities of web browsers we can proceed to conceptualization and design. We need to define the functionality of MathworldVR, criteria for application and select the approach to development.
- Then we can proceed to selecting a WebVR framework.
- Before start of the development, we need select the technologies. MathworldVR will be client-side WebVR application and since WebVR is a novel

technology, we need to look into modern development tools and approaches.

- After selecting the development tools we need to prepare the development PC for work by installing the Node.js, NPM, initialization of the project with NPM and installing needed development tools and project dependencies in form of Node modules. For our needs, we'll go with code editor/IDE "VSCode" by Microsoft, which includes tools for efficient programming and static code analysis.
- MathworldVR will be deployed to web server and tested manually in different web browsers that support WebVR API with use of HTC Vive HMD to ensure compatibility and good user experience.
- In the end, MathworldVR is tested privately by students at Technical University in Košice and lecturers from the department of mathematics at FBERG.

## 2 Theoretical analysis

Undoubtedly VR has attracted a lot of interest of people in last few years. Being a new paradigm of user interface it offers great benefits in many application areas. It provides an easy, powerful, intuitive way of human-computer interaction. The user can watch and manipulate the simulated environment in the same way we act in the real world, without any need to learn how the complicated (and often clumsy) user interface works. Therefore many applications like flight simulators, architectural walkthrough or data visualization systems were developed relatively fast. Later on, VR has been applied as a teleoperating and collaborative medium, and of course in the entertainment area.

One can say that virtual reality established itself in many disciplines of human activities, as a medium that allows easier perception of data or natural phenomena appearance. Therefore the education purposes seem to be the most natural ones. The intuitive presentation of construction rules (virtual Lego-set), visiting a virtual museum, virtual painting studio or virtual music playing (Loeffler, 1995) are just a few examples of possible applications.

Virtual environments are inherently three-dimensional. They can provide interactive playgrounds with a degree of interactivity that goes far beyond what is possible in reality. If using VR as a tool for mathematics education, it ideally offers an added benefit to learning in a wide range of mathematical domains (Kaufmann, 2011).

## 3 Analysis of current state

### 3.1 Building virtual reality applications and experiences

The leading platform for building VR experiences today is the game engine Unity, both because the company had the foresight to add support for the Oculus Rift development kit early on, but also simply because the early use cases from when Oculus Rift was still just a very successful Kickstarter project centered around video games.

### 3.2 Virtual reality on the web

WebVR provides support for exposing virtual reality devices — for example head-mounted displays like the HTC Vive or Oculus Rift — to web apps, enabling developers to translate position and movement information from the display into movement around a 3D scene in browser. As of today, support for both head-mounted displays is available in experimental or development builds of Chrome and Firefox, with official release planned for 2017. This has numerous very interesting applications, from virtual product tours and interactive training apps to immersive first person games. Unity, for instance, is able to make native builds for all major platforms from the same code base, including PC, Mac, Linux, iOS, Android and more. When made by professionals, such native builds will undoubtedly look better and run faster than a comparable VR experience built with WebGL and WebVR (at least AAA games or other experiences where high fidelity and performance are paramount).

The major advantage of WebVR over natively built experiences is the same as the web has always had over desktop apps and mobile apps today - no need to download and install anything. User just needs to click a link, type in a url, and the application runs directly in her browser. There's no app store needed. Web developers can also



take advantage of many open source libraries available on the internet.

## 4 Technologies and tools for development

### 4.1 JavaScript

JavaScript is an interpreted programming language with object-oriented (OO) capabilities. Syntactically, the core JavaScript language resembles C, C++ and Java, with programming constructs such as the if statement, the while loop, and the operator. The similarity ends with the syntactic resemblance, however. JavaScript is a loosely typed language, which means that variables do not need to have a type specified. Object in JavaScript map property names to arbitrary property values. In this way they are more like hash tables or associative arrays (in Perl) than they are structs (in C) or objects (in C++ or Java). The OO inheritance mechanism of JavaScript is prototype-based. This is different from inheritance in C++ and Java.[flanagan](#)

JavaScript is mostly used in web browsers. It allows scripts to interact with the user, control the web browser and alter the document content that appears within the web browser window. This embedded version of JavaScript runs scripts embedded within HTML web pages. It's called client-side JavaScript to distinguish them from scripts that run on the server, since JavaScript can also be used on server-side with Node.js.[flanagan](#)

JavaScript programming language is standardized in the ECMA-262 specification and ISO/IEC 16262 by standards organization European Computer Manufacturers Association (ECMA) and is often referred to as ECMAScript. Most popular browsers currently support ECMAScript in version 5 (ES5). ECMAScript 6 (ES6) is the sixth version seventh edition of ECMAScript language which was introduced to improve

JavaScript and ensure that developers no longer needed to use abstractions or other techniques to write quality code.Narayan (2015)

## 4.2 NPM

NPM is the package manager for JavaScript and the world's largest software registry, which makes it easy for JavaScript developers to share the code that they've created to solve particular problems, and for other developers to reuse that code in their own applications.NPM (2017)

The bits of reusable code are called packages, or sometimes modules. A package is just a directory with one or more files in it, that also has a file called "package.json" with some metadata about this package. A typical application, such as a website, will depend on dozens or hundreds of packages. These packages are often small. The general idea is to create a small building block which solves one problem and solves it well. This makes it possible for developers to compose larger, custom solutions out of these small, shared building blocks.NPM (2017)

There's lots of benefits to this. It makes it possible for development teams to draw on expertise outside of the organization they are working in by bringing in packages from people who have focused on particular problem areas. But even if they don't reuse code from people outside of the organization, using this kind of module based approach can actually help the team work together better, and can also make it possible to reuse code across projects.NPM (2017)

We can find packages to help us build our application by browsing the npm website. When we're browsing the website, we'll find different kinds of packages and node modules. NPM started as the node package manager, so we'll find lots of modules which can be used on the server side. There are also packages which add commands for us to use in the command line.NPM (2017) And there are a number of packages

which can be used in the browser, on the front end, which we're going to use in our project, MathworldVR.

### 4.3 Three.js

Three.js is cross-browser JavaScript library/API used to create and display animated 3D computer graphics in a web browser. It uses WebGL.

### 4.4 A-Frame

A-Frame is a web framework for building virtual reality experiences. It was started by Mozilla to make WebVR content creation easier, faster, and more accessible. A-Frame lets you build scenes with just HTML while having unlimited access to JavaScript, Three.js, and all existing Web APIs. It uses an entity-component-system pattern that promotes composition and extensibility. It is free and open source with growing community and a ecosystem of tools and components. A-Frame (2017)

There are no build steps or boilerplate required to install, we just need an HTML file:

```
<html>
  <head>
    <script src="https://aframe.io/releases/0.5.0/aframe.min.js"></script>
  </head>
  <body>
    <a-scene>
      <a-box color="#6173F4" opacity="0.8" depth="2"></a-box>
      <a-sphere radius="2" src="texture.png" position="1 1 0"></a-sphere>
      <a-sky color="#ECECEC"></a-sky>
    </a-scene>
  </body>
</html>
```

`<a-scene>` contains all of the objects in 3D scene. It also handles all of the setup that is traditionally required for 3D: setting up WebGL, the canvas, camera, lights, renderer, render loop as well as out of the box VR support on platforms such as

HTC Vive, Oculus Rift, Samsung GearVR, and smartphones (Google Cardboard). We can place objects within our scene using assorted primitive elements that come with A-Frame such as `<a-box>` or `<a-sphere>`. This approach helps with keeping the codebase readable. We could copy and paste this HTML to any other scene and it would behave in the same way. A-Frame (2017)

#### 4.4.1 JavaScript and Aframe

We can use traditional JavaScript DOM APIs to manipulate A-Frame scenes to add logic, behavior, and functionality:

```
var box = document.querySelector('a-box');
box.getAttribute('position');
box.addEventListener('click', function () {
  box.setAttribute('color', 'red');
});
```

A-Frame components are being based on the DOM, so most existing client-side libraries and frameworks such as React, Vue.js, d3.js, jQuery, or Angular work on top of A-Frame. The existing web ecosystem of tools were built on top of the notion of manipulating plain HTML and are thus compatible with A-Frame. A-Frame (2017)

#### 4.4.2 Entity-Component System

A-Frame at its core is an entity-component-system framework. Entity-component-system (ECS) is a pattern popular in game development and is prominent in game engines like Unity. ECS favors composition over inheritance. Every single object in the scene is an entity. An entity is an empty placeholder object that by itself does nothing. We plug in reusable components to attach appearance, behavior or functionality. We can also put different components together and configure them in order to define different types of objects. A-Frame (2017)

Object-oriented and hierarchical patterns have well-suited the 2D web, where we lay out elements and components that have fixed behavior on a web page. 3D and VR is different; there are infinite types of objects with endless complexity. A-Frame provides an easy way to build up different kinds of objects without having to create a special class for each one. A-Frame (2017)

In A-Frame, an entity is simply an HTML tag:

```
<a-entity></a-entity>
```

A-Frame components are reusable modules that can be plugged into any entity. They are allowed to do anything and have full access to JavaScript, Three.js, and Web APIs. The structure of a basic component may look like this:

```
AFRAME.registerComponent('foo', {
  schema: {
    bar: {type: 'number'},
    baz: {type: 'string'}
  },
  init: function () {
    // Do something when component is plugged in.
  },
  update: function () {
    // Do something when component's data is updated.
  }
});
```

Then once defined, we can plug this bundle of appearance, behavior, or functionality into an entity straight from an HTML attribute A-Frame (2017) :

```
<a-entity foo="bar: 5; baz: qux"></a-entity>
```

#### 4.4.3 Component Ecosystem

A-Frame ships with several components, but since A-Frame is fully extensible at its core, the community provided the ecosystem with lot's of components such as physics, particle systems, audio visualizations, and Leap Motion controls. This ecosystem is the driving force behind the popularization of A-Frame. Developer can

build a component, publish it, and then someone else can take that component and use it straight from HTML without having to know JavaScript. A-Frame (2017)


These components are curated and collected into the A-Frame Registry. This is similar to the collection of components and modules on the Unity Asset Store or NPM, but free and open source. A-Frame maintainers and core developers make sure they work well and from there they are easily searchable and installable through multiple channels, one of which is through the A-Frame Inspector. A-Frame (2017)

#### **4.4.4 A-Frame Inspector**

The A-Frame Inspector is a visual tool for inspecting and editing A-Frame scenes. Similar to the browser's DOM Inspector, you can go to any A-Frame scene, local or on the Web, and hit <ctrl> + <alt> + i on your keyboard. This will open the visual Inspector where you can make changes and return to the scene with the reflected changes. You can visually move and place objects, change properties of the components, or pan the camera around to see a different view of the scene. It's similar to viewing the source code in an interactive way. The A-Frame Inspector is integrated with the A-Frame Registry. From the Inspector, you can install components from the Registry and attach them to objects in the scene. A-Frame (2017)

#### **4.4.5 Device and Platform Support**

Devices and platform support depends on how well the browsers support certain devices and APIs. A-Frame supports both flat (3D on a normal screen) and WebVR experiences, though its focus is heavily VR. Support for flat experiences primarily depends on a browser's WebGL support. We can see which browsers support WebGL at <http://caniuse.com/#feat=webgl>. Support for VR experiences, along with WebGL support, depends on a browser's support for the WebVR API. You can

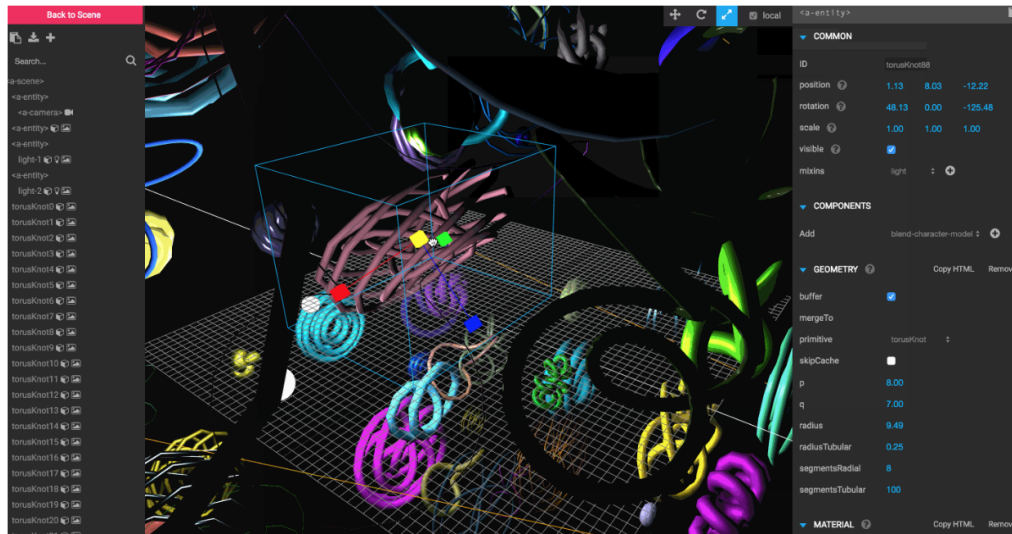

**Figure 4–1** A-Frame Inspector window.

see which browsers currently support the WebVR API at <https://webvr.rocks>. A-Frame supports version 1.0 of the WebVR API. The exception to this is for mobile devices, which are supported through the WebVR Polyfill. A-Frame currently supports controllers with six degrees of freedom (6DoF) using experimental build of Chromium browser with experimental controller support (e.g., Vive controllers). A-Frame (2017)

#### 4.4.6 Hardware specification

To use Vive, your computer must meet the following minimum system requirements.

- GPU: NVIDIA® GeForce® GTX 970, AMD Radeon™ R9 290 equivalent or better
- CPU: Intel® Core™ i5-4590/AMD FX™ 8350 equivalent or better
- RAM: 4 GB or more
- Video output: HDMI 1.4, DisplayPort 1.2 or newer

- USB port: 1x USB 2.0 or better port
- Operating system: Windows® 7 SP1, Windows® 8.1 or later, Windows® 10

## 4.5 Math.js

Math.js is an extensive math library for JavaScript and Node.js. It features a flexible expression parser with support for symbolic computation, comes with a large set of built-in functions and constants, and offers an integrated solution to work with different data types like numbers, big numbers, complex numbers, fractions, units, and matrices.

## 4.6 React

ReactJS is a javascript library for building user interfaces, originally created by engineers at Facebook to solve the challenges involved when developing complex user interfaces with datasets that change over time. It provides a way to write encapsulated components that manage their own state, then compose them to make complex user interfaces. It doesn't make assumptions about the rest of the technology stack, because it's just library. Since component logic is written in JavaScript instead of templates, we can easily pass rich data through our app and keep state out of the DOM.

## 4.7 Flux

Flux is an application architecture created by Facebook for building client-side web applications. It complements the React in a way that displaces the standard Model-View-Controller (MVC) framework. It was designed in React in mind and aims



to help developers to create more efficient, maintainable code when dissecting the application into multiple components, which according to Facebook engineers was hard if the traditional MVC pattern was followed when building the application with React.(Gackenhaimer, 2015)

Flux is utilizing a unidirectional data flow. It's more of a pattern rather than a formal framework, and developers can start using Flux immediately without a lot of new code.


Flux applications have three major parts: the dispatcher, the stores, and the views (React components). These should not be confused with Model-View-Controller. Controllers do exist in a Flux application, but they are controller-views - views often found at the top of the hierarchy that retrieve data from the stores and pass this data down to their children. Additionally, action creators - dispatcher helper methods - are used to support a semantic API that describes all changes that are possible in the application.

Flux abandons MVC in favor of a uni-directional data flow. When a user interacts with a React view, the view propagates an action through a central dispatcher, to the various stores that hold the application's data and business logic, which updates all of the views that are affected. This works especially well with React's declarative programming style, which allows the store to send updates without specifying how to transition views between states.(Facebook, Inc., 2015)

#### **4.7.1 Structure and Data Flow in Flux architecture**

A uni-directional data flow is the main consequence of using the Flux pattern, and the diagram below should be the primary mental model for the Flux programmer. The dispatcher, stores and views are independent nodes with distinct inputs and outputs. The actions are simple objects containing a action type that identifies the

property and the new data that is passed along with the action.(Facebook, Inc., 2015)

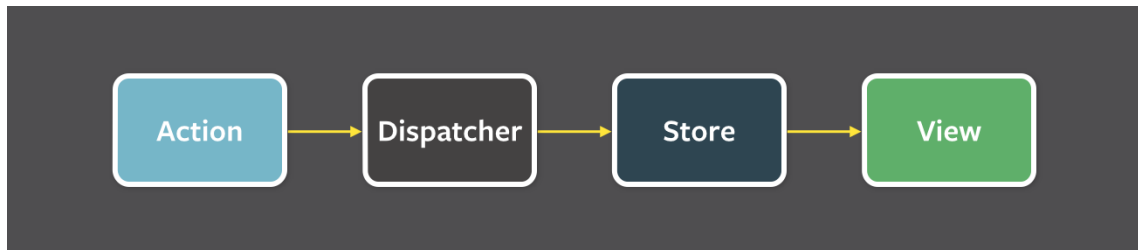


**Figure 4–2** Data in a Flux application flows in a single direction.

The views may cause a new action to be propagated through the system in response to user interactions.

All data flows through the dispatcher as a central hub. Actions are provided to the dispatcher in an action creator method, and most often originate from user interactions with the views. The dispatcher then invokes the callbacks that the stores have registered with it, dispatching actions to all stores. Within their registered callbacks, stores respond to whichever actions are relevant to the state they maintain. The stores then emit a change event to alert the controller-views that a change to the data layer has occurred. Controller-views listen for these events and retrieve data from the stores in an event handler. The controller-views call their own `setState()` method, causing a re-rendering of themselves and all of their descendants in the component tree.

This structure allows us to reason easily about our application in a way that is reminiscent of functional reactive programming, or more specifically data-flow programming or flow-based programming, where data flows through the application in a single direction — there are no two-way bindings. Application state is maintained only in the stores, allowing the different parts of the application to remain highly decoupled.

We found that two-way data bindings led to cascading updates, where changing one

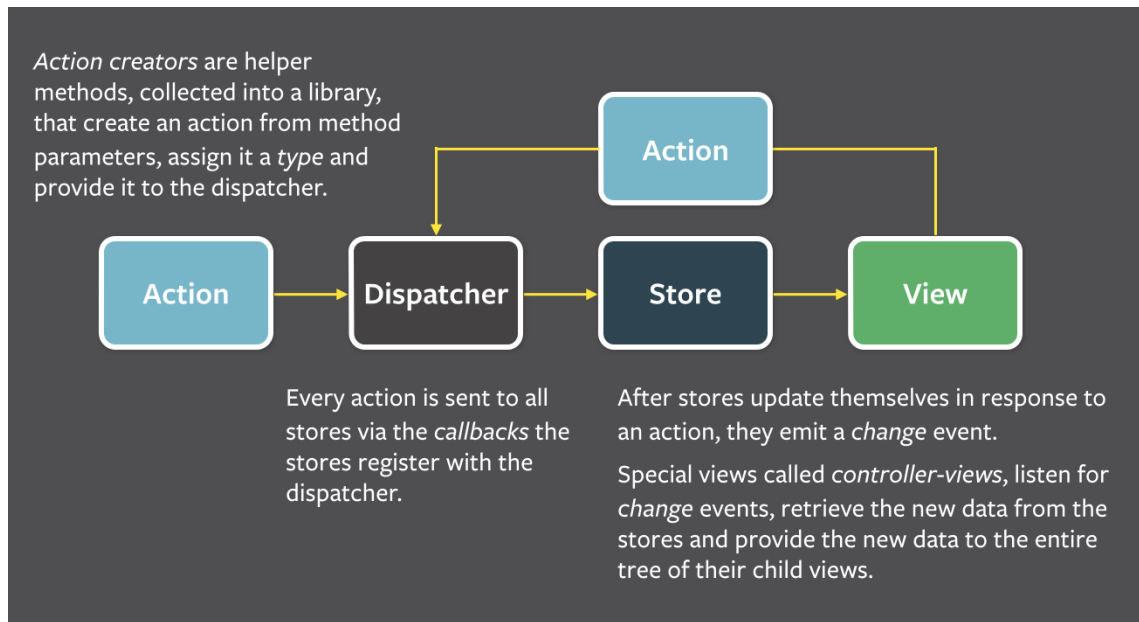

**Figure 4–3** Detailed Flux application architecture diagram.

object led to another object changing, which could also trigger more updates. As applications grew, these cascading updates made it very difficult to predict what would change as the result of one user interaction. When updates can only change data within a single round, the system as a whole becomes more predictable. (Facebook, Inc., 2015)

## 4.8 Redux

Redux is a predictable state container for JavaScript applications, inspired by several important qualities of Flux architecture. It helps developers write applications that behave consistently, run in different environments (client, server, and native), and are easy to test. On top of that, it provides a great developer experience, such as live code editing combined with a time traveling debugger. (Redux.org, 2017) We are using Redux together with React, but in general it can be used with any other view library.

The whole state of application is stored in an object tree inside a single store. The only way to change the state tree is to emit an action, an object describing what happened. To specify how the actions transform the state tree, we write pure reducers.(Redux.org, 2017)

Instead of mutating the state directly, we specify the mutations we want to happen with plain objects called actions. Then we write a special function called a reducer to decide how every action transforms the entire application's state.(Redux.org, 2017)

Unlike Flux, Redux does not have the concept of a Dispatcher. This is because it relies on pure functions instead of event emitters, and pure functions are easy to compose and don't need an additional entity managing them.

The beauty and strength of this pattern is how well it scales to large and complex apps. It also enables very powerful developer tools, because it is possible to trace every mutation to the action that caused it. We can record user sessions and reproduce them just by replaying every action.(Redux.org, 2017)

#### **4.8.1 Three Principles of Redux**

##### **1. Single source of truth**

The state of your whole application is stored in an object tree within a single store.

This makes it easy to create universal apps, as the state from your server can be serialized and hydrated into the client with no extra coding effort. A single state tree also makes it easier to debug or inspect an application; it also enables you to persist your app's state in development, for a faster development cycle. Some functionality which has been traditionally difficult to implement - Undo/Redo, for example - can suddenly become trivial to implement, if all of your state is stored in a single tree.

##### **2. State is read-only**

The only way to change the state is to emit an action, an object describing what happened.

This ensures that neither the views nor the network callbacks will ever write directly to the state. Instead, they express an intent to transform the state. Because all changes are centralized and happen one by one in a strict order, there are no subtle race conditions to watch out for. As actions are just plain objects, they can be logged, serialized, stored, and later replayed for debugging or testing purposes.

### 3. Changes are made with pure functions

To specify how the state tree is transformed by actions, you write pure reducers.


Reducers are just pure functions that take the previous state and an action, and return the next state. Remember to return new state objects, instead of mutating the previous state. You can start with a single reducer, and as your app grows, split it off into smaller reducers that manage specific parts of the state tree. Because reducers are just functions, you can control the order in which they are called, pass additional data, or even make reusable reducers for common tasks such as pagination.

## 4.9 Webpack

Webpack is a module bundler for modern JavaScript applications. It takes modules with dependencies and generates static assets representing those modules [4–4]. Its strength is that it's configurable and developers using it in their applications should know the four core concepts used when configuring Webpack:

- Entry - Webpack creates a graph of all of your application's dependencies and the starting point of this graph is called entry point. It tells Webpack where to start and follows the graph of dependencies to know what to bundle.

- Output - it tells Webpack where to bundle our application.
- Loaders - Webpack treats every file (.css, .html, .scss, .jpg, etc.) as a module. However, webpack only understands JavaScript, so loaders transform these files into modules as they are added to dependency graph.
- Plugins - loaders only execute transform on per-file basis, but plugins are mostly used to perform actions and custom functionality on combinations or chunks of bundled modules.

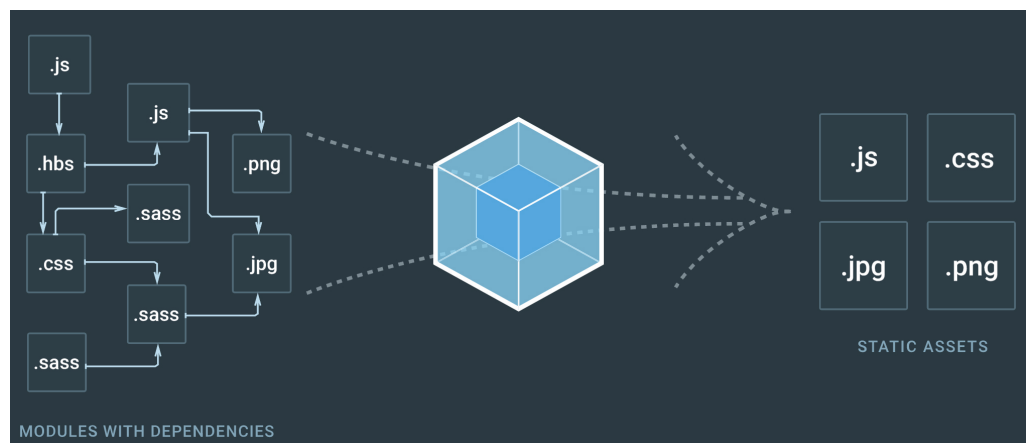

**Figure 4–4** Bundling dependencies and static assets with Webpack

## 5 Conceptualisation and design

At the heart of user interface design is the "user" and the user is in the "driver's seat". Therefore it is critical that users of any virtual environment should be able to use the interface intuitively, regardless of cultural diversities. The goal of user interface design is to make the user's interaction as simple and efficient as possible, in terms of accomplishing user goals. This is called user-centered design. Badrul (2011)

The most important goal for designing virtual environment in MathworldVR is to reach learners more effectively through seamless integration of content and its organization, together with the navigational and interactive controls that user use to work with the content.

### 5.1 Inputs and objections

### 5.2 Functionality planning

...zatiaľ len par poznamok... - možnosť pohybovať sa voľne v 3D priestore - funkcia vykresľovania 3D parametrickej funkcie vo virtuálnom priestore - potrebujeme možnosť zapojenia rúk (ovládacie HTC Vive/Oculus Touch) - nadväzujeme na to vyššie - potrebujeme 3D funkciu uchopiť, otáčať, zväčšovať/zmenšovať - potrebujeme vedieť meniť/upravovať premenné funkcie - potrebujeme meniť/upravovať constraints funkcie - potrebujeme prijímať user input - potrebujeme prijímať user input spojiť s 3D parametrickou funkciou

### 5.3 Virtual user interface

## 6 Implementation of virtual reality application

### 6.1 Virtual calculator entity

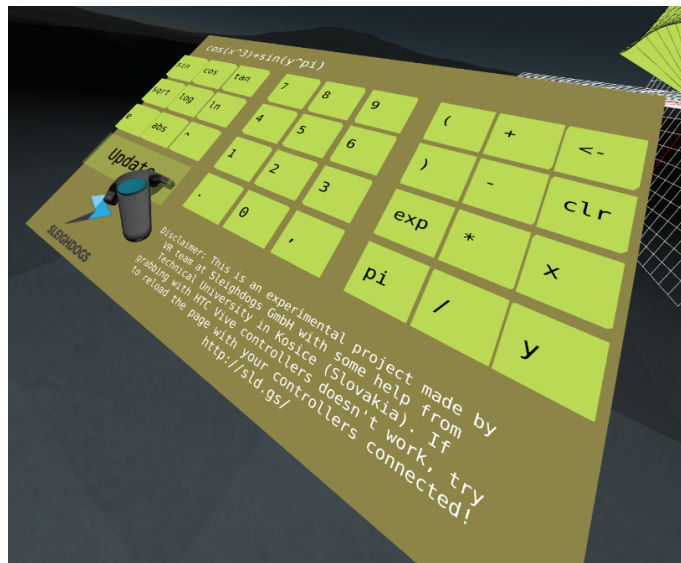


Figure 6–1 Virtual calculator entity 6–1





Figure 6–2 Function settings entity 6–2

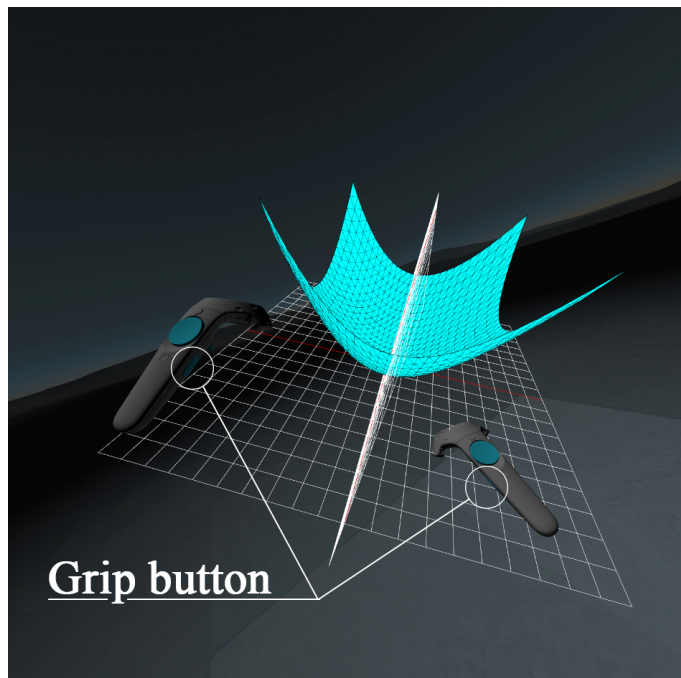


Figure 6–3 Grabbing functionality 6–3

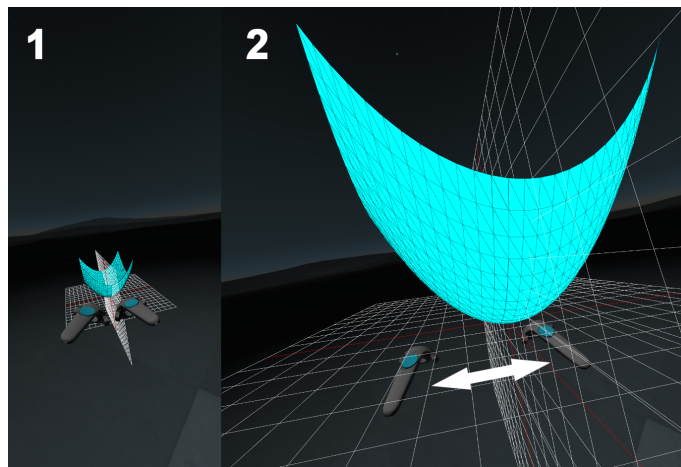


Figure 6–4 Scaling functionality 6–4

#### 6.1.1 Parsing equations with Math.js

### 6.2 Parametrized function grid entity

### 6.3 Interactive function settings panel entity

### 6.4 Interactions

#### 6.4.1 Grabbing

#### 6.4.2 Scaling

### 6.5 Building and deploying the application to web hosting

## 7 Conclusion

Táto časť záverečnej práce je povinná. Autor uvedie zhodnotenie riešenia. Uvedie výhody, nevýhody riešenia, použitie výsledkov, ďalšie možnosti a pod., prípadne načrtne iný spôsob riešenia úloh, resp. uvedie, prečo postupoval uvedeným spôsobom.

## References

- BECK, K. 2003. *Test-driven Development: By Example*. USA: Addison-Wesley Professional, 2003. 220 s. ISBN 9780321146533
- BADRUL, K. 2011. *User Interface Design for Virtual Environments: Challenges and Advances*. USA: IGI Global, 2011. 375 s. ISBN 9781613505175
- FLANAGAN, D. 2006. *JavaScript: The Definitive Guide (5th edition)*. USA: O'Reilly, 2006. 1032 s. ISBN 978-0-596-10199-2
- NARAYAN, P. 2015. *Learning ECMAScript 6*. USA: Packt Publishing, 2015. 202 s. ISBN 9781785884443
- LOEFFLER, C. 1995. *Distributed Virtual Reality: Applications for Education, Entertainment and Industry*. [http://www.wiumlie.no/1993/telelektronikk-4-93/Loeffler\\_C\\_E.html](http://www.wiumlie.no/1993/telelektronikk-4-93/Loeffler_C_E.html)
- KAUFMANN, H. 2011. *Virtual Environments for Mathematics and Geometry Education*. In: Themes In Science and Technology Education. Vienna : Klidarithmos Computer Books, 2011, Special Issue, pp. K 131–152
- NPM [online]*. Available on internet: <https://docs.npmjs.com/all>
- A-Frame Introduction [online]*. Available on internet: <https://aframe.io/docs/0.5.0/introduction/>
- GACKENHEIMER, C. 2015. *Introduction to React*. USA: Apress, 2015 129 s. ISBN 978-1-4842-1245-5
- FACEBOOK, Inc. 2015. *Flux - In Depth Overview [online]*. Available on internet: <https://facebook.github.io/flux/docs/in-depth-overview.html>

*Redux* [online]. Available on internet: <https://aframe.io/docs/0.5.0/introduction/>