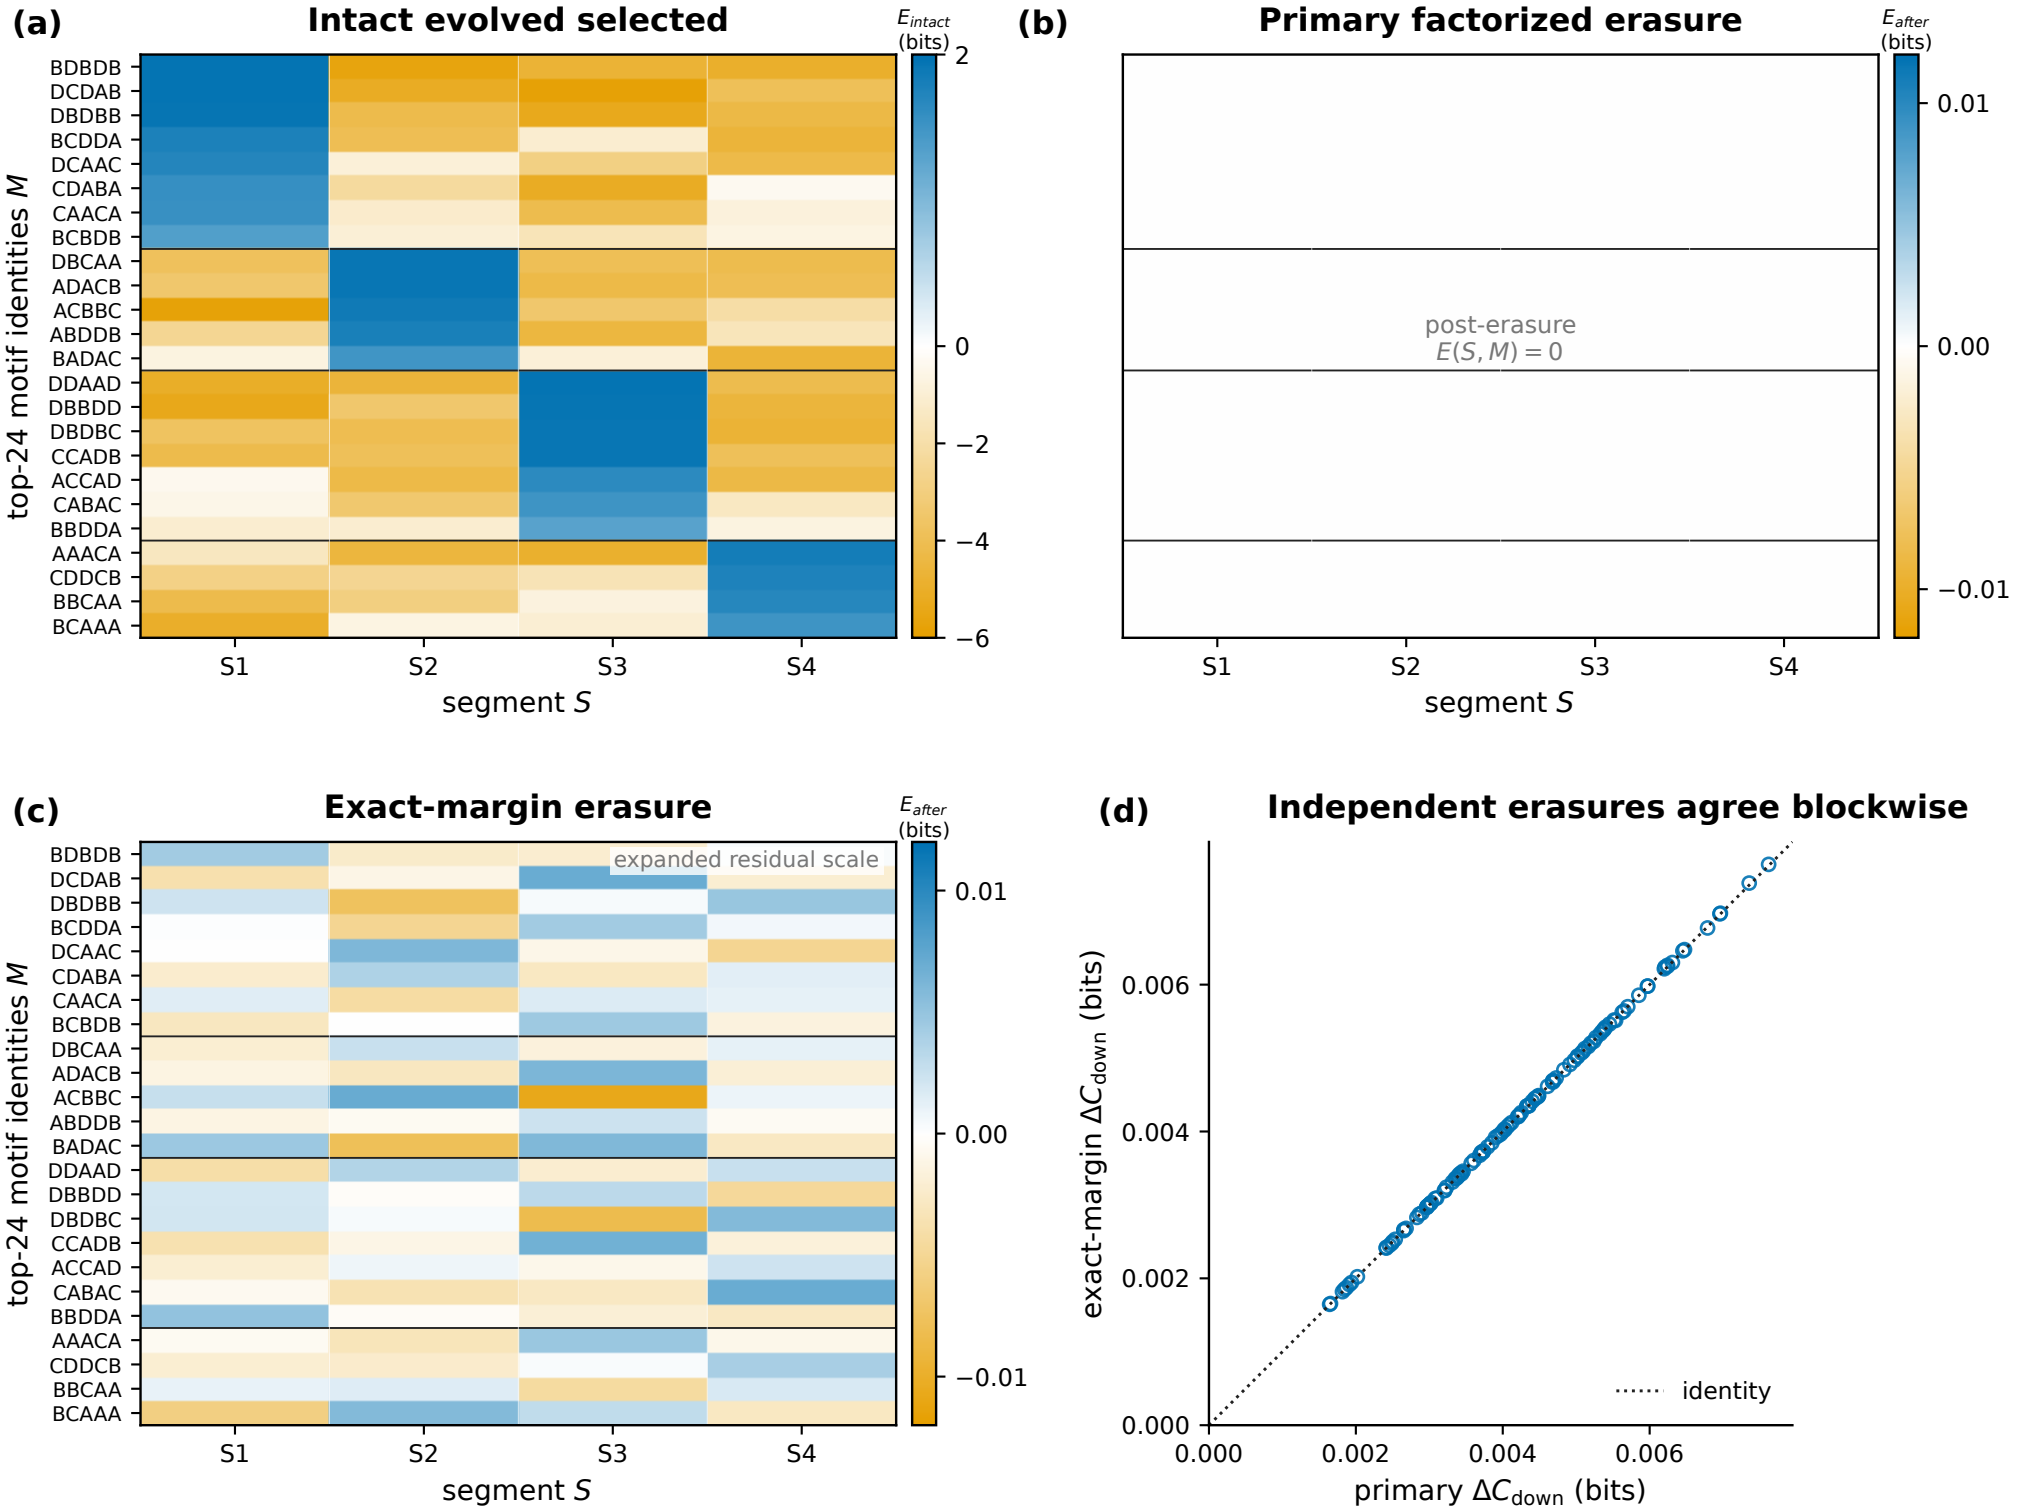

(a)
Intact evolved selected
E_{intact} (bits)
2
0
−2
−4
−6
top-24 motif identities M
BDBDB
DCDAB
DBDBB
BCDDA
DCAAC
CDABA
CAACA
BCBDB
DBCAA
ADACB
ACBBC
ABDDB
BADAC
DDAAD
DBBDD
DBDBC
CCADB
ACCAD
CABAC
BBDDA
AAACA
CDDCB
BBCAA
BCAAA
S1
S2
S3
S4
segment S
(b)
Primary factorized erasure
E_{after} (bits)
0.01
0.00
−0.01
post-erasure
$E(S, M) = 0$
S1
S2
S3
S4
segment S
(c)
Exact-margin erasure
E_{after} (bits)
expanded residual scale
0.01
0.00
−0.01
top-24 motif identities M
BDBDB
DCDAB
DBDBB
BCDDA
DCAAC
CDABA
CAACA
BCBDB
DBCAA
ADACB
ACBBC
ABDDB
BADAC
DDAAD
DBBDD
DBDBC
CCADB
ACCAD
CABAC
BBDDA
AAACA
CDDCB
BBCAA
BCAAA
S1
S2
S3
S4
segment S
(d)
Independent erasures agree blockwise
exact-margin ΔC_{down} (bits)
0.000
0.002
0.004
0.006
identity
0.000
0.002
0.004
0.006
primary ΔC_{down} (bits)