

The ShareUp database, stripped to essentials

Same app, fewer moving parts. Two tables folded into the entities they always belonged to, junction tables trimmed to just their keys, and every option field (`role` , `status` , `share_perm`) now stores a small integer instead of text.

11

TABLES (V1)

9

TABLES (V2)

14

RELATIONSHIPS (V1)

11

RELATIONSHIPS (V2)

0

UUID STRINGS — ALL BIGINT IDS

● Identity & access

● Events & ledger

● Membership & media

What changed, and why

01 / changelog

MERGED

`event_shares` is gone — `share_token` , `share_perm` , `share_created_at` moved onto `events` directly. It was always exactly one row per event; a separate table only bought an extra join for nothing.

MERGED

`transaction_payments` is gone — replaced by one nullable column, `transactions.excluded_at` . "Is this expense excluded from settlement" is a fact about the transaction, not a relationship.

TRIMMED

`participants` (was `event_friends`) dropped its own `id` and `created_at` — a membership fact needs nothing beyond the pair itself.

TRIMMED

`receipts` (was `transaction_slips`) dropped the legacy base64 `slip` / `slip_hi` columns. Old rows get converted to a Drive `file_id` once, during migration, instead of two photo formats living side by side forever.

RENAMED

Every table is now a plain noun you'd say out loud: `splits` , `participants` , `settlements` , `receipts` . Every primary key is just `id` ; every foreign key is `<thing>_id` — no more `transaction_id` as a lone exception.

RETYPED

Ids are `BIGSERIAL` , not UUID strings. Smaller index, faster joins, and readable at a glance in DBeaver. `sessions.token` and `events.share_token` stay opaque random strings on purpose — those must be unguessable, not sequential.

RETYPED

`role` , `status` , `share_perm` are `SMALLINT` codes (e.g. `status` : 0=disabled, 1=active) instead of text — 1 byte instead of several, and no string comparison in every query. True/false flags stay `BOOLEAN` , already the efficient native type for a two-state fact.

Relationships

02 / diagram

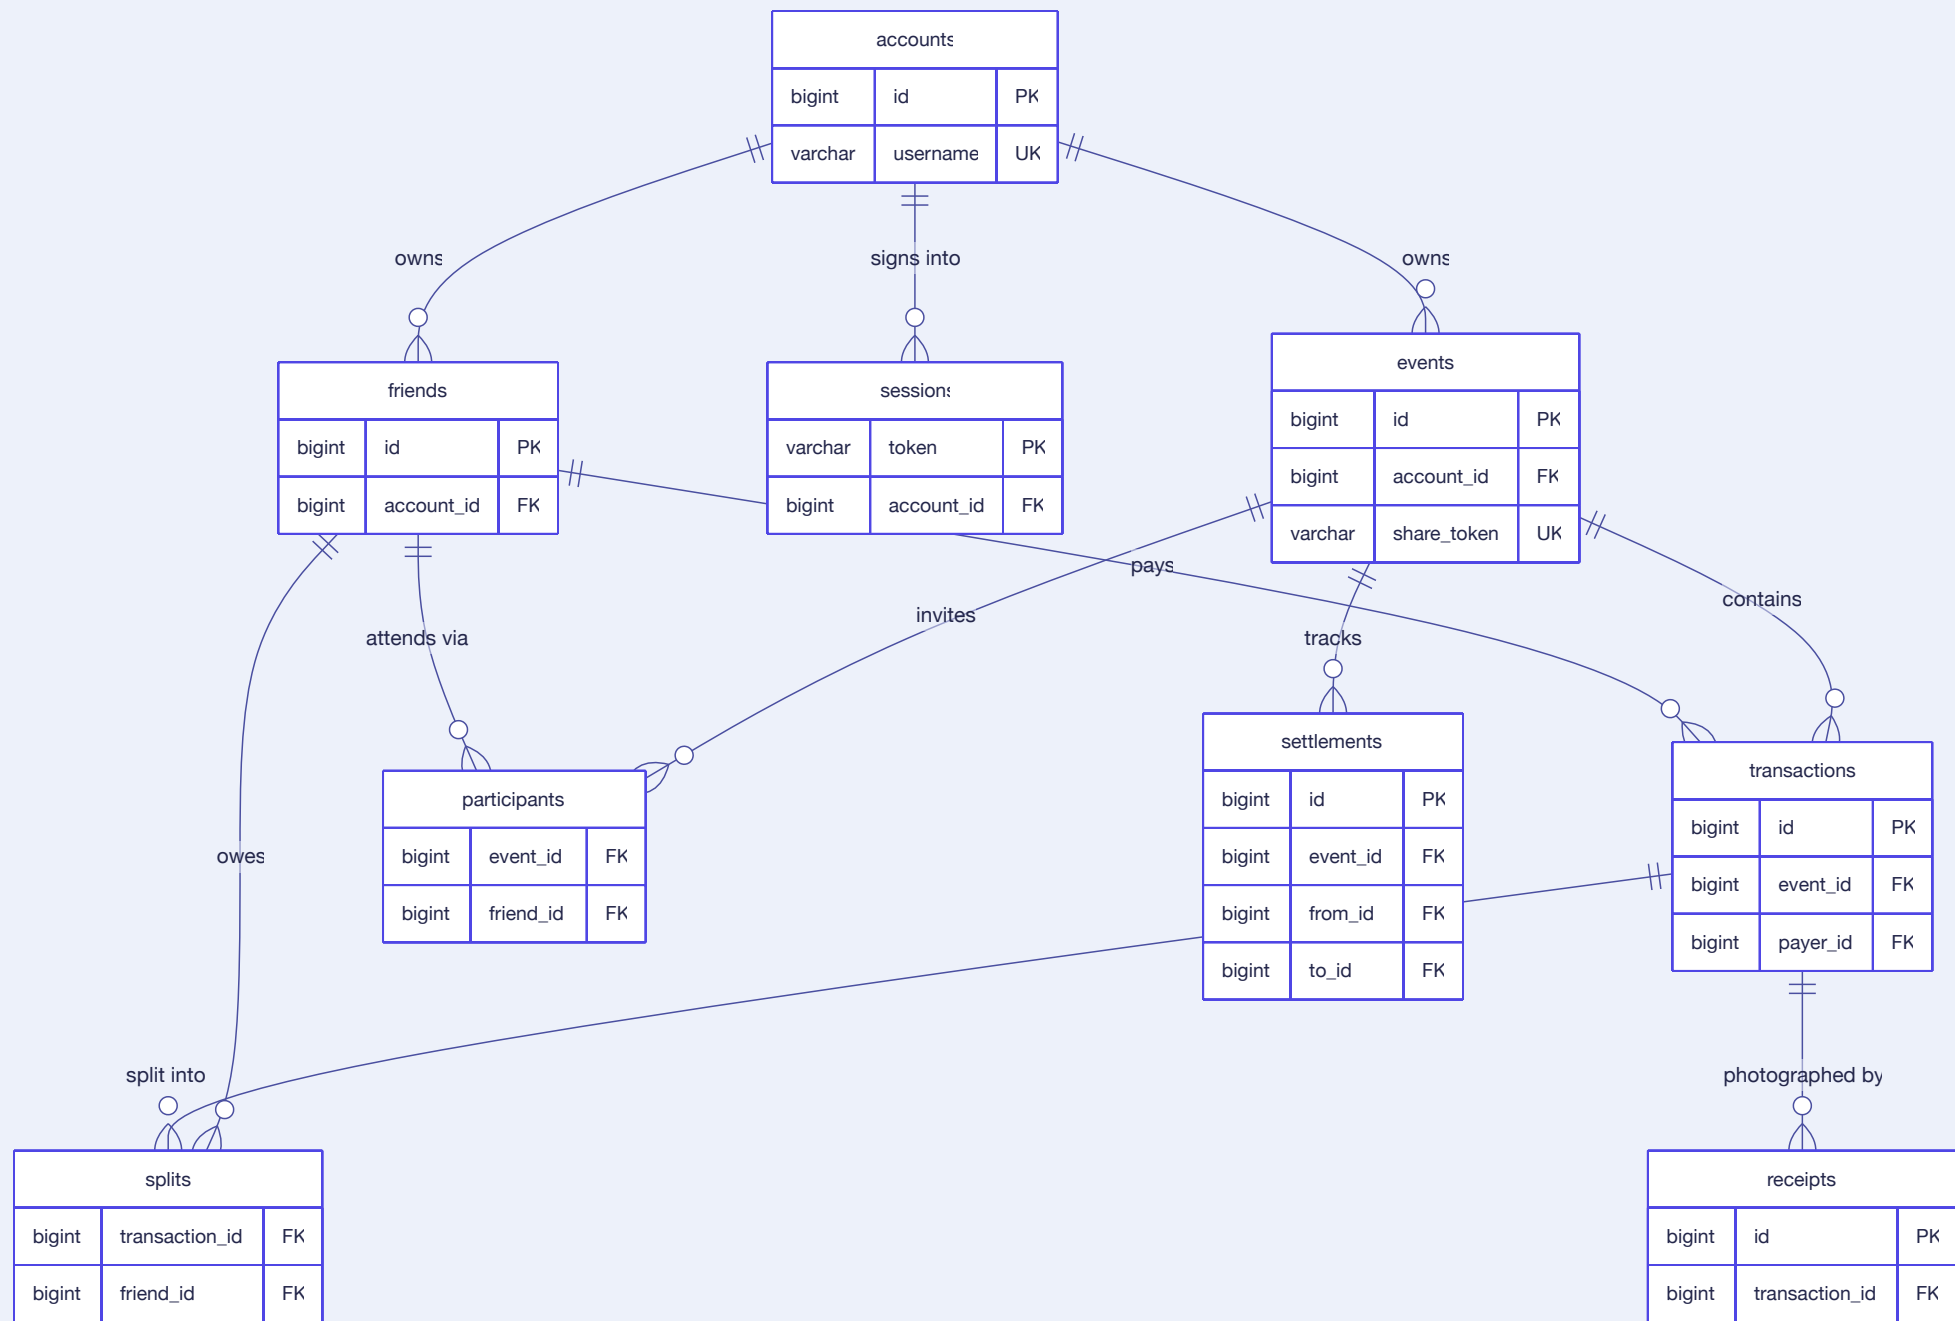


Table reference

03 / columns

Identity & access

Who's using the app, and how they stay signed in

accounts

one row per registered user

id	PK bigserial
name	varchar(255)
username	UK varchar(255)
pwd_hash	char(64)
role	0/1
status	0/1
email, photo	text

friends

people an account can split with

id	PK bigserial
account_id	FK → accounts
name	varchar(255)
is_self	boolean

idx_friends_account (account_id)	

sessions

active login tokens

token	PK varchar(128)
account_id	FK → accounts
info	jsonb
expires_at	timestamp

idx_sessions_account (account_id)	
idx_sessions_expires (expires_at)	

Events & ledger

The trip/occasion, its expenses, and the money math

events

one shared expense occasion (sharing built in)

id	PK	bigserial
account_id	FK	→ accounts
name, icon		varchar
is_active		boolean
share_token	UK	null = off
share_perm		0/1

idx_events_account (account_id)

transactions

one expense (settlement-exclusion built in)

id	PK	bigserial
event_id	FK	→ events
payer_id	FK	→ friends
amount		decimal >0
description		varchar(500)
excluded_at		null = counted

idx_tx_event_created (event_id,
created_at desc)
idx_tx_payer (payer_id)

splits

who owes what, per expense

transaction_id	PK·FK	→ transactions
friend_id	PK·FK	→ friends
amount		decimal ≥0

idx_splits_friend (friend_id)

settlements

a net debt marked settled

id	PK	bigserial
event_id	FK	→ events
from_id, to_id	FK	→ friends
amount		decimal >0

unique (event_id, from_id, to_id)

Membership & media

Who's actually in each event, and what got photographed

participants

roster — which friends are in which event

event_id PK·FK → events

friend_id PK·FK → friends

that's the whole table

receipts

photos (Drive pointers only)

id PK bigserial

transaction_id FK → transactions

file_id Drive id

idx_receipts_tx (transaction_id)