Creation of a Redshift Cluster

I. Screenshots of the configuration of the Redshift cluster that you have created:

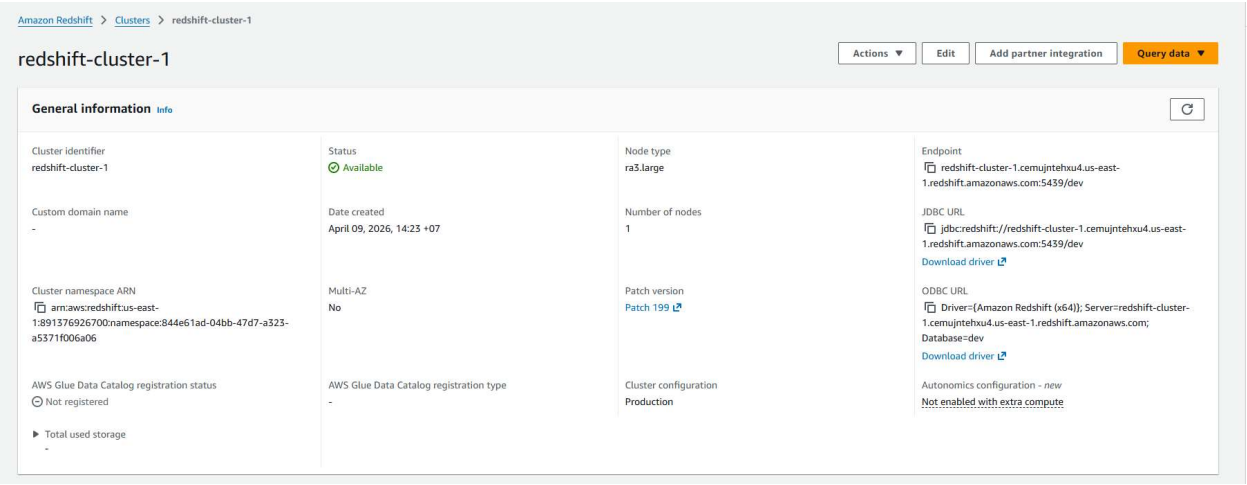

Setting up a database in the Redshift cluster and running queries to create the dimension and fact tables

II. Queries to create the various dimension and fact tables with appropriate primary and foreign keys:

Note: The dimension tables were created with appropriate primary keys, and the fact table was designed with foreign key columns that logically reference the corresponding dimension tables. Although Amazon Redshift does not enforce referential integrity constraints, the relationships are maintained at the data modeling level.

1. dim_location

```
CREATE TABLE dim_location (
   location_id INT PRIMARY KEY,
   location VARCHAR(50),
   streetname VARCHAR(255),
   street_number INT,
   zipcode INT,
   lat DECIMAL(10,3),
   lon DECIMAL(10,3)
);
```

© Copyright. upGrad Education Pvt. Ltd. All rights reserved

Summary

Returned rows: 0

Elapsed time: 424ms

Result set query:

```
/* RQEV2-YPoungF1pL */
CREATE TABLE dim_location (
    location_id INT PRIMARY KEY,
    location VARCHAR(50),
    streetname VARCHAR(255),
    street_number INT,
    zipcode INT,
    lat DECIMAL(10,3),
    lon DECIMAL(10,3)
)
```

2. **dim_atm**

```
CREATE TABLE dim_atm (
    atm_id INT PRIMARY KEY,
    atm_number VARCHAR(20),
    atm_manufacturer VARCHAR(50),
    atm_location_id INT
);
```

Summary

Returned rows: 0

Elapsed time: 474ms

Result set query:

```
/* RQEV2-ANulZDAD9G */
CREATE TABLE dim_atm (
    atm_id INT PRIMARY KEY,
    atm_number VARCHAR(20),
    atm_manufacturer VARCHAR(50),
    atm_location_id INT
)
```

3. **dim_date**

```
CREATE TABLE dim_date (
    date_id INT PRIMARY KEY,
    full_date_time TIMESTAMP,
    year INT,
    month VARCHAR(20),
    day INT,
    hour INT,
    weekday VARCHAR(20)
```

© Copyright. upGrad Education Pvt. Ltd. All rights reserved

);

Summary

Returned rows: 0

Elapsed time: 409ms

Result set query:

```
/* RQEV2-0JkgFmkpA2 */
CREATE TABLE dim_date (
    date_id INT PRIMARY KEY,
    full_date_time TIMESTAMP,
    year INT,
    month VARCHAR(20),
    day INT,
    hour INT,
    weekday VARCHAR(20)
)
```

4. **dim_card_type**

```
CREATE TABLE dim_card_type (
    card_type_id INT PRIMARY KEY,
    card_type VARCHAR(30)
);
```

Summary

Returned rows: 0

Elapsed time: 349ms

Result set query:

```
/* RQEV2-8bGua2b2N7 */
CREATE TABLE dim_card_type (
    card_type_id INT PRIMARY KEY,
    card_type VARCHAR(30)
)
```

5. **fact_atm_trans**

```
CREATE TABLE fact_atm_trans (
    trans_id BIGINT PRIMARY KEY,
    atm_id INT,
    weather_loc_id INT,
    date_id INT,
    card_type_id INT,
    atm_status VARCHAR(20),
    currency VARCHAR(10),
    service VARCHAR(20),
    transaction_amount INT,
    message_code VARCHAR(255),
    message_text VARCHAR(255),
```

© Copyright. upGrad Education Pvt. Ltd. All rights reserved

```
    rain_3h DECIMAL(10,3),
    clouds_all INT,
    weather_id INT,
    weather_main VARCHAR(50),
    weather_description VARCHAR(255)
);
```

Loading data into a Redshift cluster from Amazon S3 bucket

III. Queries to copy the data from S3 buckets to the Redshift cluster in the appropriate tables

Note: Due to strict Parquet schema enforcement in Redshift COPY operations, Redshift Spectrum was used as a staging mechanism to load the data from S3 into Redshift tables. This approach still fulfills the requirement of copying data from S3 to Redshift.

```
CREATE EXTERNAL SCHEMA ext_schema
FROM DATA CATALOG
DATABASE 'default'
IAM_ROLE 'arn:aws:iam::891376926700:role/service-role/AmazonRedshift-
CommandsAccessRole-20260409T141751'
CREATE EXTERNAL DATABASE IF NOT EXISTS;
```

1. **dim_location**

© Copyright. upGrad Education Pvt. Ltd. All rights reserved

```
CREATE EXTERNAL TABLE ext_schema.ext_dim_location (
    location_id BIGINT,
    location VARCHAR(50),
    streetname VARCHAR(255),
    street_number INT,
    zipcode INT,
    lat DOUBLE PRECISION,
    lon DOUBLE PRECISION
)
STORED AS PARQUET
LOCATION 's3://mike-upgrad-etl-project/dim_location/';
```

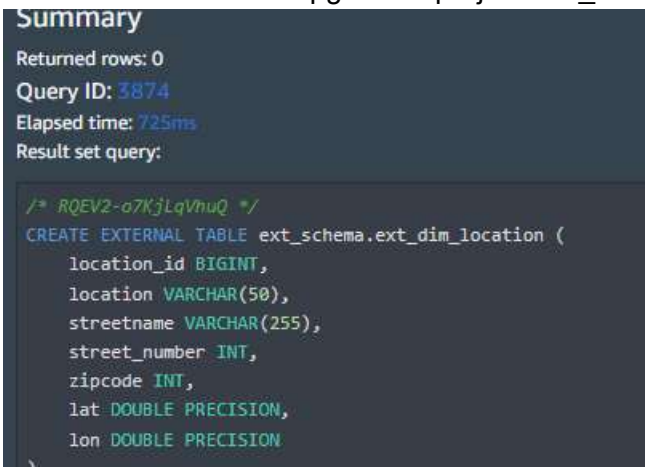


```
INSERT INTO dim_location
SELECT
    location_id,
    location,
    streetname,
    street_number,
    zipcode,
    CAST(lat AS DECIMAL(10,3)),
    CAST(lon AS DECIMAL(10,3))
FROM ext_schema.ext_dim_location;
```

© Copyright. upGrad Education Pvt. Ltd. All rights reserved

2. **dim_atm**

```
CREATE EXTERNAL TABLE ext_schema.ext_dim_atm (
   atm_id INT,
   atm_number VARCHAR(20),
   atm_manufacturer VARCHAR(50),
   atm_location_id BIGINT
)
STORED AS PARQUET
LOCATION 's3://mike-upgrad-etl-project/dim_atm/';
```

```
INSERT INTO dim_atm
SELECT
   atm_id,
   atm_number,
```

© Copyright. upGrad Education Pvt. Ltd. All rights reserved

```
    atm_manufacturer,
    atm_location_id
FROM ext_schema.ext_dim_atm;
```

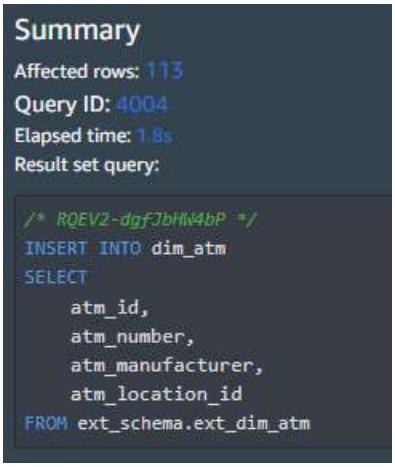

3. **dim_date**

```
CREATE EXTERNAL TABLE ext_schema.ext_dim_date (
    date_id BIGINT,
    full_date_time VARCHAR(50),
    year INT,
    month VARCHAR(20),
    day INT,
    hour INT,
    weekday VARCHAR(20)
)
STORED AS PARQUET
LOCATION 's3://mike-upgrad-etl-project/dim_date/';
```

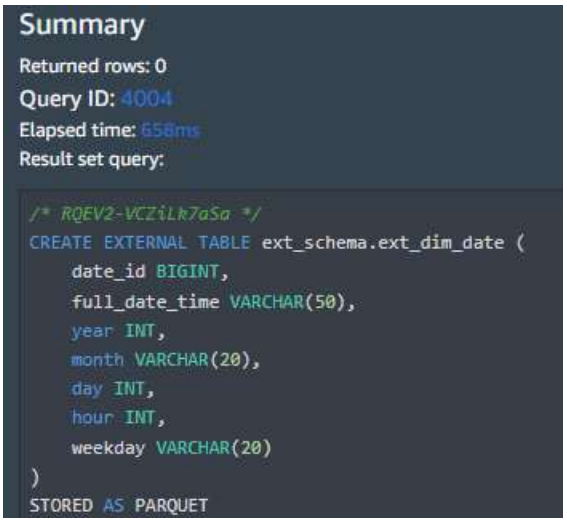

© Copyright. upGrad Education Pvt. Ltd. All rights reserved

```
INSERT INTO dim_date
SELECT
    date_id,
    TO_TIMESTAMP(
        year || ' ' || month || ' ' || day || ' ' || hour,
        'YYYY FMMonth DD HH24'
    ),
    year,
    month,
    day,
    hour,
    weekday
FROM ext_schema.ext_dim_date;
```

4. **dim_card_type**

```
CREATE EXTERNAL TABLE ext_schema.ext_dim_card_type (
    card_type_id BIGINT,
    card_type VARCHAR(30)
)
STORED AS PARQUET
LOCATION 's3://mike-upgrad-etl-project/dim_card_type/';
```

© Copyright. upGrad Education Pvt. Ltd. All rights reserved

Summary

Returned rows: 0

Query ID: 4083

Elapsed time: 553ms

Result set query:

```
/* RQEV2-gKjPj6UOyT */
CREATE EXTERNAL TABLE ext_schema.ext_dim_card_type (
    card_type_id BIGINT,
    card_type VARCHAR(30)
)
STORED AS PARQUET
LOCATION 's3://mike-upgrad-etl-project/dim_card_type/'
```

```
INSERT INTO dim_card_type
SELECT
    card_type_id,
    card_type
FROM ext_schema.ext_dim_card_type;
```

Summary

Affected rows: 12

Query ID: 4125

Elapsed time: 1.7s

Result set query:

```
/* RQEV2-2gObU5KuGd */
INSERT INTO dim_card_type
SELECT
    card_type_id,
    card_type
FROM ext_schema.ext_dim_card_type
```

5. **fact_atm_trans**

```
CREATE EXTERNAL TABLE ext_schema.ext_fact_atm_trans (
    trans_id BIGINT,
    atm_id INT,
    weather_loc_id BIGINT,
    date_id BIGINT,
    card_type_id BIGINT,
    atm_status VARCHAR(20),
    currency VARCHAR(10),
    service VARCHAR(20),
    transaction_amount INT,
    message_code VARCHAR(255),
```

© Copyright. upGrad Education Pvt. Ltd. All rights reserved

```
    message_text VARCHAR(255),
    rain_3h DOUBLE PRECISION,
    clouds_all INT,
    weather_id INT,
    weather_main VARCHAR(50),
    weather_description VARCHAR(255)
)
STORED AS PARQUET
LOCATION 's3://mike-upgrad-etl-project/fact_atm_trans/';
```

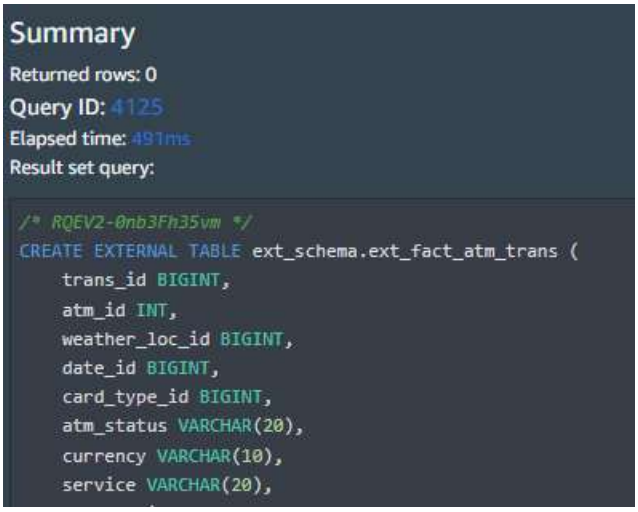


```
INSERT INTO fact_atm_trans
SELECT
    trans_id,
    atm_id,
    weather_loc_id,
    date_id,
    card_type_id,
    atm_status,
    currency,
    service,
    transaction_amount,
    message_code,
    message_text,
    CAST(rain_3h AS DECIMAL(10,3)),
    clouds_all,
    weather_id,
    weather_main,
    weather_description
```

© Copyright. upGrad Education Pvt. Ltd. All rights reserved

FROM ext_schema.ext_fact_atm_trans;

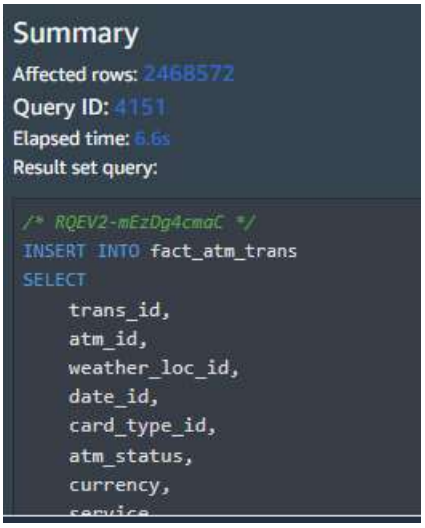

© Copyright. upGrad Education Pvt. Ltd. All rights reserved