


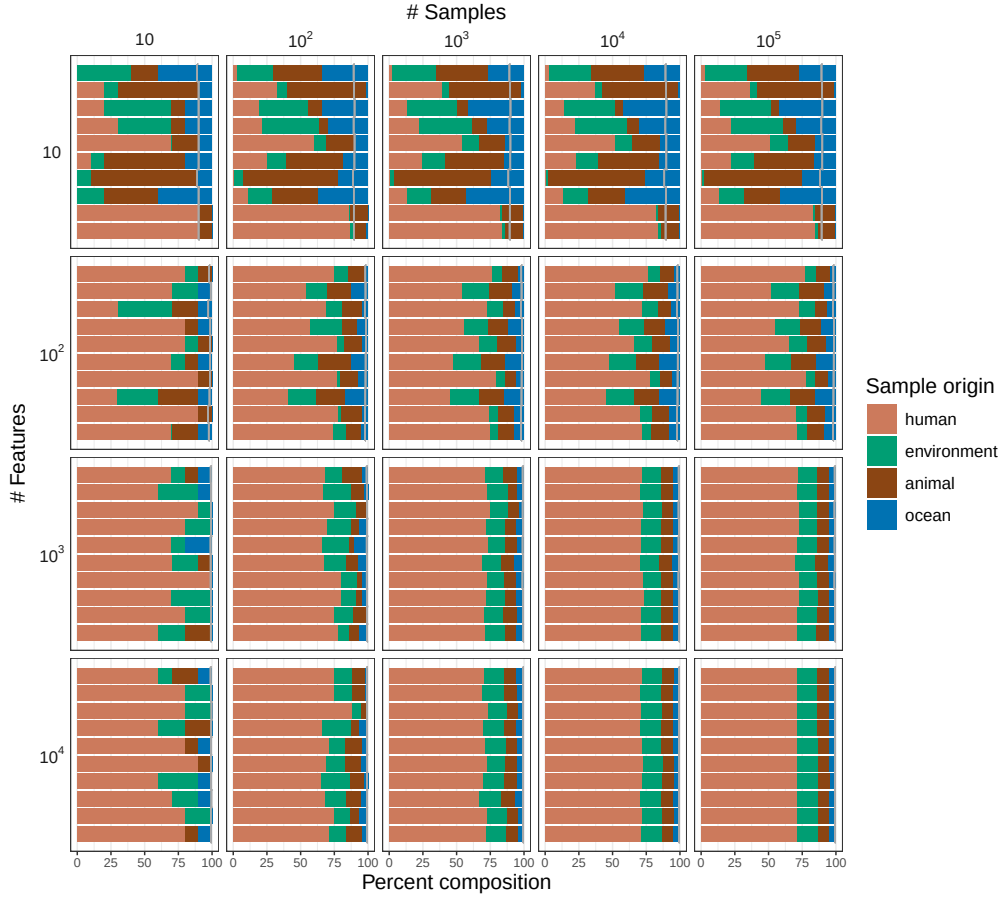

Supplementary Figure 1: Sample composition of benchmarking subsets. The barplot depicts the percent composition by sample origin for the subsets of the Metalog dataset used in the benchmarking analysis^{1;2}. Each facet corresponds to one combination of feature (rows) and sample sizes (columns). The bars within each facet represent the ten different replicates generated using random states 0-9. Sample origin is encoded by bar color, and the percent sparsity of each subset is marked with gray vertical lines.

Supplementary references

- [1] Kuhn, M. *et al.* Metalog: curated and harmonised contextual data for global metagenomics samples. *Nucleic Acids Research* **54**, D826–D834 (2026).
- [2] Benedetti, G. & Lahti, L. microbiome/benchmarking: Benchmarking alternative frameworks for microbiome data science (2026). URL <https://doi.org/10.5281/zenodo.21310342>.