See what's new.
Understand the difference.


AI-in-One dashboard
v2.0.0

Report responsiveness

Shared report calculations and access controls across all four editions; clearer agent engagement, navigation and hierarchy handling.

Tables now use wrapped headers and explicit column widths.

No change to any calculated value, suppression or security behavior

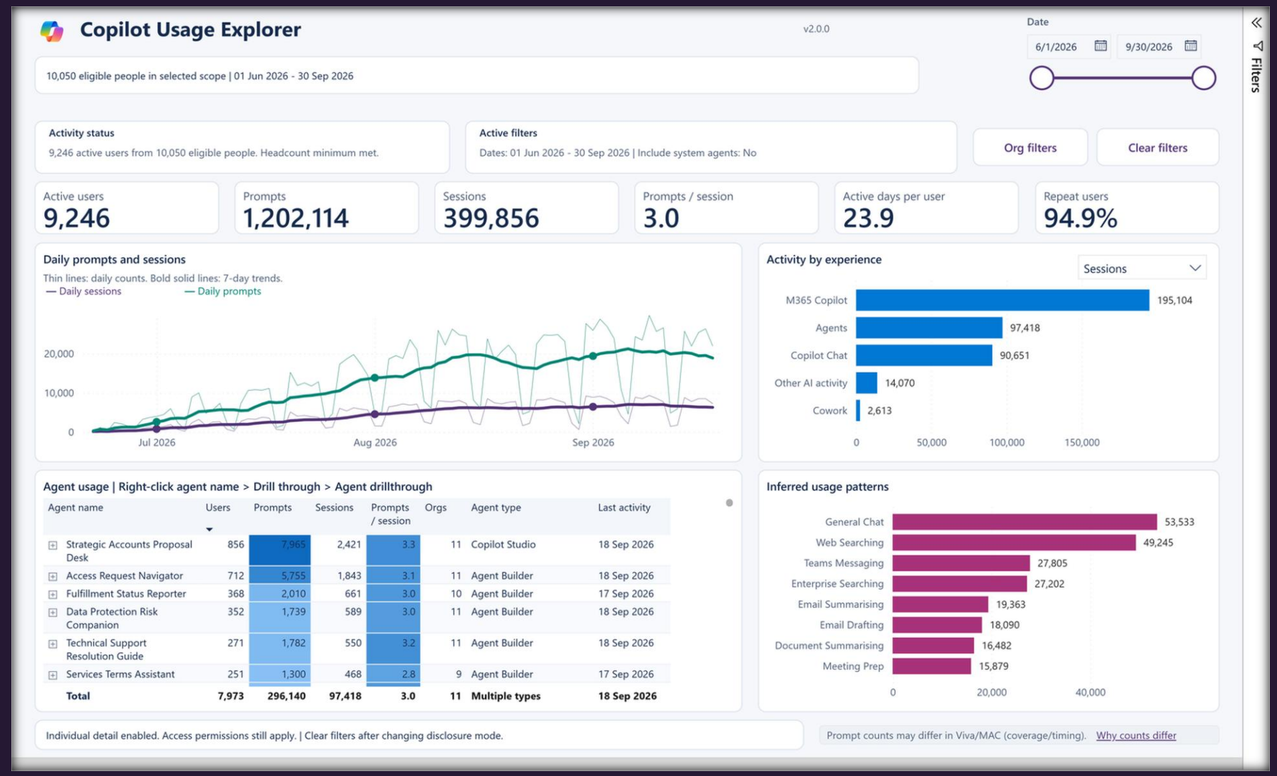

Microsoft Copilot Analytics Team

October 2026

One dashboard, clearer ways to explore

Match the numbered pictures with the Before and Now explanations. Open the report to explore the detailed tables.

01 CHOOSE AND RESET

Choose your team, department and dates. These choices follow you between pages. Clear filters resets your selections, but never changes who you are allowed to see.

02 TEAM SIZE AND PEOPLE

Minimum Group Size defaults to 3: show team results for groups of at least three people. The report owner must approve changing it to 1 for individual activity.

03 KNOW WHAT YOU ARE SEEING

Active filters lists up to three names, then shows how many you selected. Activity status explains when there are no records or a group is too small to show.

04 UNDERSTAND THE NUMBERS

Usage bands follow dates and scope. Agent metadata and readable prompt/session comparisons add context as customers' needs evolve.

THE REPORT IS SHARED; CONNECTION SETUP VARIES

The pages, metrics and navigation described here apply across editions using this dashboard version. Follow the separate connection instructions for your data location.

Set Minimum Group Size

Choose the reporting detail before the first load. You can change the same setting later.

FIRST OPEN: TEMPLATE (.PBIT)

Enter your edition's source settings, then set Minimum Group Size before selecting Load.



Initial template dialog.

1 Individual detail, only when approved. Access permissions still apply.

3 Team reporting minimum group default size. Groups need at least three eligible people; individual activity stays hidden. To enforce a custom minimum group size, choose a value >1.

CHANGE IT LATER IN DESKTOP

1. Home > Transform data.

2. Power Query Editor: Home > Manage parameters.

3. Select the existing Minimum Group Size and edit Current value.

4. OK > Close & Apply. Wait for processing; refresh if prompted.


5. Ctrl+click “Clear filters” in Desktop edit mode, then confirm the reporting mode.

Reopening a saved PBIX does not show the initial dialog. Do not use Modeling > New parameter.

USE IT The minimum counts eligible people in the selected group, not just active users. It does not replace access permissions.

Universal organization filters

Set your organizational scope once, then keep it as you move through the report.

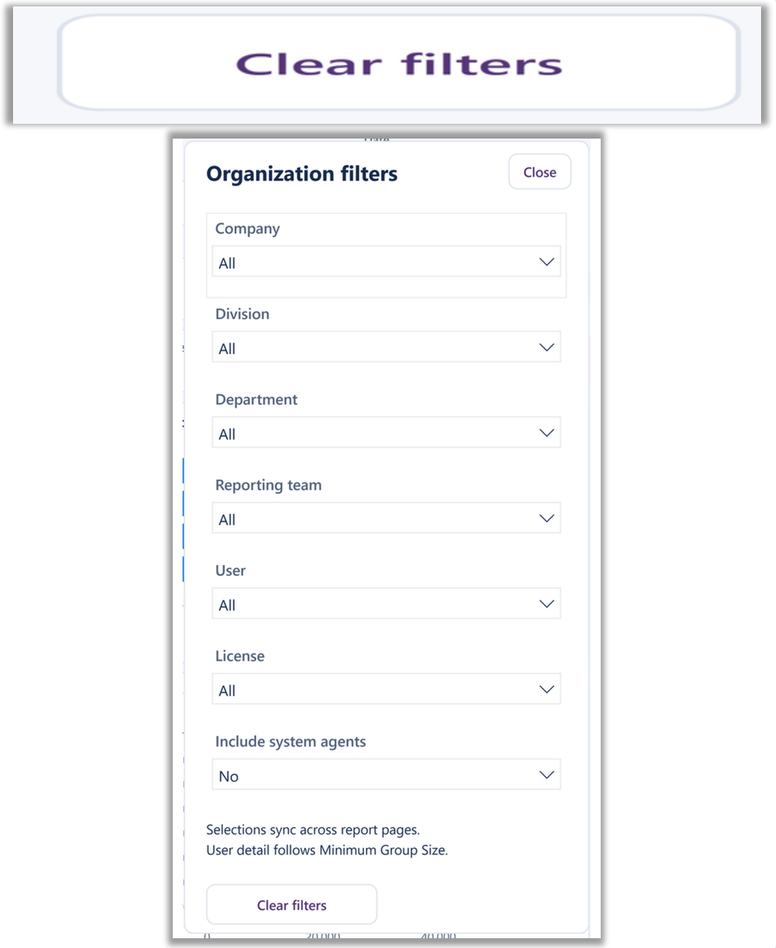

1 One place for organizational scope

Company, Division, Department, Reporting team, User, License and Include system agents share one panel. System agents default to No.

2 Keep your selection as you move

Selections follow you across analytical pages. Closing the panel keeps your choices. The glossary stays focused on definitions and guidance.

3 Reset filters and table drill-downs

Clear filters resets synchronized selections, restores Include system agents to No and returns tables to their starting level on the same page.


4 Individual detail stays protected

User detail needs approved 1; default 3 stays. Blank PAX manager keys or unresolved managers form roots; any diagnostic stays with that person, not their reports.

USE IT Open Org filters beside Clear filters. Close keeps your choices; Clear filters resets the scope and table drill-downs.

Copilot Usage Explorer

One place to start exploring your team's Copilot use.

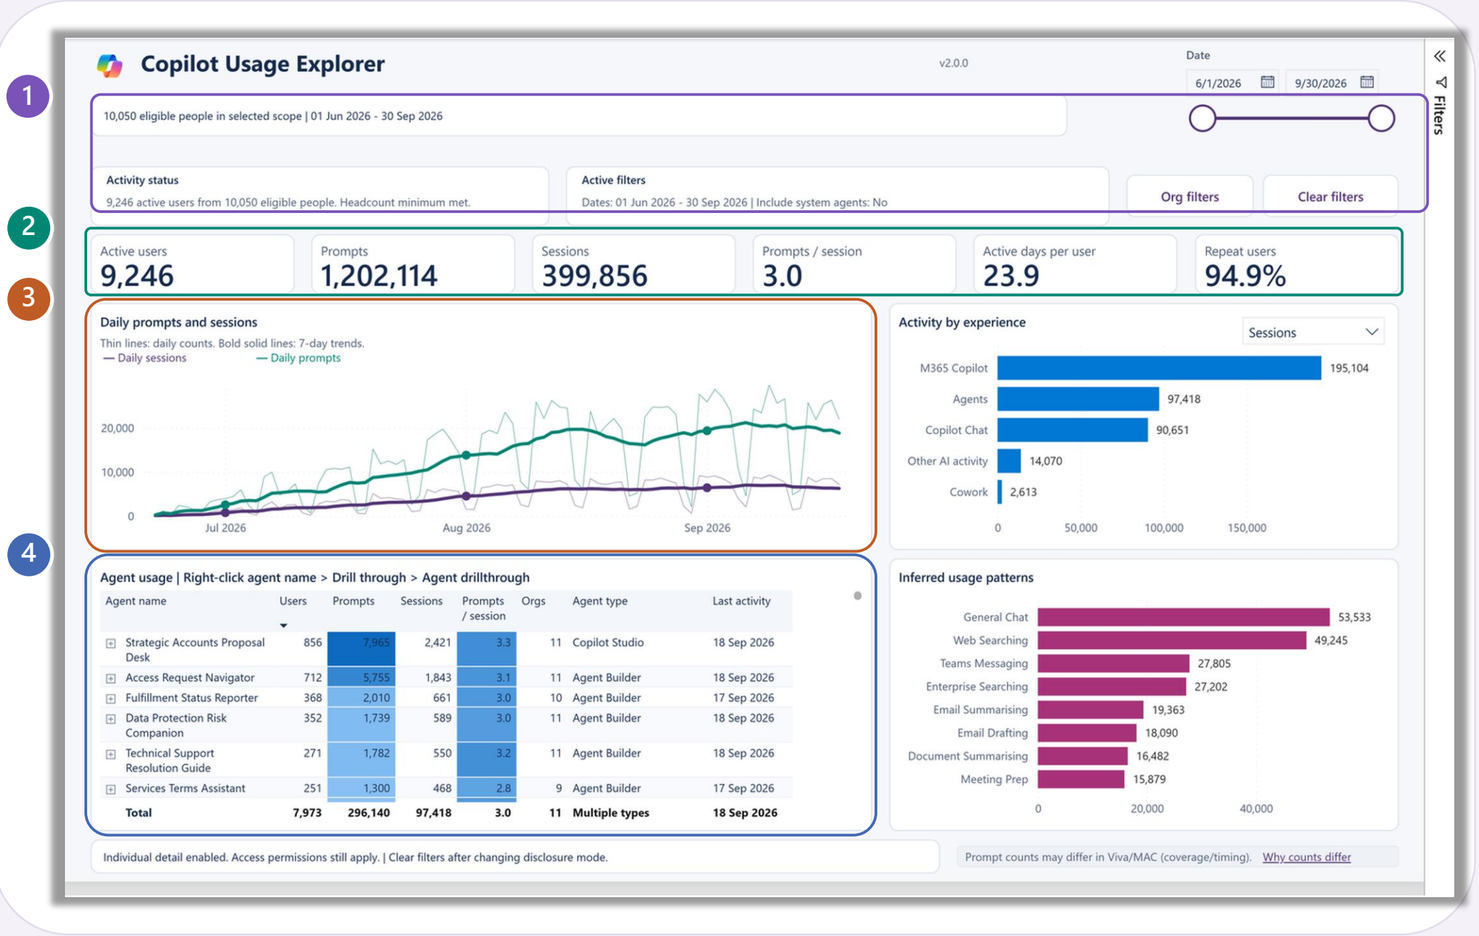

1 Find a team or agent

BEFORE: No single overview brought these choices together.

NOW: Search for a manager at any level, choose a reporting team, or select an agent.

2 Understand missing numbers

BEFORE: Selections and reasons for missing data were harder to see.

NOW: Scope and activity messages, headline help and coverage footers explain hidden results and prompt-count differences.

3 See the weekly pattern

BEFORE: You needed several pages to see the overall activity picture.

NOW: Thin daily lines keep the detail. Month-start dots sit on the bold 7-day trends, not on weekend daily dips.

4 Open agent details

BEFORE: There was no direct route from an overview to agent details.


NOW: Right-click an agent name, then choose Drill through > Agent drillthrough to open its details.

IN BRIEF The earlier report opened on Combined Trends; Explorer is new.

USE IT Switch Activity by experience between sessions and prompts. Right-click an agent for details; organization and date scope remain.

License Prioritization

Start a licensing conversation, rather than make a decision from one score.

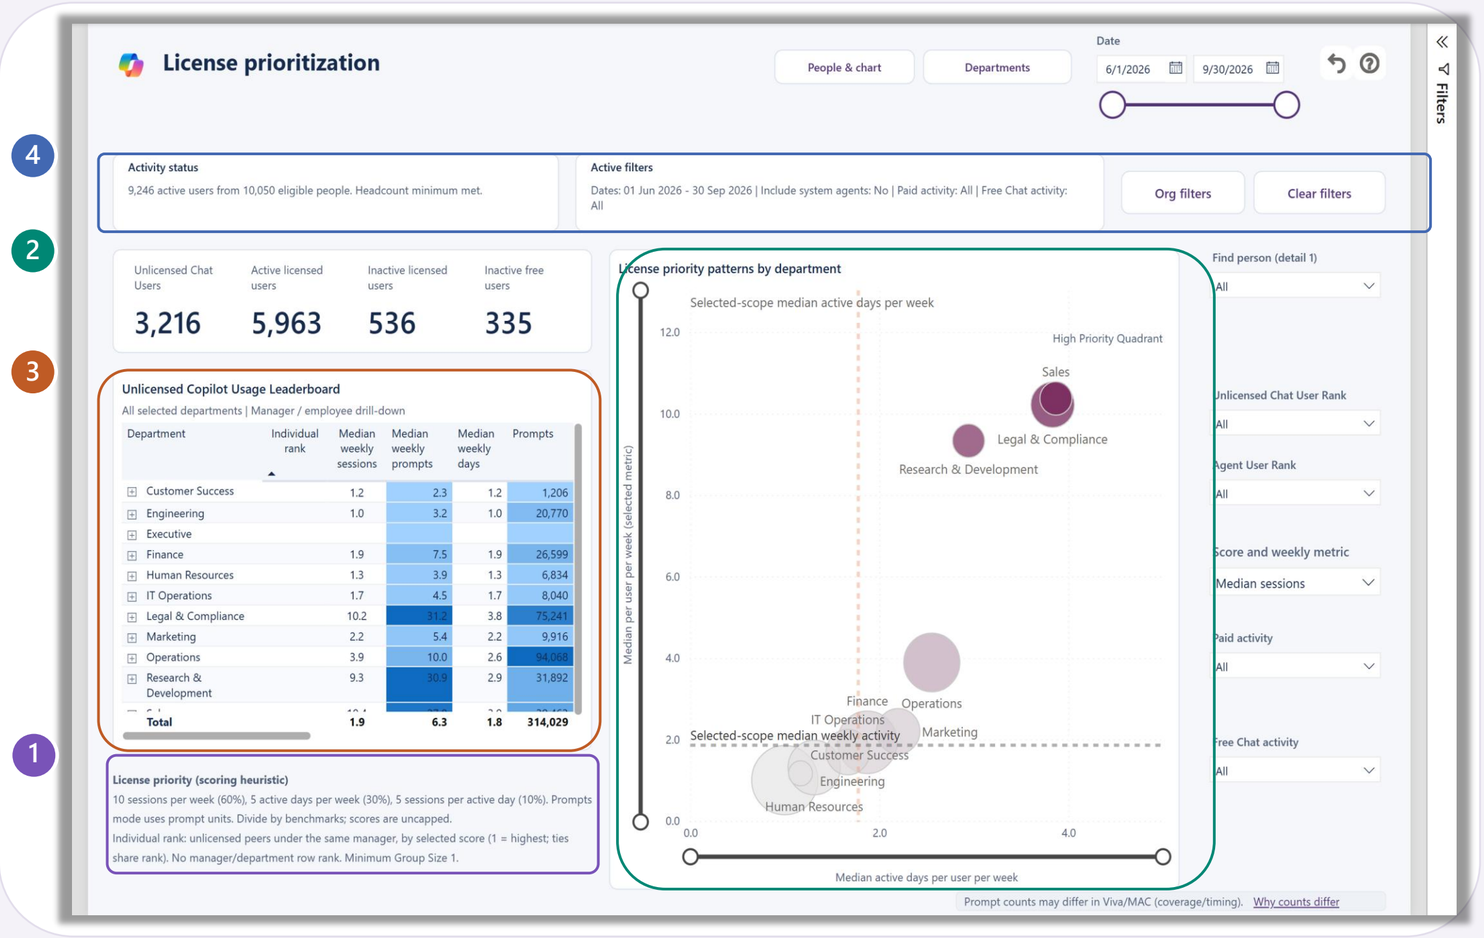

1 Correct explanation, same score

BEFORE: The explanation said 60/40 even though the score used 60/30/10.

NOW: Sessions or Prompts uses the same 60/30/10 weights and 10/5/5 benchmarks. Uncapped heuristic.

2 Compare the same weekly figures

BEFORE: Chart reference lines could use a different time basis.

NOW: Weekly reference lines match the plotted metric; the median and scale follow Sessions or Prompts.

3 Start with departments

BEFORE: The table could show individual user rankings immediately.

NOW: At approved 1, rank 1 leads unlicensed peers under one manager; ties share ranks. Blanks have no pink fill.

4 Know which results you are comparing

BEFORE: Choices made on other pages were less obvious here.


NOW: Paid/free counts and independent activity choices; Clear filters resets the selectors.

IN BRIEF Departments and People & chart provide two views; person search needs approved individual detail.

USE IT Use the page to start a licensing discussion alongside job needs, cost and colleague feedback—not as an automatic decision.

Combined Trends

Compare Copilot experiences without adding overlapping user counts.

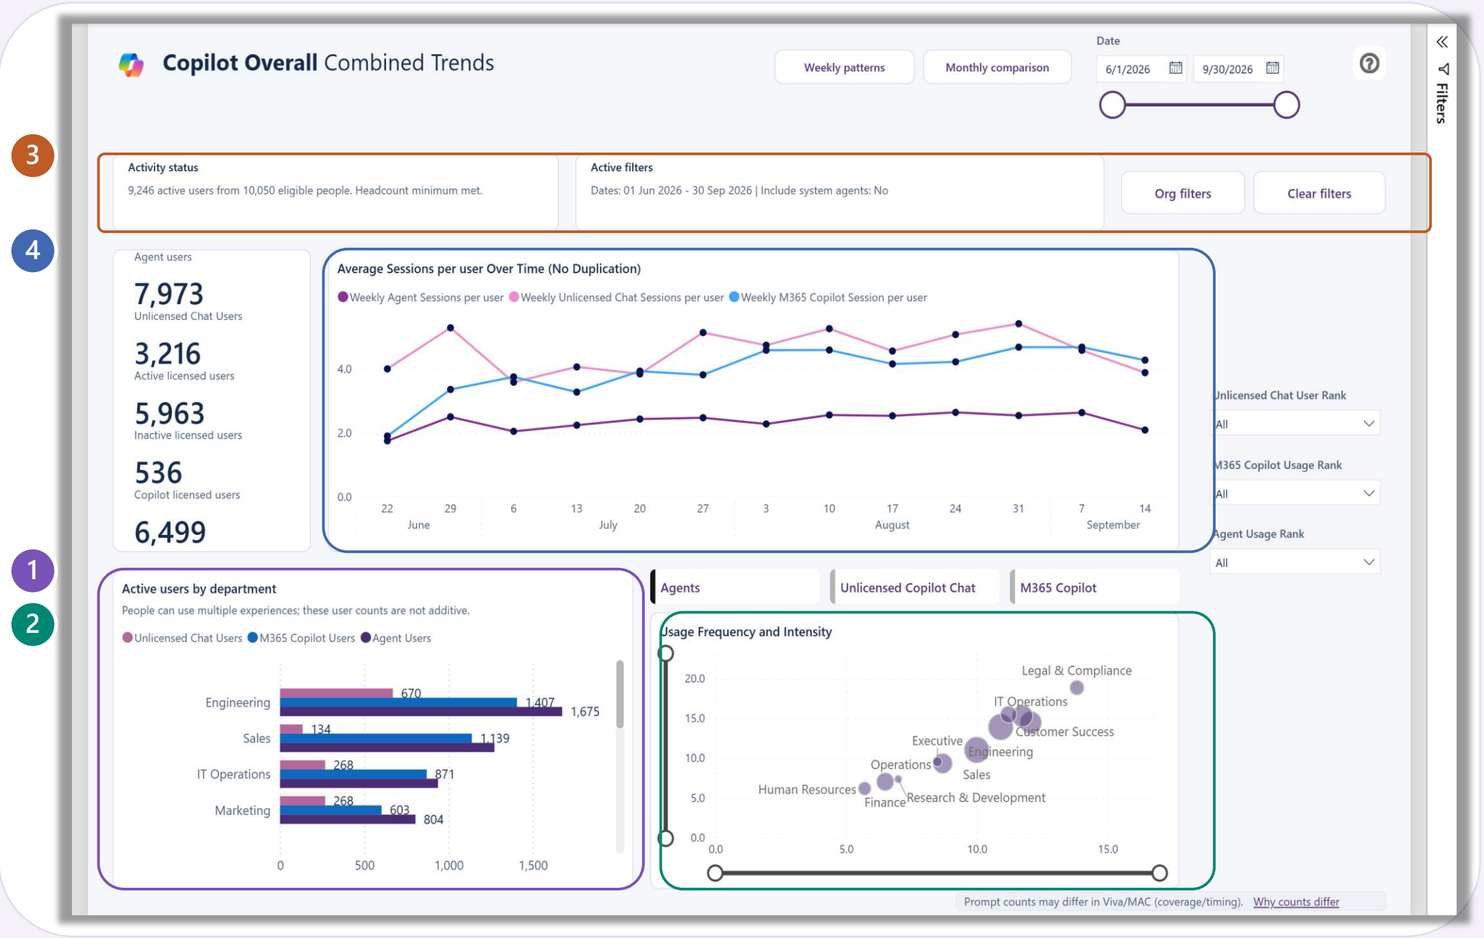

IN BRIEF The main comparisons were already here; the layout and grouping are clearer.

1 Compare side by side

BEFORE: Stacked bars could make different user groups look like one total.

NOW: Monthly comparison adds totals, distinct active people and per-active-person ratios.

2 Keep the whole chart visible

BEFORE: Larger department bubbles could be cut off.

NOW: The full department bubble chart remains visible, including larger departments.

3 Keep your selections

BEFORE: It was harder to see which choices carried between pages.

NOW: Date handles and selection summaries make it easier to follow the same team and period.

4 Compare the right activity


BEFORE: A license alone could determine which activity was counted as chat.

NOW: Chat results use recorded chat activity. Team summaries are the default.

USE IT Keep one team and date range selected. Observed-history paid/free cohorts can overlap; distinct totals count each person once.

Combined Leaderboard

Compare departments using clearly defined chat-user percentages.

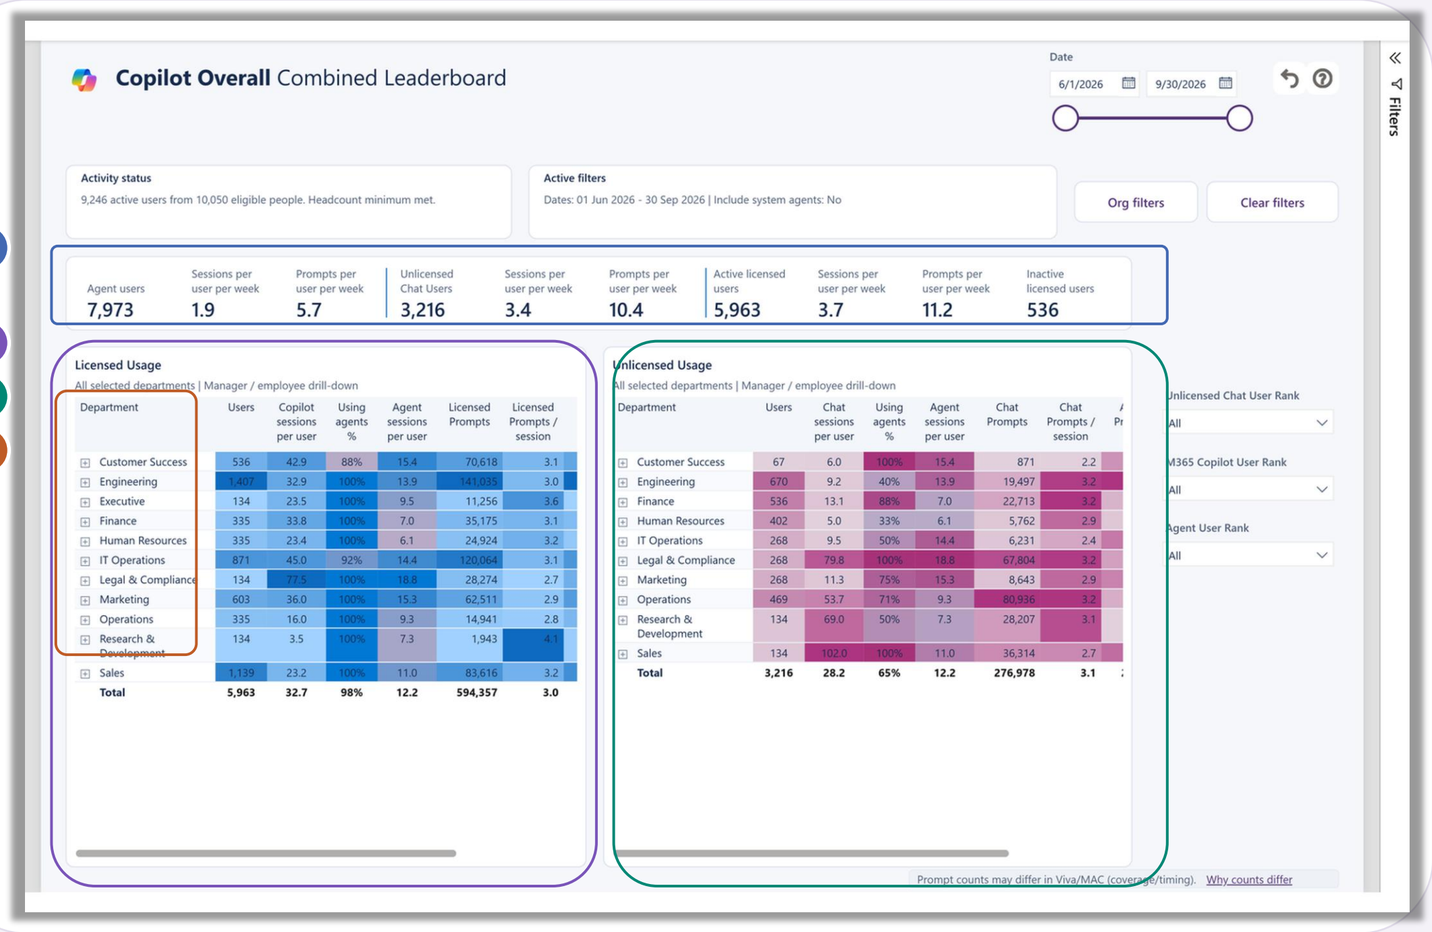

1 A clearer licensed percentage

BEFORE: Agent users could be included even if they had not used chat.

NOW: The percentage now asks: of these licensed chat users, how many also used agents?

2 A clearer unlicensed percentage

BEFORE: People with unknown license information could enter this group.

NOW: Among chat users recorded as unlicensed, this shows how many also used agents. Unknown license status is excluded.

3 Teams first, people by approval

BEFORE: The table could expand straight to individual user identifiers.

NOW: Department results come first. Individual activity needs the approved setting of 1.

4 Easier comparison

BEFORE: Dense headings and less visible selections made comparisons harder.


NOW: Agent prompts and prompts per session stay blank unless this table's row meets the minimum.

IN BRIEF Both department tables existed before; their percentages and presentation are improved.

USE IT Read each percentage as a share of that table's chat users. Compare departments using the same dates and a clearly understood license group.

Agents | Usage Trends

See which agents reach people and whether people return.

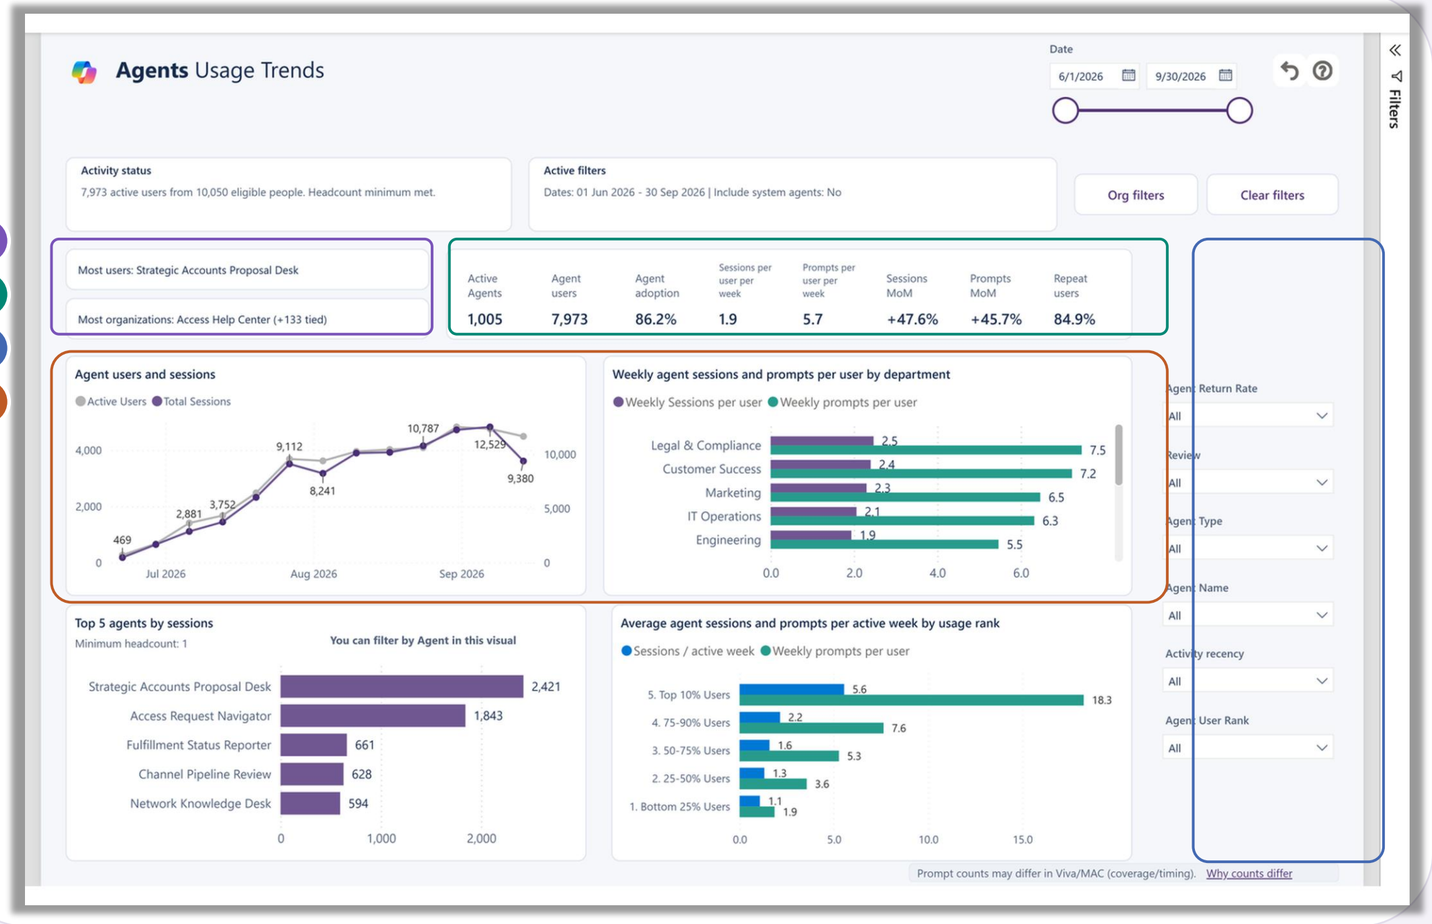

IN BRIEF The main charts were already available; labels, selections and readability have improved.

1 Know what is being ranked

BEFORE: Popularity labels did not clearly say what was being compared.

NOW: Most users and Most organizations show ties; Top builder stays stable when an individual agent is selected.

2 Clearer headline numbers

BEFORE: Adoption and return labels were easy to confuse.

NOW: Labels help separate how many people try agents from how many return to use them.

3 Compare weekly usage rank

BEFORE: Crowded charts and large labels used up space.

NOW: Paired bars show average agent sessions and prompts per active week by usage rank, matching the licensed page's design.

4 Keep description and type in reach


BEFORE: Agent types could depend on older classification labels.

NOW: Hover over Top 5 agents for gated description and type. This replaces the old card without removing its information.

USE IT Compare reach and repeat use over several weeks, then open Agent Details to understand a particular agent.

Agents | Habit Formation

See how often people use agents, with the month clearly shown.

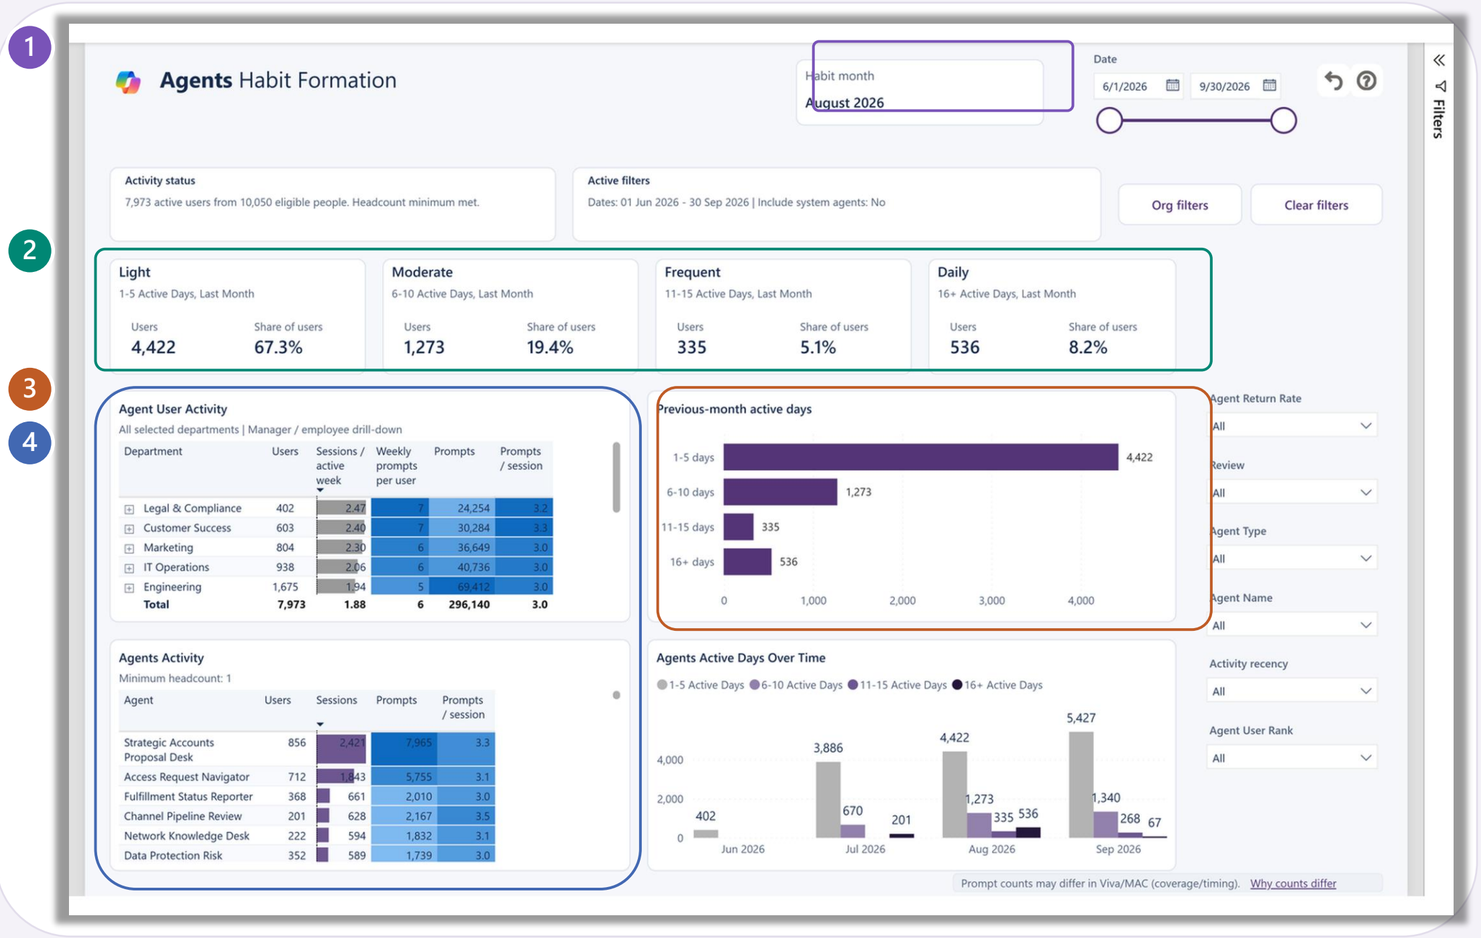

IN BRIEF The habit groups existed before; the page now gives them a clearer month and layout.

1 Know which month you are reading

BEFORE: The month depended on the latest activity found in the data.

NOW: The page prints the month before your selected end month.

2 A compact habit summary

BEFORE: Four tall cards left less room for the tables and charts.

NOW: Light, Moderate, Frequent and Daily sit together in one row.

3 Compare people, not slices

BEFORE: A ring-shaped chart made group sizes harder to compare.

NOW: Bars show how many people fall into each active-day range.

4 More room for useful detail


BEFORE: Uneven table and chart sizes made the page difficult to read.

NOW: Two tables and two charts line up neatly below the summary.

USE IT Read the named habit month first. Compare its four cards with the matching bars, not the whole-period table.

Agents | Leaderboard

Compare agents or the people using them, with room to read the details.

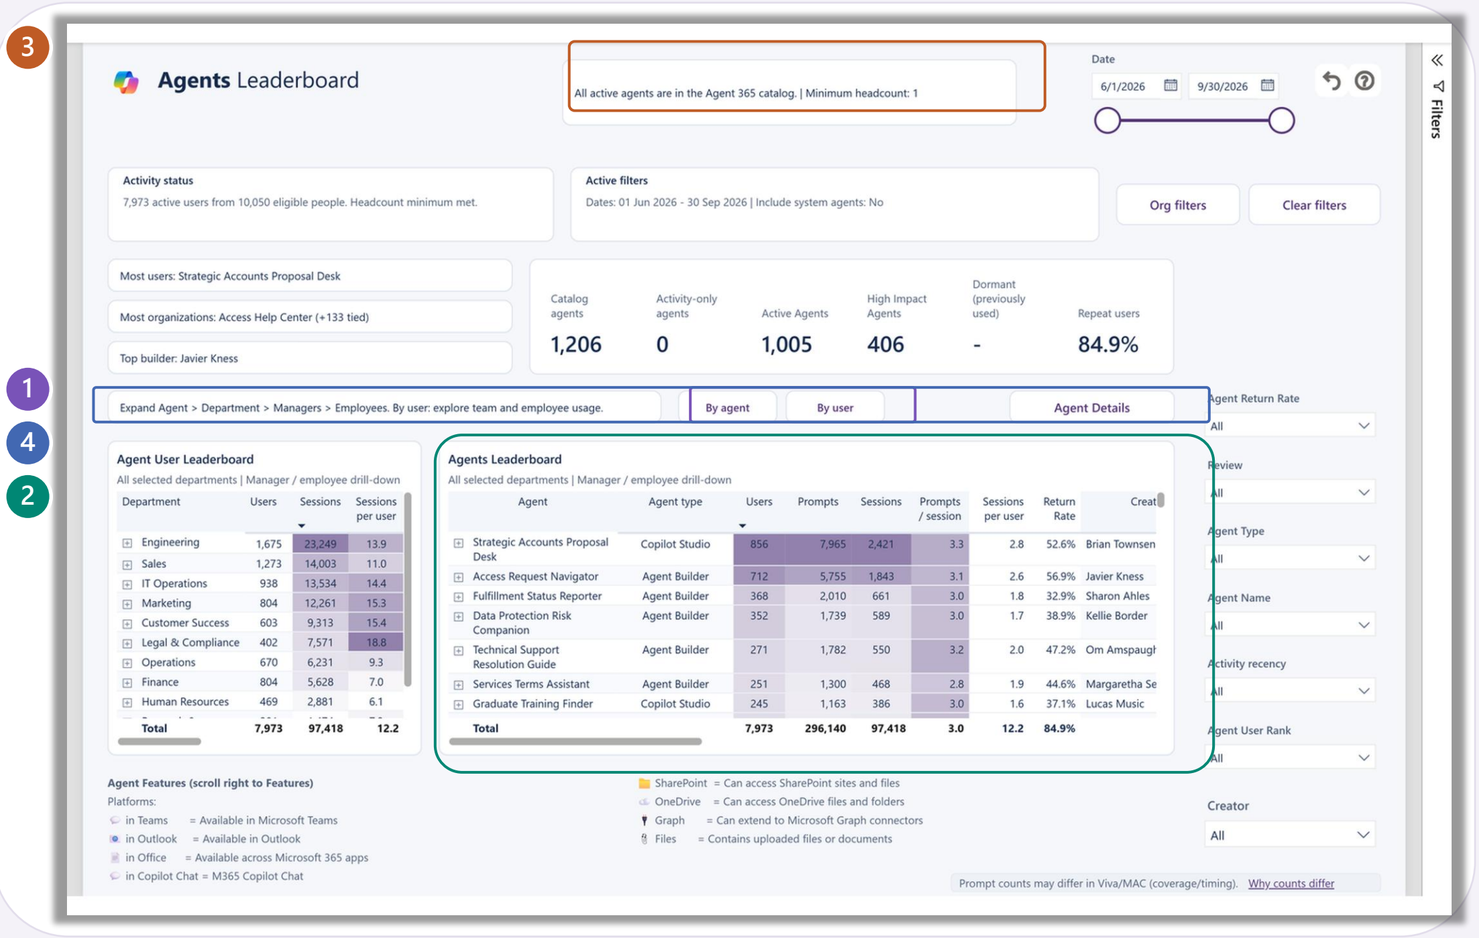

1 By agent or By user

BEFORE: The main table listed agents, with people shown separately.

NOW: Start By agent. An approved individual-detail setting also enables By user.

2 More useful activity detail

BEFORE: The table focused mainly on users, sessions and return visits.

NOW: Each row adds Most used agent and distinct Agents used.

3 Clearer agent types

BEFORE: Some Agent Builder agents could receive the wrong type label.

NOW: Agent Builder is identified consistently, with clear platform labels for other agent types.

4 Open details without losing your place

BEFORE: There was no dedicated Agent Details page.


NOW: Drillthrough keeps the clicked agent; Open Agent Details opens the full list in scope.

IN BRIEF Creator includes matching catalog agents with no usage; protected activity stays gated. Scroll right for Features and metadata.

USE IT Most used agent ranks by sessions, then name. Scroll right for the new columns; By user still requires approved individual detail.

Agents | Health Check

Use current activity to decide which agents deserve a closer look.

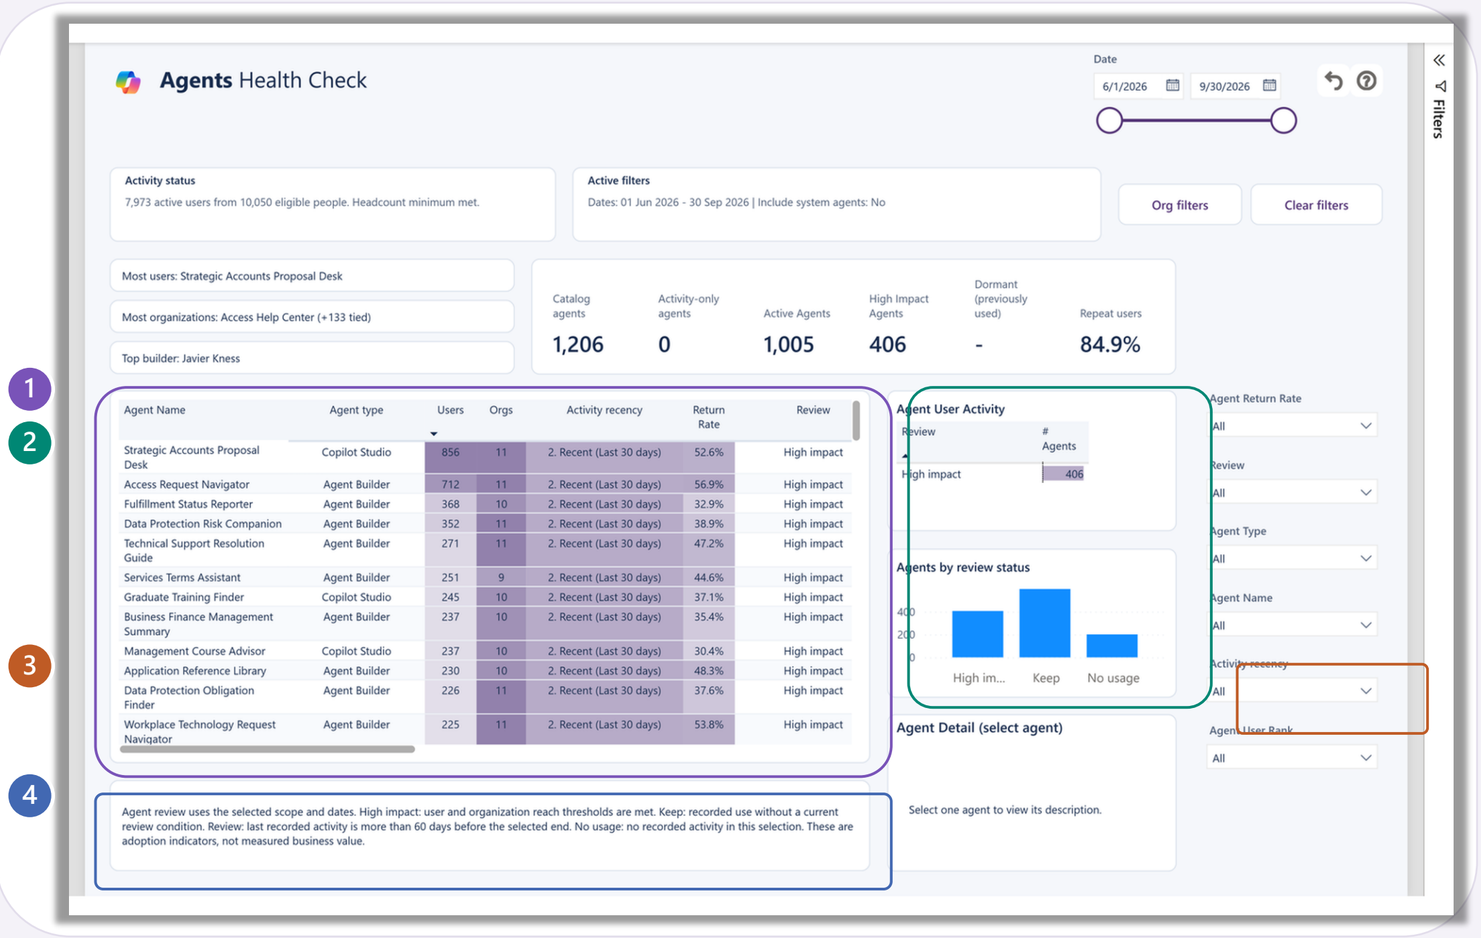

1 Results follow your choices

BEFORE: Some review figures reflected the last data update, not your selections.

NOW: Active counts reconcile by catalog status; system and untracked entries are explained.

2 Clearer review labels

BEFORE: Several labels overlapped or were difficult to interpret.

NOW: Dormant means previously used, not Never Used. High impact, Keep, Review and No usage stay distinct.

3 Understand recent use

BEFORE: Last Activity looked like it would show an exact date.

NOW: Activity recency clearly groups agents by how recently they were used.

4 Keep the explanation in view

BEFORE: Long notes and cramped panels were hard to read.


NOW: Return Rate is 0% with no repeat users, and blank with no activity.

IN BRIEF Review labels existed before, but some figures did not follow the selected team and dates.

USE IT Org filters can include system agents; they are not review targets. Security Copilot shows Usage not tracked here. Discuss other labels with owners.

Agents | Use Cases

See possible uses for agents, then discuss them with the people doing the work.

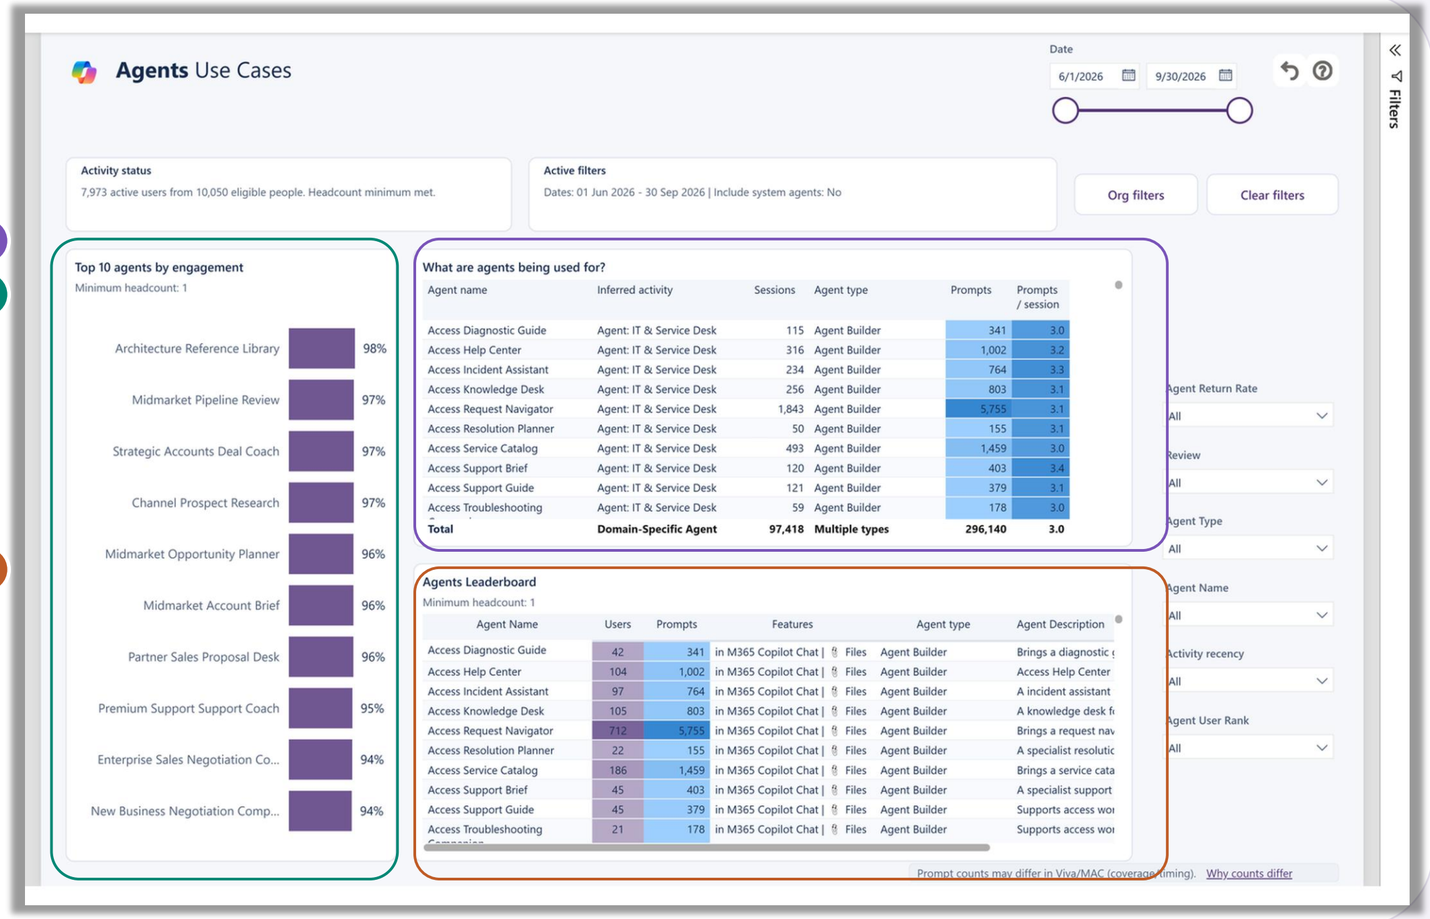

IN BRIEF Sessions descending, then agent name ascending, break score ties. This is engagement, not measured business value.

1 A useful table instead of an empty summary

BEFORE: The automatic written summary was sometimes unavailable.

NOW: A table shows likely activities and conversation counts. Not enough activity to infer labels insufficient evidence.

2 Top 10 agents by engagement

BEFORE: The Top 10 compared session totals alone.

NOW: Eligible agents need MAX(Minimum Group Size, 5) users in the selected scope.

3 Clearer agent information

BEFORE: Older type labels and crowded details were harder to understand.

NOW: The table shows Features, agent type and description. System agents default to No.

Three equal engagement components


BEFORE: Session volume alone could favor a large audience.

NOW: Average the eligible-peer percentile ranks of return rate, sessions per user and prompts per session with equal weight.

USE IT Hover for users, sessions, prompts and prompts/session. Check inferred tasks with users; they are clues, not measured outcomes.

Agent Details

Start with all agents, then choose the one you want to understand.

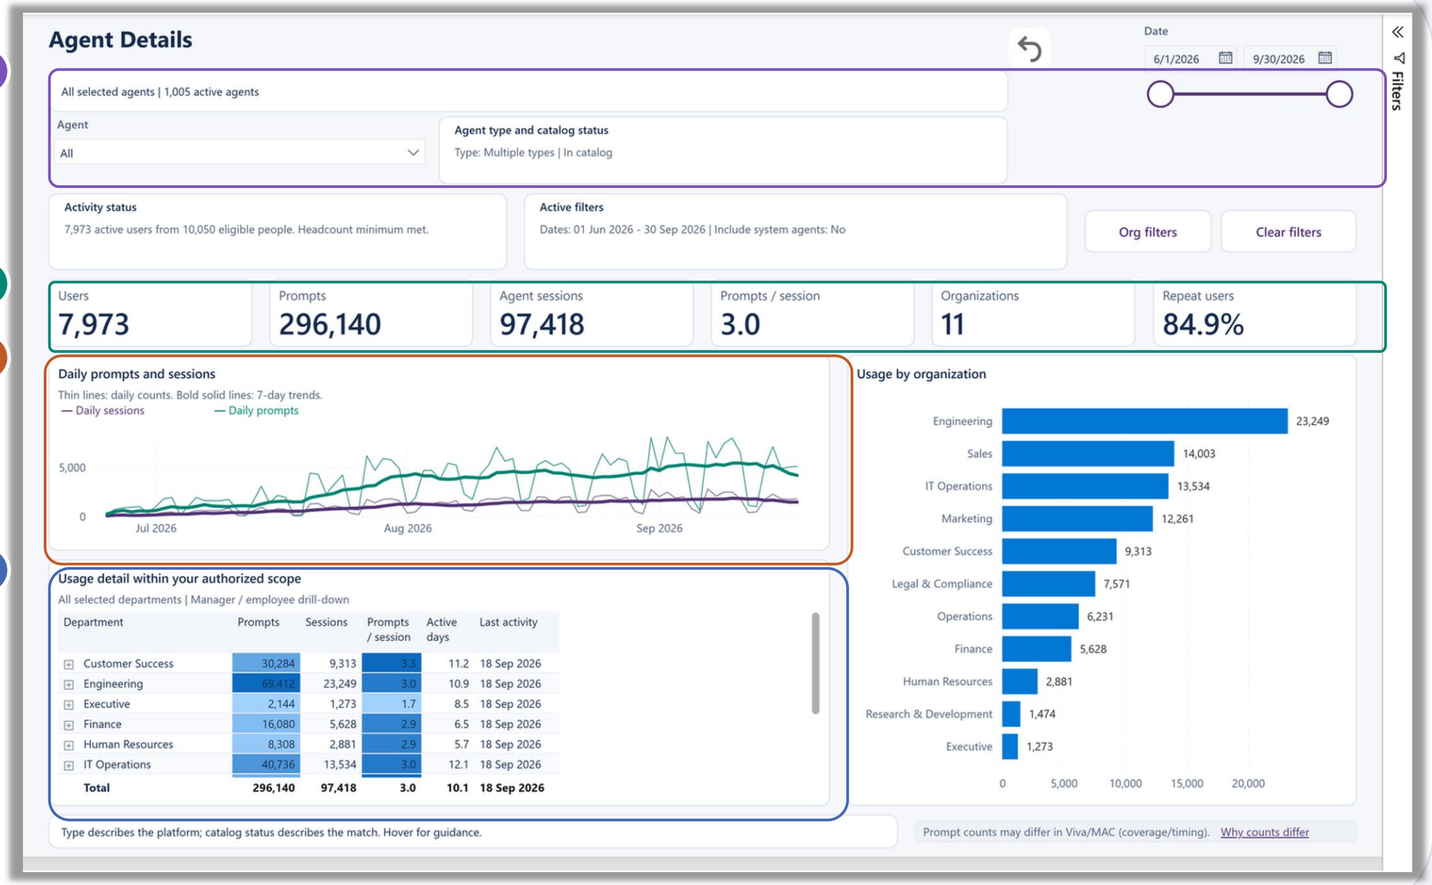

1 Useful before you choose an agent

BEFORE: There was no dedicated page for agent details.

NOW: Open the tab to browse freely. With no agent selected, it starts with all agents; choose one or several.

2 One clear activity summary

BEFORE: There was no six-number summary for agent activity.

NOW: See people, prompts, conversations, departments and repeat use together.

3 See the weekly pattern

BEFORE: There was no dedicated daily chart on an agent details page.

NOW: Thin daily lines and bold 7-day averages show short-term changes and the wider pattern.

4 Department detail in context

BEFORE: No table on a dedicated Agent Details page.


NOW: See departments and, when approved, people alongside Last activity, with the same team and dates.

IN BRIEF Agent Details is a new page, with a separate route for opening a chosen agent.

USE IT Drillthrough deliberately keeps the selected agent. Read its note, then use Open Agent Details for the full list; Back and Clear filters keep their roles.

M365 Copilot | Usage Trends

Understand licensed Copilot use without treating activity as proof of value.

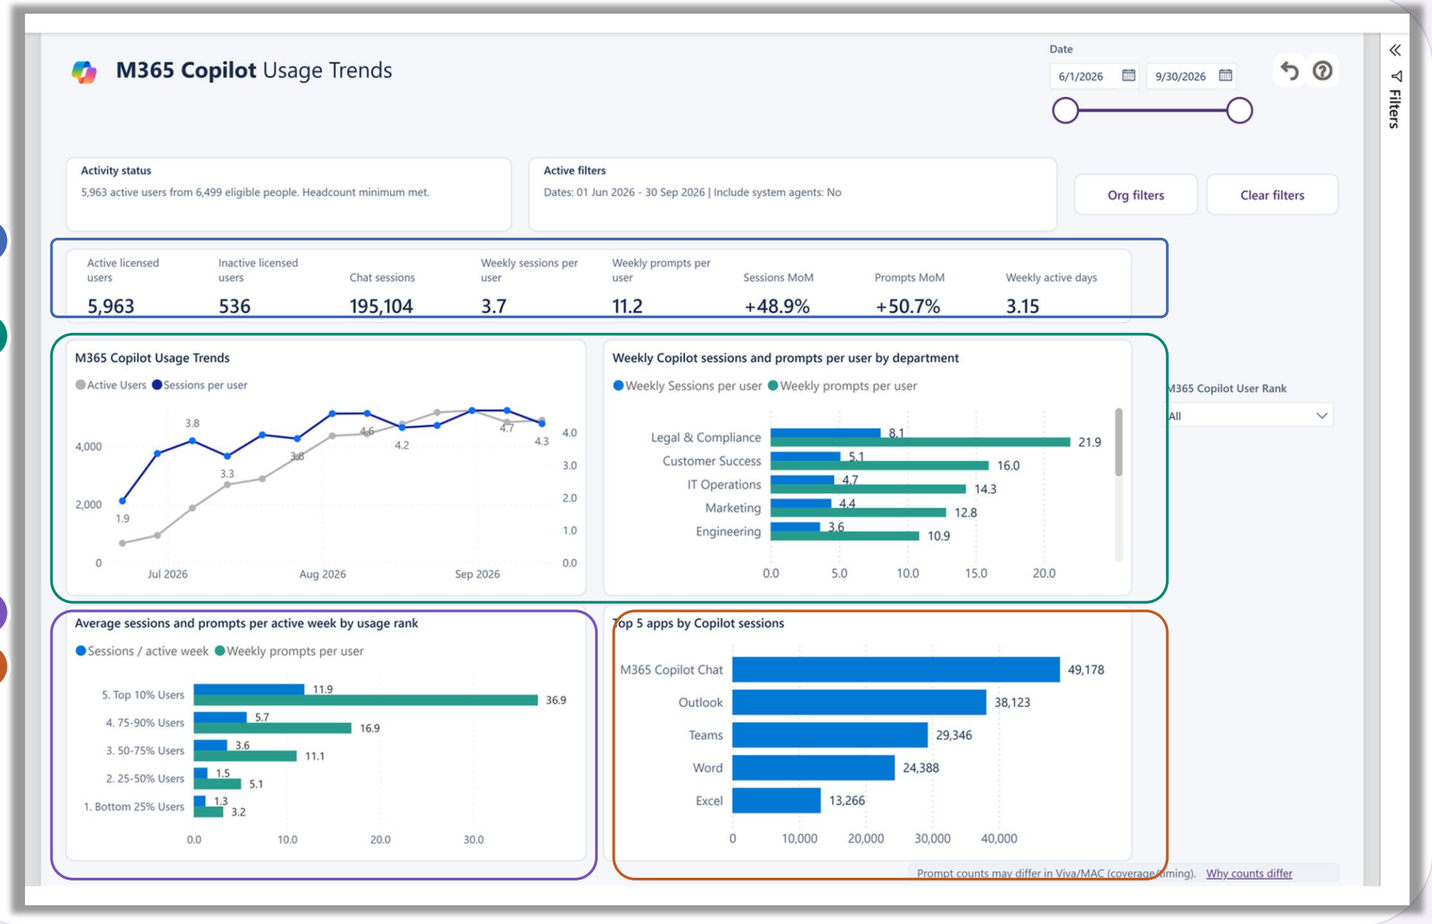

1 Easier comparisons

BEFORE: Weekly averages appeared as slices of a ring-shaped chart.

NOW: Bars and clear number labels make the averages easier to compare.

2 More readable charts

BEFORE: Crowded labels and uneven spacing made comparisons difficult.

NOW: The trend and department charts line up and keep their own units.

3 Keep the application view

BEFORE: The application breakdown was already useful.

NOW: It remains, showing where licensed Copilot sessions were recorded.

4 Consistent team-size setting

BEFORE: There was no single grouping setting across every page.


NOW: Headline numbers and details now follow the same team-size setting and selections.

IN BRIEF The activity and application views remain; their presentation and grouping are improved.

USE IT App names now identify products; raw AppHost remains available in tooltips. Compare scope before drawing conclusions.

M365 Copilot | Habit Formation

Read monthly habits separately from activity over the whole selected period.

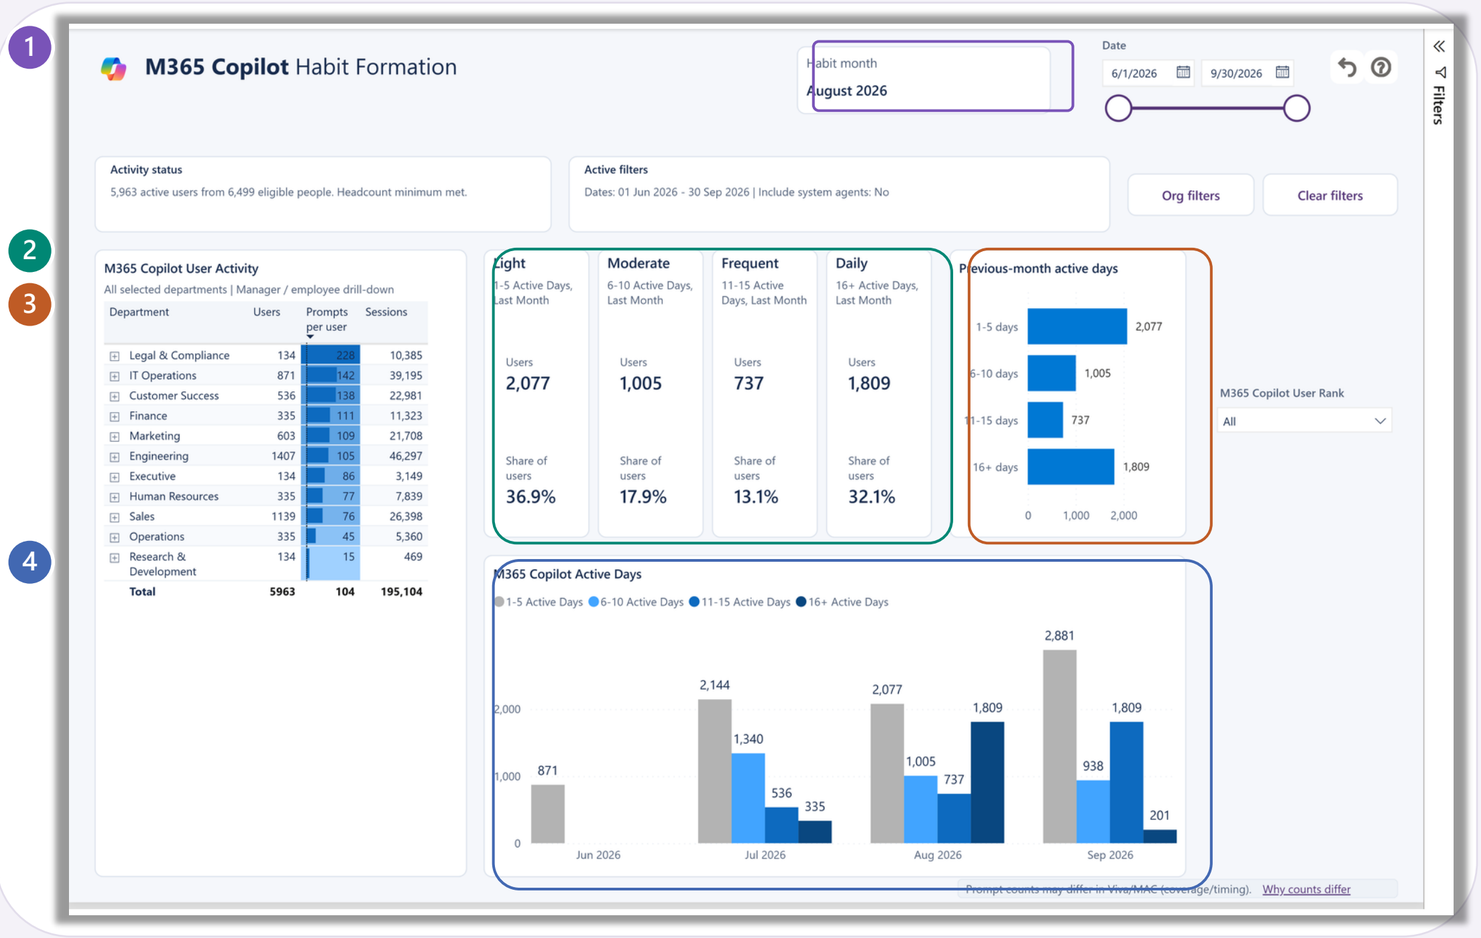

IN BRIEF The habit cards remain; the monthly chart, labels and group comparison are clearer.

1 Know which month is shown

BEFORE: The latest activity record decided the month.

NOW: The page prints the month before your selected end month.

2 Use consistent habit ranges

BEFORE: The four groups were easier to interpret differently.

NOW: All habit views use the same four active-day ranges.

3 Compare counts with bars

BEFORE: The group sizes were shown as ring-shaped chart slices.

NOW: Bars show how many people fall in each range.

4 See individual months


BEFORE: The trend could group activity at the year level.

NOW: The chart now shows the month-by-month pattern.

USE IT Keep the named habit month separate from the selected-period Prompts / user table. The monthly chart shows how the pattern changes over time.

M365 Copilot | Leaderboard

Compare departments, then explore the applications people use.

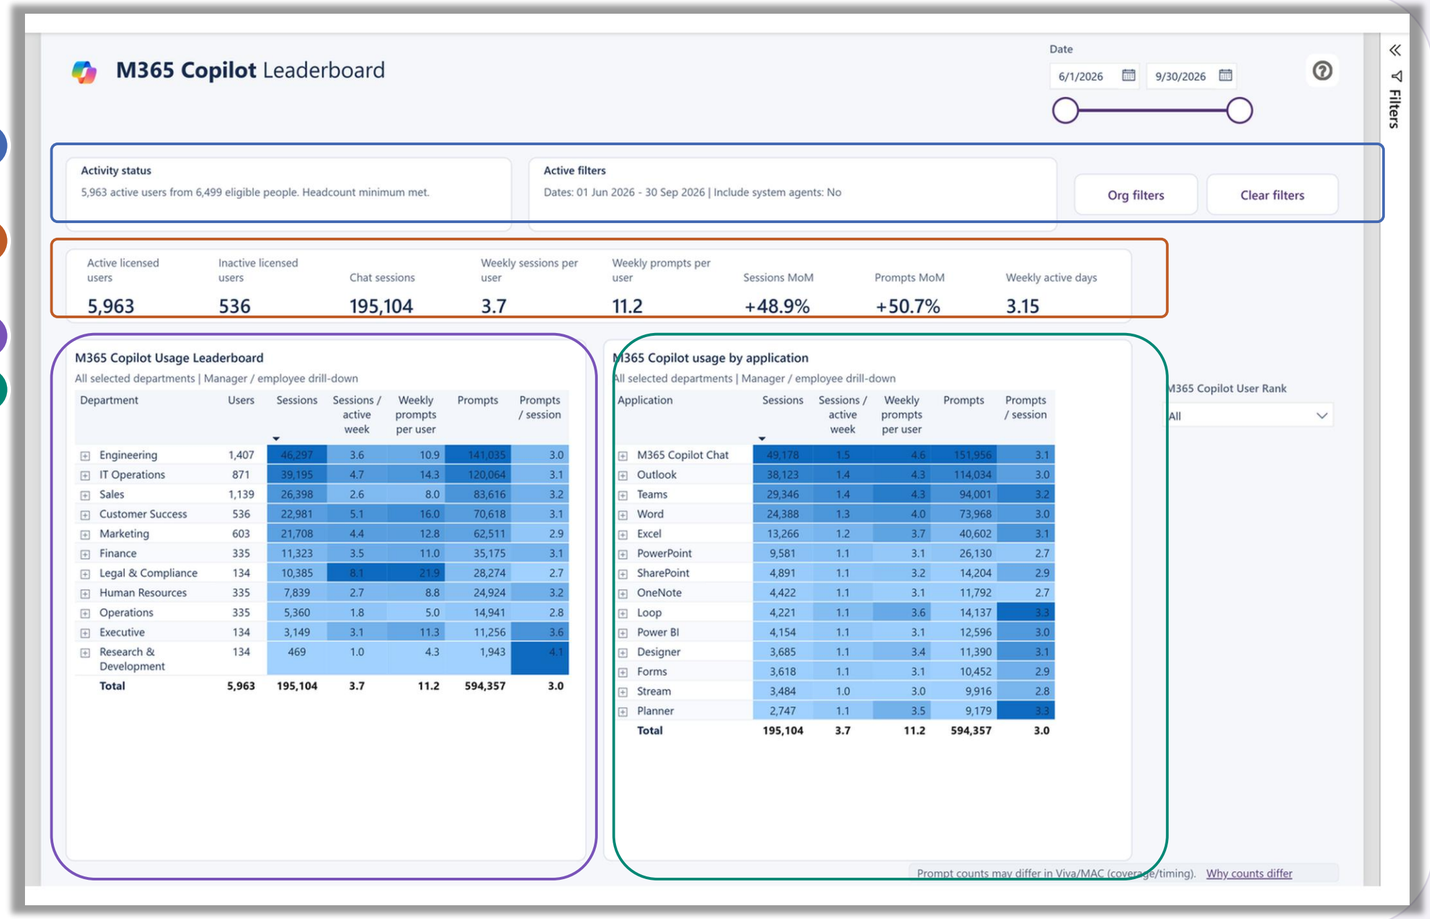

IN BRIEF The department and application tables remain, with clearer grouping and more detail.

1 Department results first

BEFORE: The table could expand directly to individual identifiers.

NOW: Team results are the default. Individual activity requires approval.

2 Open application details

BEFORE: The application table stopped at application totals.

NOW: Expand an application into departments and, when approved, individual people.

3 Keep licensed chat separate

BEFORE: License information could bring other activity into the totals.

NOW: Chat stays scoped; prompt columns and dynamic usage bands add detail for the selected dates and teams.

4 See your selections here too


BEFORE: Choices made elsewhere were less visible on this page.

NOW: Friendly app names and Clear filters keep application grouping and sorting consistent.

USE IT Friendly app names stay readable. Hover for raw AppHost, then expand to departments and authorized people.

Copilot Chat | Usage Trends

Copilot Chat (Unlicensed) makes the population explicit; per-user labels clarify the units.

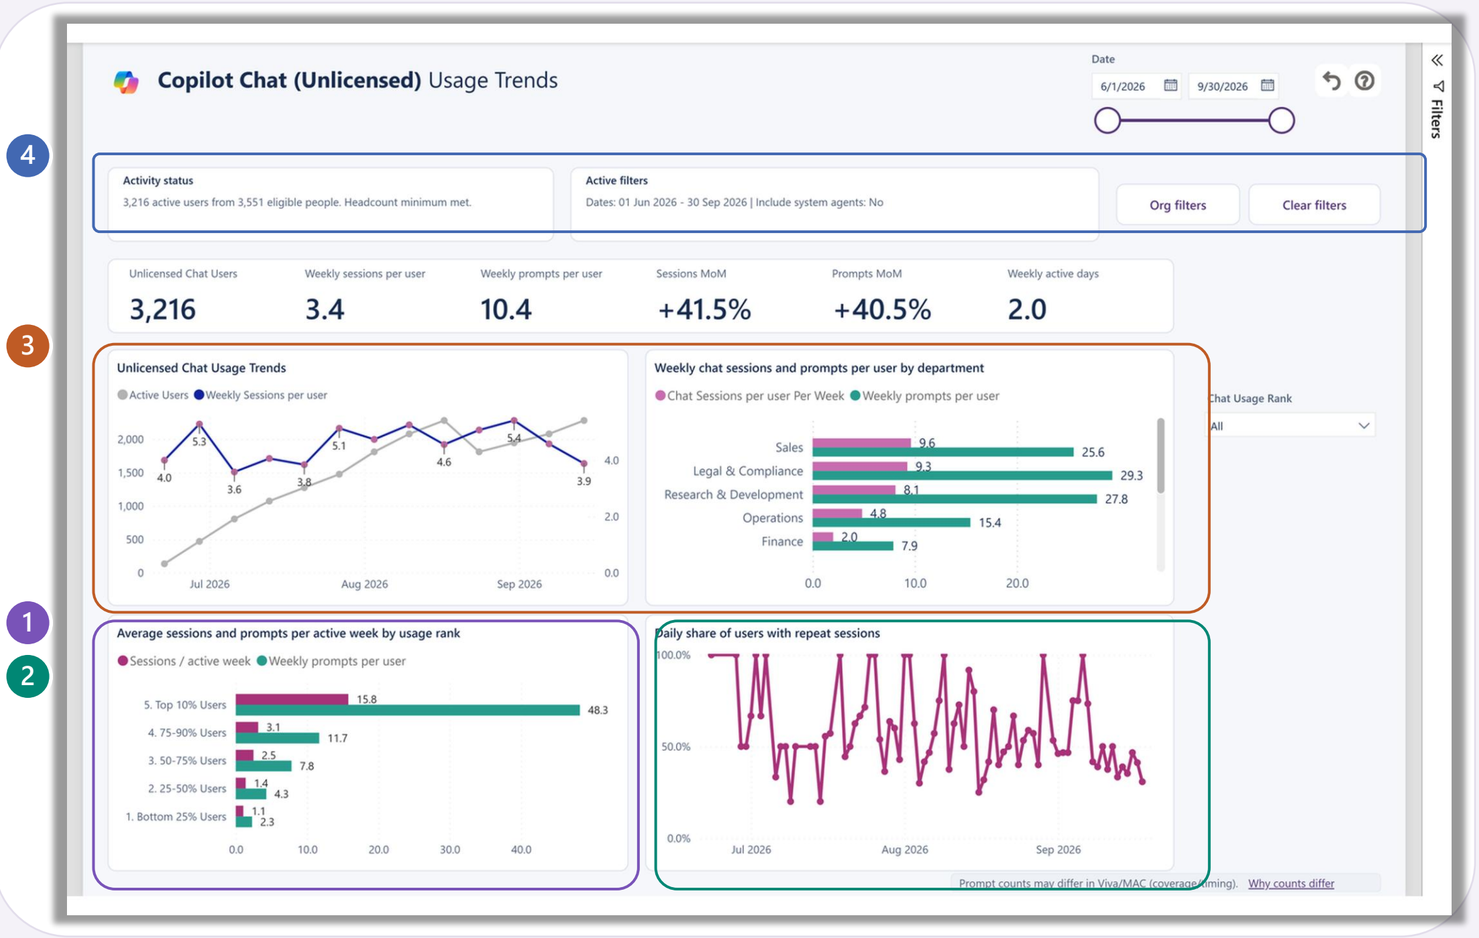

IN BRIEF Bars replace the old averages chart; daily repeat use replaces the location breakdown.

1 Compare averages with bars

BEFORE: A ring-shaped chart made averages look like pieces of one total.

NOW: Bars make weekly session averages easier to compare.

2 See same-day repeat use

BEFORE: The lower-right chart showed where chat sessions took place.

NOW: A daily line shows the share of active users who had more than one session.

3 Keep the weekly picture

BEFORE: Weekly activity and department comparisons were already here.

NOW: Those comparisons remain, with more consistent spacing and clearer labels.

4 Understand what is included


BEFORE: Selections and reasons for hidden figures were harder to find.

NOW: The page shows your choices and explains when a group is too small.

USE IT Read same-day repeat use alongside the weekly pattern. More conversations can reflect useful work, retries or a difficult task.

Copilot Chat | Habit Formation

See whether chat is becoming a regular habit.

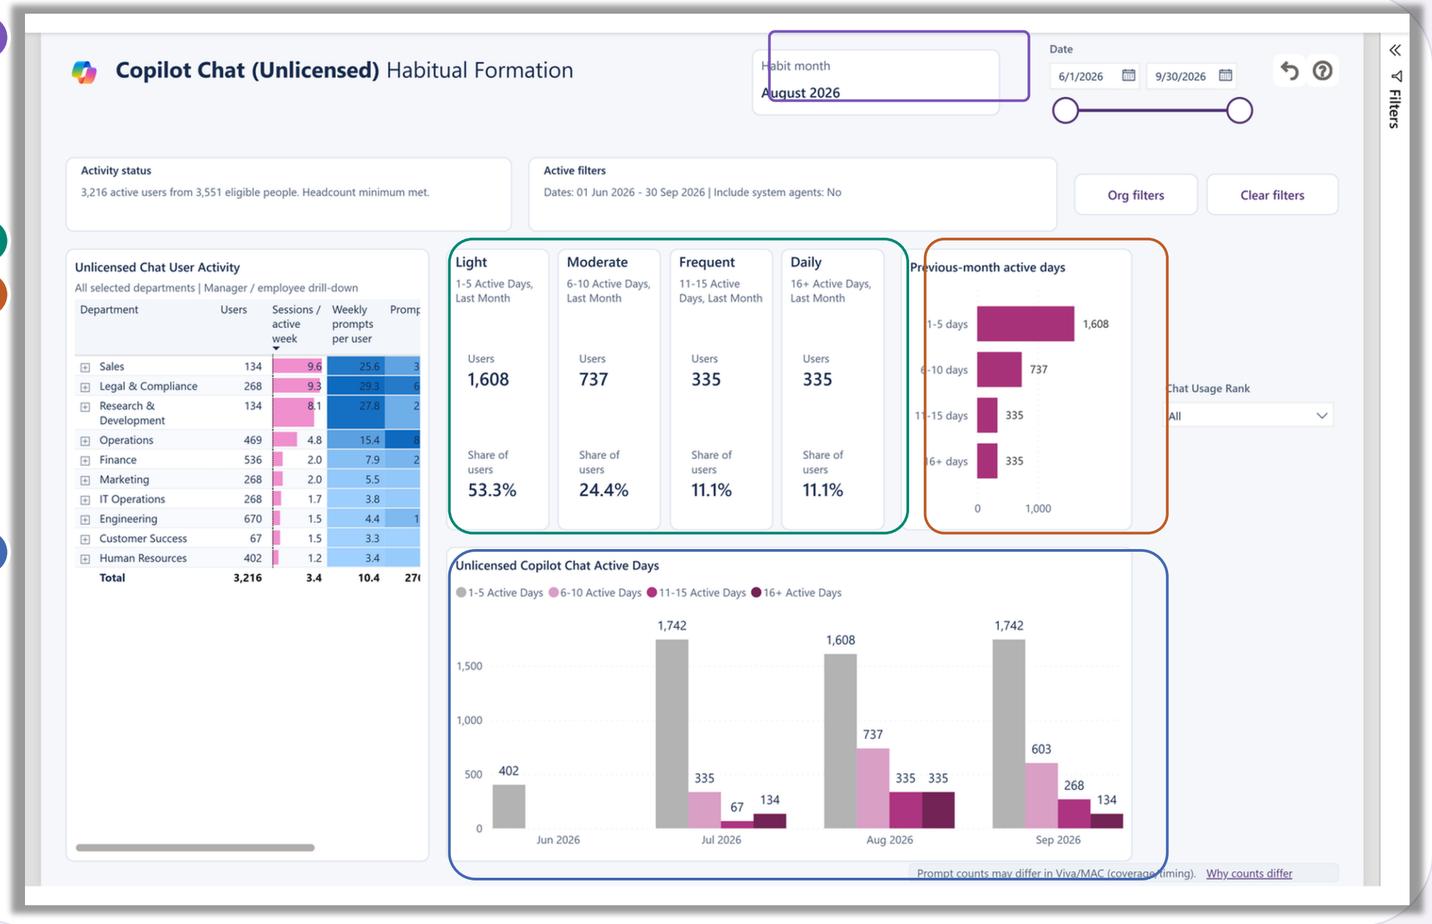

IN BRIEF The habit groups remain, with a clearer month, simpler charts and better spacing.

1 A clearly named month

BEFORE: The latest recorded activity decided the month behind the figures.

NOW: The page shows the month before your selected end month.

2 The same four ranges everywhere

BEFORE: Group labels and calculations were easier to misread.

NOW: Cards and charts use 1-5, 6-10, 11-15 and 16 or more active days.

3 Compare group sizes directly

BEFORE: A ring-shaped chart showed the habit groups as slices.

NOW: Bars show the number of people in each group.

4 Separate month and period


BEFORE: A dense layout made the different time periods less obvious.

NOW: Monthly habit charts sit together; the table still covers your selected period.

USE IT Compare the cards and bars for the printed month, then use the wider-period table to understand the broader activity pattern.

Copilot Chat | Leaderboard

Understand Copilot Chat use among people recorded without a paid license.

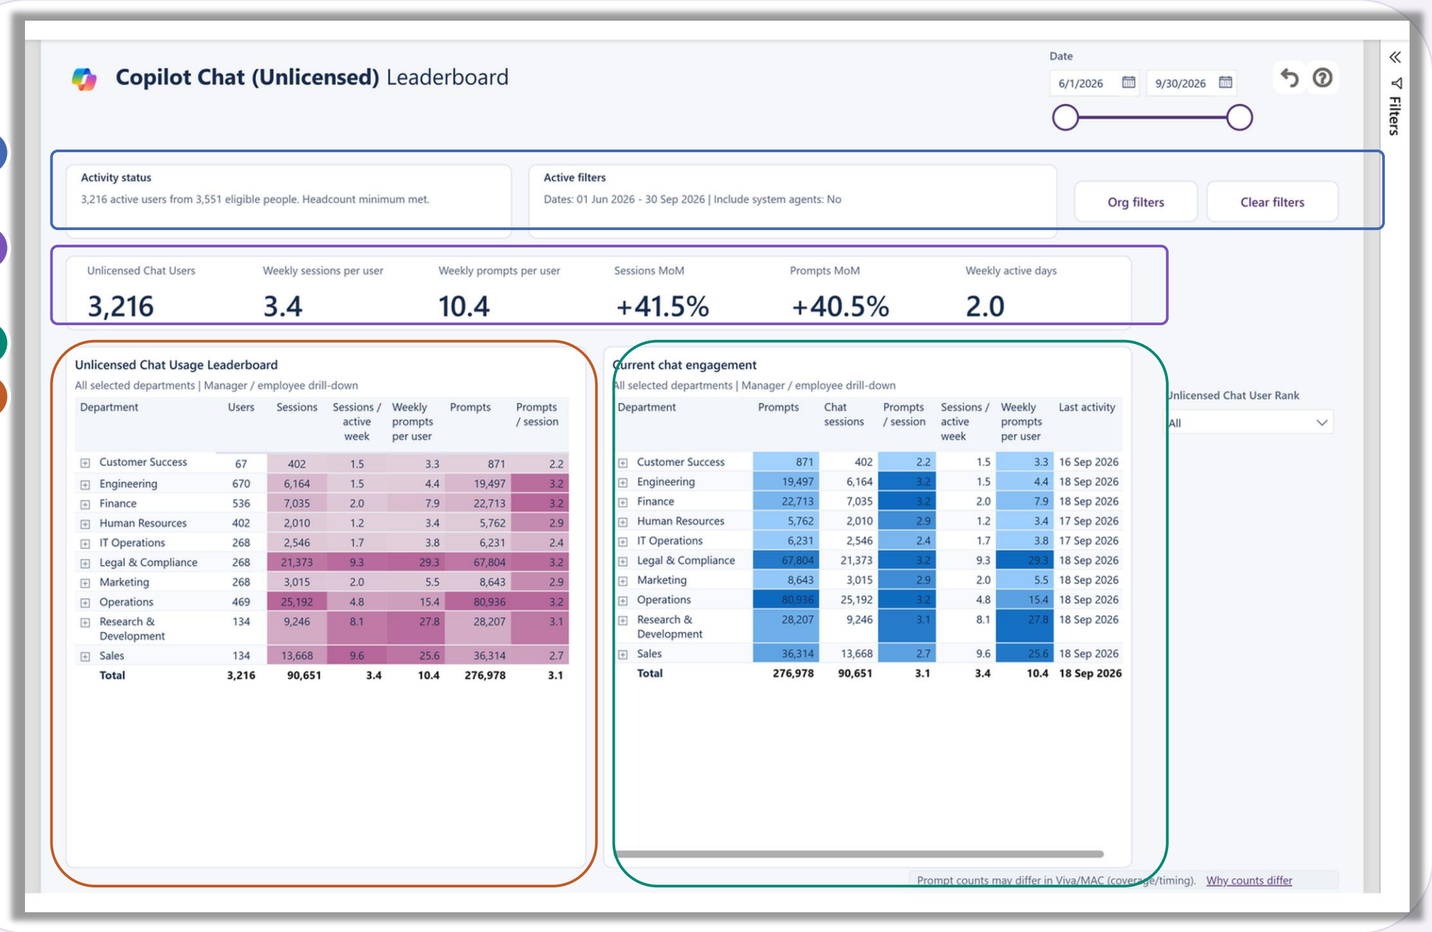

1 Count chat, not other activity

BEFORE: License information alone could bring other activity into this view.

NOW: Unlicensed Chat Users refers to recorded chat, separate from agent, Cowork and unidentified activity.

2 More useful conversation detail

BEFORE: The right-hand table mainly compared where chat was used.

NOW: It now shows prompts, conversations, frequency and the last recorded activity.

3 Keep individual activity controlled

BEFORE: The table included individual user identifiers.

NOW: Departments are shown by default. Individual activity needs an approved change.

4 Make the two tables easier to compare

BEFORE: It was harder to connect the numbers with your selections.

NOW: Both tables use the same choices, with explanations when results cannot be shown.

IN BRIEF The right-hand table now focuses on chat engagement rather than the chat entry point.

USE IT Choose a department and dates, then read people, prompts and conversations separately. These views describe chat, not agent activity.

Metric Glossary & Guide

Find explanations for the numbers and controls you are looking at.

Find the page definitions

BEFORE: The guide opened on a page that was no longer part of the report.

NOW: The glossary opens on Copilot Usage Explorer. Select any of the 17 existing report pages for its definitions.

Useful explanations

BEFORE: Some definitions used old assumptions or general targets.

NOW: User License Timeline describes protected existing person-row tooltips. First seen is observed, not assigned; monthly populations may overlap.

Two ways to set team size

BEFORE: The report did not explain when to change the setting.

NOW: Choose the setting at first load or change it later; Close & Apply, then Clear filters.

Team size is not access permission

BEFORE: The difference between grouping and access was not clear.

NOW: The guide separates what a page displays from who is allowed to see the data.

IN BRIEF General definitions cover the existing report. History does not add a report page.

USE IT Look up a number or control in its page's glossary entries. Use the Interpretation Guide for a fuller explanation of everyday report use.

From a clearer picture to a useful conversation.

01

FIND THE RIGHT VIEW

Start in Explorer, choose a team and period, then open the page that answers your question. Browse agents, compare departments or look at monthly habits.

02

READ THE RIGHT NUMBERS

People, prompts and conversations describe different things. Check the selected dates and the printed habit month before comparing results.

03

SHARE RESPONSIBLY

Keep the agreed team-size setting and access permissions. Activity can guide a conversation; it does not rate employees or prove business value.

ONE GUIDE ACROSS EDITIONS

The report pages, definitions and navigation are shared across data connections.

Synthetic screenshots use Minimum Group Size 1 to show optional detail; templates still default to 3. Real individual views require approval. Get the report and other free tools at aka.ms/Analytics-Hub.

Prioritization and monthly comparisons

Use the view that matches the question; the score supports a conversation, not a decision.

Choose a prioritization view

Paid/free counts, independent activity choices, Departments and protected person search work together. Clear filters resets the selections.

Choose Sessions or Prompts


Sessions is the default. Prompts uses the same 10/5/5 benchmarks and 60/30/10 weights in prompt units. The score is uncapped, not a percentage or productivity measure.

Compare months

Combined Trends compares monthly totals, distinct active people and per-active-person ratios in temporal paid/free cohorts. Weekly-only rank controls do not change totals.

Allow overlap

With observed history, a person may belong to paid and free populations in one period. Distinct totals can be smaller than their sum.

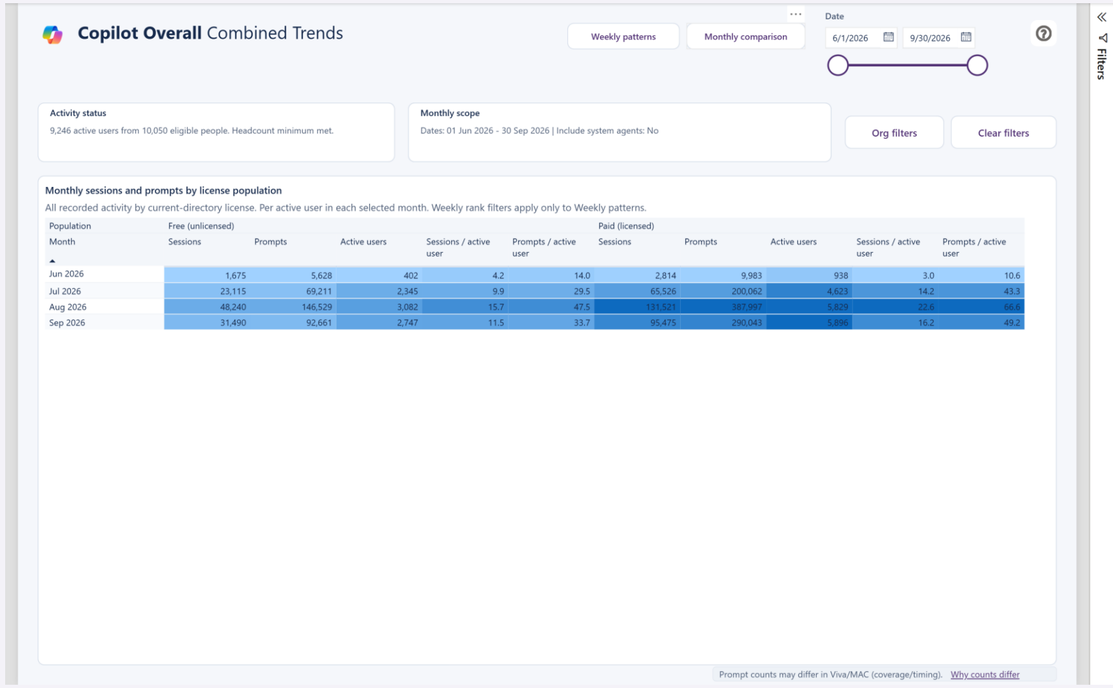

Population	Free (unlicensed)					Paid (licensed)				
Month	Sessions	Prompts	Active users	Sessions / active user	Prompts / active user	Sessions	Prompts	Active users	Sessions / active user	Prompts / active user
Jun 2026	1,675	5,628	402	4.2	14.0	2,814	9,983	938	3.0	10.6
Jul 2026	23,115	69,211	2,345	9.9	29.5	65,526	200,062	4,623	14.2	43.3
Aug 2026	48,240	146,529	3,082	15.7	47.5	131,521	387,997	5,829	22.6	66.6
Sep 2026	31,490	92,661	2,747	11.5	33.7	95,475	290,043	5,896	16.2	49.2

Monthly comparison using the unchanged synthetic snapshot.

Example data is illustrative, not a benchmark. Minimum Group Size defaults to 3.

Read observed history responsibly

Collection history adds context; it does not reconstruct every entitlement change.

History across the existing report

All 17 pages count people by stable person key, not state UserKey. Organization follows the latest person record; activity uses event-time licensing. History Off and one-state inputs keep snapshots.

License Population in Period

Distinct authorized people with a recorded state in effect during the period. Paid/free periods can overlap; the earliest dated state covers earlier events. Unknown stays Unknown.

Keep existing definitions

Habit bands stay 1–5, 6–10, 11–15 and 16+ active days in the displayed month. Prompt-only messages do not support a responses-per-prompt metric.

Use patterns, not claimed outcomes

Stored behavior labels use resource/action/context/plugin/app-host evidence and sometimes agent-name keywords. Leading patterns use agent sessions with alphabetical ties; no prompt-text AI inference is implied.

Recognize the example

The unchanged sample has 7,973 agent users: 5,829 paid + 2,144 free with no overlap. That sample fact is not a universal rule for observed history.

Notebook preparation keeps both inputs explicit

Default Graph collectors remain current snapshots. Paired processed-PAX CSV inputs preserve already-exported states, dates and event attribution; preparation validates the publication contract.

Example data is illustrative, not a benchmark. Minimum Group Size defaults to 3.