FabCon Atlanta
2026

Module 1 – Inbound Security

Module 1 Instructions – Inbound Protection

Overview

In this module, you will use pre-provisioned workspace **ws**_<*username*>_**wspl** to configure workspace private link (WS PL). Once configured, you will then test inbound access.

Hands-on: Configure and deploy Fabric Workspace PL (WS PL)

In this exercise, you will be using Microsoft Fabric and Azure Portal to configure Fabric workspace private link (WSPL).

Step 1: Microsoft Fabric – Gather Details required to configure Workspace PL.

1. Login to Microsoft Fabric via https://www.fabric.microsoft.com
   Note: Please speak to your instructors about username and password.

2. Go to **Workspaces** in the Explorer pane on the left.



3. Search for your workspace. Name of the workspace assigned to you follows the naming pattern **ws**_<*username*>_**wspl**. Please ensure that you use workspace assigned to you with suffix _*wspl*.

As shown here, if user account assigned to you is **user1** then workspace name will be **ws_user1_wspl**.

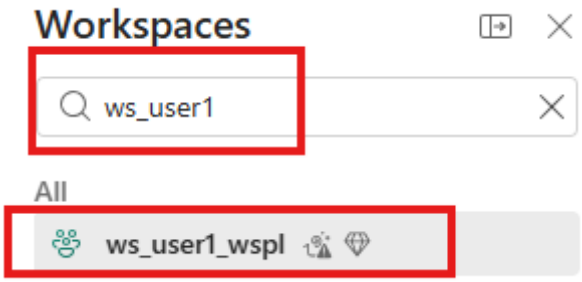

4. The workspace should contain a pre-provisioned along with sample data.
5. Navigate to Workspace Settings.

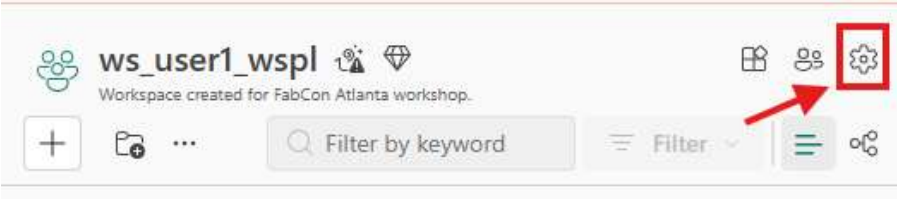

6. Select **Inbound Networking.**

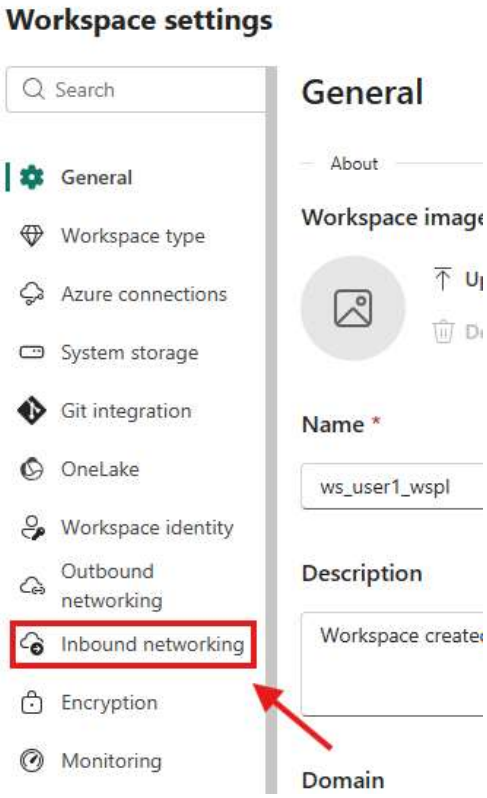

7. Leave **Allow all connection to this workspace (including private links).**
   Note: Your instructor will discuss the two settings available under Inbound Networking. The Apply button will be greyed out because no change has been made.

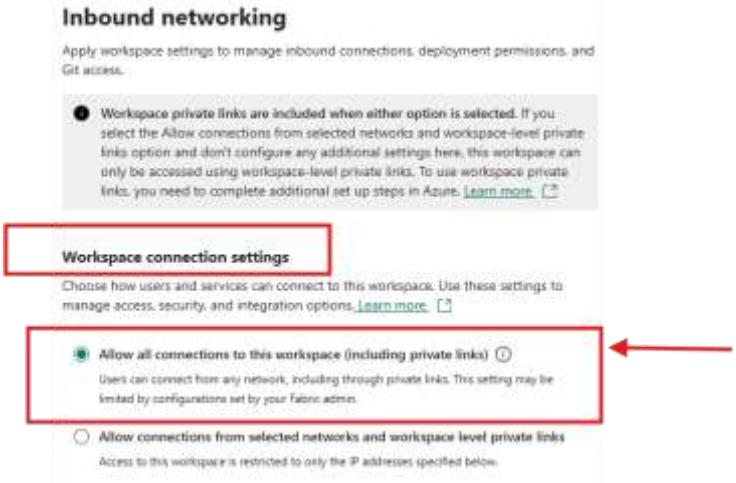

   Explanation – By default, where tenant-level PL and public access is not blocked at tenant-level, each workspace has a public IP, and traffic can be routed to the public endpoint. While keeping public endpoint routable, you can also enable Workspace PL in parallel and access workspace via private endpoint.

   The second setting blocks public access to the workspace and restricts inbound access ONLY via private endpoint. For this workshop, since we do not have access to a jump-host, we will not block public access, and we can still demonstrate result of deploying WS PL without blocking public access.

   ◯ **Allow connections from selected networks and workspace level private links**

   Access to this workspace is restricted to only the IP addresses specified below.

8. Without making any changes to the settings, exit from **Workspace Settings** by clicking **X** button at the top.

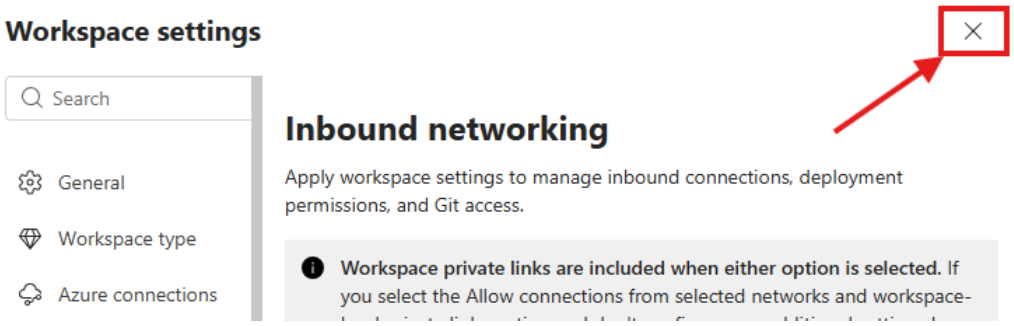

9. Note down the workspace ID of your workspace. One way to find out the workspace ID is to use the address in the browser web address bar.

In this case, workspace ID is *5870a003-aeab-4f1c-90c7-6809469144a4*. You will need workspace ID to configure workspace private link in Azure.

10. To find out **Tenant ID** of your deployment, click on your user profile at the top-right corner of Fabric web portal.

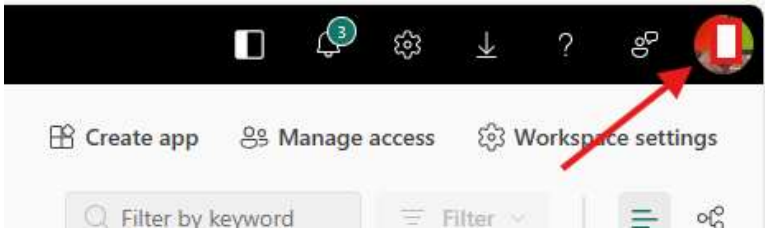

11. Hover the mouse cursor Information, and the pop-up should appear with the tenant id details of your Fabric tenant.

12. The tenant ID is listed under tenant name. You can copy and paste it to a notepad as you'll be using it later to configure workspace PL in Azure.

Checkpoint – At this stage, you have a workspace, workspace ID, and cross-checked Workspace Settings ensuring that Public Access is not blocked to the workspace.

Step 2: Provision Workspace PL on Azure & associate it with your Fabric Workspace.

In this section, you will deploy resources on Azure to enable workspace PL and provision associated endpoint for your workspace.

13. Login to Azure Portal via https://www.portal.azure.com
14. In the Azure Portal, navigate to resource group (RG) pre-provisioned for this exercise. **rg_**<*username*>.
    Note: At this stage, there will be no resources in the resource group.

15. From the Azure portal search bar, search for **deploy a custom template** and then select it from the available options.

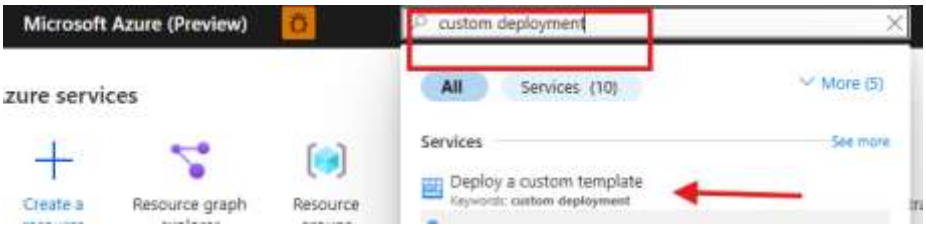

16. On the **Custom deployment** page, select **Build your own template in the editor**.

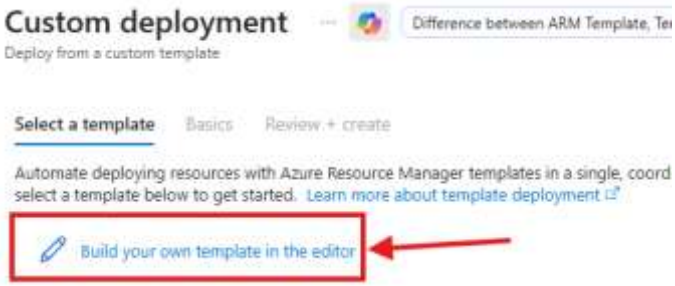

17. In the **Edit Template** experience, you can select and remove pre-filled template.

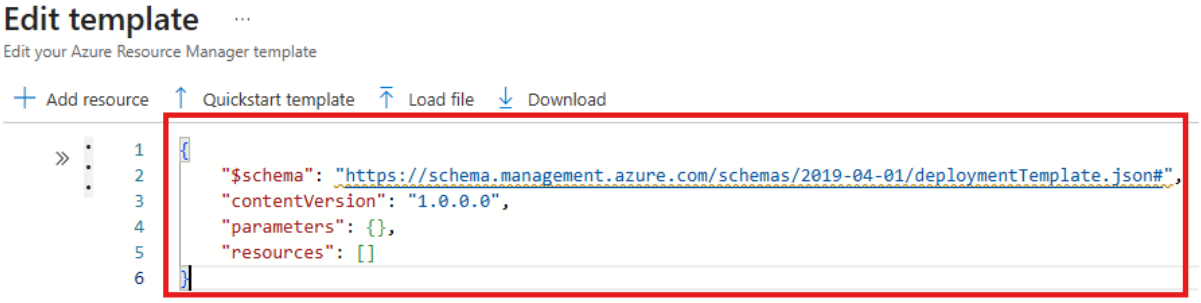

18. Replace it with the following definition and select **Save.**

```
{
      "$schema": "http://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#",
      "contentVersion": "1.0.0.0",
      "parameters": {},
      "resources": [
        {
          "type": "Microsoft.Fabric/privateLinkServicesForFabric",
          "apiVersion": "2024-06-01",
          "name": "<resource-name>",
          "location": "global",
          "properties": {
            "tenantId": "<tenant-id>",
            "workspaceId": "<workspace-id>"
          }
        }
      ]
    }
```

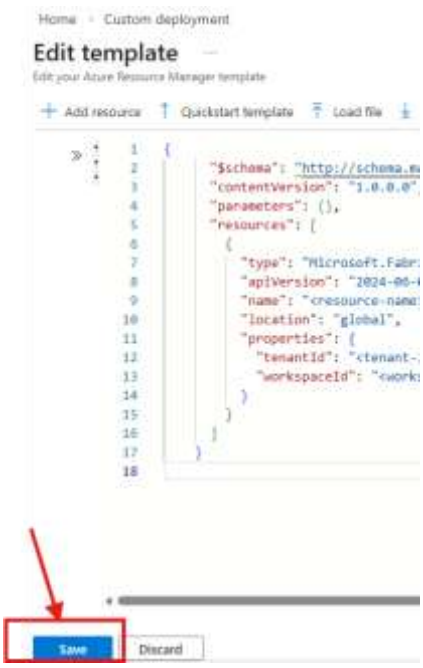

19. In the editor, create a Fabric resource using the following ARM template, where:
    - *<resource-name>* is the name you choose for the Fabric resource. You can choose any name. PrivateLinkService naming rules:
        - name must consist only of numbers, letters, and hypens.
        - Hypens may not appear consecutively or at the beginning of the name
    - *<tenant-object-id>* is your Microsoft Entra tenant ID. See How to find your Microsoft Entra tenant ID.

- *<workspace-id>* is the workspace ID you noted as part of the prerequisites.

20. In the **Resource Group** dropdown, select your resource group name. Please use the pre-provisioned resource group assigned to you.

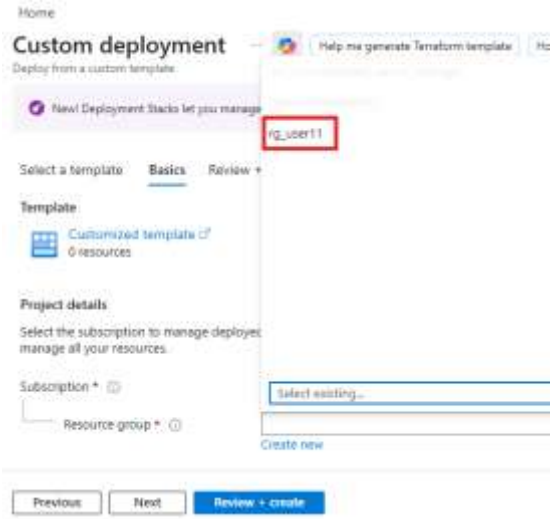

21. Once deployment is complete, you should see notification in the top-right corner.

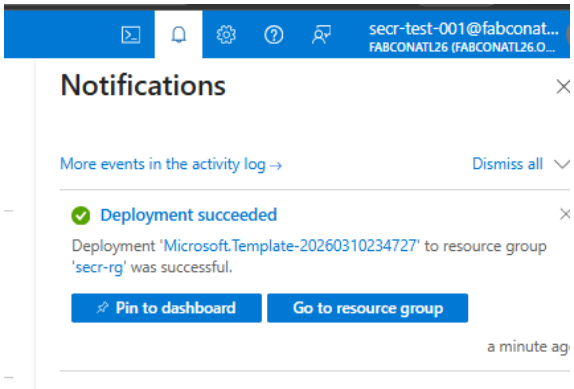

Checkpoint – You have completed setup for private link for Fabric workspace.

Step 3: Create a Virtual Network on Azure to deploy Workspace Private Endpoint.

The following procedure creates a virtual network with a resource subnet.

22. In **Azure Portal,** in the search box, enter **Virtual Networks**.

23. On the **Basics** tab of **Create virtual network**, enter or select the following information:

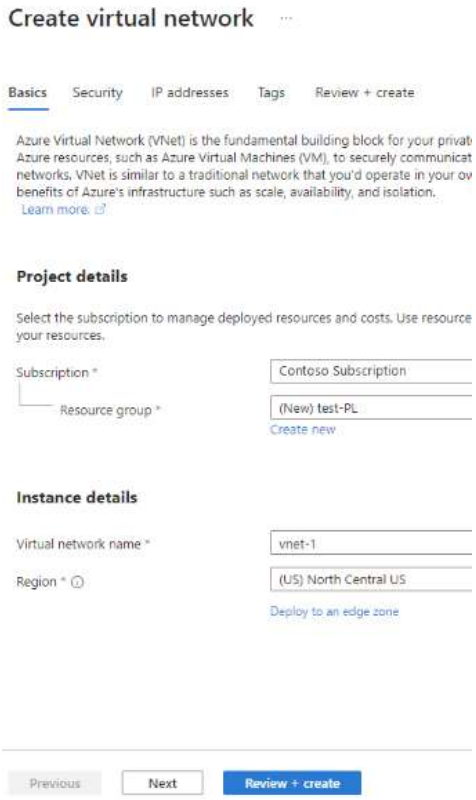

24. Select **Next** to proceed to the **Security** tab. You can keep the default settings or modify them according to your organization's requirements.

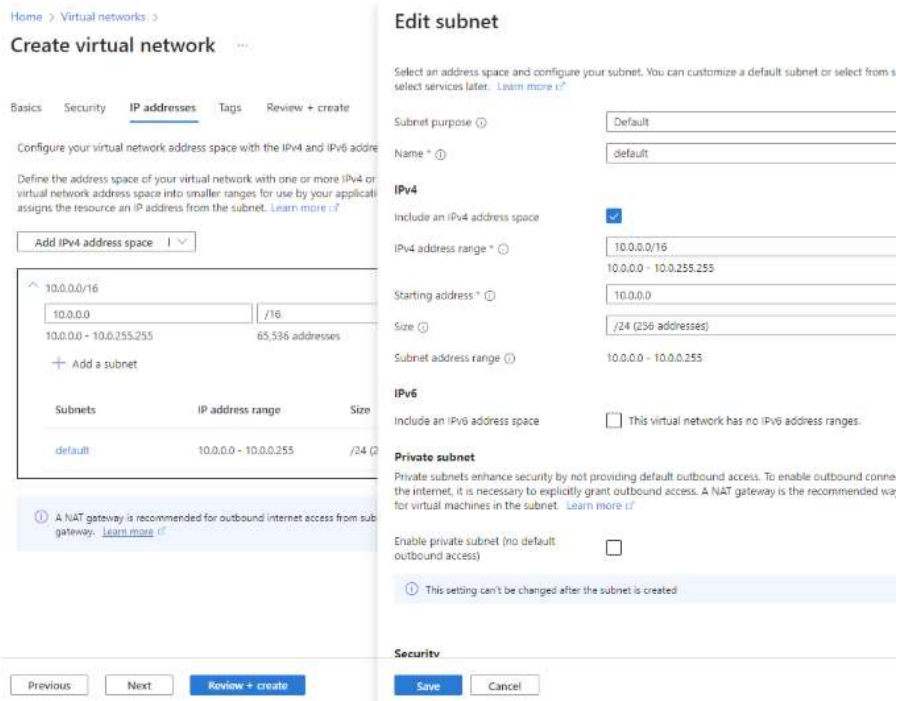

25. Select **Save.**
26. Select **Review + Create** at the bottom of the screen. When validation passes, select **Create.**

Checkpoint – You should have a virtual network provisioned in Azure.

Step 4: Create a Private Endpoint for your workspace.

The following procedure creates a private endpoint in the virtual network you created in the previous section. As part of the process, you associate the private endpoint with the private link for Fabric workspace.

27. Select **+ Create** in **Private endpoints**.
28. On the **Basics** tab of **Create a private endpoint**, enter or select the following information:

    - **Subscription**: Same subscription which you have been using. Instructors can help you with the right subscription to select from the drop-down list.
    - **Resource group**: Select your resource group assigned to you. rg_<username>
    - **Name**: Any name; must be unique within resource group.
    - **Network interface name:** Any name; must be unique within resource group.
    - **Region**: Must be same as virtual network which you provisioned earlier.

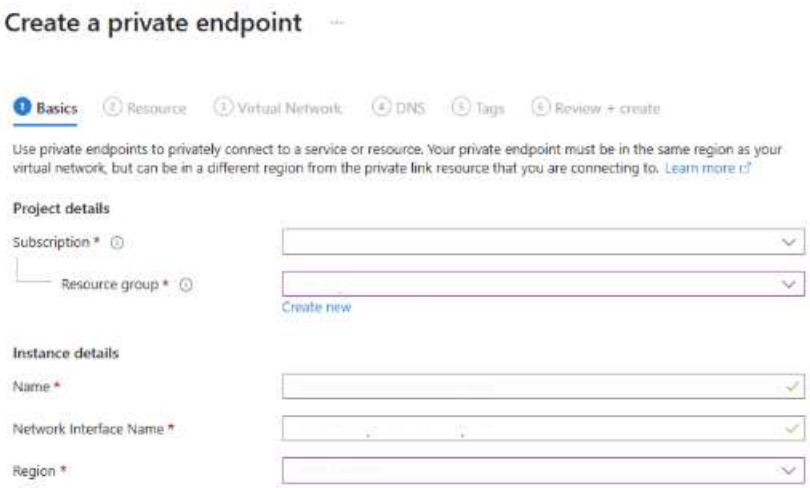

29. In this step, you will link the Fabric workspace private link you created in step-2 with the private endpoint. Enter the following details:
    - **Connection Method:** Select connect to an Azure resource in my directory.
    - **Subscription:** Same subscription which you have been using. Instructors can help you with the right subscription to select from the drop-down list.
    - **Resource type:** Select **Microsoft.Fabric/privateLinkServicesForFabric**
    - **Resource:** Choose the Fabric workspace private link (WS PL) resource you created in **step-2**. Please ensure that you select the PL you provisioned. The list will show all private links including those provisioned by other participants. Please select the one which you provisioned.
    - **Target sub-resource:** Select **Workspace**

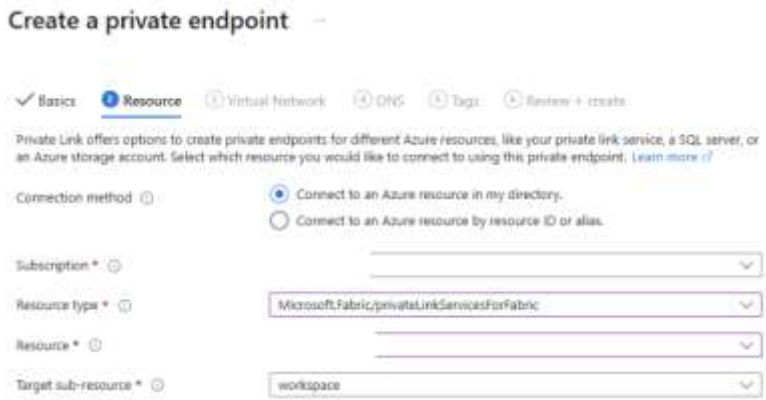

30. Select **Next: Virtual Network**. In **Virtual Network**, enter or select the following information. Use the virtual network and subnet you created earlier.

31. In the DNS setting, under **Private DNS Integration**, enter or select the following information.
    - **Integrate with private DNS zone:** Select **Yes**.
    - **Private DNS zone:** Select *(New)privatelink.fabric.microsoft.com*

32. Select **Next: Tags**, then **Next: Review + create**

33. Select **Create.**

Checkpoint – At this point, you have completed provisioning process for Fabric workspace PL; created a virtual network (VNet); created a Fabric private endpoint; and associated it with the workspace PL.

Step 4: Validate your deployment and verify that private endpoint has for your workspace has been provisioned correctly.

The following steps are optional and do not involve any configuration changes. This is supplemental guidance to verify private endpoints are provisioned correctly.

34. In the Azure portal, navigate to Fabric private endpoint provisioned for your workspace.
35. Select **DNS configuration** to list all the private IP addresses associated with workspace-scoped FQDNs.

If you block public access to your workspace, you can now use these IP addresses via a jump-host to access your workspace.

With this, you have completed the hands-on exercise for workspace private links.

Hands-on: Configure and deploy workspace IP firewall

This is a preview feature that allows administrators to configure IP rules to allow/deny inbound traffic. We will use a different workspace for this exercise as we want to keep clear demarcation between exercises and minimise the risk of misconfiguration.

1. Navigate to Fabric portal and access the workspace pre-provisioned for this exercise. Workspace name is **ws**_*<username>*_**wsipfw**. If you are user1, then the name of pre-provisioned workspace is *ws_user1_wsipfw*.

2. Open **Workspace Settings** and select **Inbound networking.**

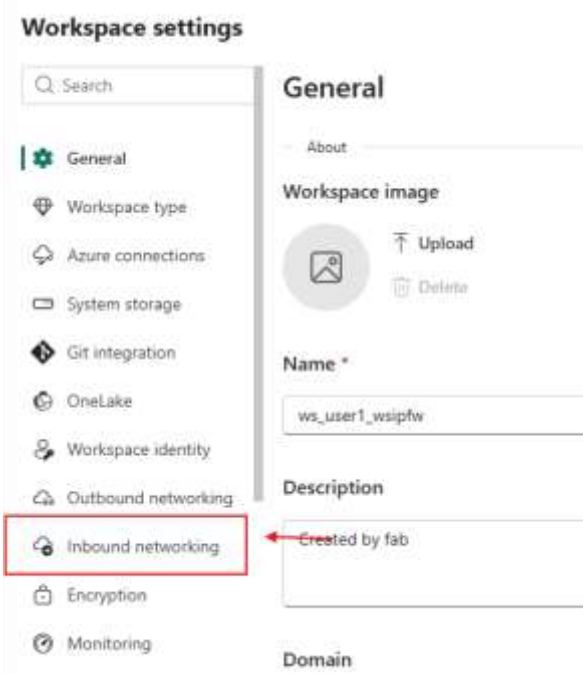

3. In **Inbound networking**, select **Allow connections from selected networks and workspace-level private links**; this reveals the **Address Configurations** section.

   This is part of workspace IP firewall feature.

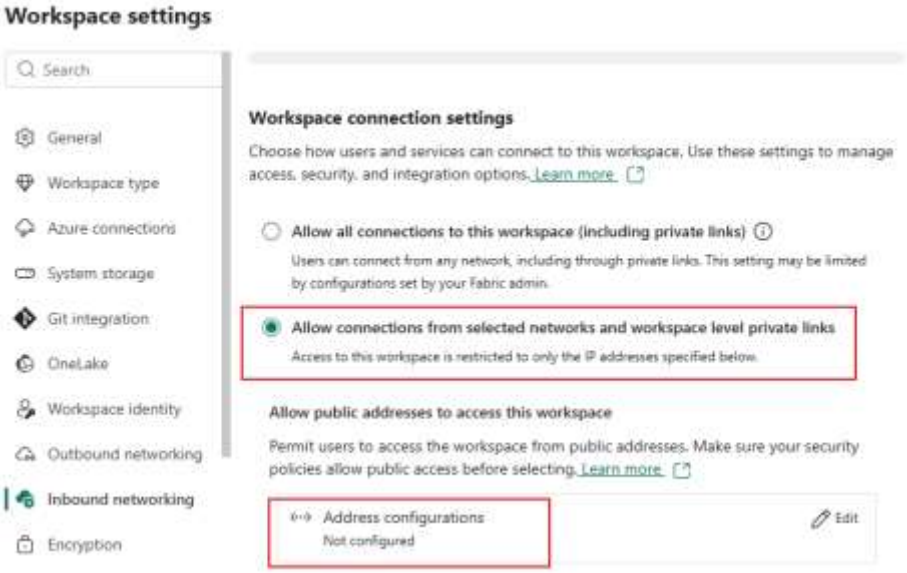

4. Select **Edit** and access IP firewall rules.

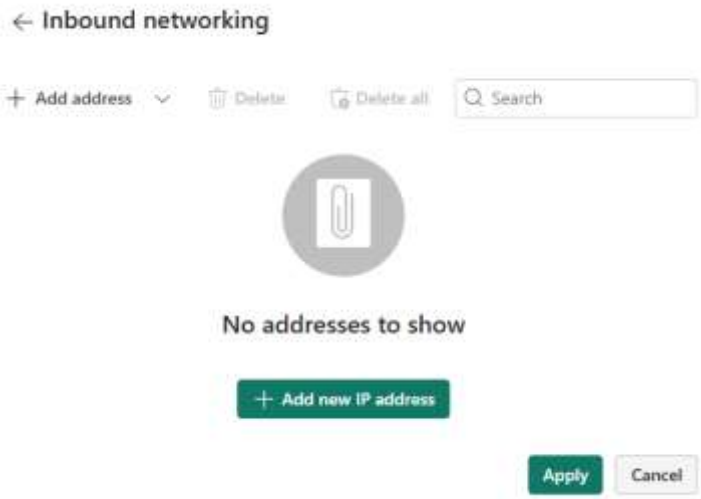

5. Add an IP rule which allows inbound traffic to the workspace.

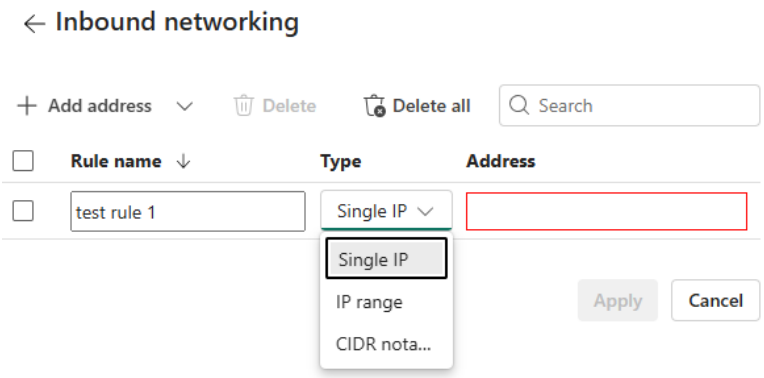

After adding IP allowlist entries, select **Apply**. During preview, changes may take up to 30 minutes to take effect.
Note: Inputs are only checked for correct format. IP address validity is not validated.

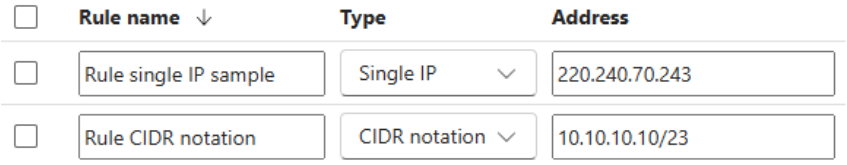

Once IP firewalls come into effect, you'll only be able to access a workspace from that IP address. If you accidentally misconfigure, you can use REST APIs to reconfigure the allowlist.

Summary

This concludes module 1. In this module, you examined how Microsoft Fabric enforces inbound access controls at the workspace level. You validated default inbound networking behaviour, deployed a workspace-scoped Private Link Service using Azure Resource Manager, and associated it with a private endpoint and private DNS integration. You also reviewed how public access can coexist with private connectivity, and under what conditions public access should be restricted entirely.

This concludes Module 1 – Inbound Protection.