

Операционные системы

Редактор Emacs

Епихина Миланья Игоревна

2026-04-11

Цели и задачи работы

Процесс выполнения лабораторной работы

Выводы по проделанной работе

1. Цели и задачи работы

Познакомиться с операционной системой Linux. Получить практические навыки работы с редактором Emacs.

1 Изучить возможности редактора Emacs

2. Процесс выполнения лабораторной работы

1. Откроем Emacs.


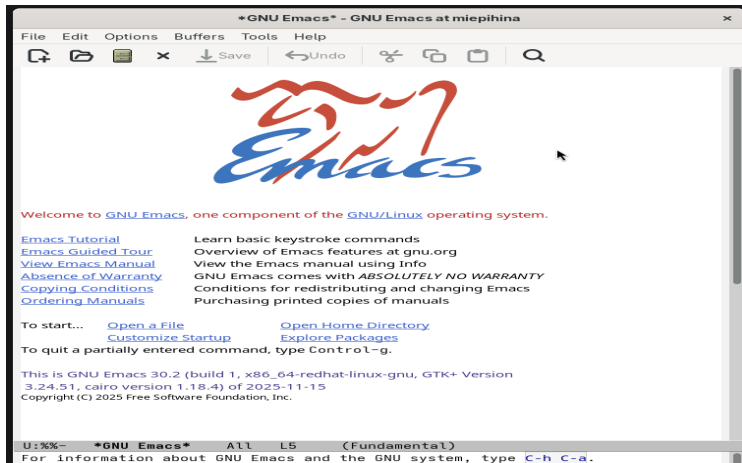


Рисунок 1: Запуск Emacs

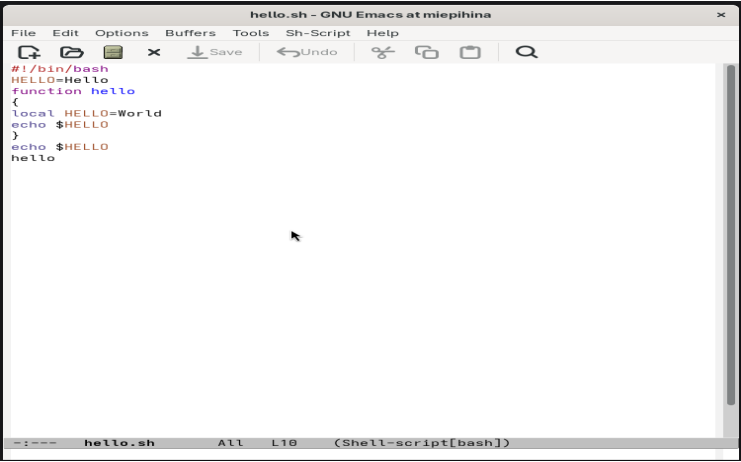


The image shows a screenshot of a GNU Emacs editor window. The title bar reads "hello.sh - GNU Emacs at miepihina". The menu bar includes "File", "Edit", "Options", "Buffers", "Tools", "Sh-Script", and "Help". The toolbar contains icons for opening, saving, undo, redo, and search. The main text area contains the following shell script code:

```
#!/bin/bash
HELLO=Hello
function hello
{
  local HELLO=World
  echo $HELLO
}
echo $HELLO
hello
```

The status bar at the bottom shows "hello.sh", "All", "L10", and "(Shell-script[bash])".

Рисунок 2: Новый файл

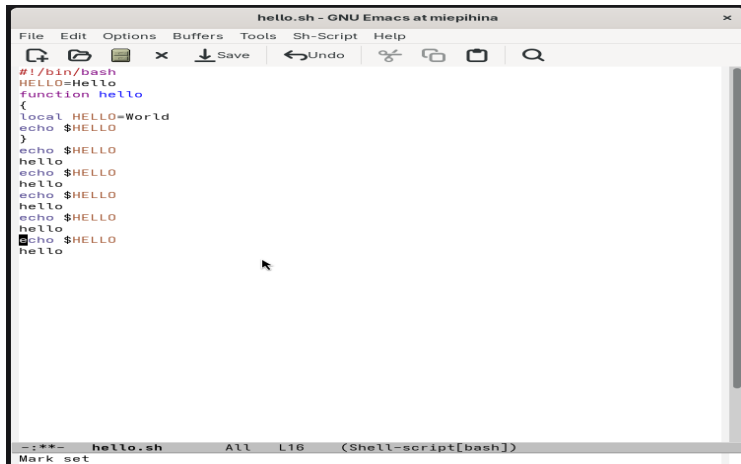

```
#!/bin/bash
HELLO=Hello
function hello
{
  local HELLO=World
  echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
```

Рисунок 3: Операция вставка

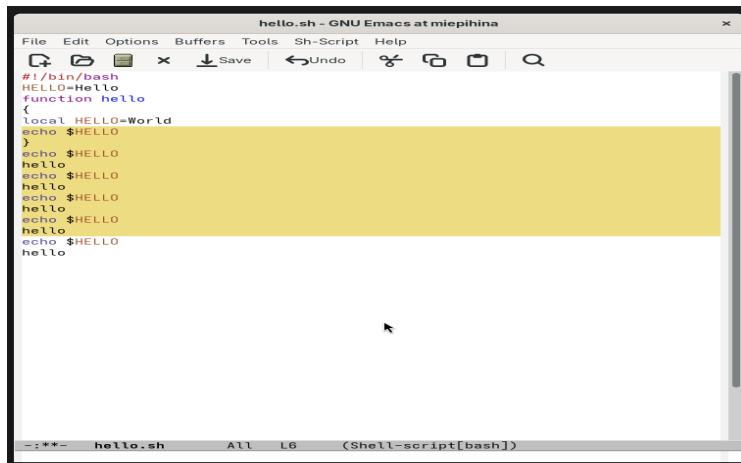


Рисунок 4: Выделение блока

The screenshot displays the GNU Emacs editor interface. The title bar reads "hello.sh - GNU Emacs at miepihina". The menu bar includes "File", "Edit", "Options", "Buffers", "Tools", "Sh-Script", and "Help". Below the menu is a toolbar with icons for opening files, saving, undoing, redoing, copying, pasting, and searching. The main editing area contains the following shell script:

```
#!/bin/bash
HELLO=Hello
function hello
{
    local HELLO=World
    echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
}
```

The status bar at the bottom shows the cursor is at the top of line 33 in the buffer "(Shell-script[bash])".

Рисунок 5: Копирование блока


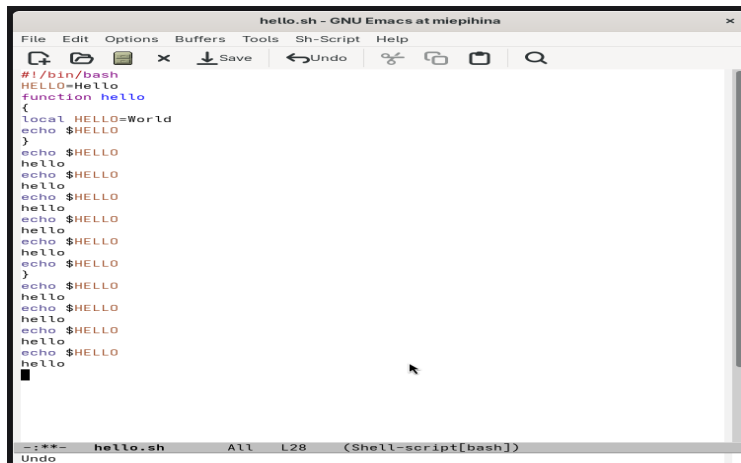


Рисунок 6: Удаление блока

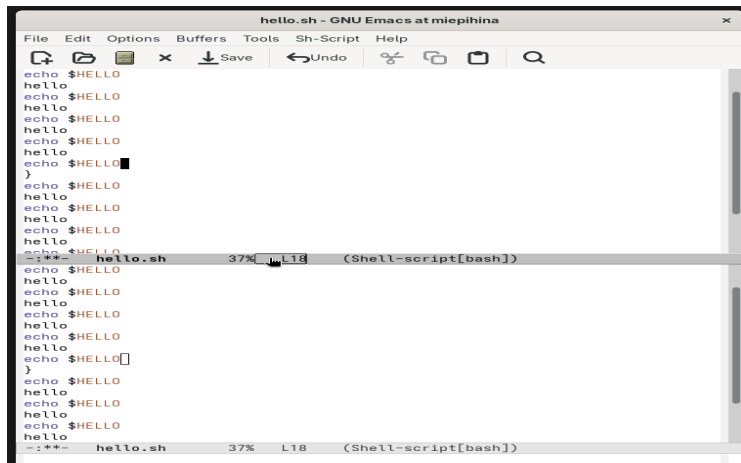


The image shows a GNU Emacs editor window titled "hello.sh - GNU Emacs at miepihina". The window is split horizontally, with the top pane showing the first 18 lines of a shell script and the bottom pane showing the remaining lines. The script contains multiple "echo \$HELLO" and "hello" commands. The status bar at the bottom of each pane indicates "hello.sh", "37%", and "L18 (Shell-script[bash])".

```
hello.sh - GNU Emacs at miepihina
File Edit Options Buffers Tools Sh-Script Help
[Icons: Open, Save, Undo, Cut, Copy, Paste, Find]

echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
-:***- hello.sh 37% L18 (Shell-script[bash])

echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
-:***- hello.sh 37% L18 (Shell-script[bash])
```

Рисунок 7: Горизонтальное разделение

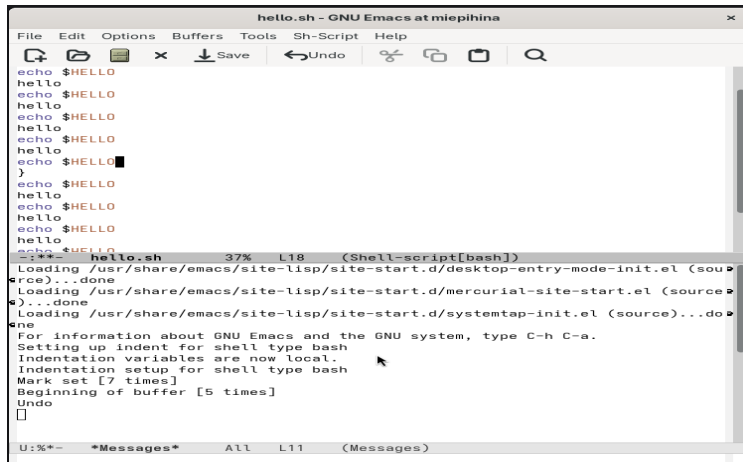

The screenshot shows the GNU Emacs editor window titled "hello.sh - GNU Emacs at miepihina". The menu bar includes File, Edit, Options, Buffers, Tools, Sh-Script, and Help. The toolbar contains icons for file operations and editing. The main text area displays a shell script with several "echo \$HELLO" commands. A status bar at the bottom indicates the current buffer is "U:%*~ *Messages* All L11 (Messages)".

```
hello.sh - GNU Emacs at miepihina
File Edit Options Buffers Tools Sh-Script Help
[Icons] Save Undo [Icons]
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
-:~*- hello.sh 37% L18 (Shell-script[bash])
Loading /usr/share/emacs/site-lisp/site-start.d/desktop-entry-mode-init.el (sou
rce)...done
Loading /usr/share/emacs/site-lisp/site-start.d/mercurial-site-start.el (sourc
e)...done
Loading /usr/share/emacs/site-lisp/site-start.d/systemtap-init.el (source)...do
ne
For information about GNU Emacs and the GNU system, type C-h C-a.
Setting up indent for shell type bash
Indentation variables are now local.
Indentation setup for shell type bash
Mark set [7 times]
Beginning of buffer [5 times]
Undo
[ ]
U:%*~ *Messages* All L11 (Messages)
```

Рисунок 8: Переключение буфера

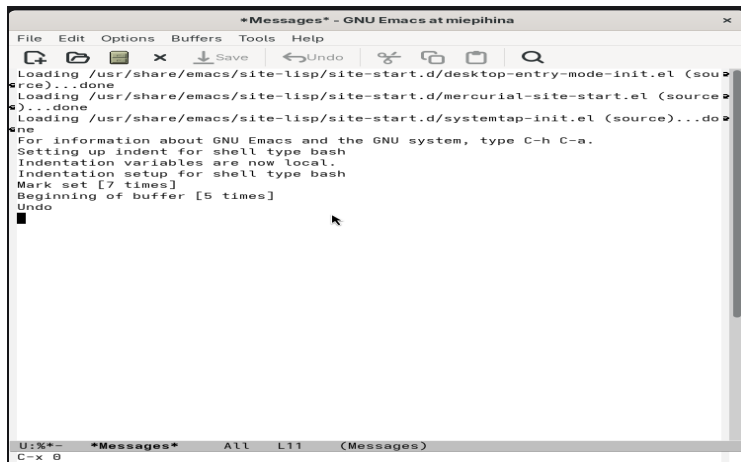


Рисунок 9: Закроем буфер

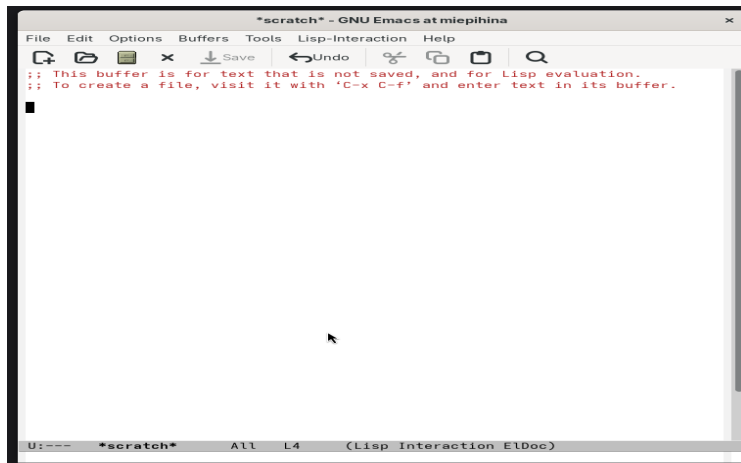


Рисунок 10: Переключение буфера

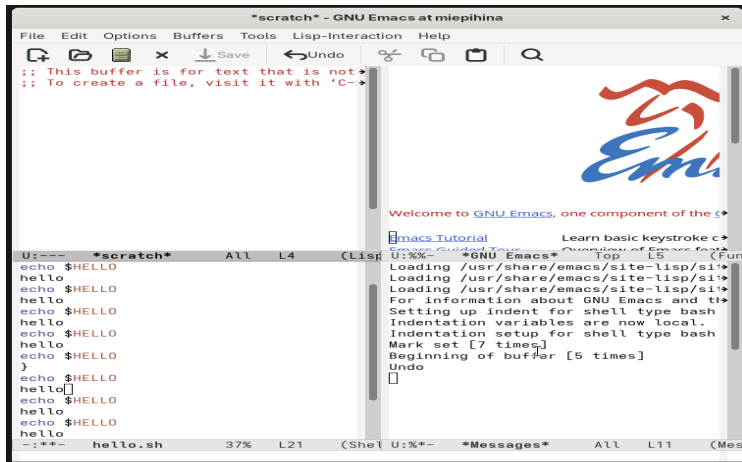


Рисунок 11: Четыре буфера

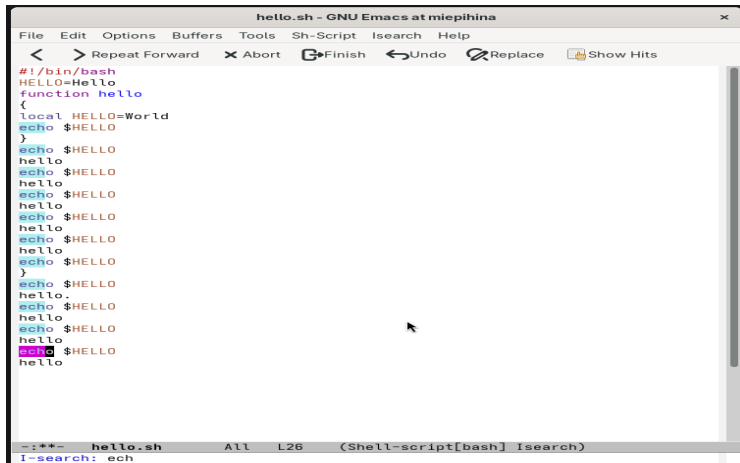


Рисунок 12: Режим поиска

3. Выводы по проделанной работе

В данной работе мы познакомились с еще одним редактором операционной системой Linux. Получили практические навыки работы с редактором Emacs.