




1. Build projektu

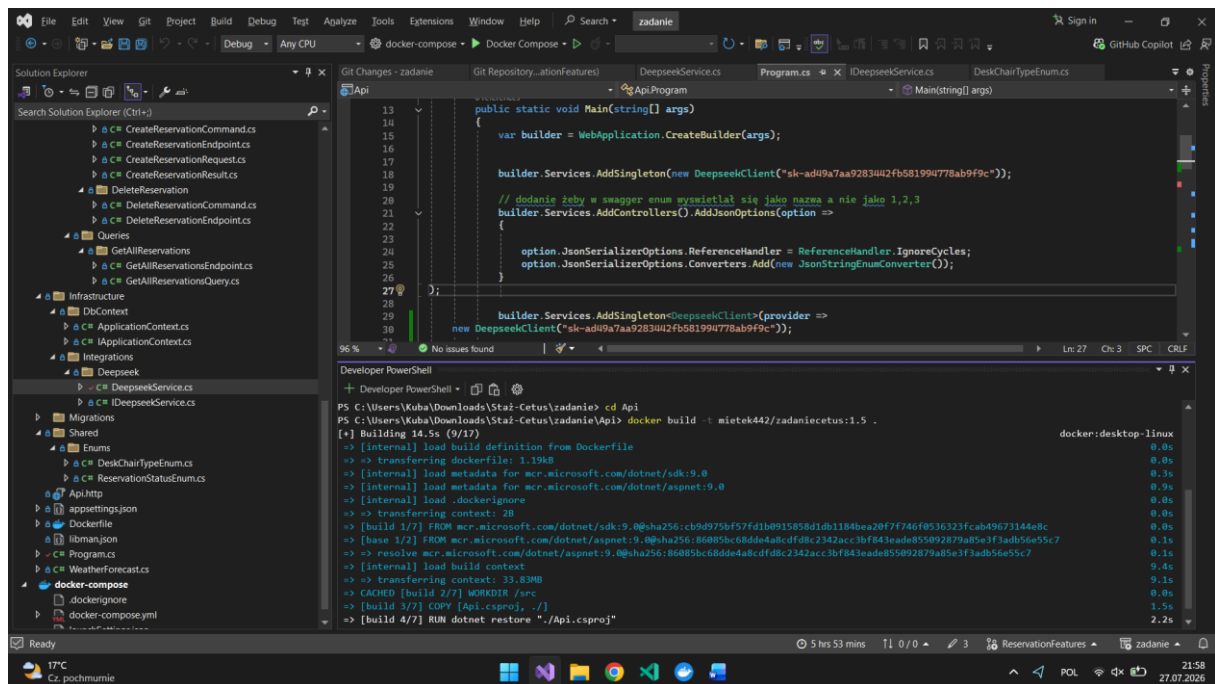

2. Testowe odpalenie lokalnie aby sprawdzić poprawność na porcie 8808- na komputerze, 8080 na dokerze.

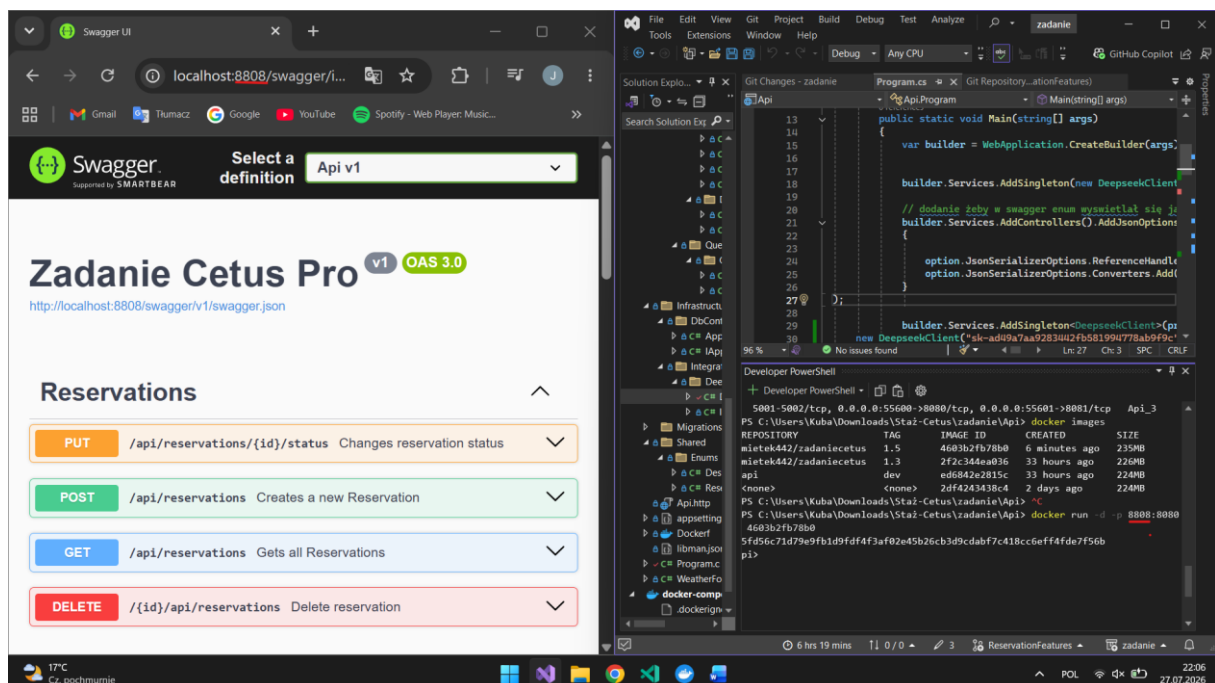


3. Zrobienie push na docker hub, wysłanie kontenera

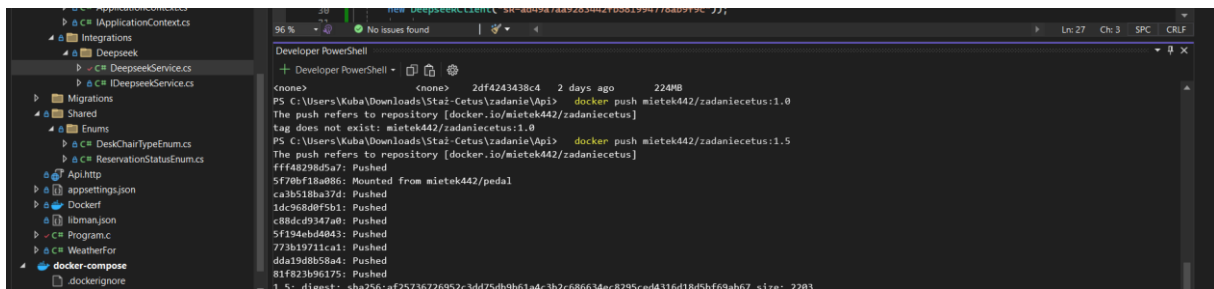

```
PS C:\Users\Kuba\Downloads\Stai-Cetus\zadanie\Api> docker push mietek442/zadaniecetus:1.0
The push refers to repository [docker.io/mietek442/zadaniecetus]
tag does not exist: mietek442/zadaniecetus:1.0
PS C:\Users\Kuba\Downloads\Stai-Cetus\zadanie\Api> docker push mietek442/zadaniecetus:1.5
The push refers to repository [docker.io/mietek442/zadaniecetus]
fff4829d5a7: Pushed
5f78bf18a886: Mounted from mietek442/pedal
ca3b518ba37d: Pushed
1dc968d8f5b1: Pushed
c88dc9347a0: Pushed
5f194ebd4043: Pushed
773b19711ca1: Pushed
dda19d8b58a4: Pushed
81f823b96175: Pushed
1.5: direct--sha256:af25736726952c3dd75db9b61a4c3b2c686634ec8295ced4316d18d5bf69ab67 size: 2203
```

4.

Pobranie na serwerze vps kontenera (w tym przypadku serwer mikrus)

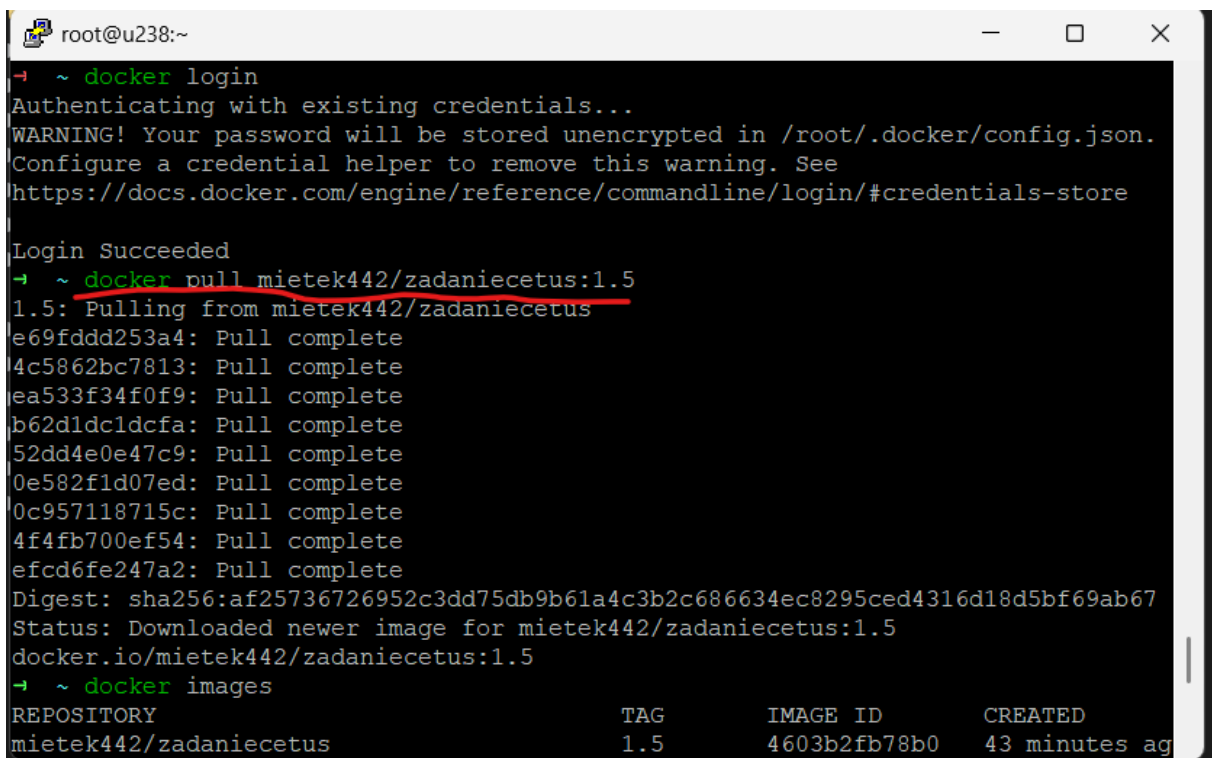

```
root@u238:~
➔ ~ docker login
Authenticating with existing credentials...
WARNING! Your password will be stored unencrypted in /root/.docker/config.json.
Configure a credential helper to remove this warning. See
https://docs.docker.com/engine/reference/commandline/login/#credentials-store

Login Succeeded
➔ ~ docker pull mietek442/zadaniecetus:1.5
1.5: Pulling from mietek442/zadaniecetus
e69fddd253a4: Pull complete
4c5862bc7813: Pull complete
ea533f34f0f9: Pull complete
b62d1dc1dcfa: Pull complete
52dd4e0e47c9: Pull complete
0e582f1d07ed: Pull complete
0c957118715c: Pull complete
4f4fb700ef54: Pull complete
efcd6fe247a2: Pull complete
Digest: sha256:af25736726952c3dd75db9b61a4c3b2c686634ec8295ced4316d18d5bf69ab67
Status: Downloaded newer image for mietek442/zadaniecetus:1.5
docker.io/mietek442/zadaniecetus:1.5
➔ ~ docker images
REPOSITORY          TAG          IMAGE ID          CREATED
mietek442/zadaniecetus 1.5          4603b2fb78b0     43 minutes ago
```

5. Ustawienie portów przekierowania w tym przypadku na apache2, (podobna zasada w NGNIX)

```
<VirtualHost *:80>
    ServerName cetuspro.jakubchrzastek.pl
    ServerAlias cetuspro.jakubchrzastek.pl
    ProxyPreserveHost On
    ProxyPass / http://127.0.0.1:8808/
    ProxyPassReverse / http://127.0.0.1:8808/
</VirtualHost>
```

6. Uruchomienie na porcie 8808-na vps, a na dockerze jest 8080 aplikacji oraz przeladowanie apache2

```
<none>
restauracja-api
<none>
redis
postgres
mcr.microsoft.com/azure-storage/azurite
hello-world
ane
-> ~ docker run -d -p 8808:8080 4603b2fb78b0
5db049a2c341e6ffcb8cd19cd47ba0512053e0ccd61cde8ccbfbf98809c5a106
-> ~ systemctl reload apache2
-> ~
```

7. Po ustawieniu cloudflare, aplikacja jest dostepna pod adresem:
<https://cetuspro.jakubchrzastek.pl/swagger/index.html>