

Midterm 1- Standard 7

Due Date October / 11th / 2021
Name **Michael Ghattas**
Student ID **109200649**

Contents

1 Instructions	1
2 Honor Code (Make Sure to Virtually Sign)	2
3 Standard 7- Kruskal's Algorithm	3
3.1 Problem 2	3

1 Instructions

- The solutions **should be typed**, using proper mathematical notation. We cannot accept hand-written solutions. Here's a short intro to \LaTeX .
- You should submit your work through the **class Canvas page** only. Please submit one PDF file, compiled using this \LaTeX template.
- You may not need a full page for your solutions; pagebreaks are there to help Gradescope automatically find where each problem is. Even if you do not attempt every problem, please submit this document with no fewer pages than the blank template (or Gradescope has issues with it).
- You **may not collaborate with other students**. **Copying from any source is an Honor Code violation. Furthermore, all submissions must be in your own words and reflect your understanding of the material.** If there is any confusion about this policy, it is your responsibility to clarify before the due date.
- Posting to **any** service including, but not limited to Chegg, Discord, Reddit, StackExchange, etc., for help on an assignment is a violation of the Honor Code.
- You **must** virtually sign the Honor Code (see Section 2). Failure to do so will result in your assignment not being graded.

2 Honor Code (Make Sure to Virtually Sign)

Problem 1.

- My submission is in my own words and reflects my understanding of the material.
- I have not collaborated with any other person.
- I have not posted to external services including, but not limited to Chegg, Discord, Reddit, StackExchange, etc.
- I have neither copied nor provided others solutions they can copy.


I agree to the above, Michael Ghattas.

□

3 Standard 7- Kruskal's Algorithm

3.1 Problem 2

Problem 2. Consider the following graph $G(V, E, w)$. Clearly indicate the order in which Kruskal's algorithm adds the edges to the minimum-weight spanning tree. You may simply list the order of the edges; it is not necessary to exhibit the state of the algorithm (i.e., the disjoint-set data structure) at each iteration.

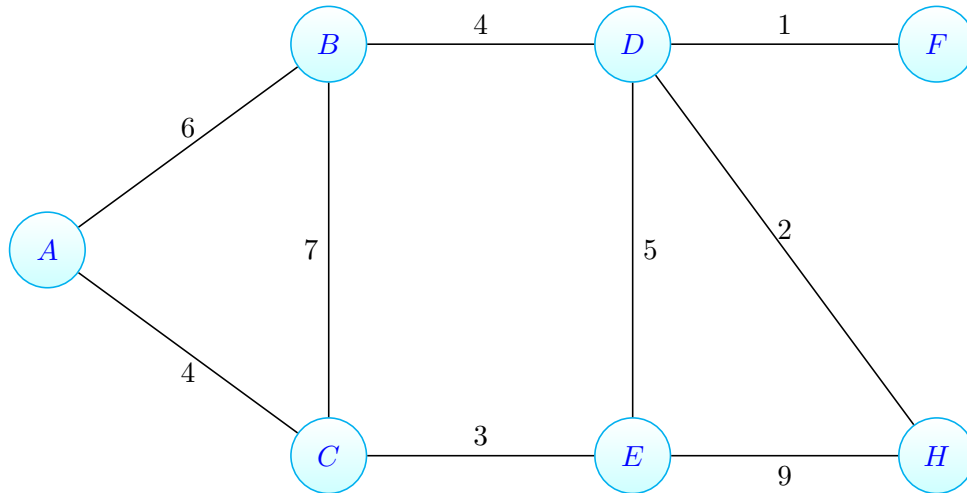

Answer:

- We initialize the intermediate spanning forest \mathcal{F} to be the empty graph (the graph on no edges). We also place the edges of G into a priority queue, which we call Q .

$$Q = [(\{D, F\}, 1), (\{D, H\}, 2), (\{C, E\}, 3), (\{A, C\}, 4), (\{B, D\}, 4), (\{D, E\}, 5), (\{A, B\}, 6), (\{B, C\}, 7)]$$

- We poll from Q , which returns the edge $\{D, F\}$. Note that $w(\{D, F\}) = 1$. As D and F are on different components of \mathcal{F} , we add the edge $\{D, F\}$ to \mathcal{F} and update Q .

$$Q = [(\{D, H\}, 2), (\{C, E\}, 3), (\{A, C\}, 4), (\{B, D\}, 4), (\{D, E\}, 5), (\{A, B\}, 6), (\{B, C\}, 7)]$$

□